

Algorithms Tutorial 4

Solutions

1. You are traveling by a canoe down a river and there are n trading posts along the way. Before starting your journey, you are given for each $1 \leq i < j \leq n$ the fee $F(i, j)$ for renting a canoe from post i to post j . These fees are arbitrary. For example it is possible that $F(1, 3) = 10$ and $F(1, 4) = 5$. You begin at trading post 1 and must end at trading post n (using rented canoes). Your goal is to design an efficient algorithm which produces the sequence of trading posts where you change your canoe which minimizes the total rental cost.

Solution:

take to reach p

st it would

<https://eduassistpro.github.io/>

1,

To reconstruct the sequence of trading posts the cano
define the following function:

Add WeChat edu_assist_pro

$$\text{from}(i) = \arg \min_{1 \leq j < i} \{\text{opt}(j) + F(j, i)\}, \quad i > 1.$$

(Note: $\arg \min$ returns the value of j that produces the minimal value of $\text{opt}(j) + F(j, i)$). The minimum cost is $\text{opt}(n)$. To get the sequence, we backtrack from post n giving the sequence $\{n, \text{from}(n), \text{from}(\text{from}(n)), \dots, 1\}$. Reverse this to get the boat's journey.

The complexity is $O(n^2)$ because there are n subproblems, and each subproblem takes $O(n)$ to find the best previous trading post.

2. You are given a set of n types of rectangular boxes, where the i^{th} box has height h_i , width w_i and depth d_i . You want to create a stack of boxes which is as tall as possible, but you can only stack a box on top of another box if the

dimensions of the 2-D base of the lower box are each strictly larger than those of the 2-D base of the higher box. Of course, you can rotate a box so that any side functions as its base. It is also allowable to use multiple instances of the same type of box.

Solution: First, since each box type has six different box rotations (there are three faces and each face can be rotated once, exchanging width and depth), it is easier to treat these rotations as being separate boxes entirely. This gives $6n$ boxes in total, and allows us to assume that boxes cannot be rotated. We now order these boxes in a decreasing order of the surface area of their base. Notice that in this way if a box B_1 can go on top of a box B_0 then B_0 precedes box B_1 in such an ordering.

We aim to solve the following subproblem: What is the maximum height possible for a stack if the top most box is box number i ? The recursion is:

$$\text{opt}(i) = \max\{\text{opt}(j) + h_i : \text{over all } j \text{ such that } w_j > w_i \text{ and } d_j > d_i\}.$$

The final solution of the problem is the maximum value returned by any of these subproblems, i.e., $\max_{1 \leq i \leq 6n} \text{opt}(i)$.

The complete problem requires that we solve all subproblems that have a base larger than the current box, and each subproblem requires that we solve all subproblems that have a base larger than the current box.

3. You have an amount of money M and you have n kinds of candies and for each candy you know how much pleasure you get from eating it, which is a number between 1 and 100, as well as the weight of the candy. Your task is to choose which candies you are going to buy to maximise the total pleasure you will get by gobbling them all.

Solution: This is a knapsack problem with duplicated values. The pleasure score is the value of the item, the cost of a particular type of candy is its weight, and the money M is the capacity of the knapsack. The complexity is $O(Mn)$.

4. Consider a 2-D map with a horizontal river passing through its centre. There are n cities on the southern bank with x -coordinates $a_1 \dots a_n$ and n cities on the northern bank with x -coordinates $b_1 \dots b_n$. You want to connect as many north-south pairs of cities as possible, with bridges such that no two bridges cross. When connecting cities, you are only allowed to connect the i^{th} city on the northern bank to the i^{th} city on the southern bank.

Solution:

Sort the cities on the south bank according to their x coordinates and then re-enumerate them so that they appear as $\{1, 2, 3, \dots\}$, and then apply the same permutation to the cities on the north bank. Now the problem reduces to finding a maximal increasing sequence of indices of cities on the north bank.

5. You are given a boolean expression consisting of a string of the symbols *true* and *false* and with exactly one operation *and*, *or*, *xor* between any two consecutive truth values. Count the number of ways to place brackets in the expression such that it will evaluate to true. For example, there is only 1 way to place parentheses in the expression *true* and *false* xor *true* such that it evaluates to true.

Solution: Let there be n symbols, and $n - 1$ operations between them. We solve the following two subproblems: How many ways are there to place brackets to make the expression starting from at the l^{th} symbol and ending at r^{th} symbol evaluate to true (T), and many ways are there to place brackets to make the expression starting from at the l^{th} symbol and ending at r^{th} symbol evaluate to false (F)? For example, in “*true* and *false* xor *true*”, $T(1, 2)$ would be the number of ways of making “*true* and *false*” evaluate to true with correct bracketing (

The base case is $T(l, l) = 1$ and $F(l, l) = 0$ because i is *true*.
The reverse is $F(l, l) = 1$ and $T(l, l) = 0$ because i is *false*.

Otherwise, for each subproblem, we ‘split’ the expr m so that everything to the left of the operator is in its own bracketed expression and everything to the right of the operator is in its own bracketed expression. For example, splitting the sample expression around “xor” would give “(*true* and *false*) xor (*true*)”. We then evaluate the subproblems on each of the two sides, and combine the results together depending on the type of operator we are splitting by, and whether we want the result to evaluate to true or false. We solve both subproblems in parallel:

$$T(l, r) = \sum_{m=l}^{r-1} TSplit(l, m, r)$$

$$F(l, r) = \sum_{m=l}^{r-1} FSplit(l, m, r)$$

$$\begin{aligned}
\text{TSplit}(l, m, r) &= \begin{cases} T(l, m) \times T(m+1, r) & \text{if operator } m \text{ is 'and'}, \\ T(l, m) \times F(m+1, r) + T(l, m) \times T(m+1, r) + F(l, m) \times T(m+1, r) & \text{if operator } m \text{ is 'or'}, \\ T(l, m) \times F(m+1, r) + F(l, m) \times T(m+1, r) & \text{if operator } m \text{ is 'xor'}. \end{cases} \\
\text{FSplit}(l, m, r) &= \begin{cases} T(l, m) \times F(m+1, r) + F(l, m) \times F(m+1, r) + F(l, m) \times T(m+1, r) & \text{if operator } m \text{ is 'and'}, \\ F(l, m) \times F(m+1, r) & \text{if operator } m \text{ is 'or'}, \\ T(l, m) \times T(m+1, r) + F(l, m) \times F(m+1, r) & \text{if operator } m \text{ is 'xor'}. \end{cases}
\end{aligned}$$

Note that the equations inside the TSplit and FSplit functions are chosen to correspond with the truth tables of the corresponding operator.

The complexity is $O(n^3)$. There are $O(n^2)$ different ranges that l and r could cover, and each range has $n-1$ different splitting points.

6. A company is organising a party for its employees. The organisers of the party want it to be a fun party, and so have assigned a fun rating to each employee. The employees are organised into a strict hierarchy, with a president at the top. There is one restriction, though, on the guest list: an employee and their immediate supervisor (parent in the tree) cannot both attend the party (because that would be no fun at all). Give an algorithm that makes a guest list for the party that maximises the sum of the fun ratings of the guests.

Solution: Let us denote by $T(i)$ the subtree of the tree T of all employees which is rooted at an employee i . For each such subtree we will compute two quantities, $I(i)$ and $E(i)$. $I(i)$ is the maximal sum of fun factors $\text{fun}(i)$ of employees selected from subtree $T(i)$ which satisfies the constraint and which must include the root i . $E(i)$ is the maximal sum of fun factors of employees selected from the subtree $T(i)$ but which does NOT include i . These two quantities are easily computed by recursion on subtrees, starting from the leaves.

For every employee i whose (immediate) subordinates are j_1, \dots, j_m we have

$$I(i) = \text{fun}(i) + \sum_{1 \leq k \leq m} E(j_k)$$

$$E(i) = \sum_{1 \leq k \leq m} \max(E(j_k), I(j_k))$$

Notice that in the definition of $E(i)$ we have the option to either include the children of i or exclude them, whatever produces larger value of $E(i)$. The final answer is $\max(I(n), E(n))$ where n is the root of the corporate tree T . Clearly such algorithm runs in time linear in the number of all employees.

7. You have n_1 items of size s_1 and n_2 items of size s_2 . You would like to pack all of these items into bins, each of capacity C , using as few bins as possible.

Solution: We will solve subproblems $P(i, j)$ of packing i many items of size s_1 and j many items of size s_2 for all $1 \leq i \leq n_1$ and all $1 \leq j \leq n_2$. Let $C/s_1 = K$. The recursion step is essentially an exhaustive search:

Assignment Project Exam Help

$$\text{opt}(i, j) = 1 + \min_{0 \leq k \leq K} \text{opt}(i - k, j - \lfloor (C - k s_1) / s_2 \rfloor)$$

 Thus, we try all n_1 items of size s_1 into one single bin and n_2 items of size s_2 and optimally pack the remaining items. $O(K n_1 n_2)$.

8. You are given n activities and for each activity i its starting time s_i , its finishing time f_i and the profit p_i of this activity. Only one activity can take place at any time. an algorithm which produces a subset S of those n activities so that no two activities in S overlap and such that the sum of profits of all activities in S is maximised.

Solution: Sort all activities by finishing time f_i . We solve the following subproblems for all i : What is the maximum profit $\text{opt}(i)$ we can make if we are to choose between activities a_1, a_2, \dots, a_i and such that activity i is the last activity we do? Recursion is simple:

$$\text{opt}(i) = \max\{\text{opt}(j) : f_j < s_i\} + p_i$$

$$\text{prev}(i) = \arg \max\{\text{opt}(j) : f_j < s_i\}$$

Finally, the solution to the original problem is profit of $\max_{1 \leq i \leq n} \text{opt}(i)$ and the sequence of jobs can be obtained starting with $m = \arg \max_{1 \leq i \leq n} \text{opt}(i)$ and then backtracking via $m, \text{prev}(m), \text{prev}(\text{prev}(m)), \dots$

9. Your shipping company has just received N individual shipping requests (jobs). For each request i , you know it will require t_i trucks to complete, paying you d_i dollars. You have T trucks in total. Devise an algorithm to select jobs which will bring you the largest possible amount of money.

Solution: This is just the standard knapsack problem with t_i being the size of the i^{th} item, d_i its value and with T as the capacity of the knapsack. Since each transportation job can be executed only once, it is a knapsack problem with no duplicated items allowed. The complexity is $O(NT)$.

10. Again your shipping company has just received N individual shipping requests (jobs). This time, for each request i , you know it will require e_i employees and t_i trucks to complete, paying you d_i dollars. You have E employees and T trucks in total. Devise an efficient algorithm to select jobs which will bring you the largest possible amount of money.

Solution: This is a slight modification of the knapsack problem with two constraints on the total size of all jobs; think of a knapsack which can hold items of total weight not exceeding E units of weight and total volume not exceeding T units of volume, with item i having a weight of e_i integer units of weight and

$e \leq E, t \leq T$ such that e, t, i is a h-collection of items 1 through N and units of volume, which is of largest possible value, putting such a value in a 3D table of size $E \times T \times N$ where N is the number of items. The values are obtained using the following recursion:

$$\text{opt}(i, e, t) = \max\{\text{opt}(i-1, e, t), \text{opt}(i-1, e-e_i, t-t_i) + d_i\}.$$

The complexity is $O(NET)$

11. Because of the recent droughts, n proposals have been made to dam the Murray Darling river. The i^{th} proposal asks to place a dam x_i meters from the head of the river (i.e., from the source of the river) and requires that there is not another dam within r_i metres (upstream or downstream). What is the largest number of dams that can be built? You may assume that $x_i < x_{i+1}$.

Solution: We solve this by finding the maximum value among the following subproblems for every $i \leq n$: Find the largest possible number of dams that can be built among proposals $1 \dots i$, such that the i^{th} dam is built. The base case is $\text{opt}(1) = 1$. The recursion is:

$$\text{opt}(i) = 1 + \max\{\text{opt}(j) : x_i - x_j > \max(r_i, r_j), j < i\}$$


We do an $O(n)$ search at every dam proposal i . Thus, the total complexity is $O(n^2)$.

12. You are given an $n \times n$ chessboard with an integer in each of its n^2 squares. You start from the top left corner of the board; at each move you can go either to the square immediately below or to the square immediately to the right of the square you are at the moment; you can never move diagonally. The goal is to reach the right bottom corner so that the sum of integers at all squares visited is minimal.
- Describe a greedy algorithm which attempts to find such a minimal sum path and show by an example that such a greedy algorithm might fail to find such a minimal sum path.
 - Describe an algorithm which always correctly finds a minimal sum path and runs in time n^2 .
 - Describe an algorithm which computes the number of such minimal paths.
 - Very tricky! Assume now that such a chessboard is stored in a read only memory. Describe an algorithm which always correctly finds a minimal sum path and runs in time $O(n)$ and space $O(1)$.

Assignment Project Exam Help

<https://eduassistpro.github.io/>

Add WeChat edu_assist_pro

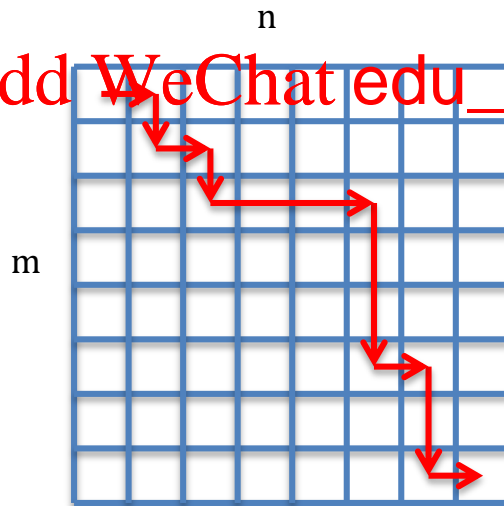

Solution: a) Start at the top left square, and always go to the immediate square below or to the right that has the smallest integer. This algorithm fails with the following example:

0	1	1
5	1000	1000
5	5	0

The algorithm will get a score of 1002, instead of the correct answer of 15.

b) We solve all subproblems of the form “What is the best score we can get arriving at the cell at row i and column j ”? The base case is that $\text{opt}(1, 1) = \text{board}(1, 1)$, and $\text{opt}(i, j) = \infty$ for all i and j that are off the board. The recursion is:

$$\text{opt}(i, j) = \text{board}(i, j) + \min\{\text{opt}(i-1, j), \text{opt}(i, j-1)\}$$

The complete

c) Solve the following problem: Find the number of ways to reach row i and column j from the top left cell. Let $\text{ways}(i, j)$ be the number of ways to reach row i and column j from the top left cell. The base case is that $\text{ways}(1, 1) = 1$ and $\text{ways}(i, j) = 0$ for all i and j that are off the board. The recursion is:

$$\text{ways}(i, j) = \begin{cases} \text{ways}(i-1, j) & \text{if } \text{opt}(i-1, j) < \text{opt}(i, j-1) \\ \text{ways}(i, j-1) & \text{if } \text{opt}(i-1, j) > \text{opt}(i, j-1) \\ \text{ways}(i-1, j) + \text{ways}(i, j-1) & \text{if } \text{opt}(i-1, j) = \text{opt}(i, j-1) \end{cases}$$

The complexity is once again $O(n^2)$

d) This is a very tricky one. The idea is to combine divide and conquer with dynamic programming. Note that to generate optimal scores at a row i you only need the optimal scores of the previous row. You start running the previous algorithm from the top left cell to the middle row $\lfloor n/2 \rfloor$, keeping in memory only the previous row. You now run the algorithm from the bottom right corner until you reach the middle row, always going either up one cell or to the left one cell. Once you reach the middle row you sum up the scores obtained by moving down and to the right from the top left cell and the scores obtained by moving up and to the left from the bottom right cell and you

pick the cell $C(n/2, m)$ in that row with the minimal sum. This clearly is the cell on the optimal trajectory. You now store the coordinates of that cell and proceed with the same strategy applied to the top left region for which $C(n/2, m)$ is bottom right cell, and also applied to the bottom right region of the board for which $C(n/2, m)$ is the top left cell. The run time is $O(n \times n + n \times n/2 + n \times n/4 + \dots) = O(n \times 2n) = O(n^2)$

13. A palindrome is a sequence of letters which reads equally from left to right and from right to left. Given a sequence of letters, find efficiently its longest subsequence (not necessarily contiguous) which is a palindrome. Thus, we are looking for a longest palindrome which can be obtained by crossing out some of the letters of the initial sequence without permuting the remaining letters.

Solution: Let S_i denote the i^{th} letter of the string. Solve the subproblem: What is the longest palindrome within the substring starting at letter i and ending at j . The base case is that $\text{opt}(i, i) = 1$, as a single letter is a palindrome by itself. We solve this using the recursion:

$$\text{opt}(i, j) = \begin{cases} 1 & \text{if } i = j, \\ j \text{ and } S_i = S_j, & \text{if } i + 1 = j \text{ and } S_i = S_j, \\ \text{opt}(i + 1, j - 1) & \text{if } S_i = S_j \text{ and } i < j - 2, \\ \max(\text{opt}(i, j - 1), \text{opt}(i + 1, j)) & \text{if } S_i \neq S_j \end{cases}$$

<https://eduassistpro.github.io/>

and a function from pairs of natural numbers into pairs of natural numbers

$$\text{pred}[(i, j)] = \begin{cases} (i, i) & \text{if } i = j, \\ (i, j) & \text{if } i + 1 = j \text{ and } S_i = S_j, \\ (i + 1, j - 1) & \text{if } S_i = S_j \text{ and } i < j - 2, \\ (i, j - 1) & \text{if } S_i \neq S_j \text{ and } \text{opt}(i, j - 1) \geq \text{opt}(i + 1, j) \\ (i + 1, j) & \text{else} \end{cases}$$

To reconstruct the palindrome, backtrack iterating function $\text{pred}[(i, j)]$ starting with $(1, n)$ and recoding values of i and j when $S_i = S_j$. The complexity of this algorithm is $O(n^2)$, where n is the length of the string.

14. A partition of a number n is a sequence $\langle p_1, p_2, \dots, p_t \rangle$ (we call the p_k parts) such that $1 \leq p_1 \leq p_2 \leq \dots \leq p_t \leq n$ and such that $p_1 + \dots + p_t = n$.
- (a) Find the number of partitions of n in which every part is smaller or equal than k , where n, k are two given numbers such that $1 \leq k \leq n$.

(b) Find the total number of partitions of n .

Solution: (a) Let $\text{numpart}(k, m)$ denote the number of partitions of m in which every part is at most k . Then for all m $\text{numpart}(1, m) = 1$ because the only way to represent m with $k = 1$ would be as a sum of m ones; for $k \geq 2$ the value of $\text{numpart}(k, m)$ satisfies the recursion

$$\text{numpart}(k, m) = \text{numpart}(k - 1, m) + \text{numpart}(k, m - k)$$

The first term on the right counts number of partitions of m when no part is equal k and the second term counts the number of partitions when there exists at least one part equal to k , which we subtract from m and look at the number of partitions of the remainder $m - k$ in which all the parts are also at most k . Note that $\text{numpart}(k, m)$ are computed in order of the value of the sum $m + k$.

(b) We run the previous algorithm; the solution is $\text{numpart}(n, n)$.

15. We say that a sequence of Roman letters A occurs as a subsequence of a sequence of Roman letters B if we can obtain A by deleting some of the symbols of B . Design an algorithm which for every two sequences A and B gives the number of different ways one can delete some of the symbols of B so that A occurs as a subsequence.
 three occur

Solution: Let A_i be the i^{th} letter of A , and B_j be the j^{th} letter of B . Solve the subproblems: How many times do the first i letters of A occur as a subsequence of the first j letters of B . $\text{ways}(i, j) = 1$ if $A_1 = B_1$ and 0 otherwise; also, clearly, $\text{ways}(i, j) = 0$ if $i > j$. The recursion is, for all $i < j$

$$\text{opt}(i, j) = \begin{cases} 0, & \text{if } i > j \\ \text{opt}(i, j - 1), & \text{if } A_i \neq B_j \\ \text{opt}(i - 1, j - 1) + \text{opt}(i, j - 1) & \text{if } A_i = B_j \end{cases}$$

Note that in the second case when $A_i = B_j$ we have two options: we can map A_i into B_j because they match, but we can also map the first i many letters of A into $j - 1$ many letters of B , so we have the sum of these two options. The complexity is $O(nm)$ where n is the length of A and m is the length of B .

16. We are given a checkerboard which has 4 rows and n columns, and has an integer written in each square. We are also given a set of $2n$ pebbles, and we


want to place some or all of these on the checkerboard (each pebble can be placed on exactly one square) so as to maximise the sum of the integers in the squares that are covered by pebbles. There is one constraint: for a placement of pebbles to be legal, no two of them can be on horizontally or vertically adjacent squares (diagonal adjacency is fine).

- (a) Determine the number of legal *patterns* that can occur in any column (in isolation, ignoring the pebbles in adjacent columns) and describe these patterns.

Call two patterns *compatible* if they can be placed on adjacent columns to form a legal placement. Let us consider sub-problems consisting of the first k columns $1 \leq k \leq n$. Each sub-problem can be assigned a type, which is the pattern occurring in the last column.

- (b) Using the notions of compatibility and type, give an $O(n)$ -time algorithm for computing an optimal placement.

Solution: (a) There are 8 patterns, listed below.

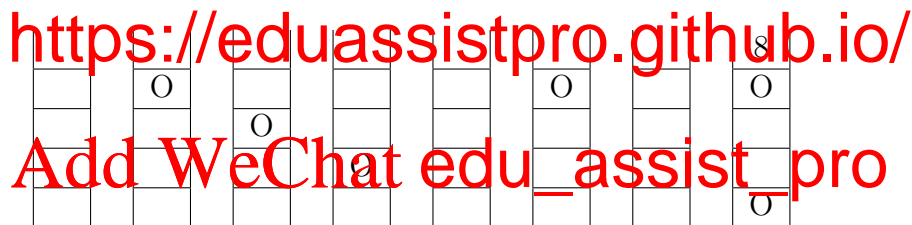

- (b) Let t denote the type of pattern, so that t ranges from 1 to 8. We solve our subproblem by choosing k columns from our set of patterns, such that each column is compatible with the one before. The subproblem is: What is the maximum score we can get by only placing pebbles in the first k columns, such that the k^{th} column has pattern t . The base case is that $\text{opt}(0) = 0$. The recursion is:

$$\text{opt}(k, t) = \text{score}(k, t) + \max\{\text{opt}(k-1, s) : s \text{ is compatible with } t\}$$

Here, $\text{score}(k, t)$ is the score obtained by using pattern t on column k . The compatibilities are as follows:

- (a) pattern 1 is compatible with all 8 patterns (including itself);

- (b) pattern 2 is compatible with all patterns except 2,6 and 8
- (c) pattern 3 is compatible with all patterns except 3 and 7;
- (d) pattern 4 is compatible with all patterns except 4 and 6;
- (e) pattern 5 is compatible with all patterns except 5,7 and 8;
- (f) pattern 6 is compatible with all patterns except 2,6 and 8;
- (g) pattern 7 is compatible with all patterns except 3,5,7 and 8;
- (h) pattern 8 is compatible with all patterns except 2,5,6,7 and 8.

The complexity is $O(n)$, as the number of patterns is constant.

17. Skiers go fastest with skis whose length is about their height. Your team consists of n members, with heights h_1, h_2, \dots, h_n . Your team gets a delivery of $m \geq n$ pairs of skis, with lengths l_1, l_2, \dots, l_m . Your goal is to design an algorithm to assign to each skier one pair of skis to minimise the sum of the absolute differences between the height h_i of the skier and the length of the corresponding ski. i.e. to minimise

where $s(i)$ is the ski assigned to skier i .

Solution: First observe that if we have two skiers i and j such that $h_i < h_j$, then $s(i) < s(j)$. If this were not the case, we could swap the skis assigned to i and j , which would lower the sum of differences. To solve the problem, we initially sort the skiers by height, and sort the skis by length, and find some sort of pairing such that there are no crossovers (similar to question 4). Also, if you have equal number of skiers and skis, you would give i^{th} skier i^{th} pair of skis.

We now solve the following subproblem: What is the minimum cost of matching the first i skiers with the first $j > i$ skis such that each of the first i skiers gets a ski? The base case is $\text{opt}(i, i) = \sum_{k=1}^i |h_k - l_k|$. The recursion for $j > i$ is:

$$\text{opt}(i, j) = \min\{\text{opt}(i, j-1), \text{opt}(i-1, j-1) + |h_i - l_j|\}.$$

To retrieve the assignment, we start at (i, j) where $i = n$ and $j = m$. If $\text{opt}(i-1, j-1) + |h_i - l_j| < \text{opt}(i, j-1)$ then $s(i) = j$ and we try again at

$(i - 1, j - 1)$. Otherwise, we try again at $(i, j - 1)$. If at any point we reach $i = j$ (our base case), we simply assign $s(k) = k$ for all $1 \leq k \leq i$.

The complexity of the initial recursion is $O(nm)$. The complexity of retrieving the assignment is $O(m)$, as each time we run the algorithm, j decreases by exactly 1.

18. You have to cut a wood stick into several pieces. The most affordable company, Analog Cutting Machinery (ACM), charges money according to the length of the stick being cut. Their cutting saw allows them to make only one cut at a time. It is easy to see that different cutting orders can lead to different prices. For example, consider a stick of length 10 m that has to be cut at 2, 4, and 7 m from one end. There are several choices. One can cut first at 2, then at 4, then at 7. This leads to a price of $10 + 8 + 6 = 24$ because the first stick was of 10 m, the resulting stick of 8 m, and the last one of 6 m. Another choice could cut at 4, then at 2, then at 7. This would lead to a price of $10 + 4 + 6 = 20$, which is better for us. Your boss demands that you design an algorithm to find the minimum possible cutting cost for any given stick.

Solution: Let $x(i)$ be the distance along the stick the i th cutting point is at. Solve the fo

he stick comp j . The base case is $\text{opt}(i, i + 1)$

$$\text{opt}(i, j) = x(j) - x(i) + \min\{\text{op}$$

The complexity is $O(n^2)$, where n is the nu tick.

Note: always cutting the stick as close to its middle as possible does not always produce an optimal solution; try making a counter example.

19. For bit strings $X = x_1 \dots x_m$, $Y = y_1 \dots y_n$ and $Z = z_1 \dots z_{m+n}$ we say that Z is an interleaving of X and Y if it can be obtained by interleaving the bits in X and Y in a way that maintains the left-to-right order of the bits in X and Y . For example if $X = 101$ and $Y = 01$ then $x_1x_2y_1x_3y_2 = 10011$ is an interleaving of X and Y , whereas 11010 is not. Give an efficient algorithm to determine if Z is an interleaving of X and Y .

Solution: Solve the following subproblem: Do the first i bits of X and the first j bits of Y form an interleaving in the first $i + j$ bits of Z ? The base case is $\text{opt}(0, 0) = \text{true}$, and $\text{opt}(i, j) = \text{false}$ if $i < 0$ or $j < 0$. The recursion is:

$$\text{opt}(i, j) = (\text{opt}(i - 1, j) \text{ AND } z_{i+j} = x_i) \text{ OR } (\text{opt}(i, j - 1) \text{ AND } z_{i+j} = y_j).$$

The complexity is $O(nm)$.

20. Some people think that the bigger an elephant is, the smarter it is. To disprove this you want to analyse a collection of elephants and place as large a subset of elephants as possible into a sequence whose weights are increasing but their IQs are decreasing. Design an algorithm which given the weights and IQs of n elephants, will find a longest sequence of elephants such that their weights are increasing but IQs are decreasing.

Solution: Sort the elephants in order of decreasing IQs. The problem now becomes finding the longest increasing subsequence of elephant weights.

21. You have been handed responsibility for a business in Texas for the next N days. Initially, you have K illegal workers. At the beginning of each day, you may hire an illegal worker, keep the number of illegal workers the same or fire an illegal worker. At the end of each day, there will be an inspection. The inspector on the i^{th} day will check that you have between l_i and r_i illegal workers (inclusive). If you do not, you will fail the inspection. Design an algorithm that determines the fewest number of inspections you will fail if you hire and fire illegal employees optimally.

Solution: Let $failed(i, j)$ be the minimum number of inspections you will fail if you have j illegal workers on day i and you have failed i inspections before the first day begins. Let $failed(i, j)$ be the minimum number of inspections you will fail if you have j illegal workers on day i and you have failed i inspections before the first day begins. The base case is $failed(0, j) = 0$ for all j such that $0 \leq j \leq K$. The recursion is: for all i such that $1 \leq i \leq N$ and all j such that $\max(0, K - i) \leq j \leq K + i$,

$$failed(i, j) = \min \left\{ \begin{array}{ll} failed(i-1, j-1) & \text{if } j-1 \geq \max(0, K-(i-1)) \\ \infty & \text{if } j-1 < \max(0, K-(i-1)) \\ failed(i-1, j) & \\ failed(i-1, j+1) & \text{if } j+1 \leq K+i-1 \\ \infty & \text{if } j+1 > K+i-1 \end{array} \right.$$

Note that the first option in the cases corresponds to hiring an illegal worker on the morning of day i , providing that the number of workers on the previous day was achievable over the period of $i-1$ days (you start with K workers, so

after $i - 1$ days you must have at least $K - (i - 1)$ workers which happens if you kept firing one worker every day); the second corresponds to keeping the same number of illegal workers as on the previous day and the third option corresponds to firing a worker from the previous day. The final answer is equal to $\min_{\max(K-N, 0) \leq j \leq K+N} \text{opt}(N, j)$.

The complexity is $O(N^2)$, as there are N days, and at most $2N + 1$ possible values of illegal worker each day.

22. Given an array of N positive integers, find the number of ways of splitting the array up into contiguous blocks of sum at most K .

Solution: Solve the subproblem: What is the number of ways I can split the first i elements into contiguous blocks of sum at most K . The base case is $\text{opt}(0) = 1$. For $1 \leq j < i$ let $\text{sum}(j, i)$ is the sum of all numbers from $A[j]$ to $A[i]$ inclusive. The recursion is:

$$\text{opt}(i) = \sum_{j=1}^{i-1} \{\text{opt}(j-1) : 1 \leq j \leq i, \text{sum}(j, i) \leq K\}$$

The complete search.

23. There are K levels to the next level another level later in the game. Determine if there is a path that plays exactly K levels.

Solution: The subproblems are: Can I reach the level i by playing exactly k levels? The base case is $\text{opt}(0, 0) = \text{true}$. The recursion is:

$$\text{opt}(i, k) = \text{opt}(i-1, k-1) \text{ OR } (\exists j < i-1)(\text{opt}(j, k-1) \text{ AND link}(j, i))$$

Here $\text{link}(j, i)$ is true if and only if level j has a secret exit to level i . The final answer is $\text{opt}(K, N)$. The time complexity is $O(N^2)$.

24. Given a sequence of n positive or negative integers A_1, A_2, \dots, A_n , determine a contiguous subsequence A_i to A_j for which the sum of elements in the subsequence is maximised.

Solution: We solve the subproblem: What is the maximum sum of elements ending with integer i ? The base case is $\text{opt}(0) = 0$. The recursion is:

$$\text{opt}(i) = A_i + \max(0, \text{opt}(i-1)).$$

Here, we take the maximum of 0 and $\text{opt}(i - 1)$ because we may either choose to add A_i to the previous block, or start a completely new block. To determine the actual block, we may also solve the following recursive function for all i :

$$\text{start}(i) = \begin{cases} \text{start}(i - 1) & \text{if } \text{opt}(i - 1) > 0, \\ i & \text{if } \text{opt}(i - 1) \leq 0 \end{cases}$$

To get the block, we simply find the element i such that $\text{opt}(i)$ is maximised. The block with maximum sum is $[\text{start}(i), i]$. The complexity is $O(n)$.

25. Consider a row of n coins of values v_1, v_2, \dots, v_n , where n is even. We play a game against an opponent by alternating turns. In each turn, a player selects either the first or last coin from the row, removes it from the row permanently, and receives the value of the coin. Determine the maximum possible amount of money we can definitely win if we move first.

Solution: DP has a very important role in the field of game theory. Let $\text{opt}(i, j)$ for i, j two integers such that $j - i + 1$ is an even number and $1 \leq i < j \leq n$ denote the maximal amount of money we can definitely win if we play on the subsequence j . Then $\text{opt}(i, j)$ satisfies the f

$$\text{opt}(i, j) = \max_i \min_j \{ \text{opt}(i+1, j-1), \text{opt}(i, j-2) \}$$

The options inside the min functions represent the either to continue taking from the same end as you took or end of the sequence. The problems to find $\text{opt}(i, j)$ are solved in order of the size of $j - i$. The complexity is $O(n^2)$, because this is how many pairs of i, j we have and each stage of the recursion has only constant number of steps (4 table lookups and 2 additions plus two min and one max operations).