

# JavaScript & Bootstrap BFF

---



**Mario Macari**

PROFESSOR, DEVELOPER & ARTIST

[www.mariomacari.com](http://www.mariomacari.com)

Chrome

FileEditViewHistoryBookmarksPeopleWindowHelp

0902-tooltips.html (0902-start) — Brackets

13</head>

14<body>

15

16

17<div class="container py-5">

18

19<button data-toggle="tooltip" data-placement="top" class="btn btn-success" title="Your message goes here!>Rollover Me</button>

20<button data-toggle="tooltip" data-placement="right" class="btn btn-danger" title="Your message goes here!>Rollover Me</button>

21<button data-toggle="tooltip" data-placement="bottom" class="btn btn-primary" title="Your message goes here!>Rollover Me</button>

22<button data-toggle="tooltip" data-placement="left" class="btn btn-info" title="Your message goes here!>Rollover Me</button>

Bootstrap Tooltips

127.0.0.1:49245/0902-tooltips.html


Your message goes here!

Rollover Me

Rollover Me

Rollover Me

Rollover Me

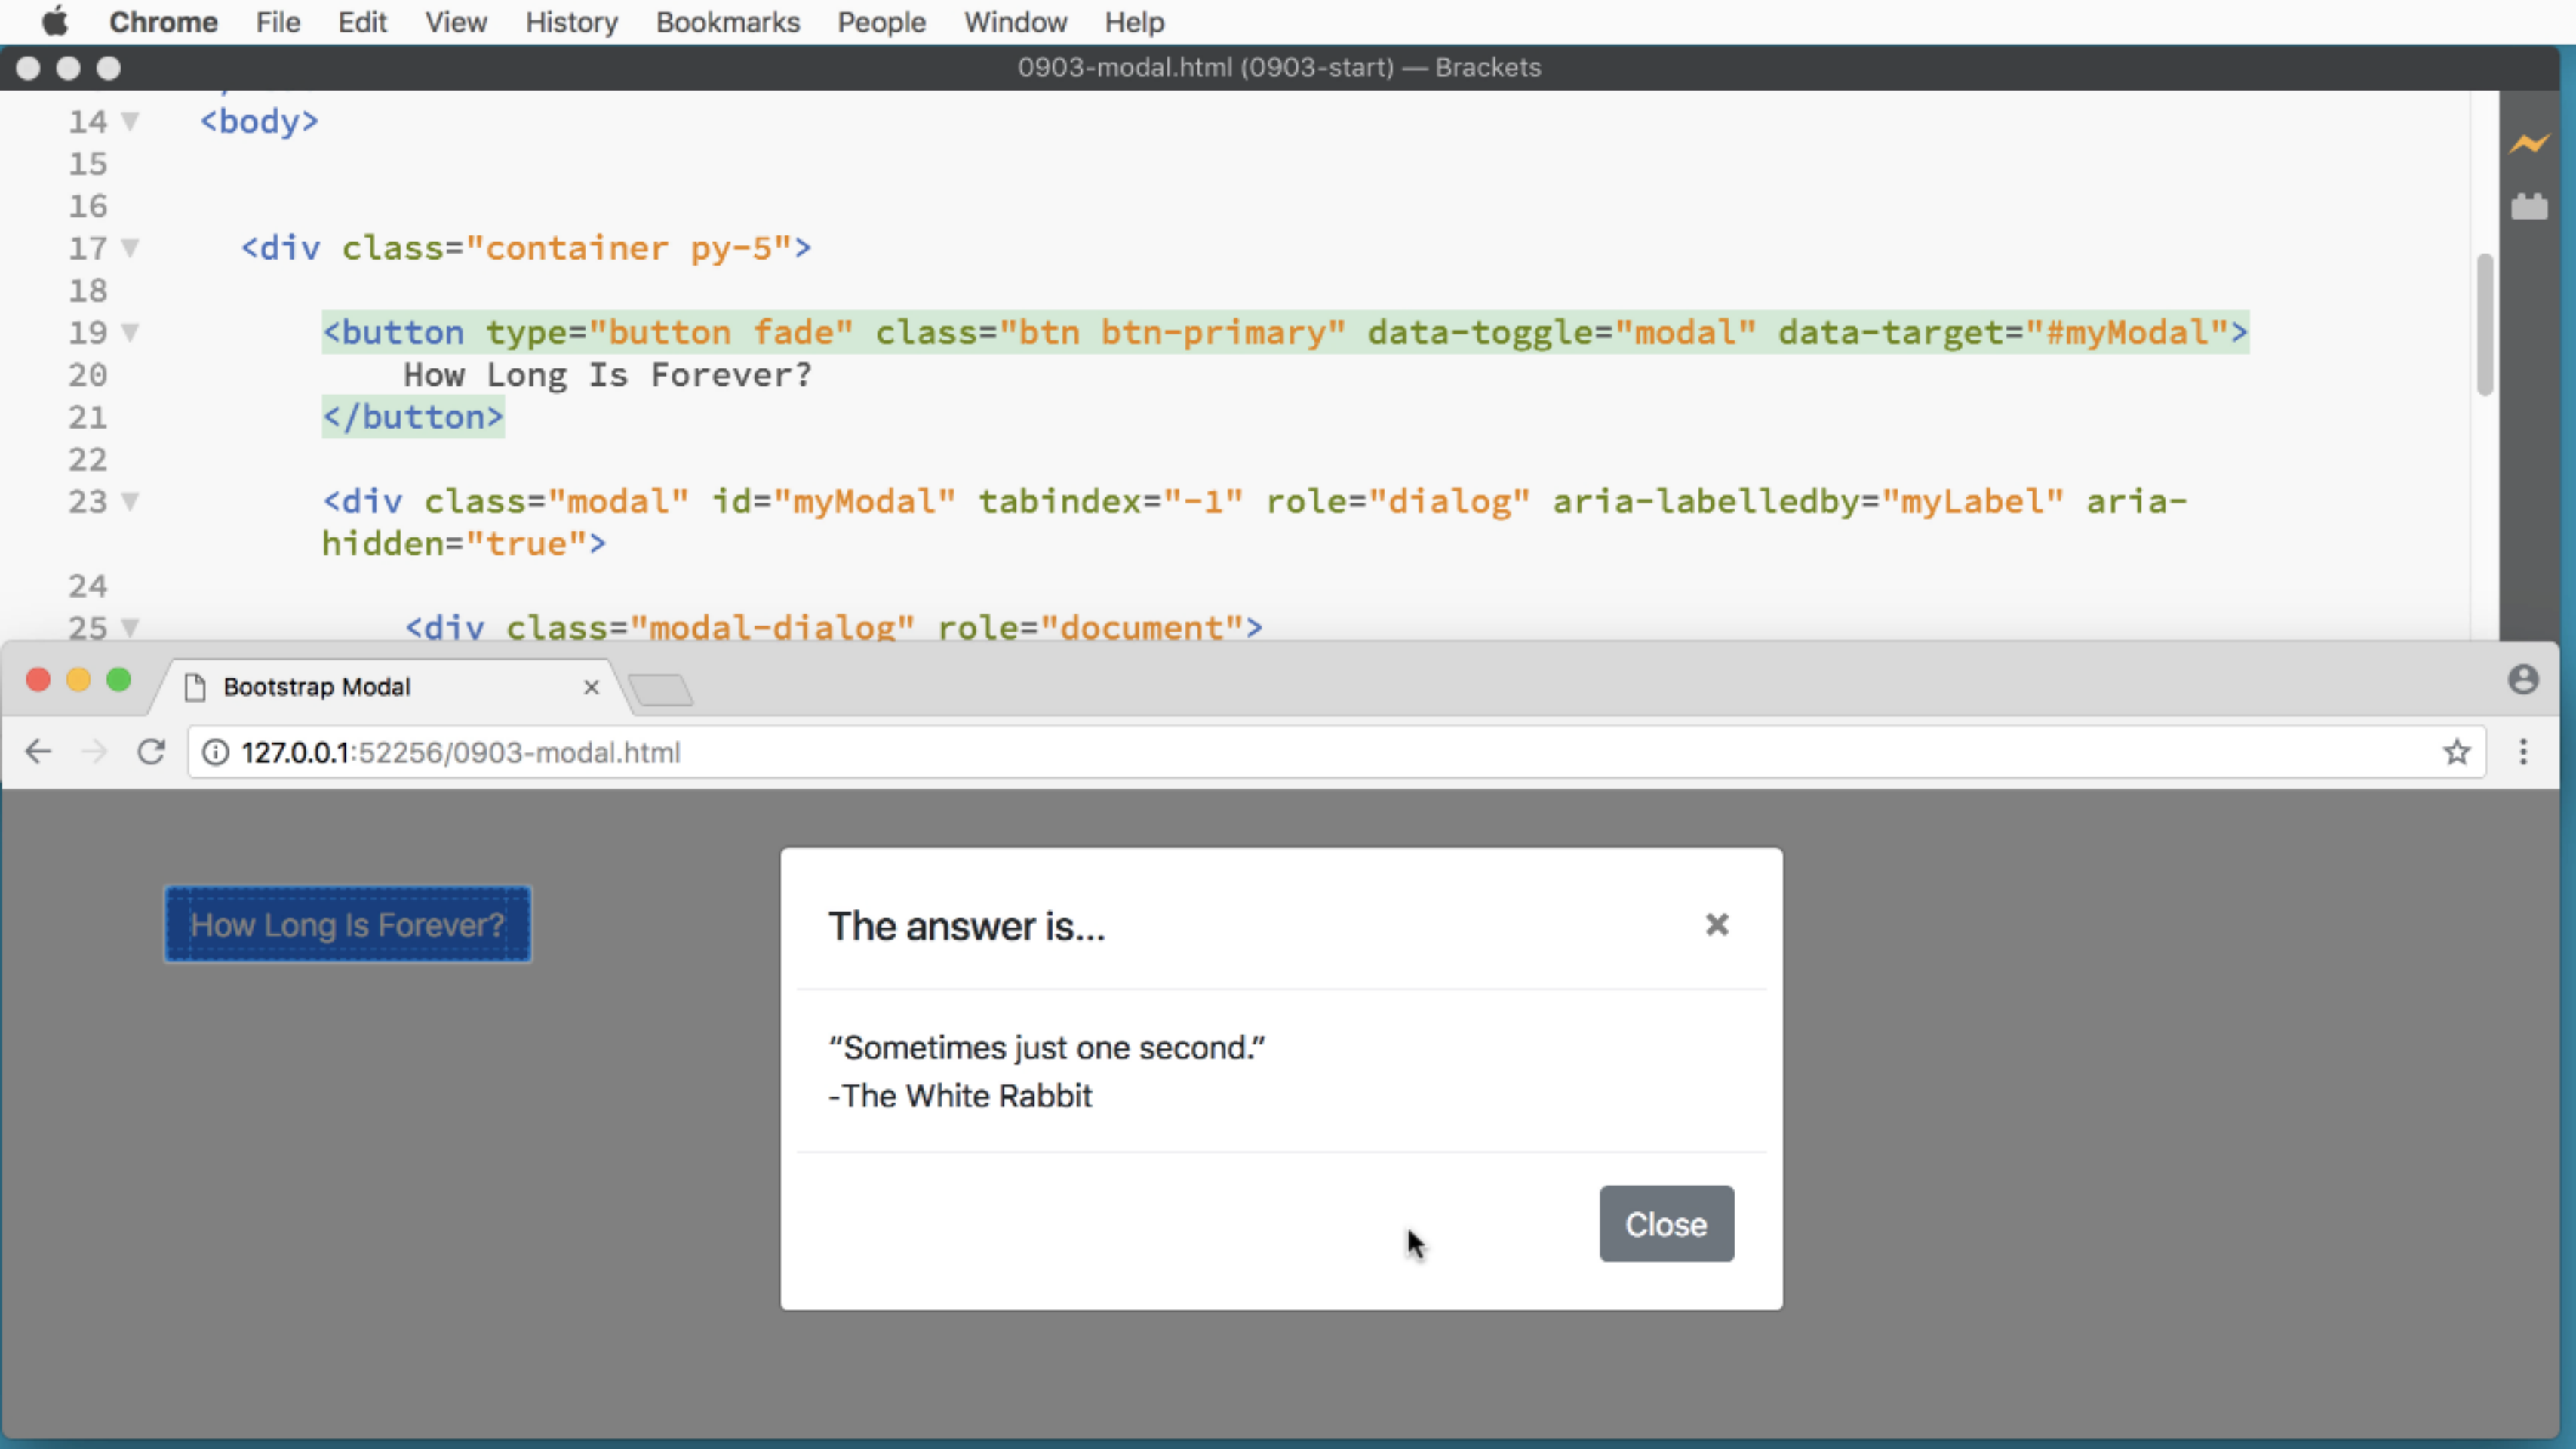


```
14 <body>
15
16
17 <div class="container py-5">
18
19 <button type="button" class="btn btn-primary" data-toggle="modal" data-target="#myModal">
20     How Long Is Forever?
21 </button>
22
23 <div class="modal" id="myModal" tabindex="-1" role="dialog" aria-labelledby="myLabel" aria-
24     hidden="true">
25 <div class="modal-dialog" role="document">
```

How Long Is Forever?

The answer is...

"Sometimes just one second."  
-The White Rabbit

Close

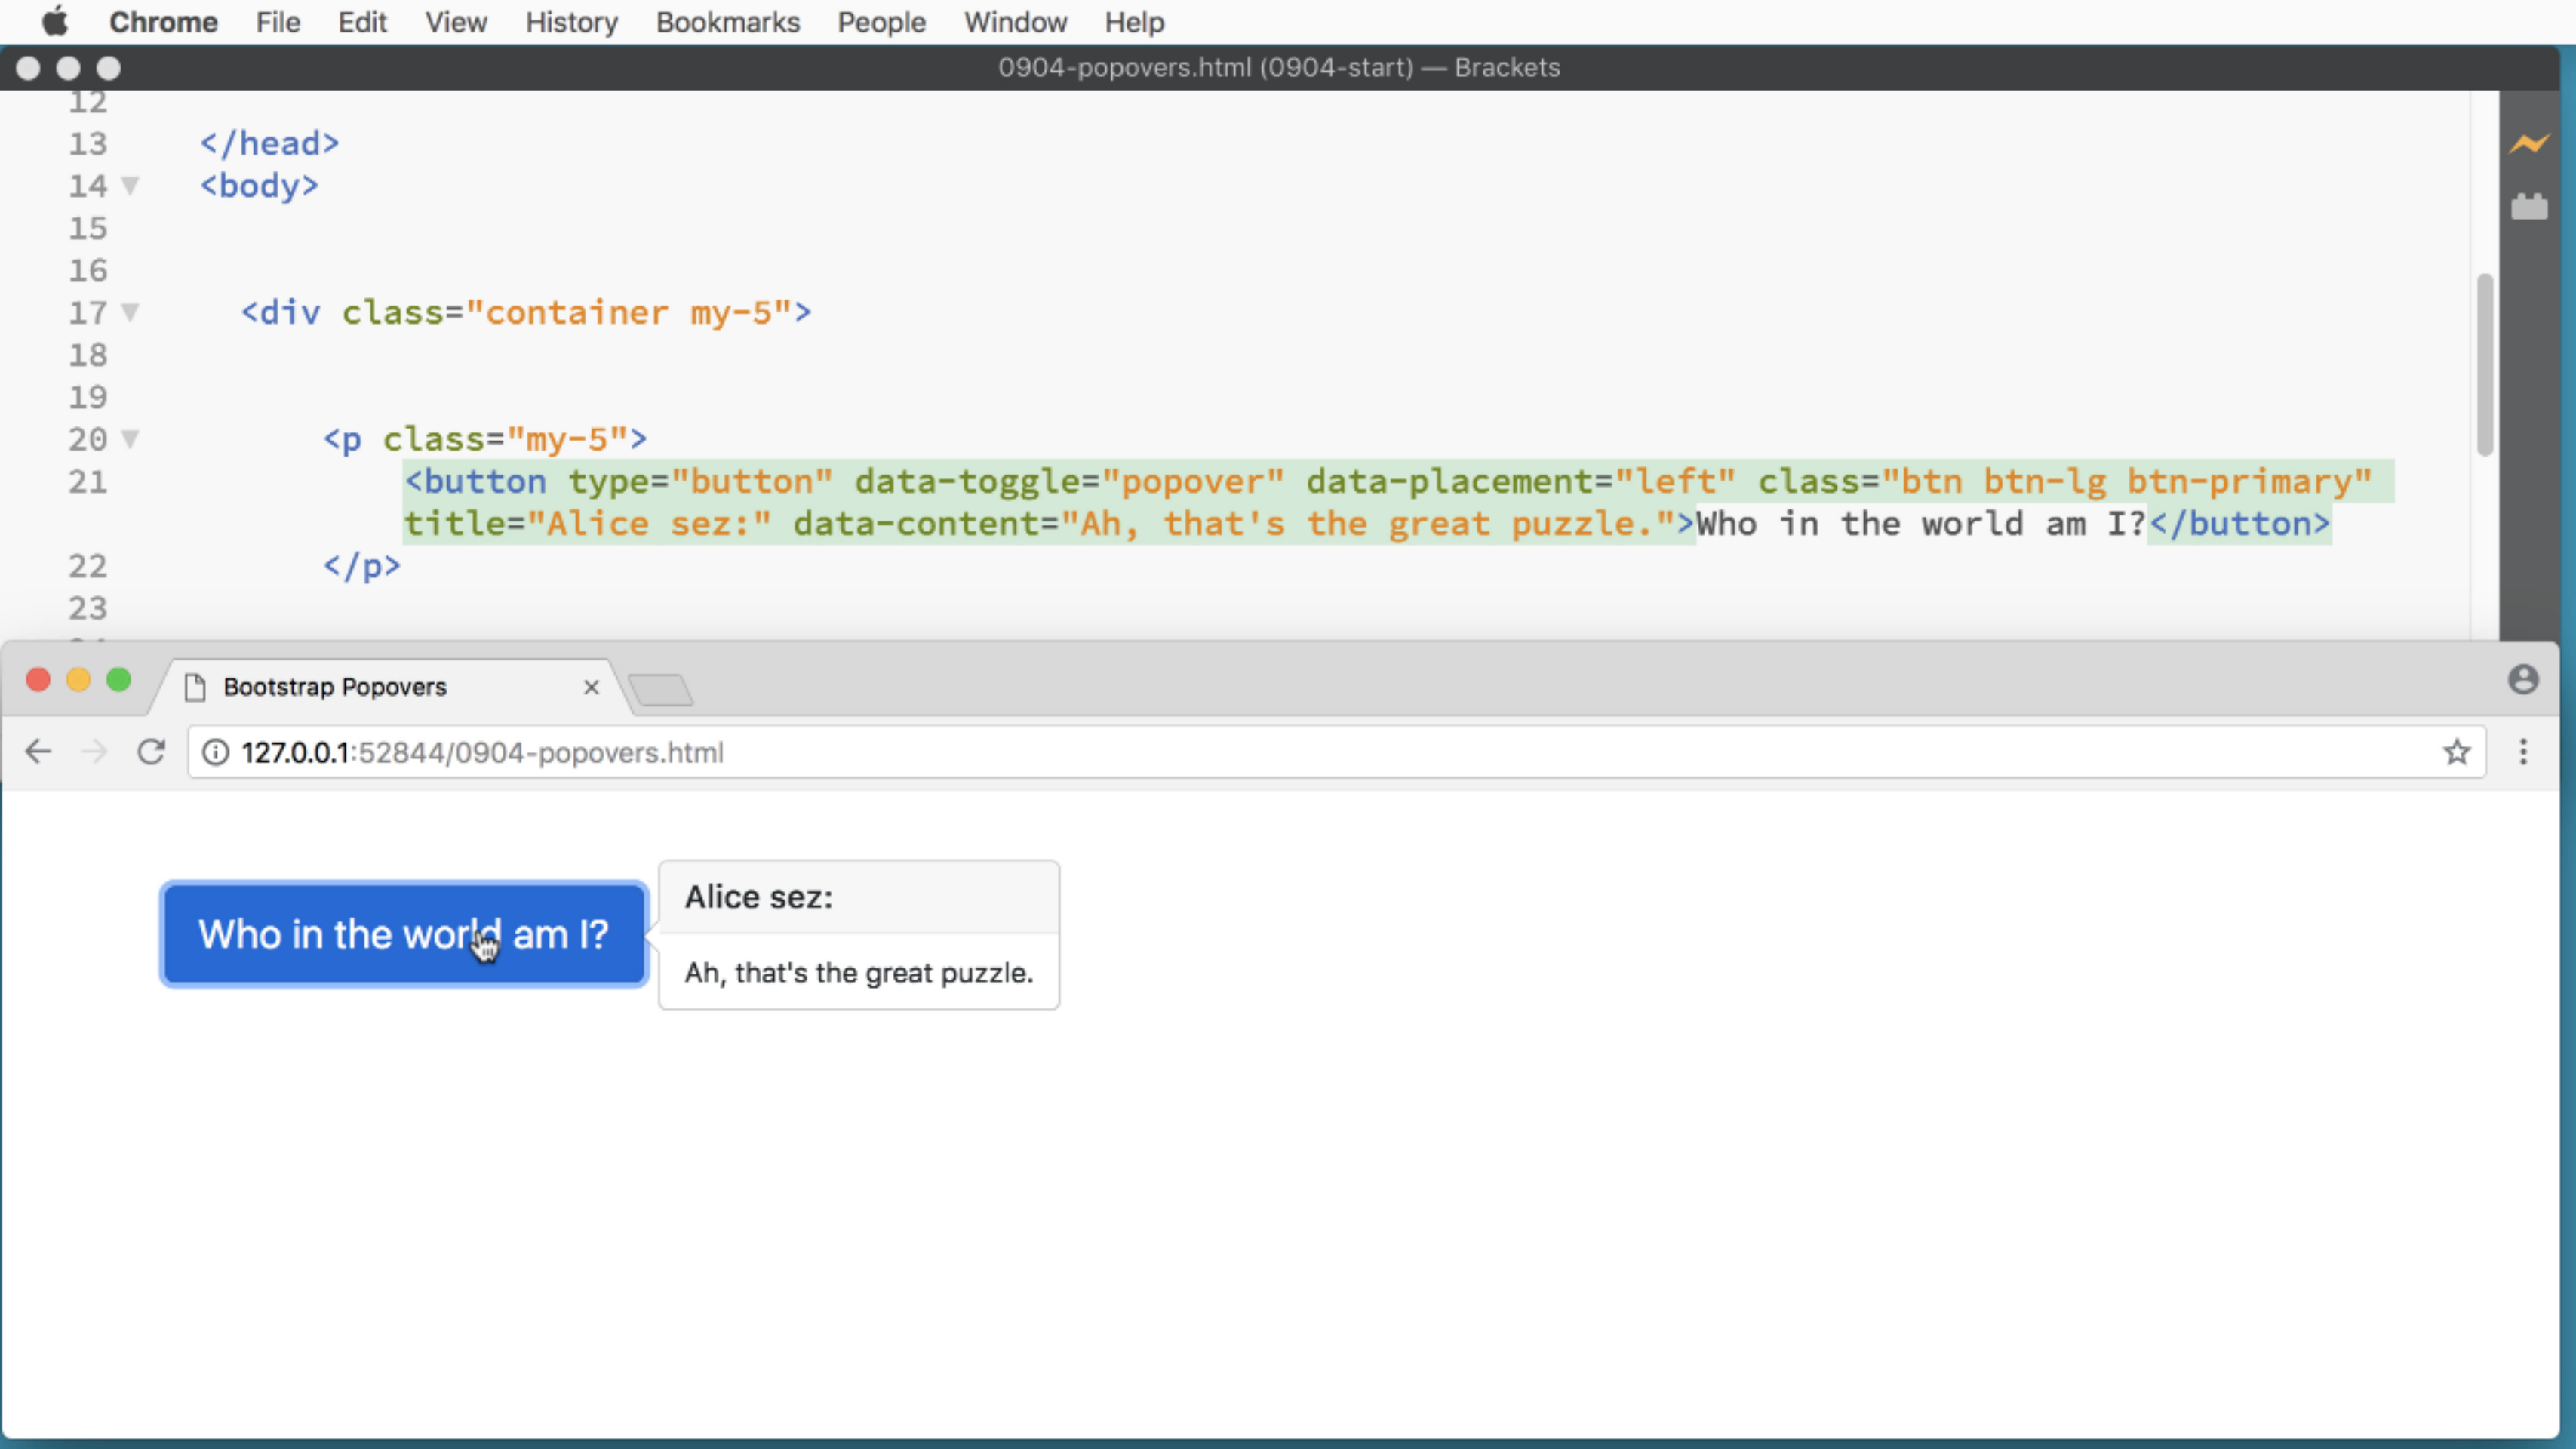

12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23

```
</head>  
<body>  
  
  <div class="container my-5">  
  
    <p class="my-5">  
      <button type="button" data-toggle="popover" data-placement="left" class="btn btn-lg btn-primary"  
        title="Alice sez:" data-content="Ah, that's the great puzzle.">Who in the world am I?</button>  
    </p>  
  </div>  
</body>
```

Who in the world am I?

Alice sez:  
Ah, that's the great puzzle.

ChromeFileEditViewHistoryBookmarksPeopleWindowHelp0905-scrollspy.html (0905-start) — Brackets

24 <div class="container my-5">  
25  
26 <div class="row">  
27  
28 <div class="col-2">

Bootstrap Scrollspy

127.0.0.1:61994/0905-scrollspy.html#Chapter-2

- Chapter 1
- Chapter 2
- Chapter 3
- Chapter 4

## Chapter 2: The Pool of Tears

**'Curiouser and curiouser!'** cried Alice (she was so much surprised, that for the moment she quite forgot how to speak good English); `now I'm opening out like the largest telescope that ever was! Good-bye, feet!' (for when she looked down at her feet, they seemed to be almost out of sight, they were getting so far off). `Oh, my poor little feet, I wonder who will put on your shoes and stockings for you now, dears? I'm sure \_I\_ shan't be able! I shall be a great deal too far off to trouble myself about you: you must manage the best way you can; –but I must be kind to them,' thought Alice, `or perhaps they won't walk the way I want to go! Let me see: I'll give them a new pair of boots every Christmas.' And she went on planning to herself how she would manage it. `They must go by the carrier,' she thought: `and how funny it'll seem, sending presents to one's

## Components with Events & Methods



Alerts

Carousel

Collapse

Dropdowns

List Group

Modal

Navs

Navbars

Popovers

Scrollspy

Tooltips

Let's get started.

# Alerts

Provide contextual feedback messages for typical user actions with the handful of available and flexible alert messages. Bootstrap's alert plugin exposes a few events for hooking into alert functionality.





```
$( '#myAlert' ).on( 'close.bs.alert', function () {  
    // your code goes here  
})
```

This event fires immediately when the **close** instance method is called.



```
$( '#myAlert' ).on( 'closed.bs.alert', function () {  
    // your code goes here  
})
```

This event is fired when the alert has been closed (will wait for CSS transitions to complete).



# Carousel

A slideshow component for cycling through elements—images or slides of text—like a carousel. Bootstrap's carousel class exposes two events for hooking into carousel functionality.



```
$( '#myAlert' ).on( 'slide.bs.carousel', function () {  
    // your code goes here  
})  
  
$( '#myAlert' ).on( 'slid.bs.carousel', function () {  
    // your code goes here  
})
```

slide.bs.carousel fires immediately when the **slide** instance method is invoked.

slid.bs.carousel fires when the carousel has completed its slide transition.



direction

◀ The direction of left or right in which the carousel is sliding

relatedTarget

◀ The DOM element that is being slid into place as the active item.

from

◀ The index of the current item

to

◀ The index of the next item



# Components with Events & Methods



Alerts

Carousel

Collapse

Dropdowns

List Group

Modal

Navs

Navbars

Popovers


Scrollspy

Tooltips




# Summary

# Summary

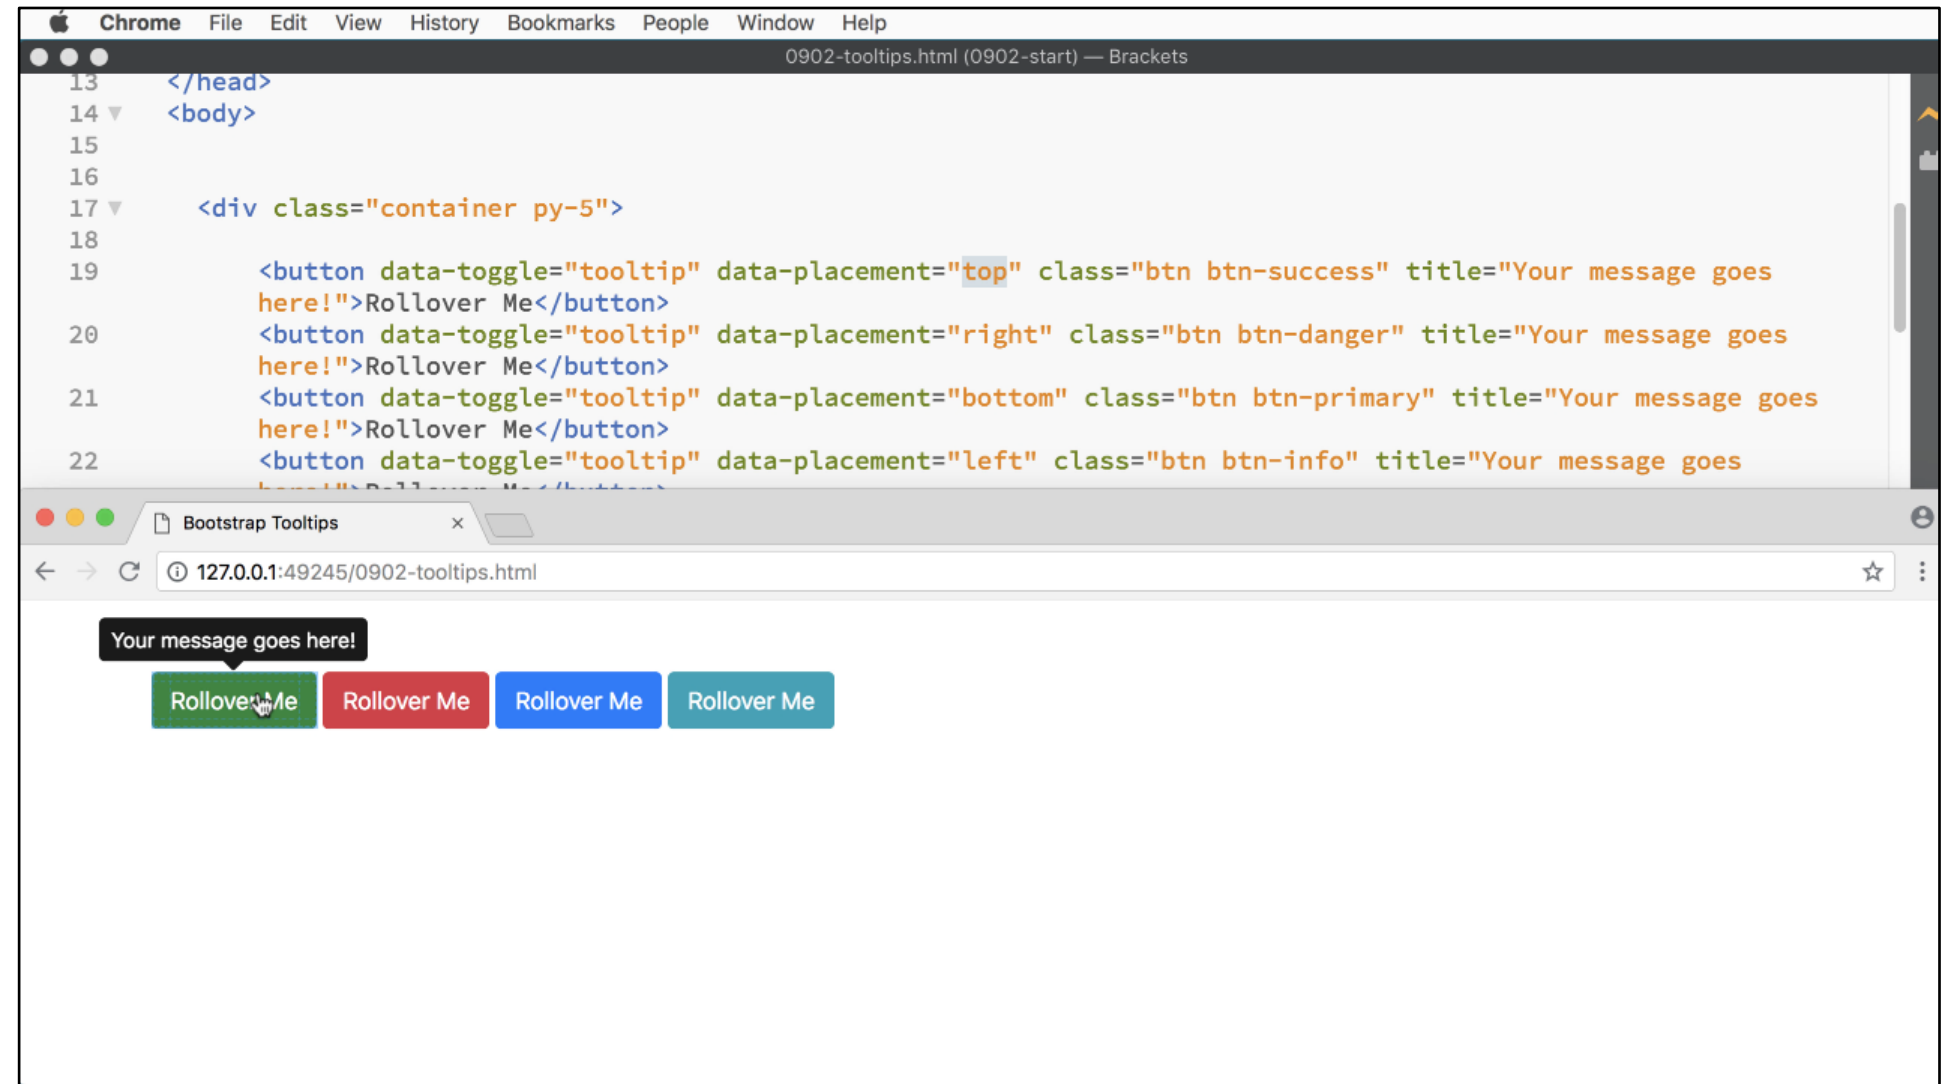





# Summary

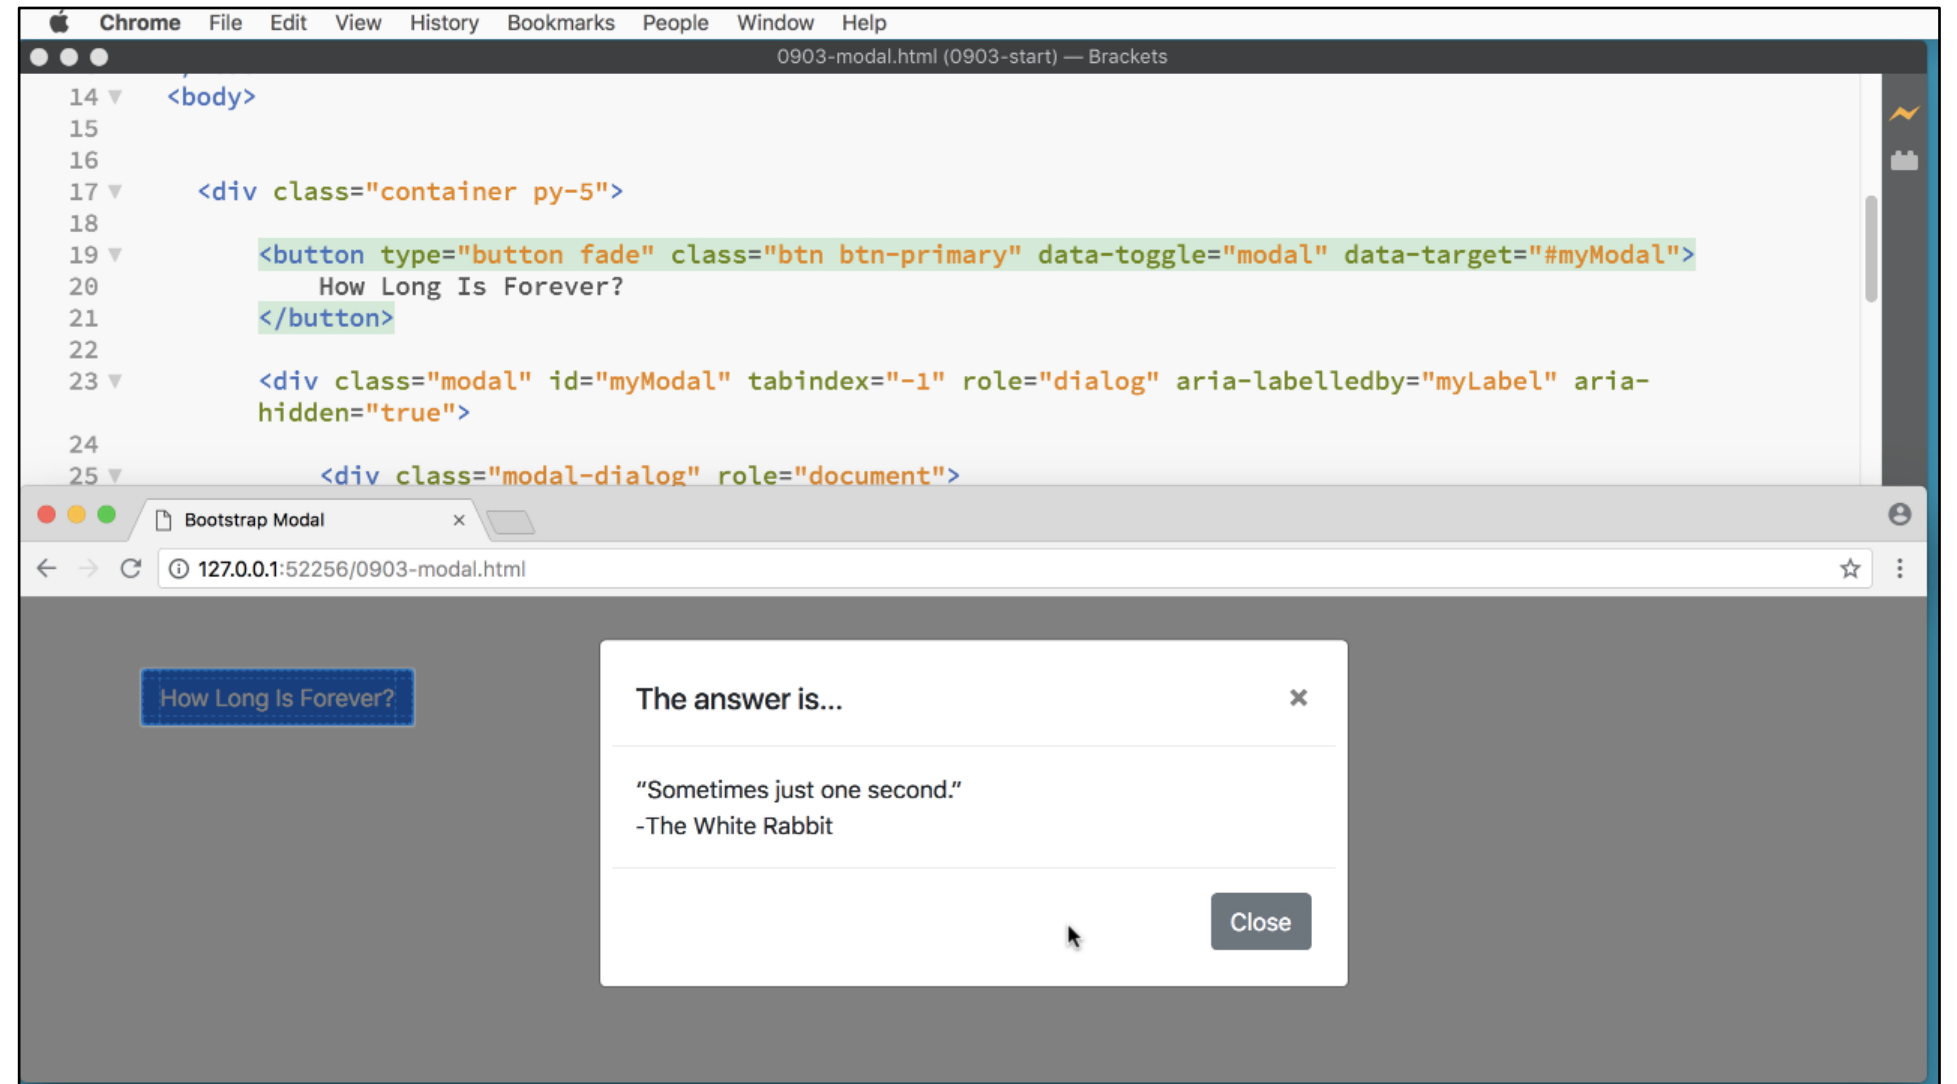

# Summary

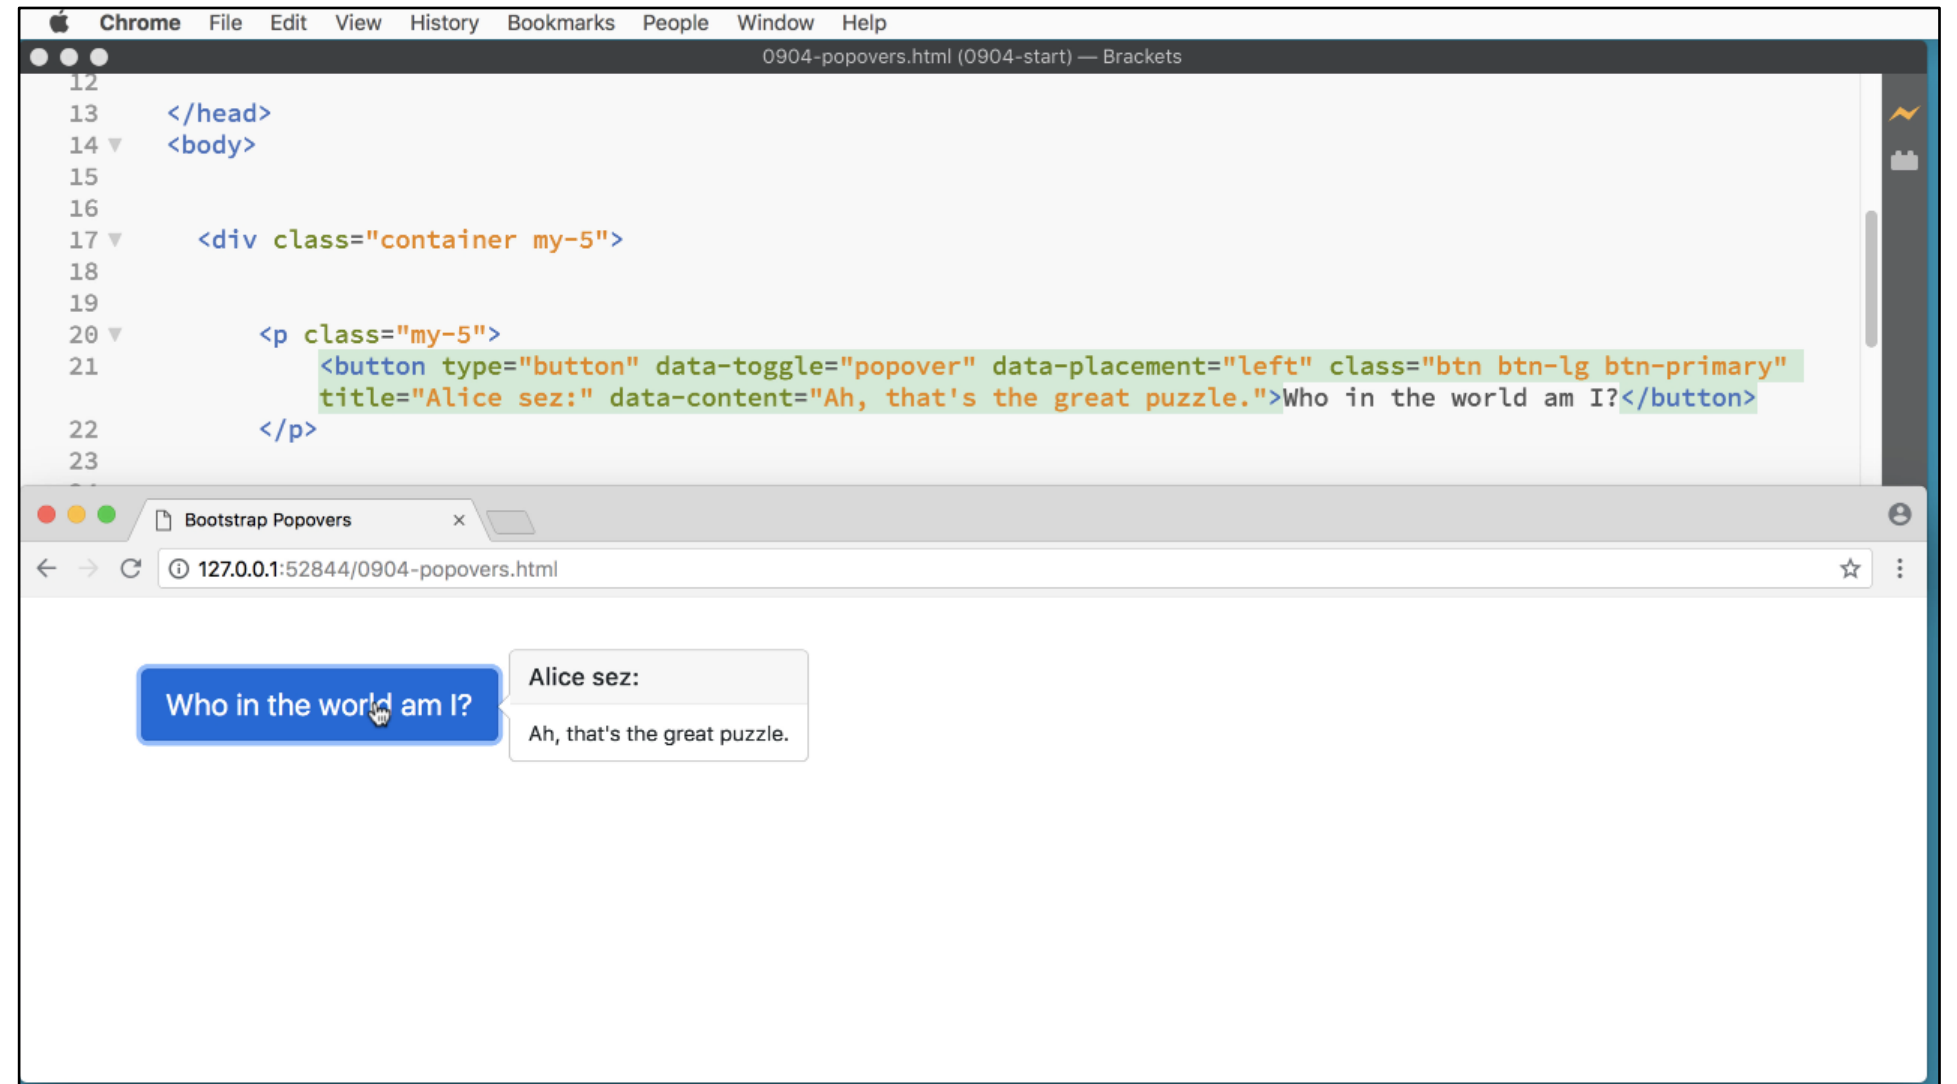

# Summary

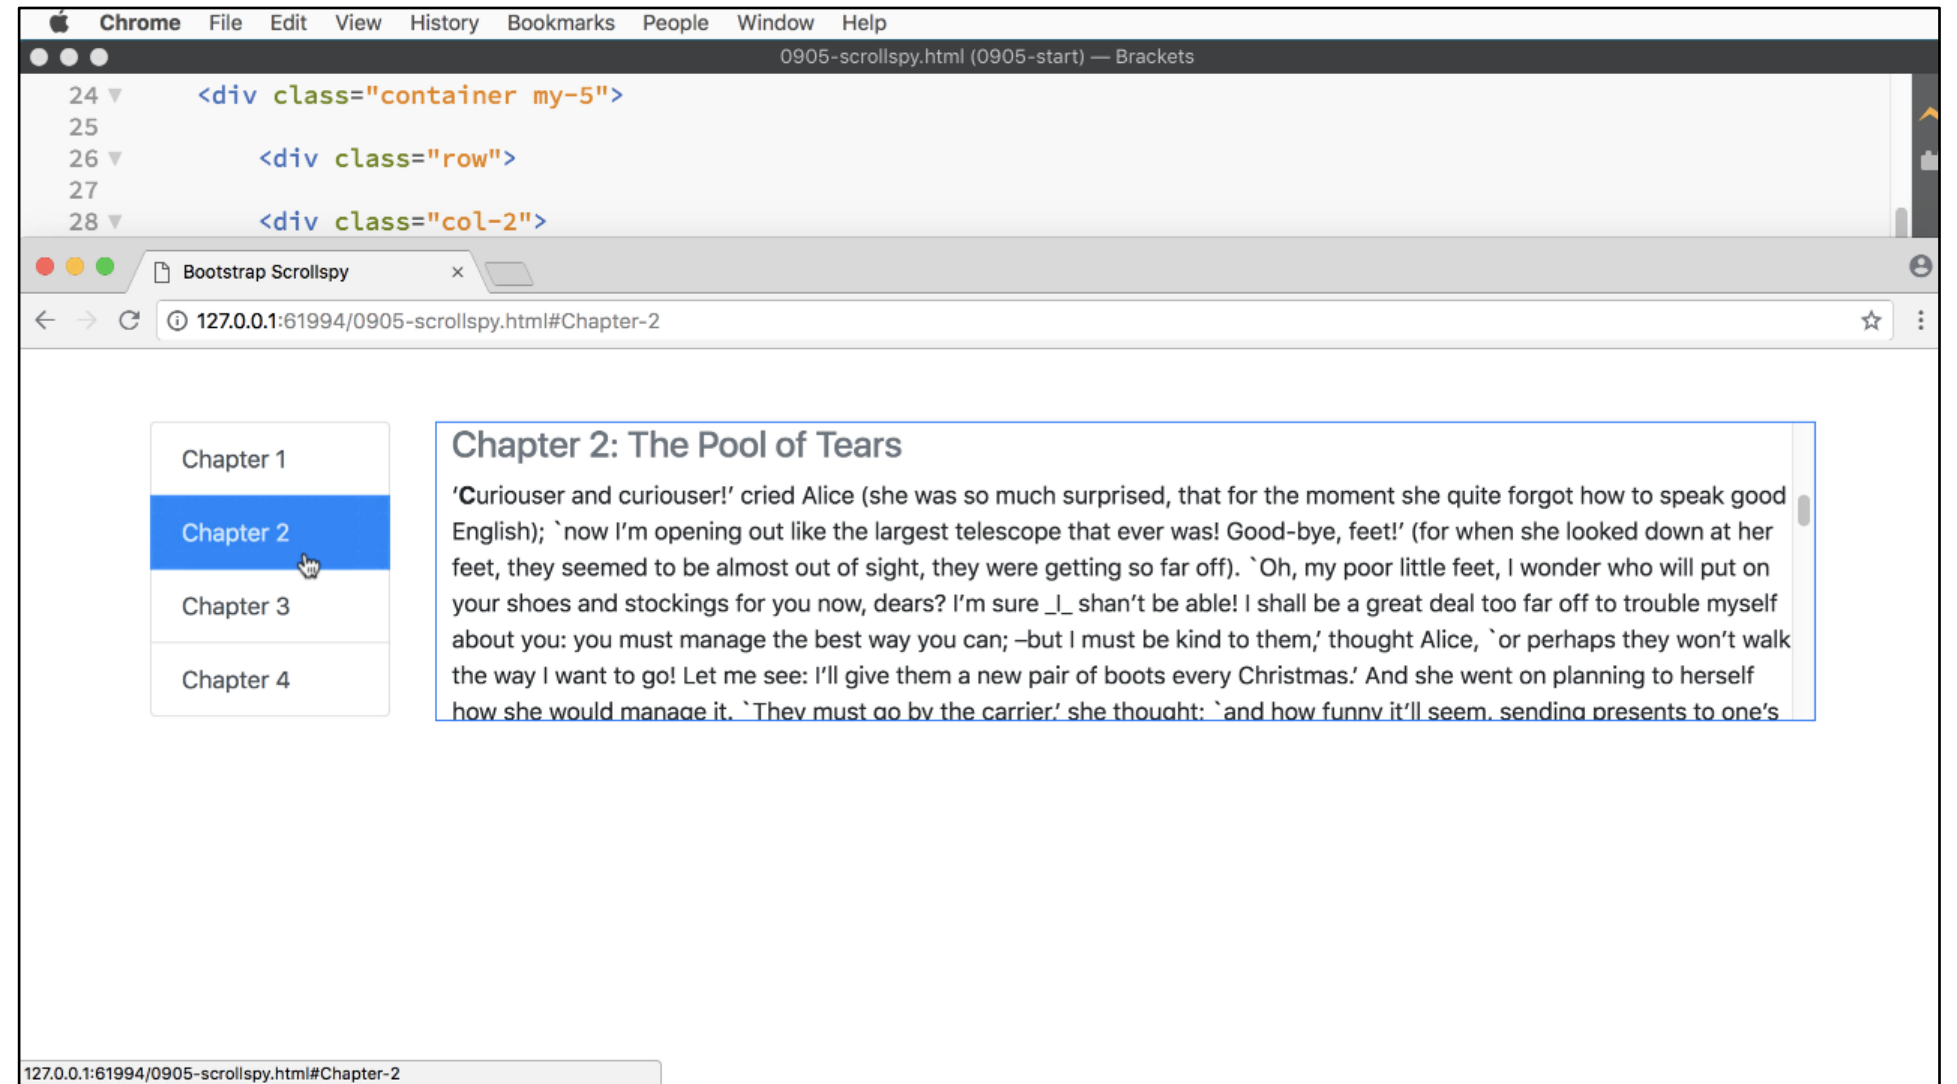

# Summary

Components with  
Events & Methods



Alerts

Carousel

Collapse

Dropdowns

List Group

Modal

Navs

Navbars

Popovers

Scrollspy

Tooltips



