Plots

Eduardo Yuki Yada

Imports

```
library(tidyverse)
library(yaml)

options(dplyr.summarise.inform = FALSE)
```

Loading data

```
load('dataset/processed_data.RData')
load('dataset/processed_dictionary.RData')

columns_list <- yaml.load_file("./auxiliar/columns_list.yaml")


outcome_column <- params$outcome_column


df[columns_list$outcome_columns] <- lapply(df[columns_list$outcome_columns], as.character)
df[columns_list$outcome_columns] <- lapply(df[columns_list$outcome_columns], as.integer)</pre>
```


Plots


```
library(lubridate)
medianWithoutNA <- function(x) {</pre>
   median(x[which(!is.na(x))])
}
k = 6
df[columns_list$outcome_columns] <- lapply(df[columns_list$outcome_columns], as.numeric)</pre>
for (column in setdiff(columns_list$numerical_columns, columns_list$outcome_columns)) {
  if (mean(is.na(df[[column]])) > 0.5) next
  df %>%
    mutate(rounded_date_admission_t0 = lubridate::floor_date(date_admission_t0,
                                                               'month')) %>%
    group_by(rounded_date_admission_t0) %>%
    summarise('Mean' = mean(!!sym(column), na.rm = T),
              'Min' = min(!!sym(column), na.rm = T),
              'Median' = medianWithoutNA(!!sym(column)),
              'Max' = max(!!sym(column), na.rm = T)) %>%
    ungroup %>%
    arrange(rounded_date_admission_t0) %>%
    mutate(Mean = zoo::rollmean(Mean, k = k, fill = NA),
           Min = zoo::rollmean(Min, k = k, fill = NA),
           Median = zoo::rollmean(Median, k = k, fill = NA),
           Max = zoo::rollmean(Max, k = k, fill = NA)) %>%
```


```
pivot_longer(!rounded_date_admission_t0, names_to = 'metric') %>%
    ggplot(aes(x = rounded_date_admission_t0, y = value, color = metric)) +
        geom_line() +
        geom_vline(xintercept = lubridate::ymd('2020-03-01'), linetype = "dashed") +
        labs(y = column) -> p
    print(p)
}
```

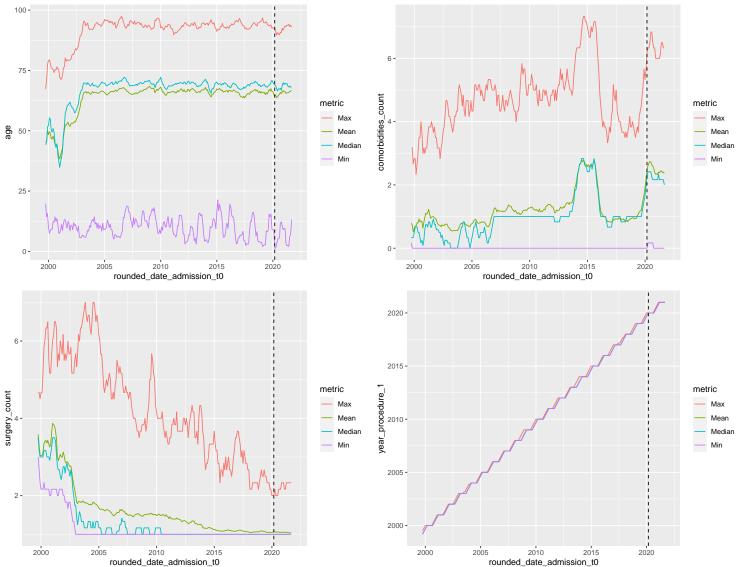


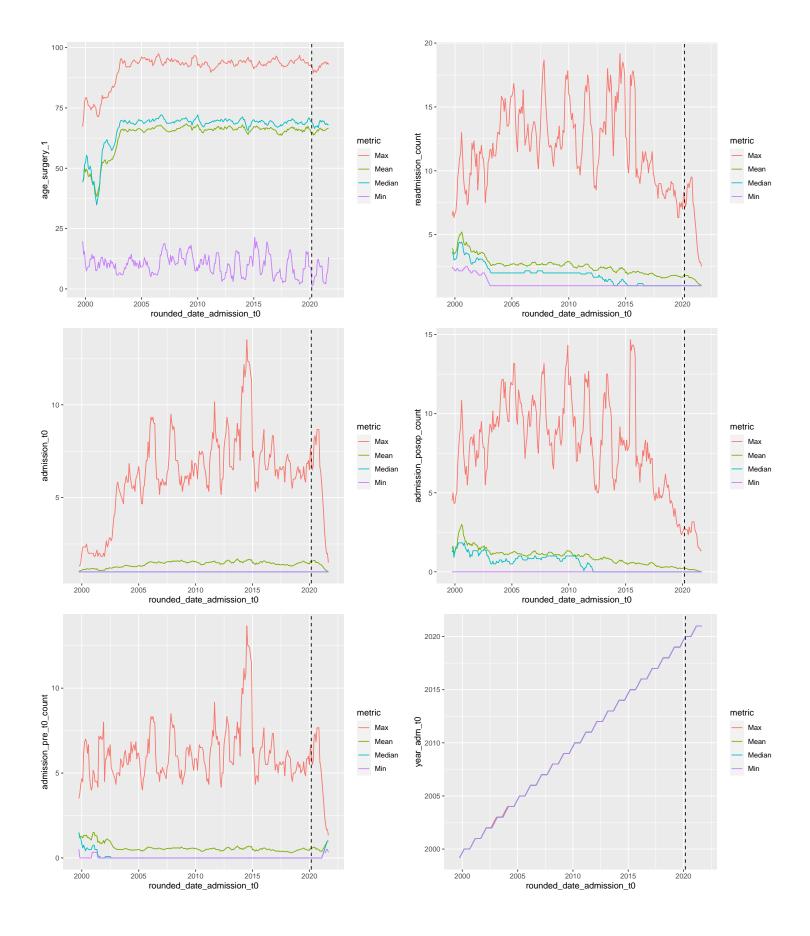


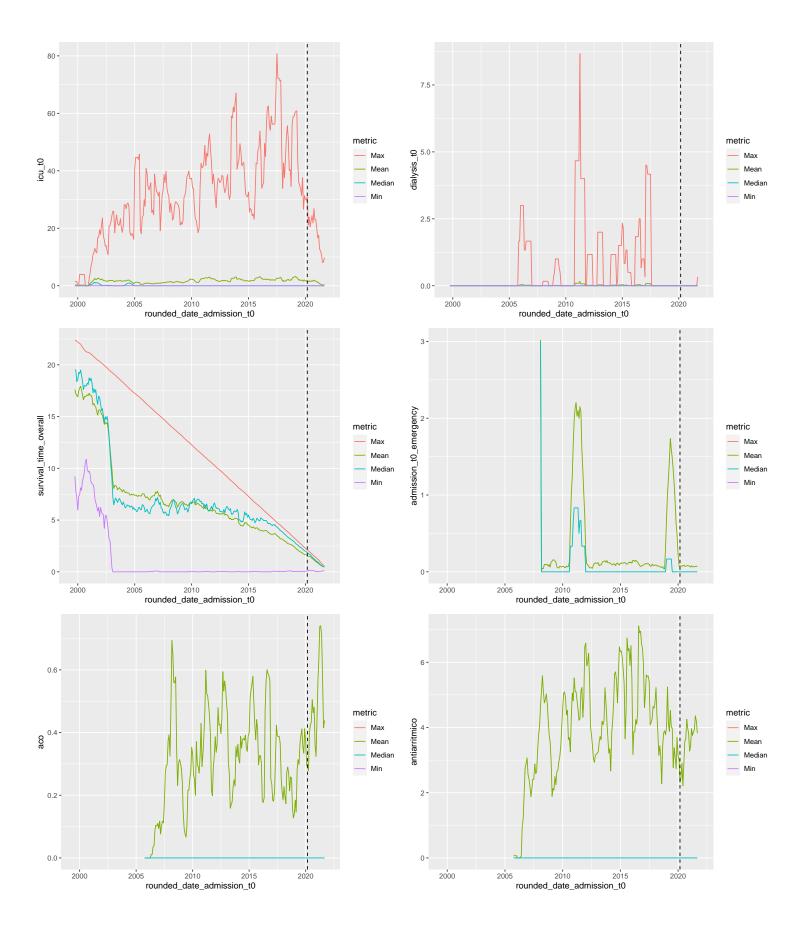


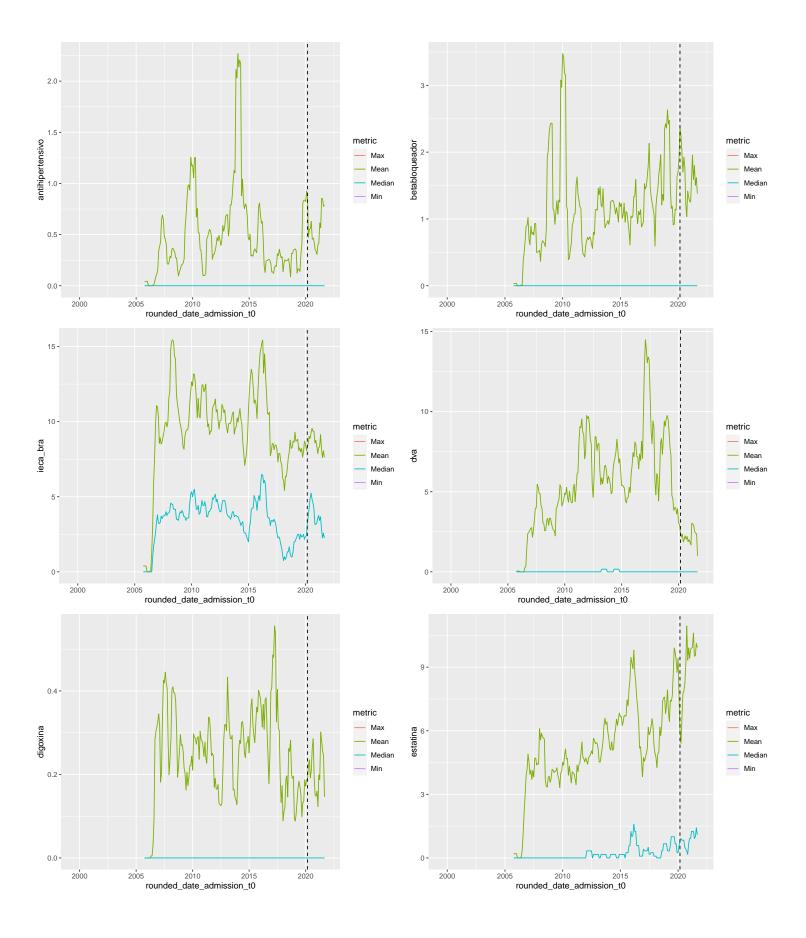


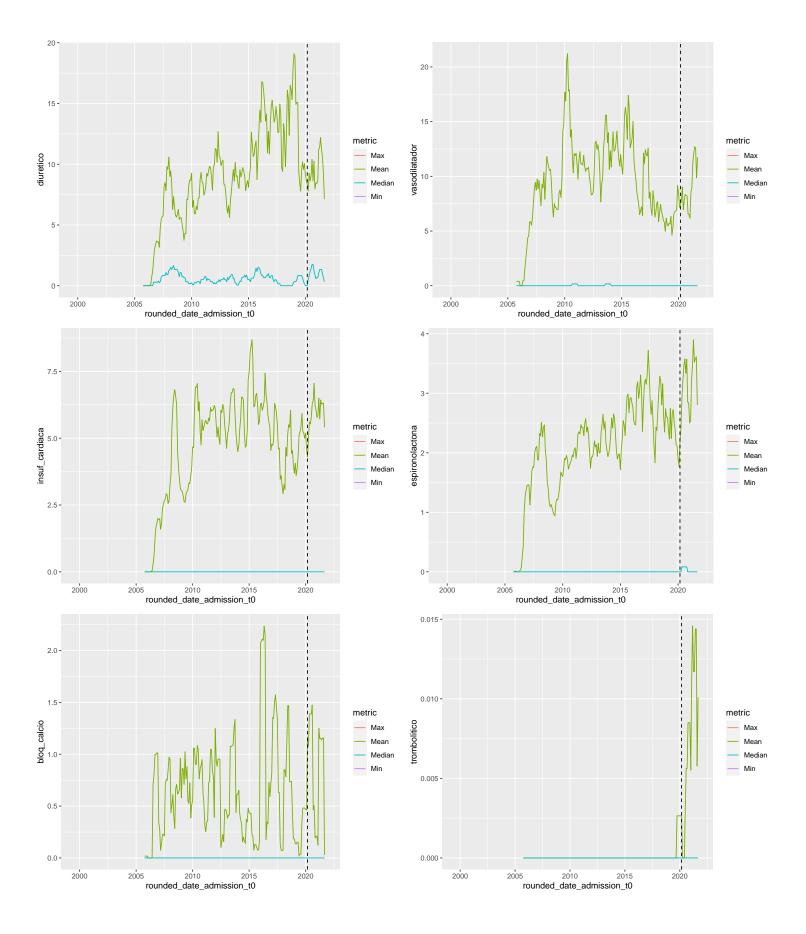


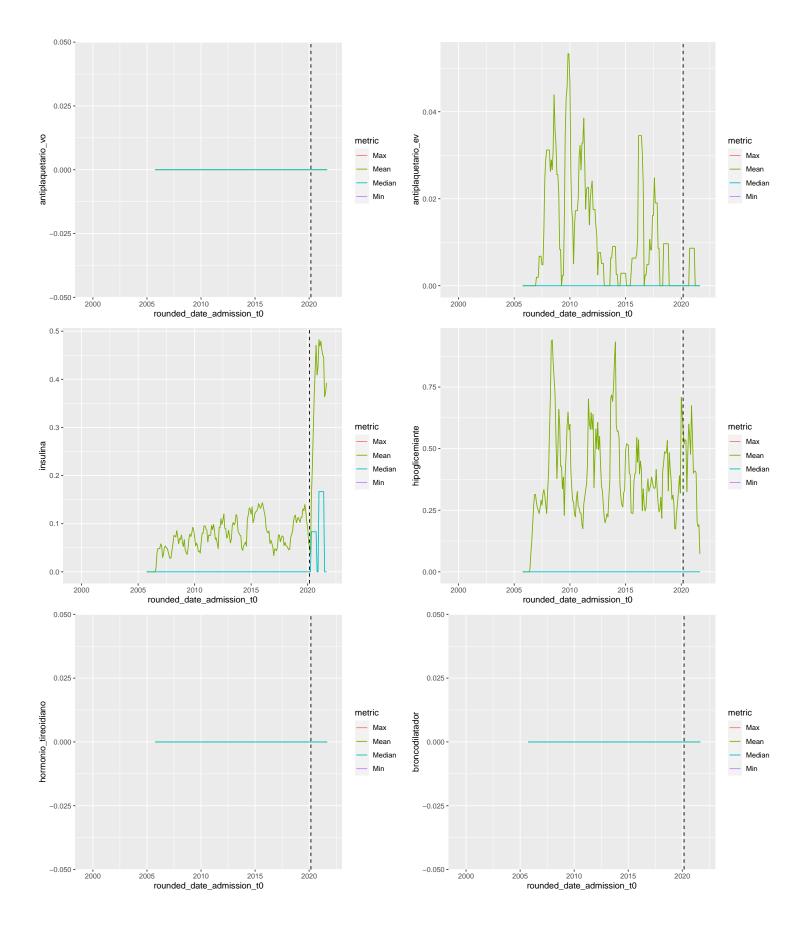


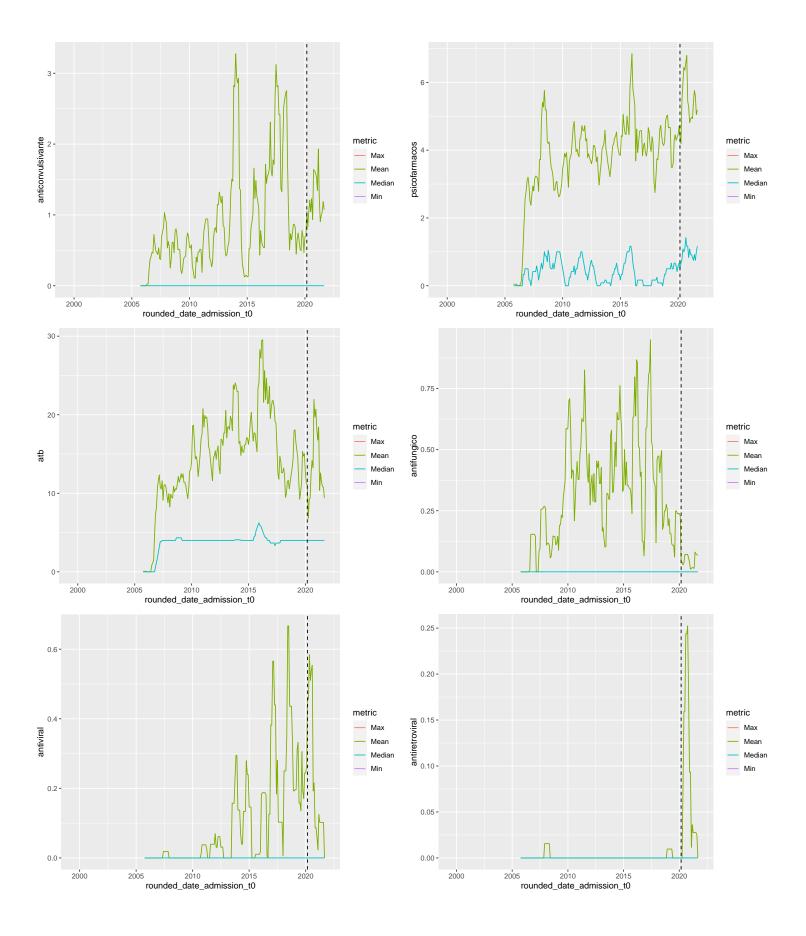


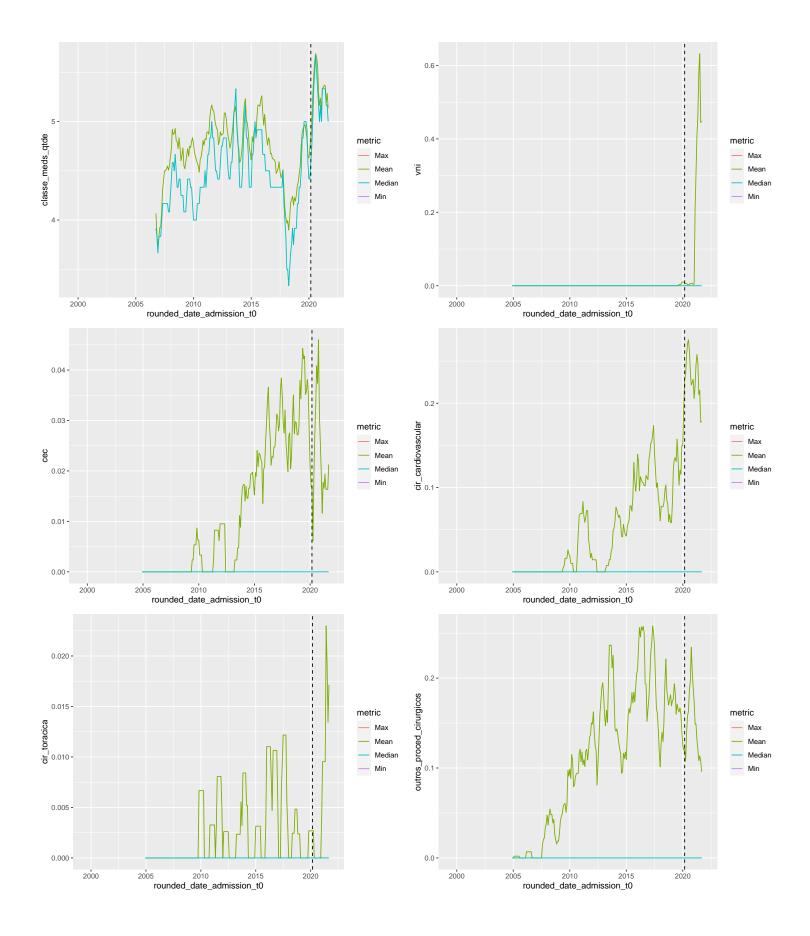


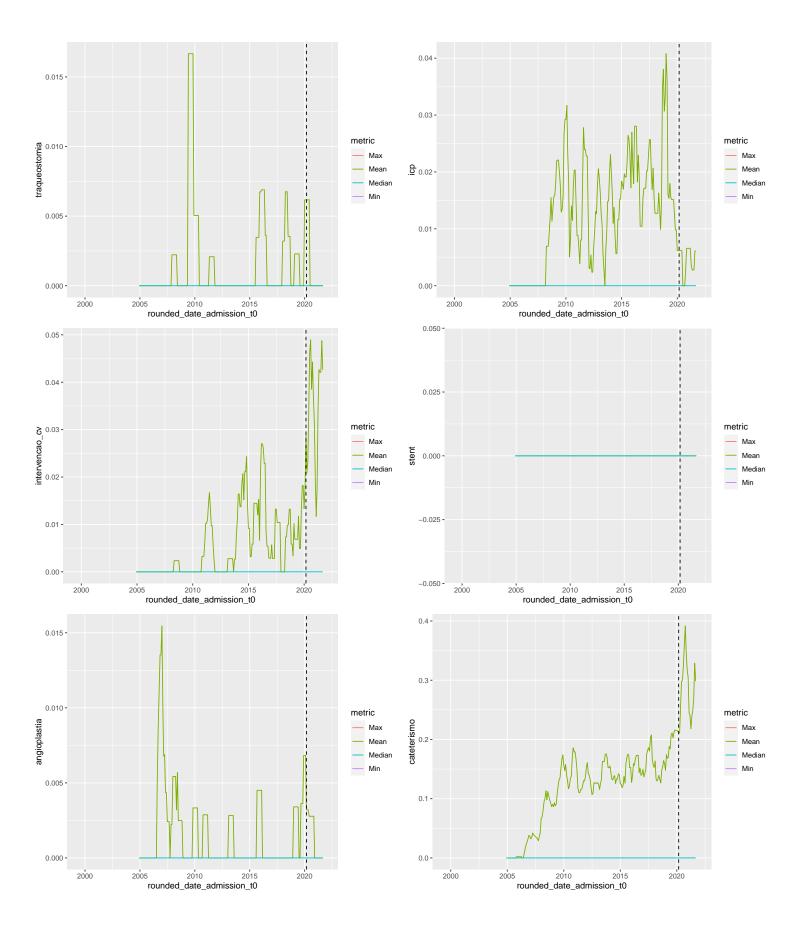


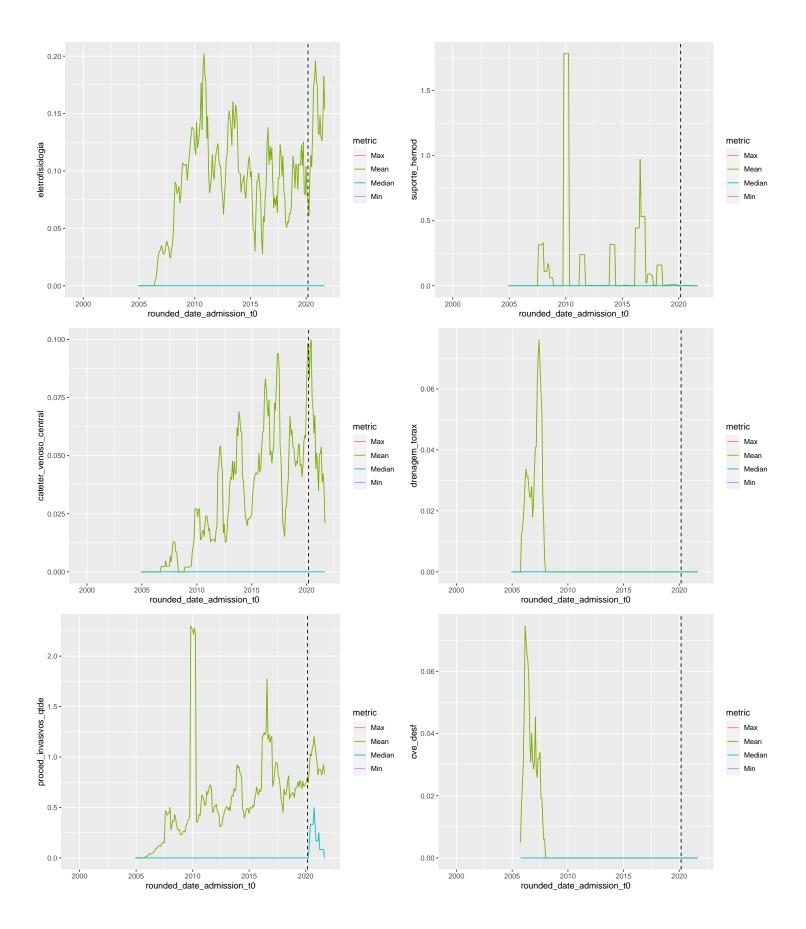


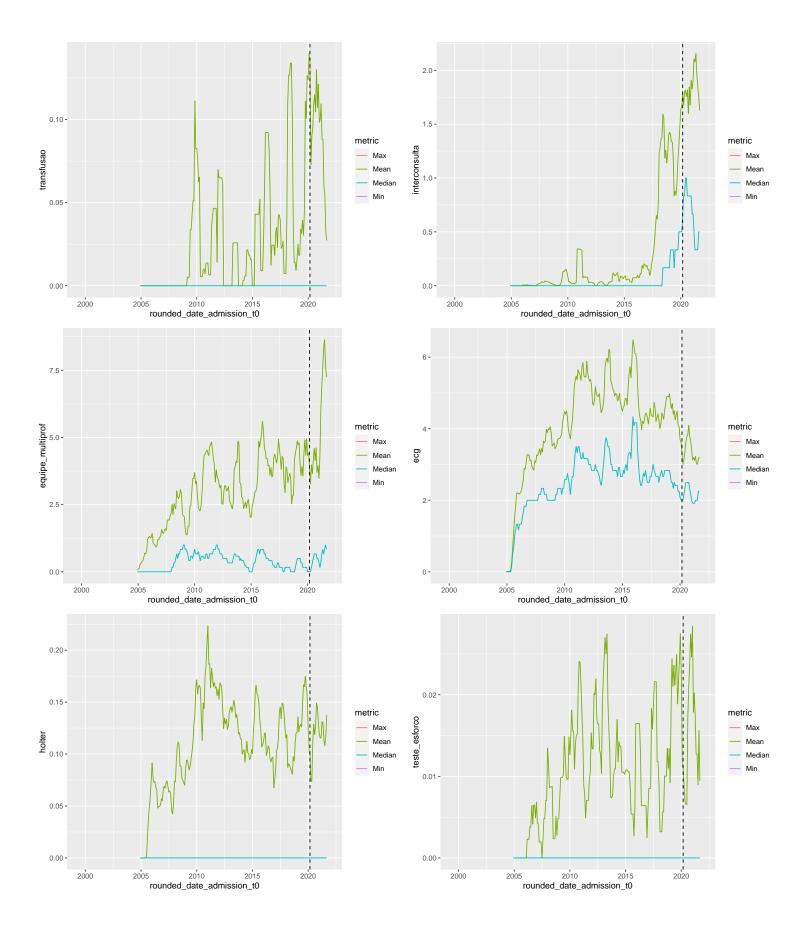


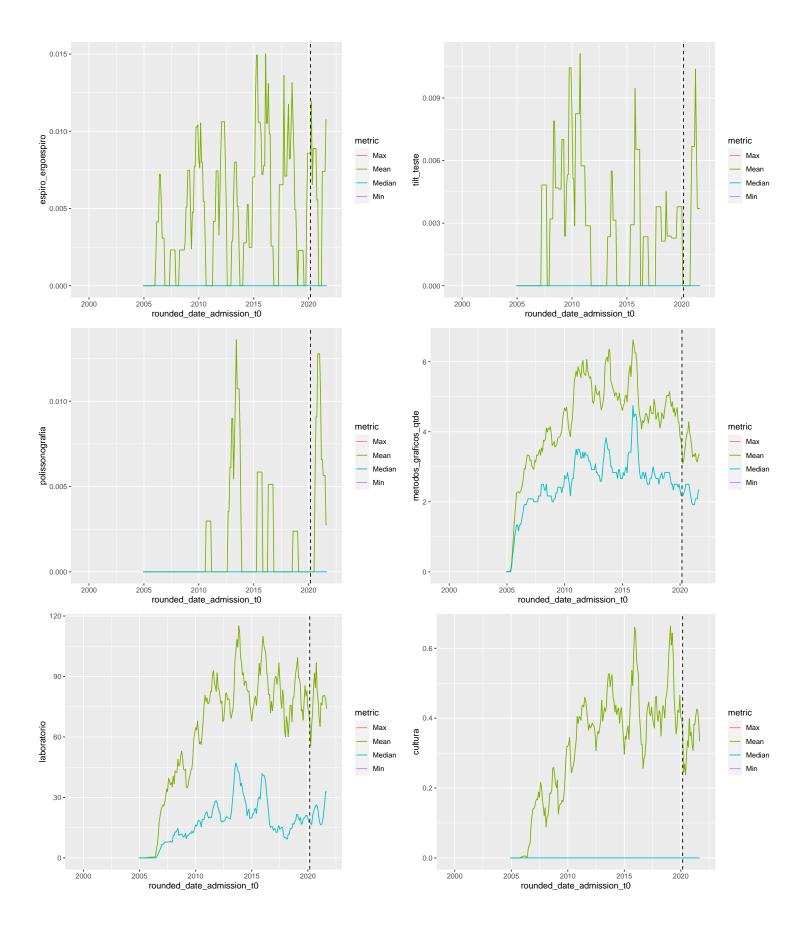


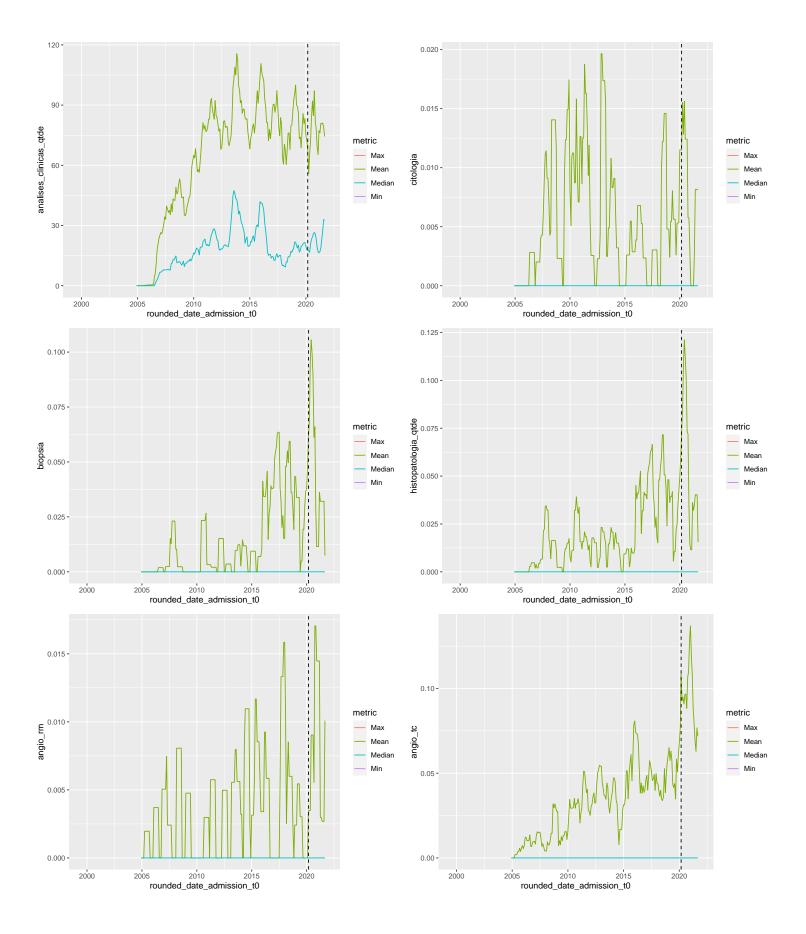


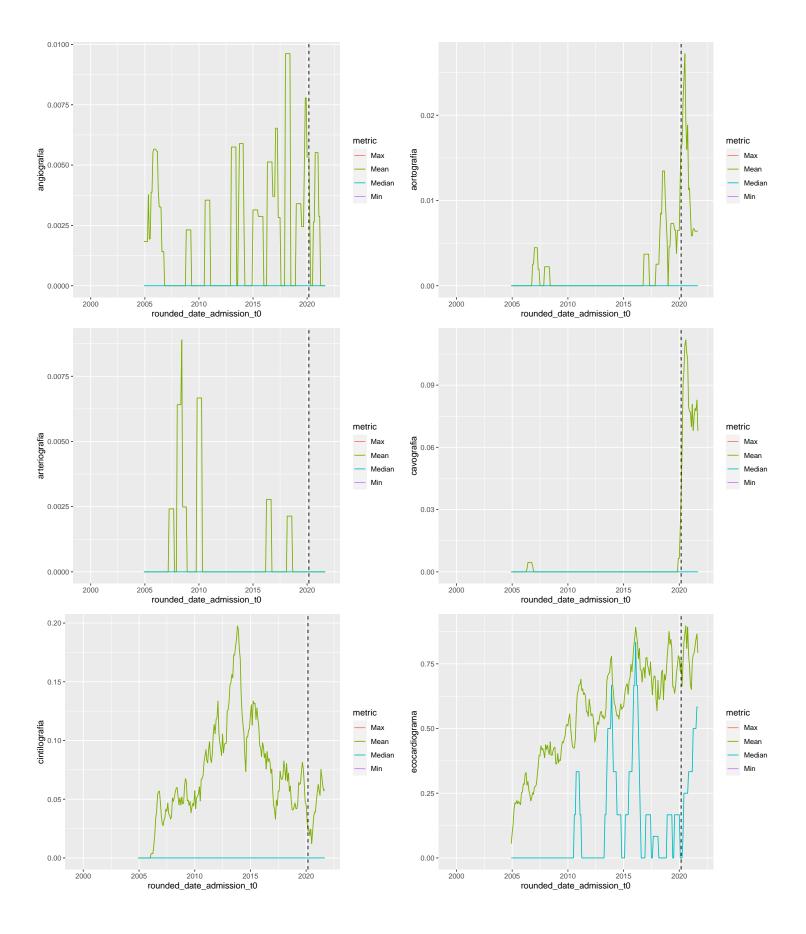

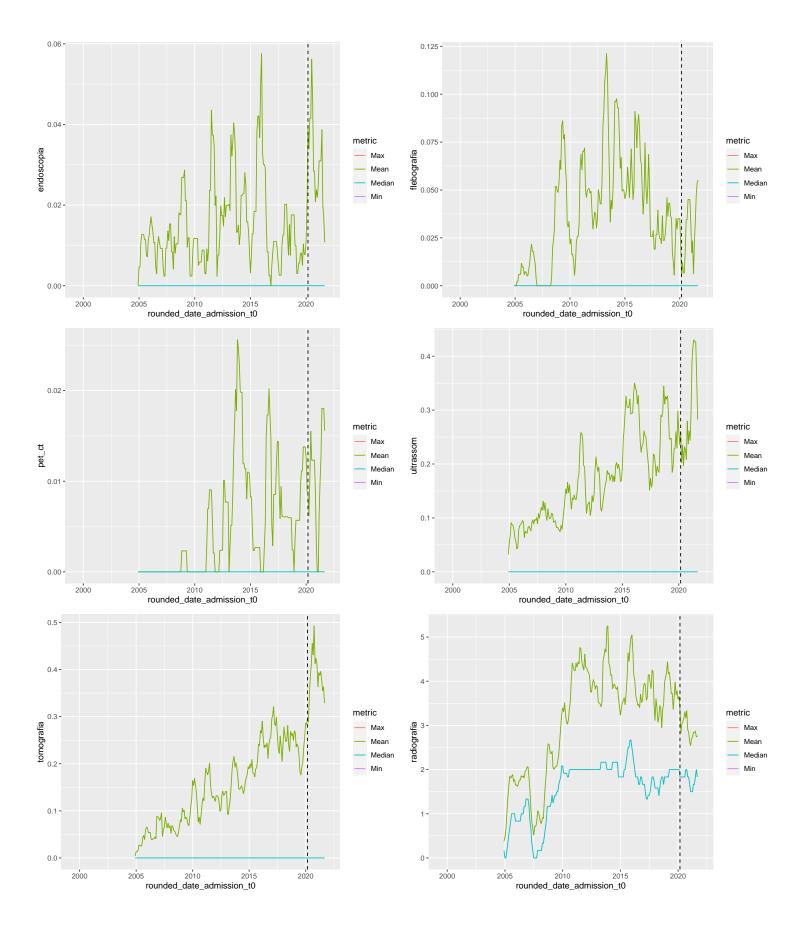

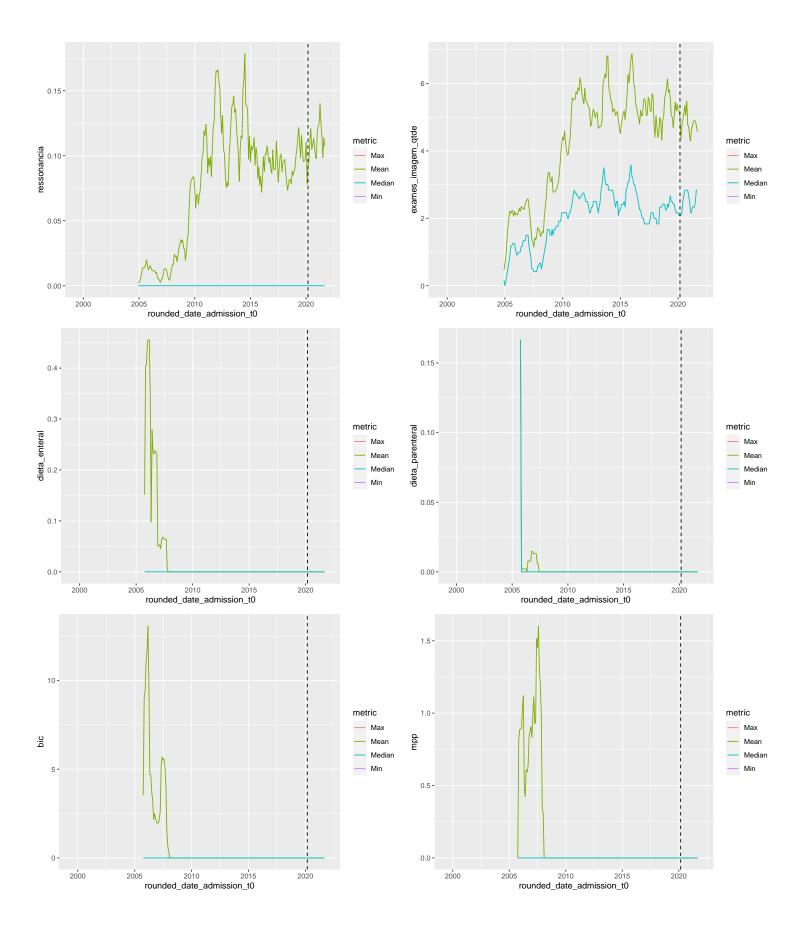

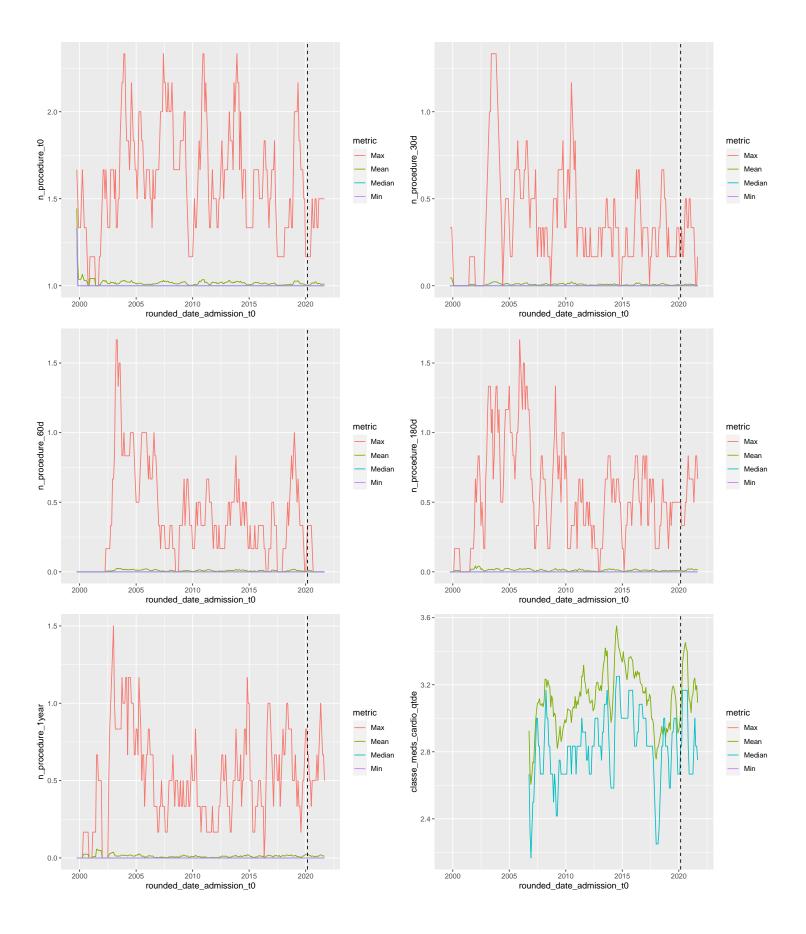


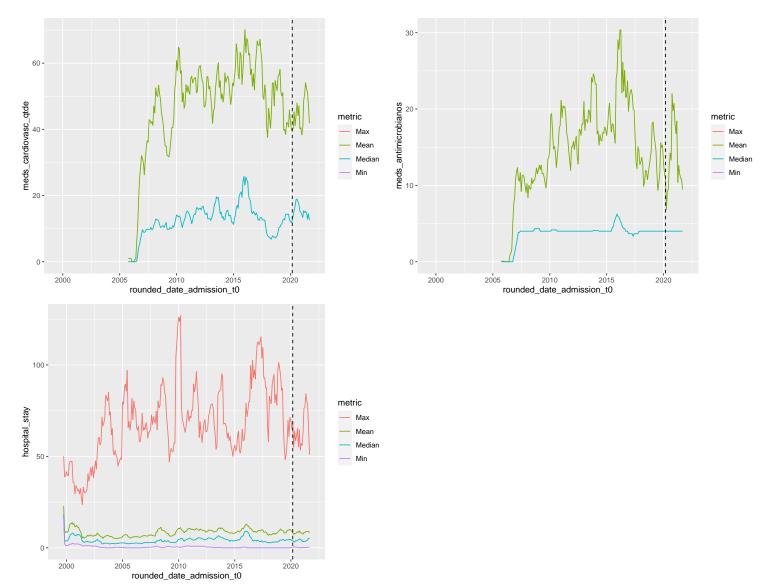



```
df[columns_list$outcome_columns] <- lapply(df[columns_list$outcome_columns], factor)</pre>
for (column in c(columns_list$categorical_columns, columns_list$outcome_columns)) {
  if (mean(is.na(df[[column]])) > 0.5) next
  if (length(unique(df[[column]])) > 10) print(column)
  df %>%
    mutate(rounded_date_admission_t0 = lubridate::floor_date(date_admission_t0,
                                                               'month')) %>%
    group_by(rounded_date_admission_t0, !!sym(column)) %>%
    summarise(N = n()) \%
    ungroup %>%
    arrange(rounded_date_admission_t0) %>%
    mutate(N = zoo::rollmean(N, k = k, fill = NA)) \%
    group_by(rounded_date_admission_t0) %>%
    mutate(percentage = N / sum(N)) %>%
    ungroup %>%
    tidyr::complete(rounded_date_admission_t0, !!sym(column),
                    fill = list(N = 0, percentage = 0)) %>%
    ggplot(aes(x = rounded_date_admission_t0, y = percentage,
               color = !!sym(column), fill = !!sym(column))) +
      geom_area(alpha = 0.6) +
      scale_y_continuous(labels = scales::percent) +
      labs(y = column) \rightarrow p
```


```
print(p)
}
```


[1] "patient_state"

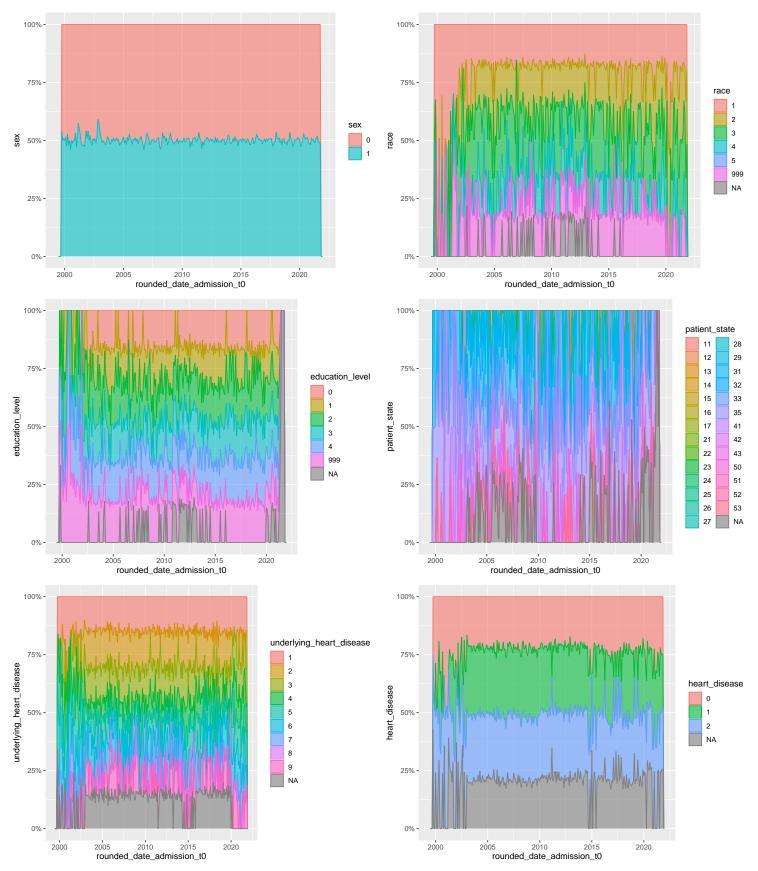


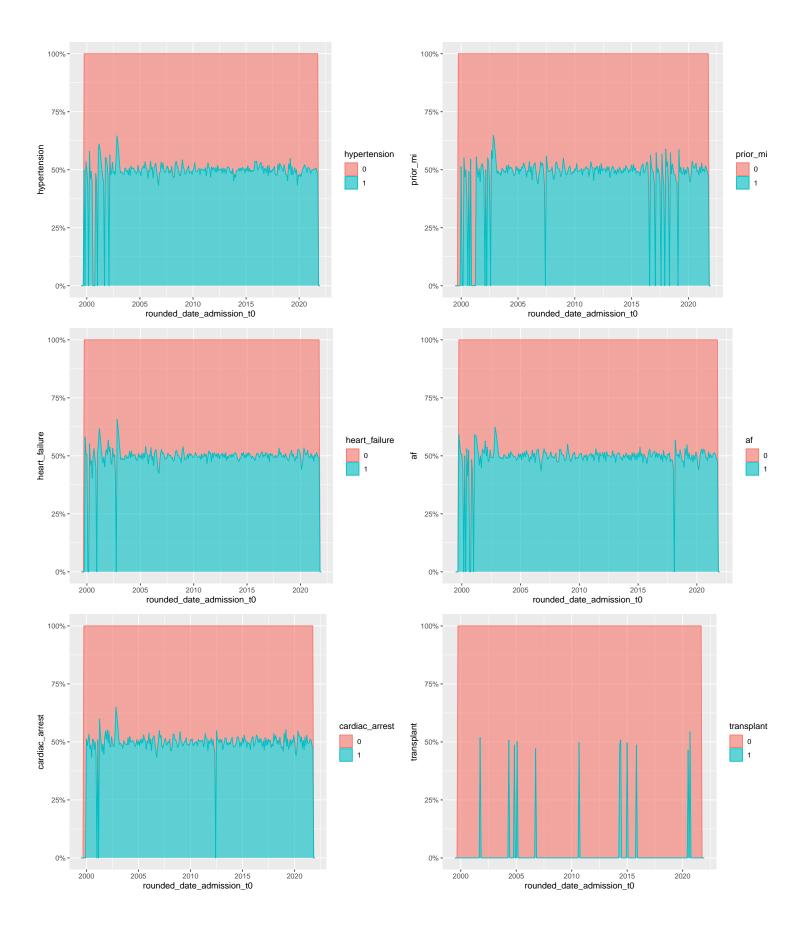


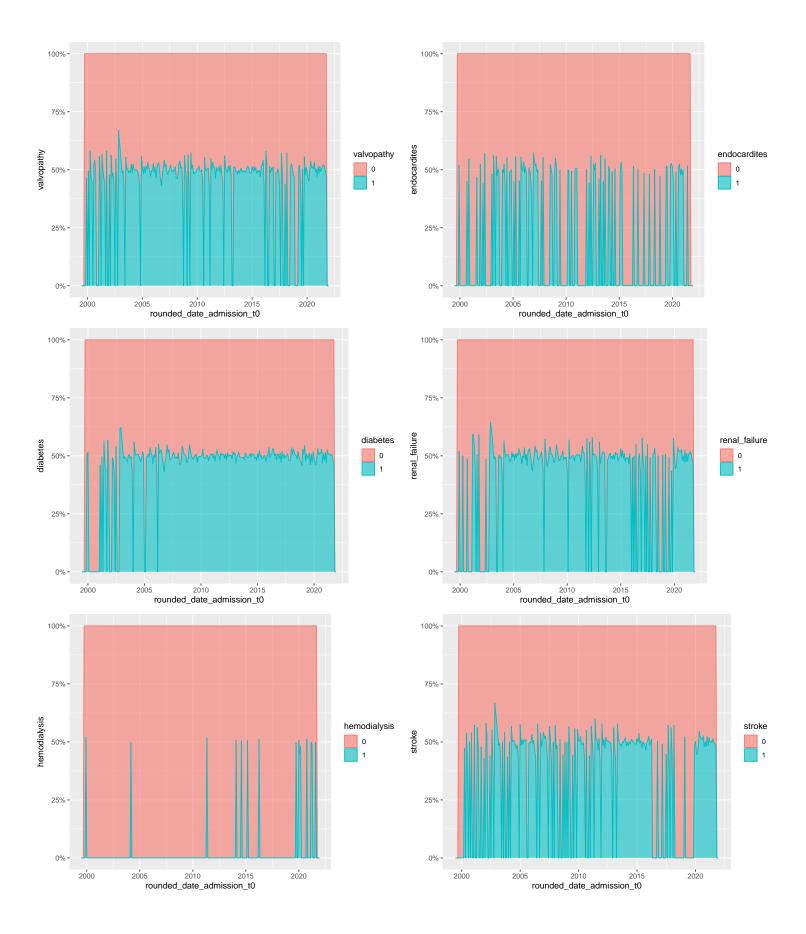


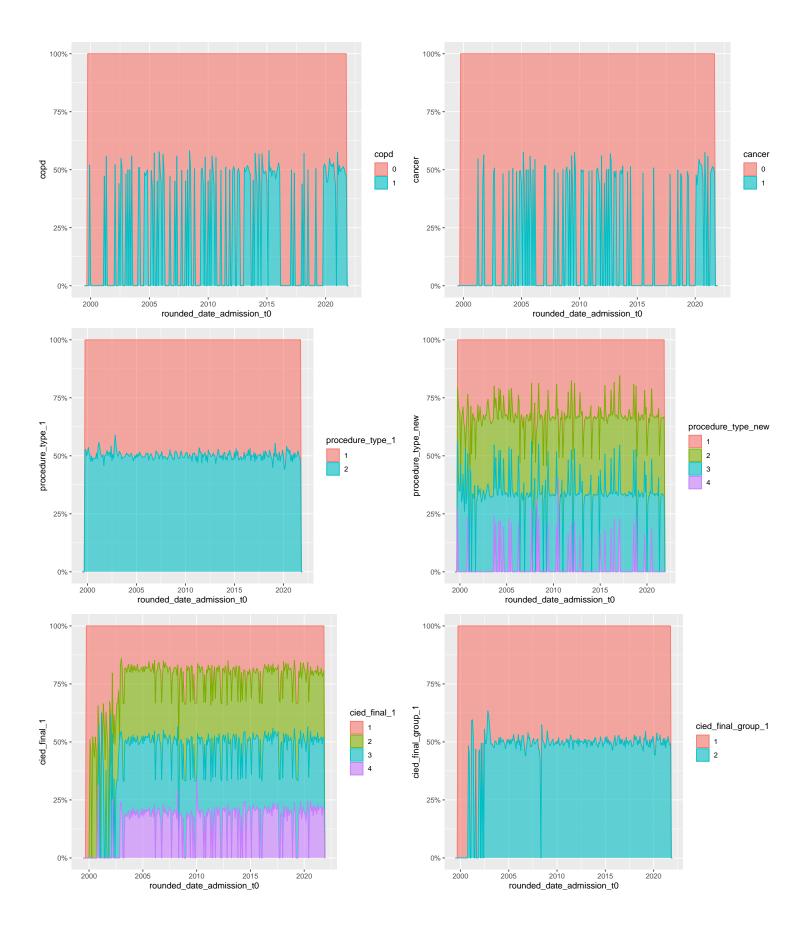


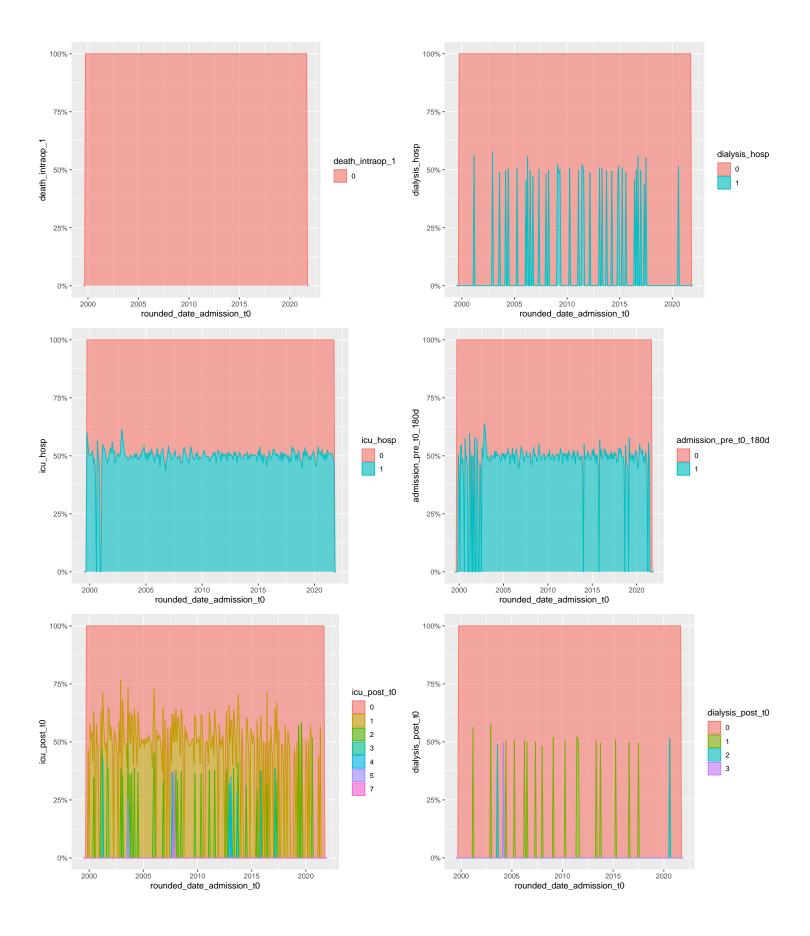


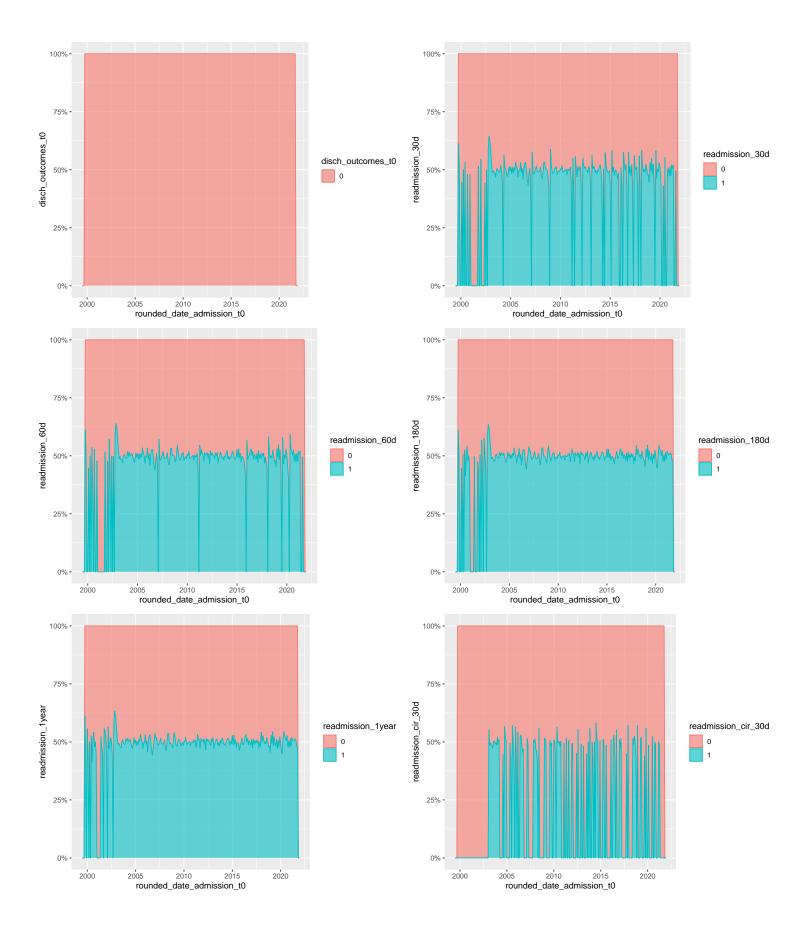

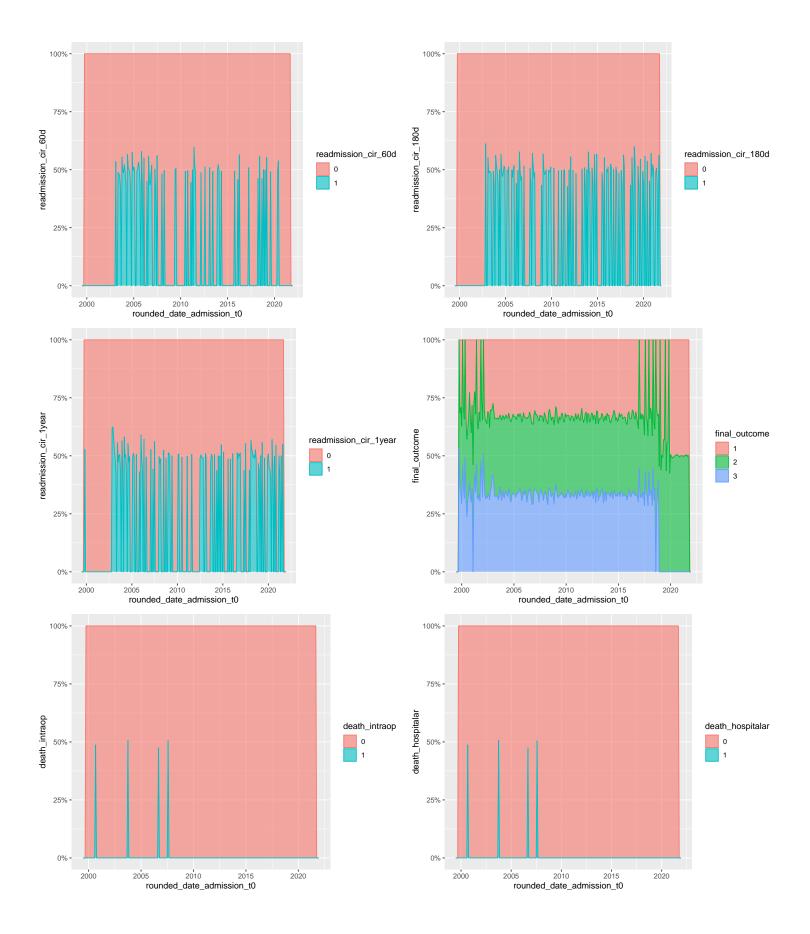

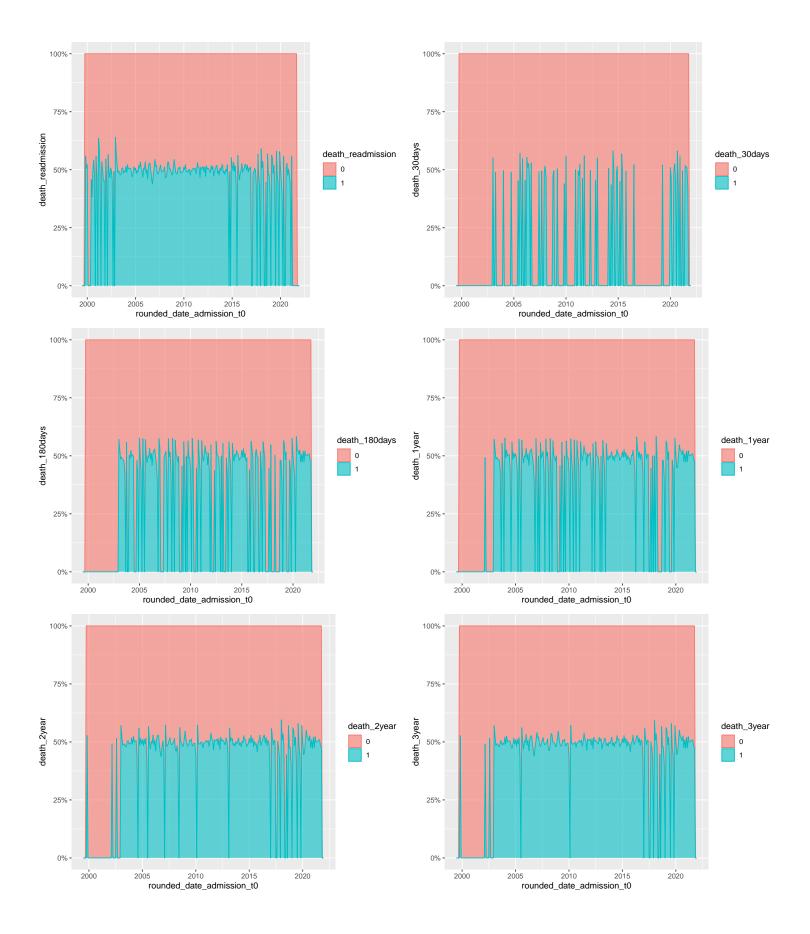

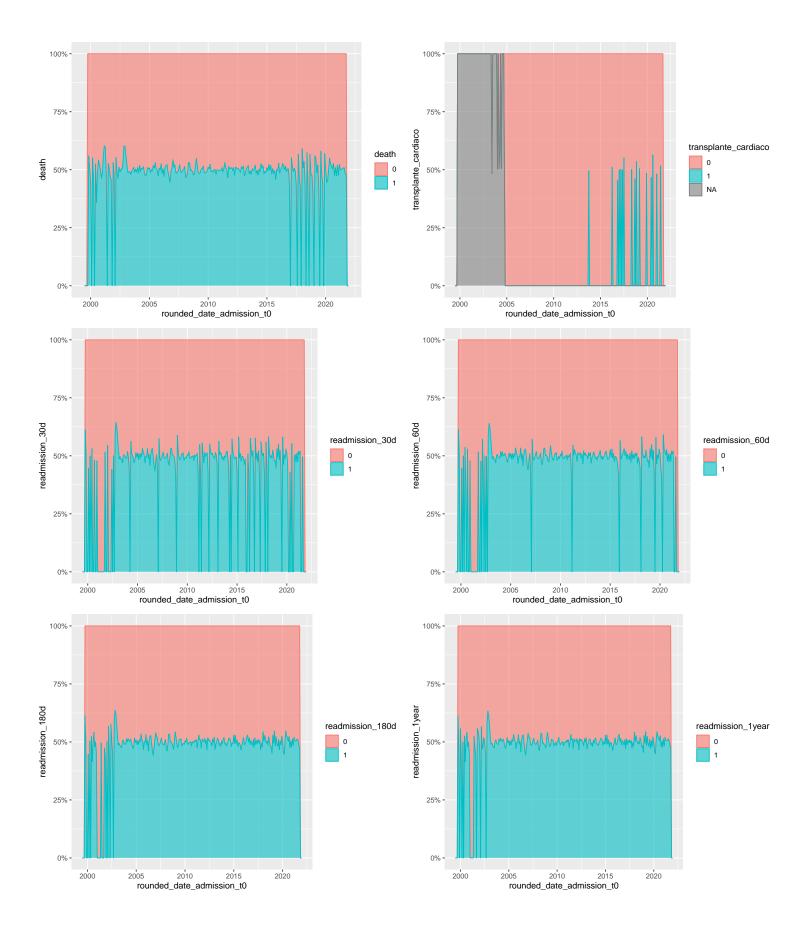

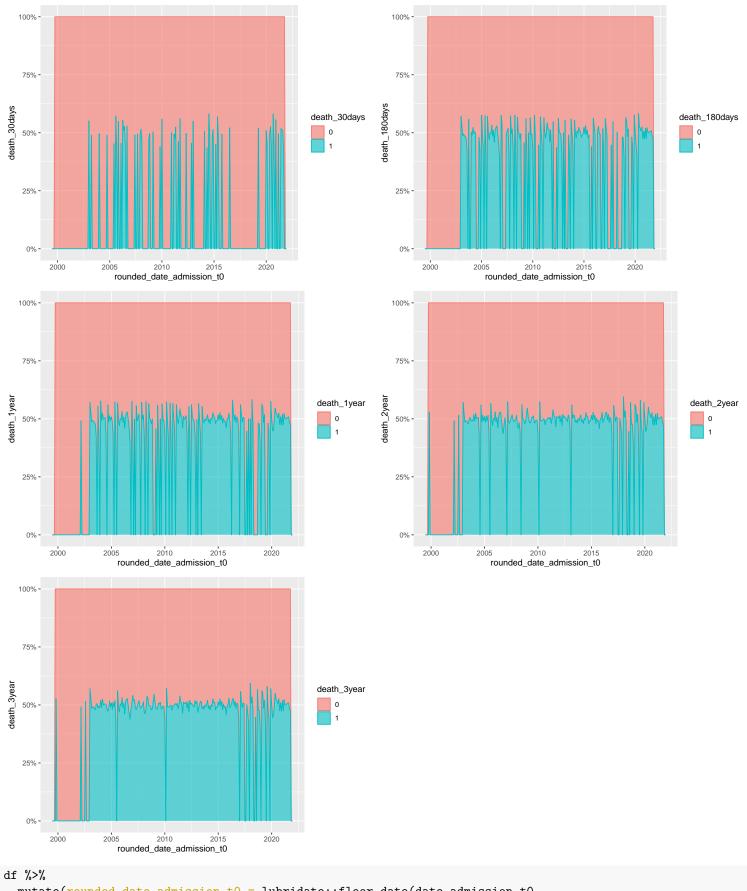

```
## [1] 98
column <- 'aco'
df %>%
    mutate(rounded_date_admission_t0 = lubridate::floor_date(date_admission_t0,
                                                              'month')) %>%
    group_by(rounded_date_admission_t0) %>%
    summarise('Mean' = mean(!!sym(column), na.rm = T),
              'Min' = min(!!sym(column), na.rm = T),
              'Median' = medianWithoutNA(!!sym(column)),
              'Max' = max(!!sym(column), na.rm = T)) %>%
    ungroup %>%
    arrange(rounded_date_admission_t0) %>%
    mutate(Mean = zoo::rollmean(Mean, k = k, fill = NA),
           Min = zoo::rollmean(Min, k = k, fill = NA),
           Median = zoo::rollmean(Median, k = k, fill = NA),
           Max = zoo::rollmean(Max, k = k, fill = NA)) %>%
  filter(rounded_date_admission_t0 <= lubridate::ymd('2021-12-01'),</pre>
         rounded_date_admission_t0 >= lubridate::ymd('2021-01-01'))
```

## # A tibble: 12 x 5						
##		${\tt rounded_date_admission_t0}$	Mean	Min	${\tt Median}$	Max
##		<date></date>	<dbl></dbl>	<dbl></dbl>	<dbl></dbl>	<dbl></dbl>
##	1	2021-01-01	0.441	NaN	0	NaN
##	2	2021-02-01	0.565	NaN	0	NaN
##	3	2021-03-01	0.630	NaN	0	NaN
##	4	2021-04-01	0.738	NaN	0	NaN
##	5	2021-05-01	0.740	NaN	0	NaN
##	6	2021-06-01	0.709	NaN	0	NaN
##	7	2021-07-01	0.569	NaN	0	NaN
##	8	2021-08-01	0.415	NaN	0	NaN
##	9	2021-09-01	0.439	NaN	0	NaN
##	10	2021-10-01	NA	NA	NA	NA
##	11	2021-11-01	NA	NA	NA	NA
##	12	2021-12-01	NA	NA	NA	NA