

Plots

Eduardo Yuki Yada

Imports

```
library(tidyverse)
library(yaml)
```

Minutes to run: 0

Loading data

```
load('../dataset/processed_data.RData')
load('../dataset/processed_dictionary.RData')

columns_list <- yaml.load_file("../auxiliar/columns_list.yaml")

outcome_column <- params$outcome_column
```

Minutes to run: 0.004

Plots

```
library(lubridate)

medianWithoutNA <- function(x) {
  median(x[which(!is.na(x))])
}

k = 6


df[columns_list$outcome_columns] <- lapply(df[columns_list$outcome_columns], as.numeric)







for (column in setdiff(columns_list$numerical_columns, columns_list$outcome_columns)){
  if (mean(is.na(df[[column]])) > 0.5) next







  df %>%
    mutate(rounded_date_admission_t0 = lubridate::floor_date(date_admission_t0,
                                                             'month')) %>%







    group_by(rounded_date_admission_t0) %>%
    summarise('Mean' = mean(!sym(column), na.rm = T),
              'Min' = min(!sym(column), na.rm = T),
              'Median' = medianWithoutNA(!sym(column)),
              'Max' = max(!sym(column), na.rm = T)) %>%
    ungroup %>%
    arrange(rounded_date_admission_t0) %>%
    mutate(Mean = zoo::rollmean(Mean, k = k, fill = NA),
           Min = zoo::rollmean(Min, k = k, fill = NA),
           Median = zoo::rollmean(Median, k = k, fill = NA),
           Max = zoo::rollmean(Max, k = k, fill = NA)) %>%
    pivot_longer(!rounded_date_admission_t0, names_to = 'metric') %>%
    ggplot(aes(x = rounded_date_admission_t0, y = value, color = metric)) +
```







```
geom_line() +  
geom_vline(xintercept = lubridate::ymd('2020-03-01'), linetype = "dashed") +  
labs(y = column)-> p  
  
print(p)  
}
```






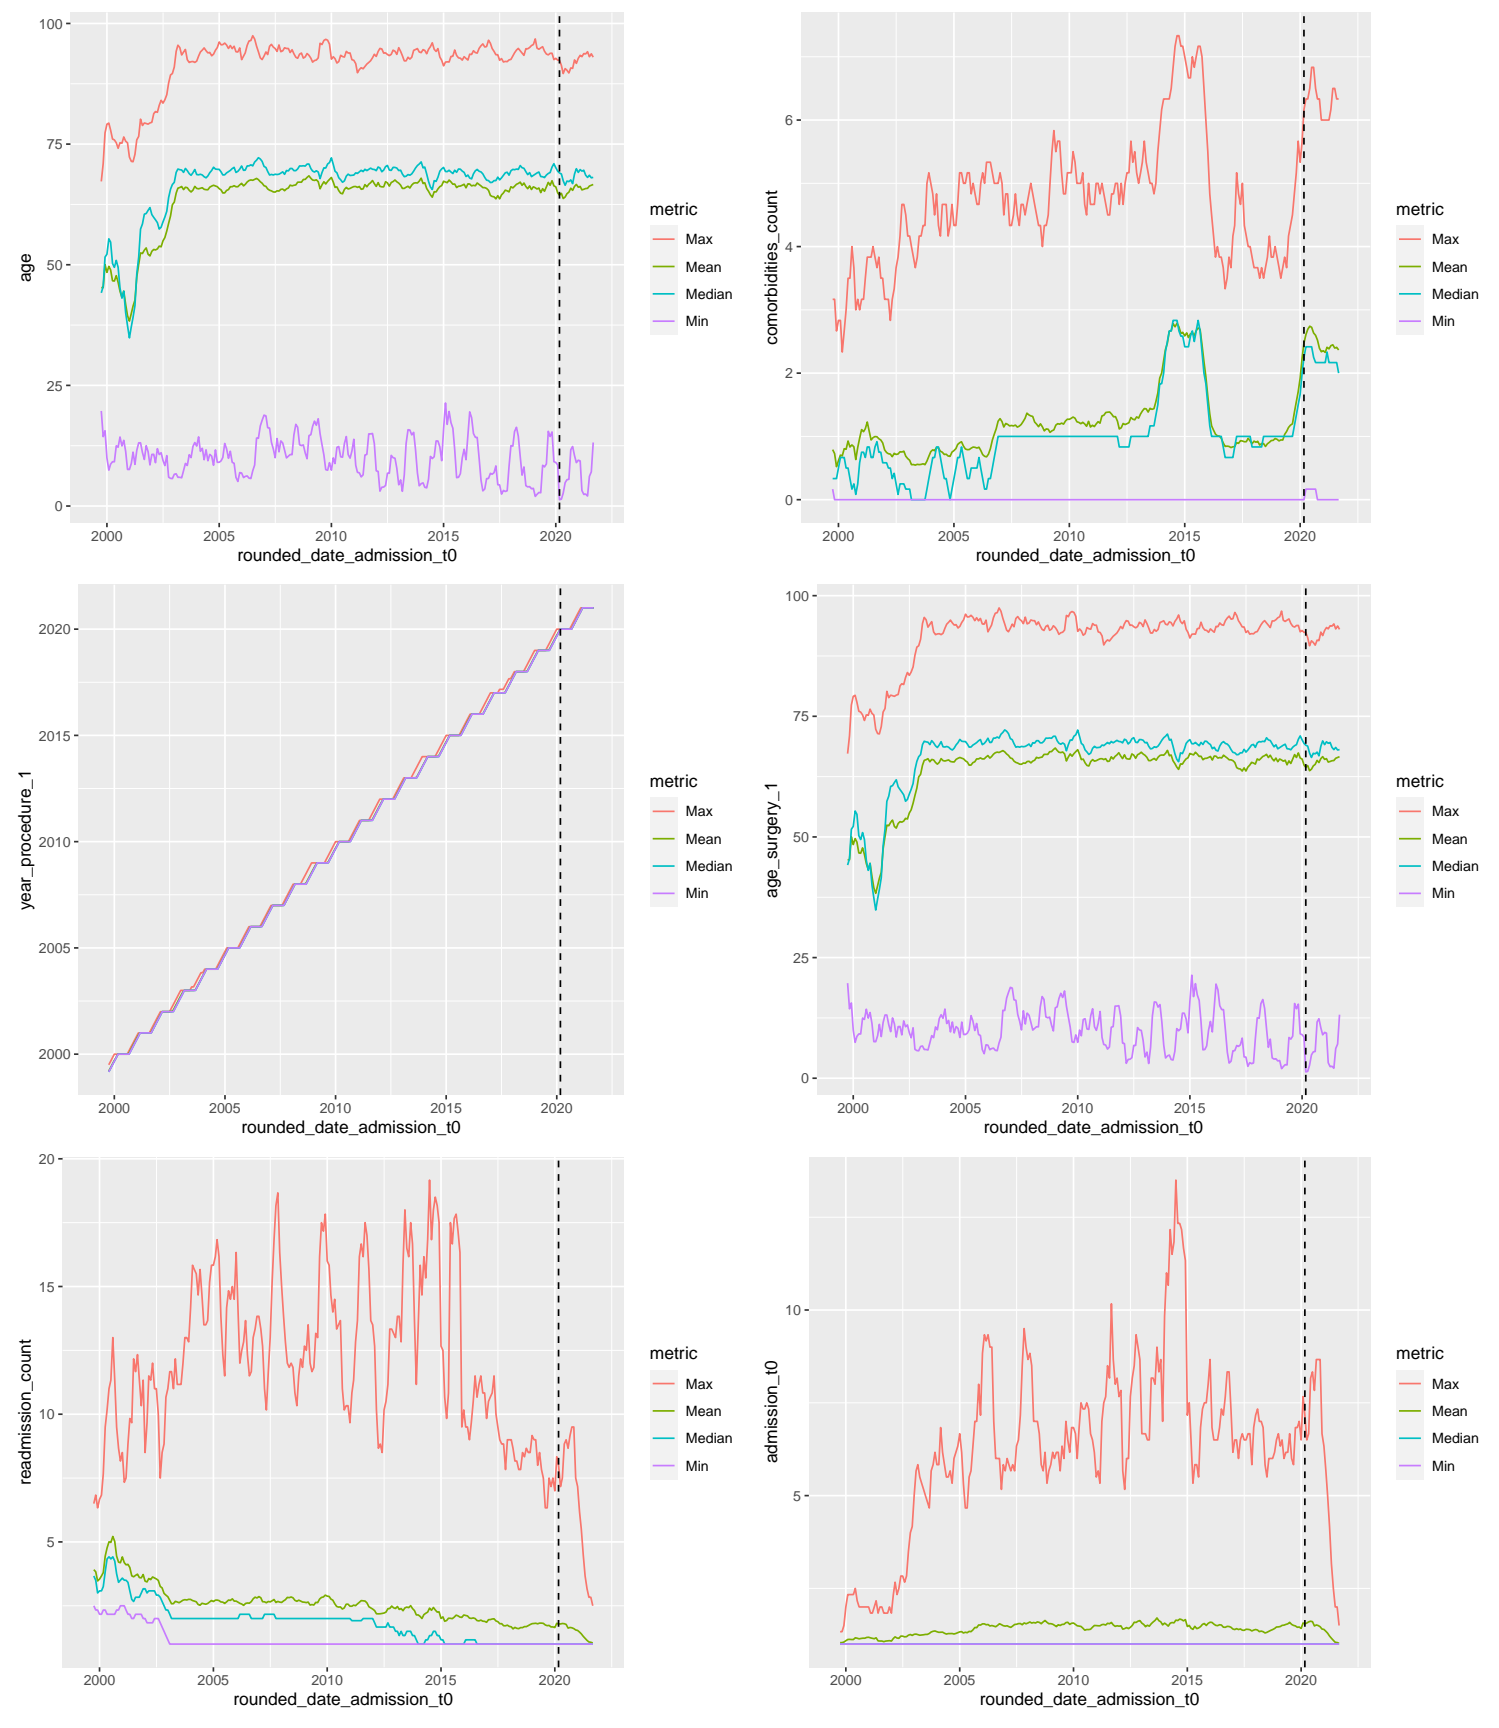


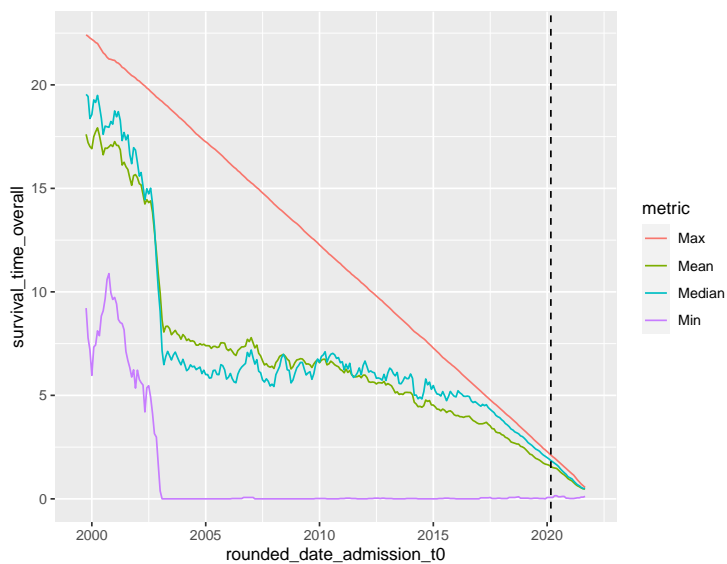
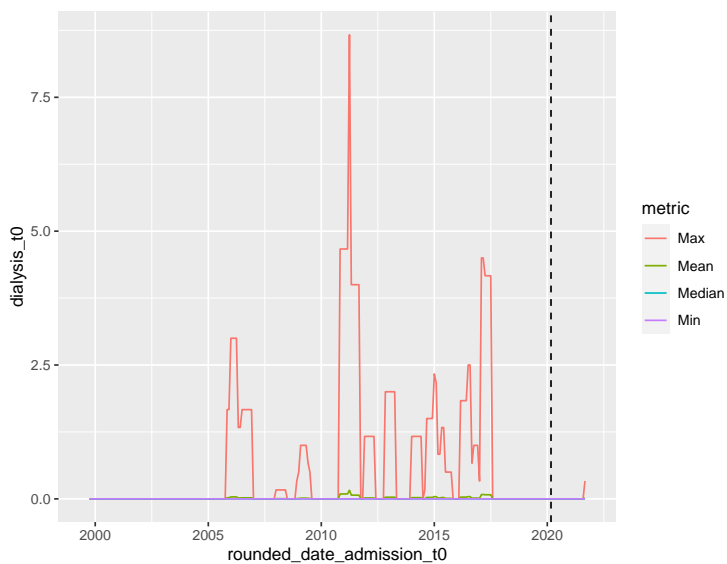
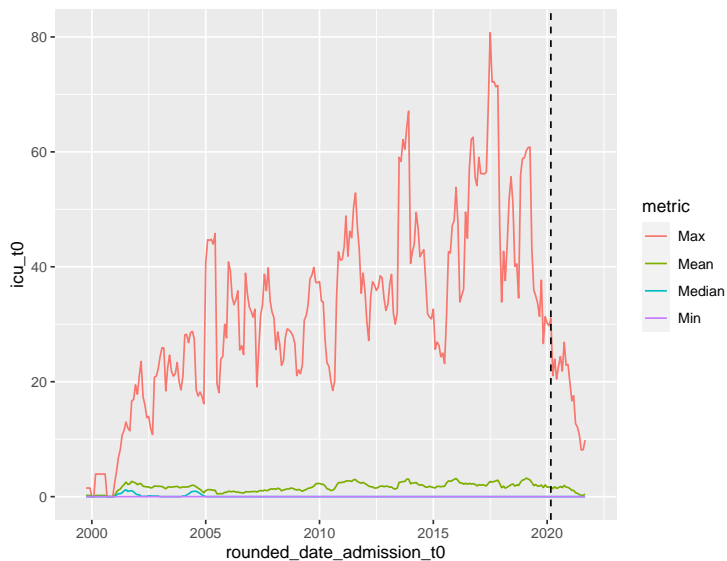
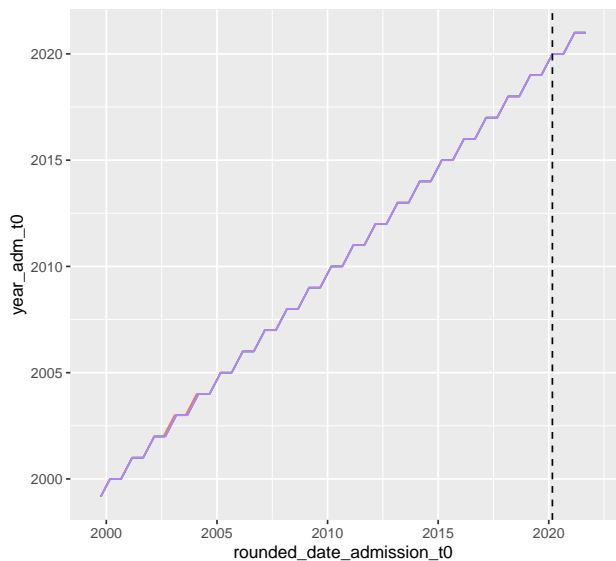
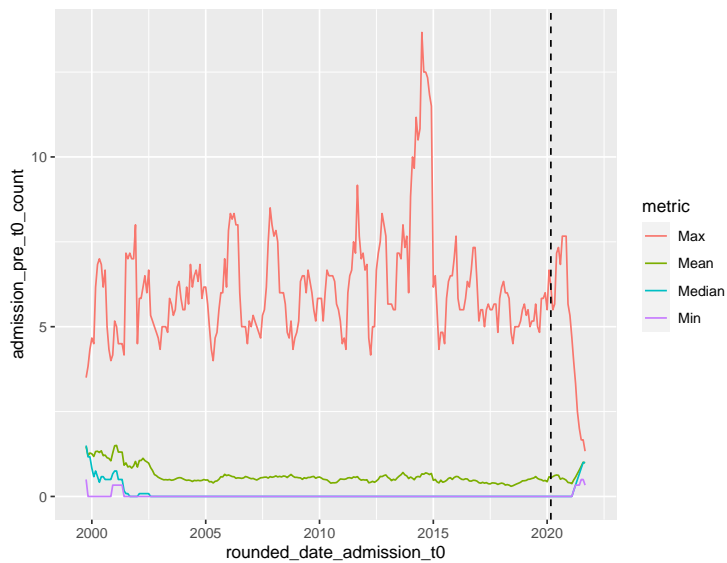
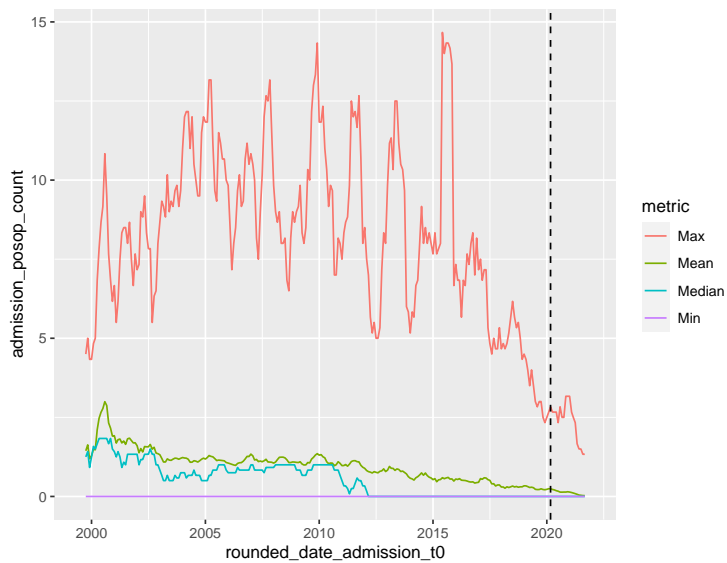


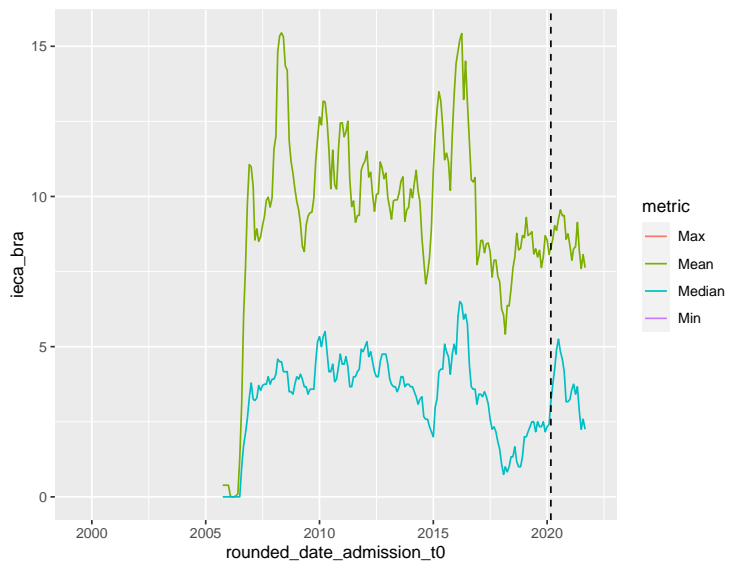
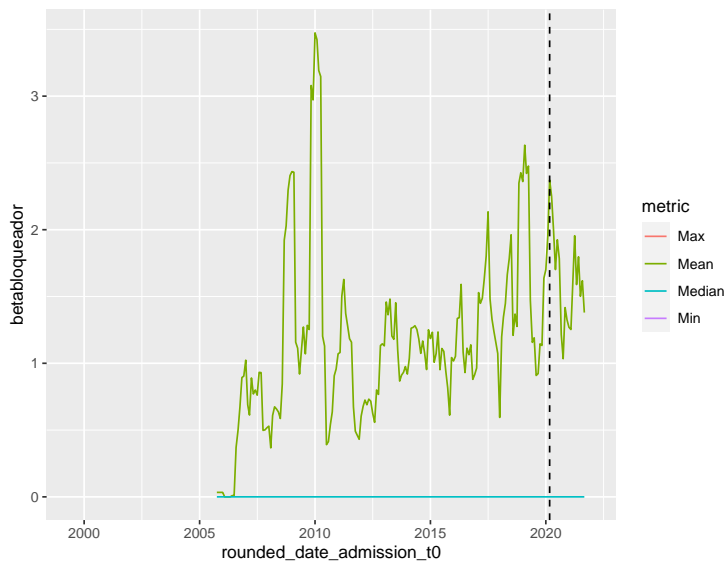
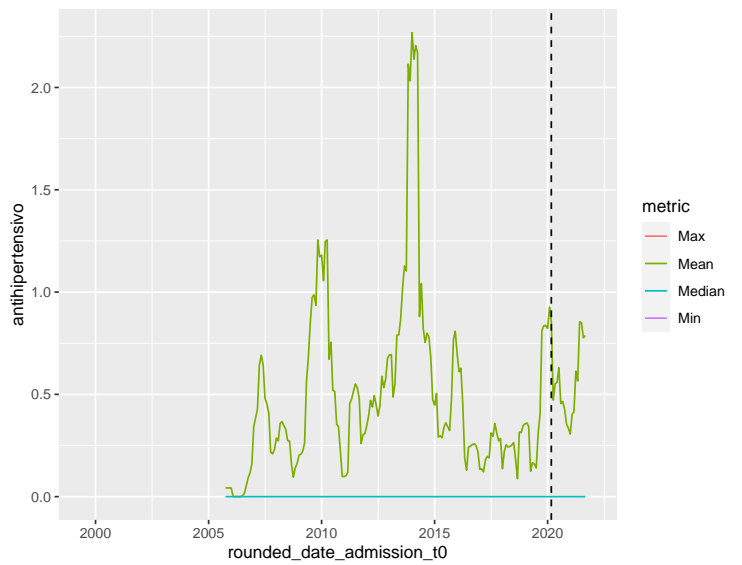
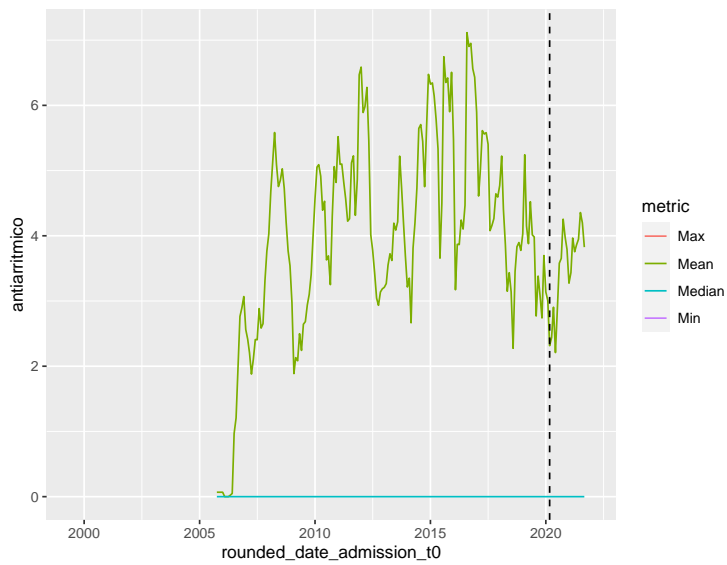
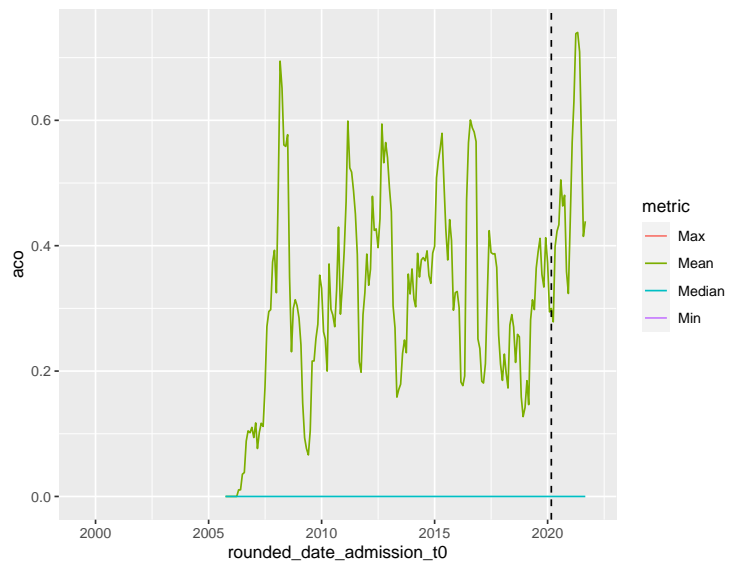
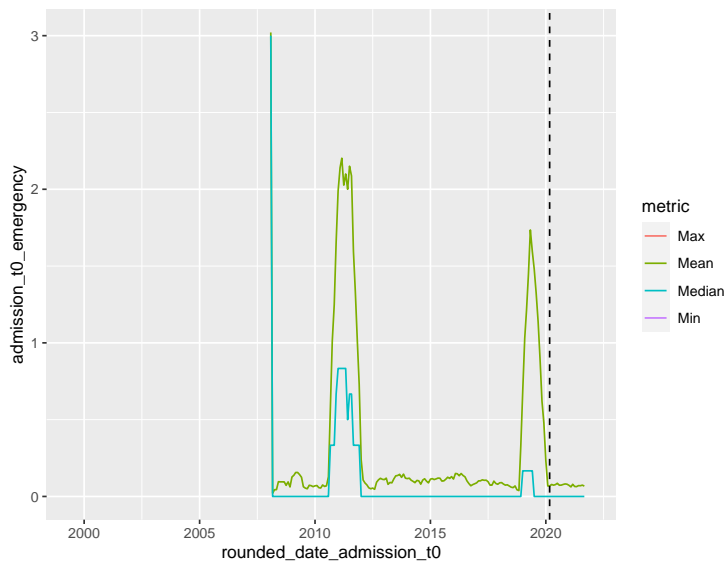


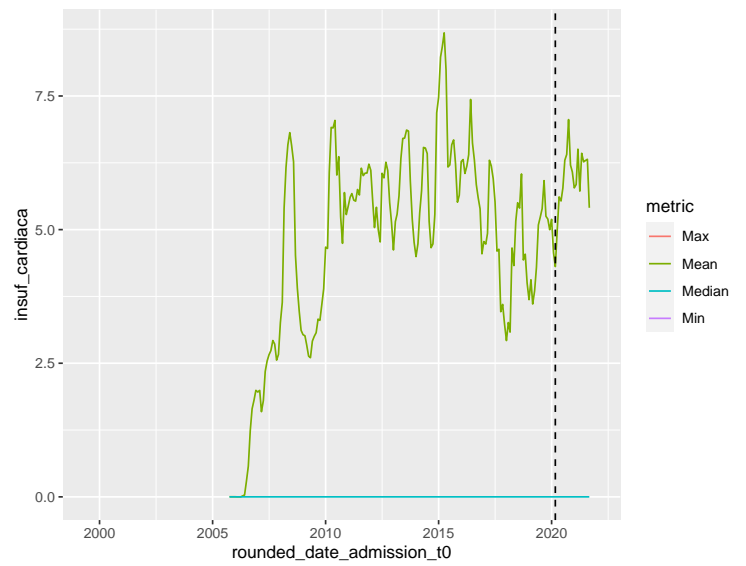
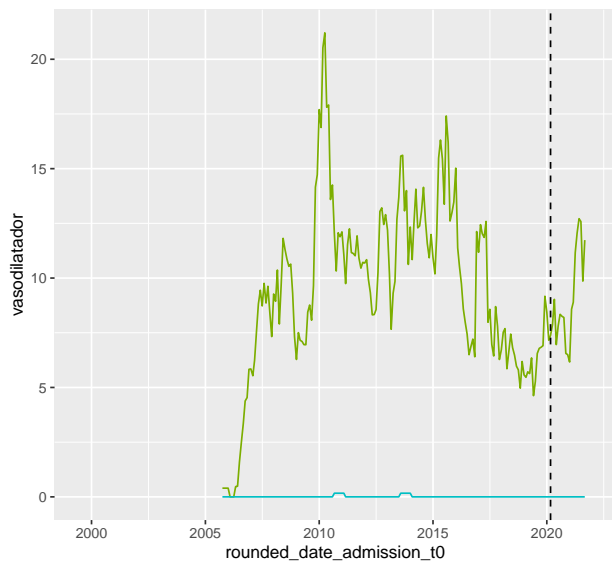
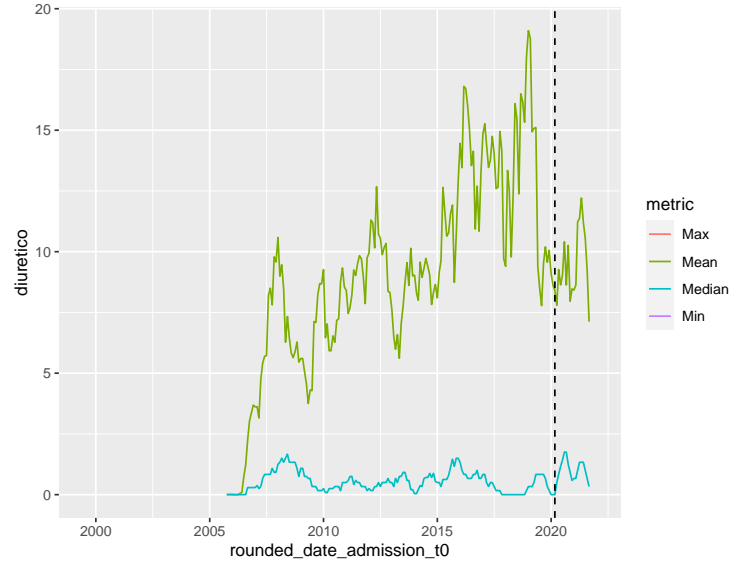
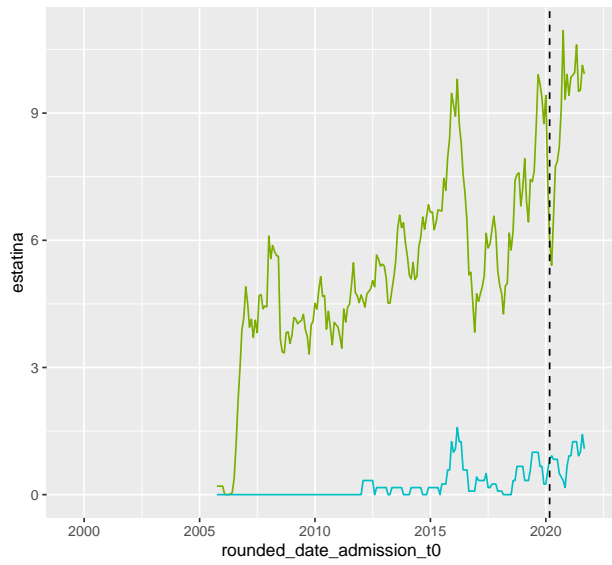
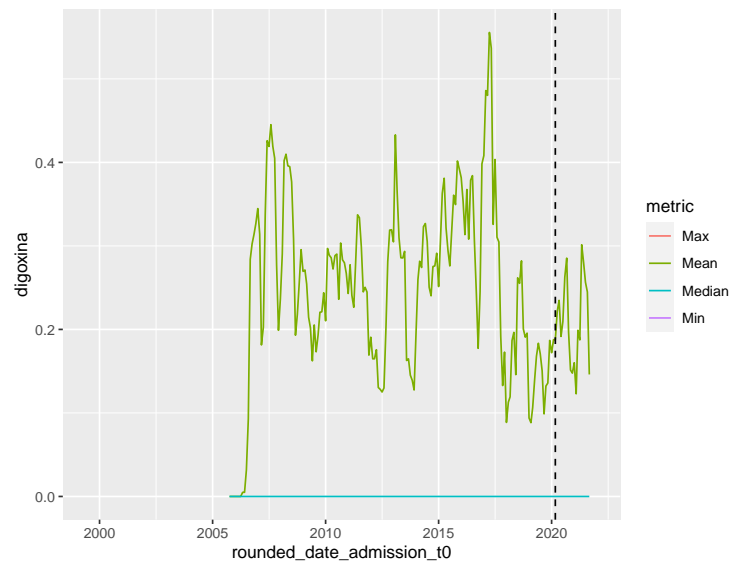
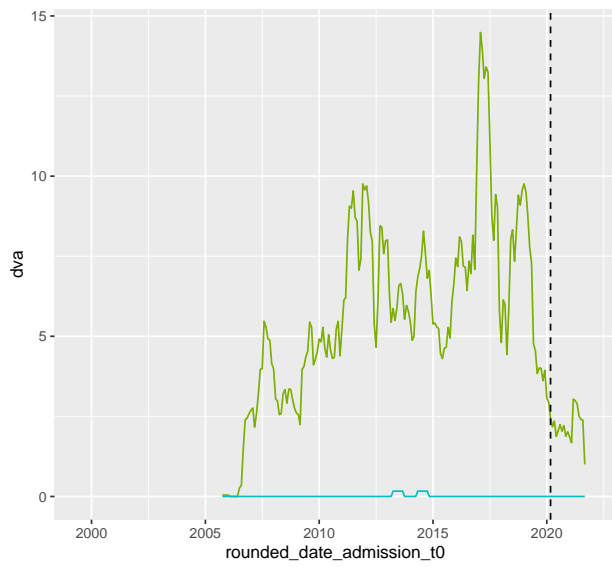


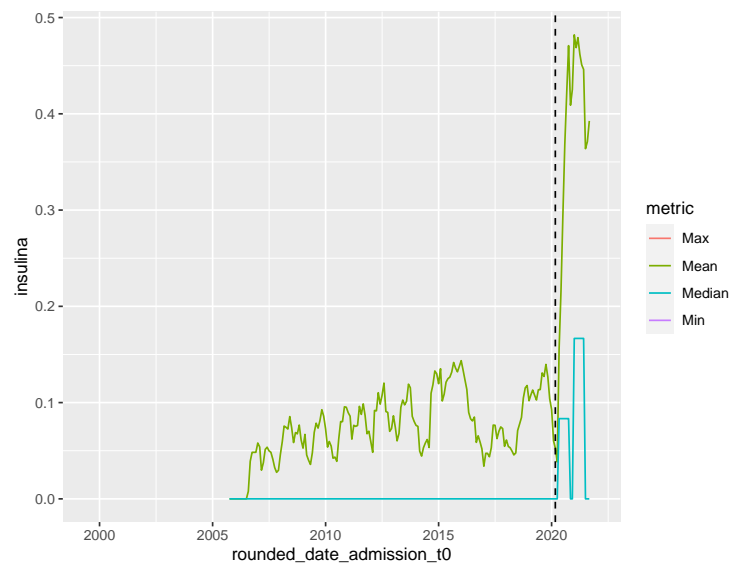
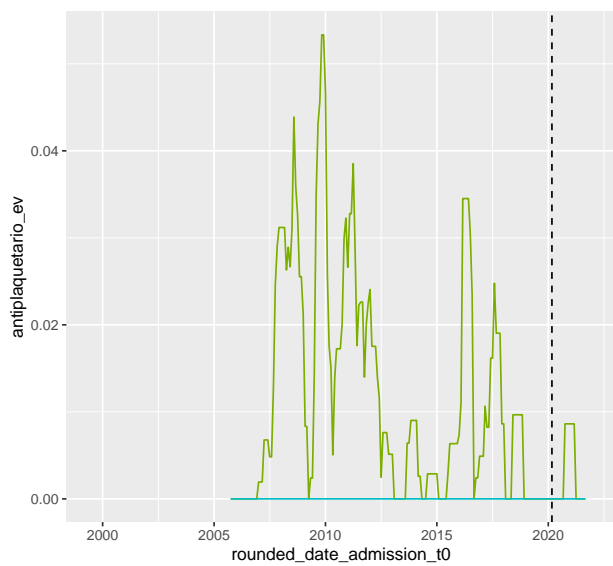
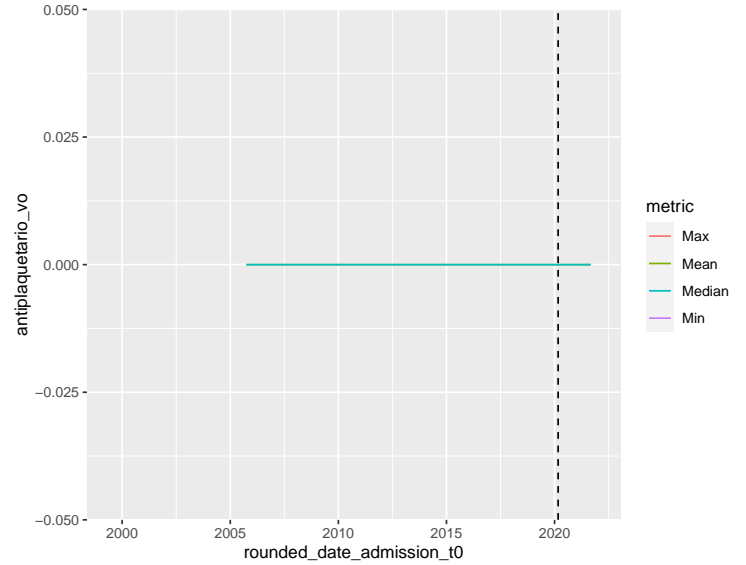
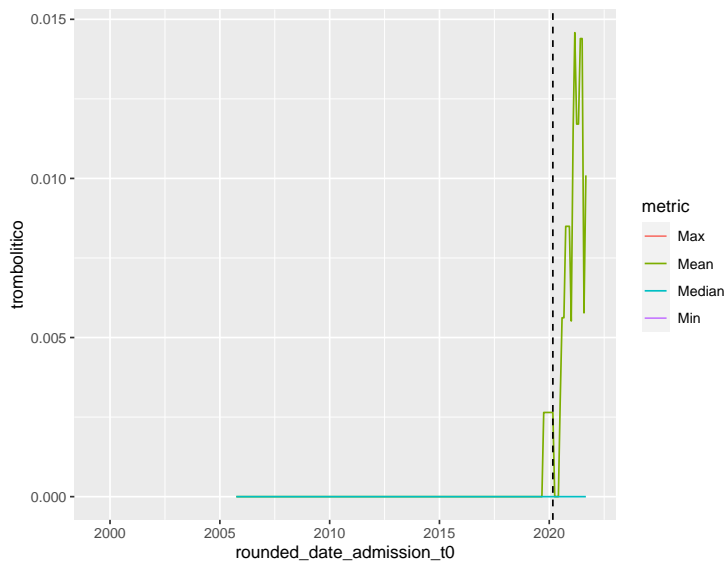
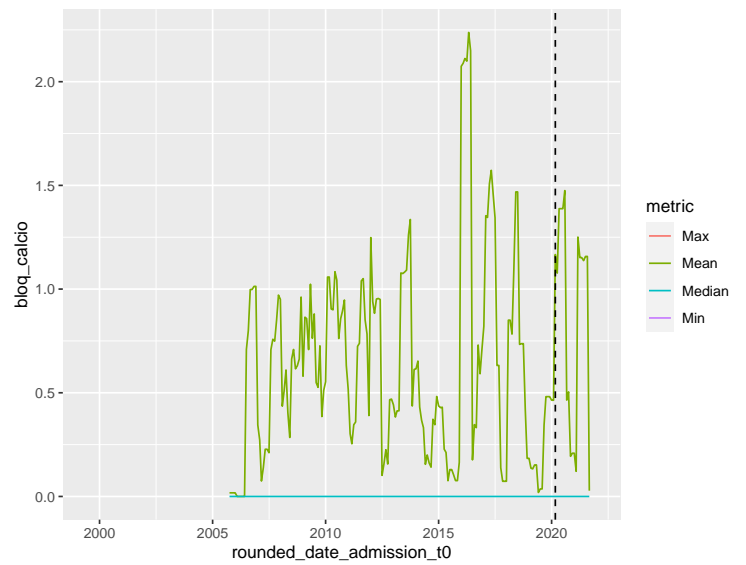
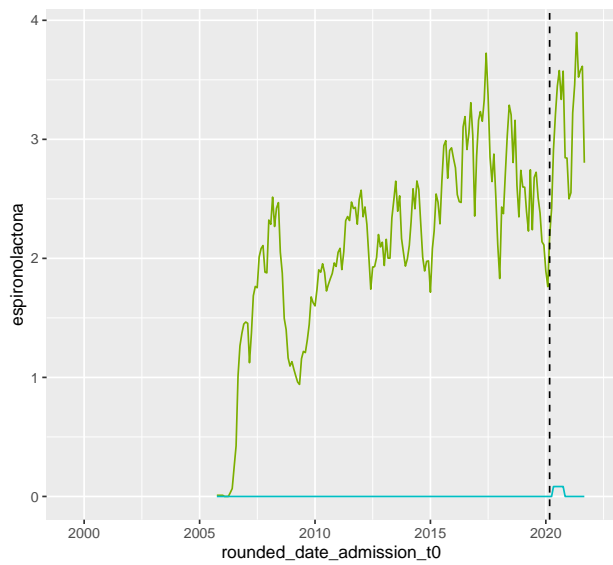


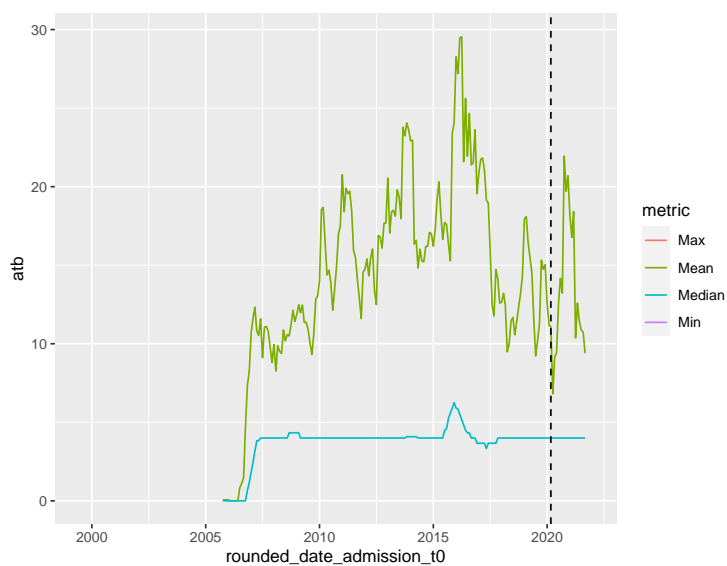
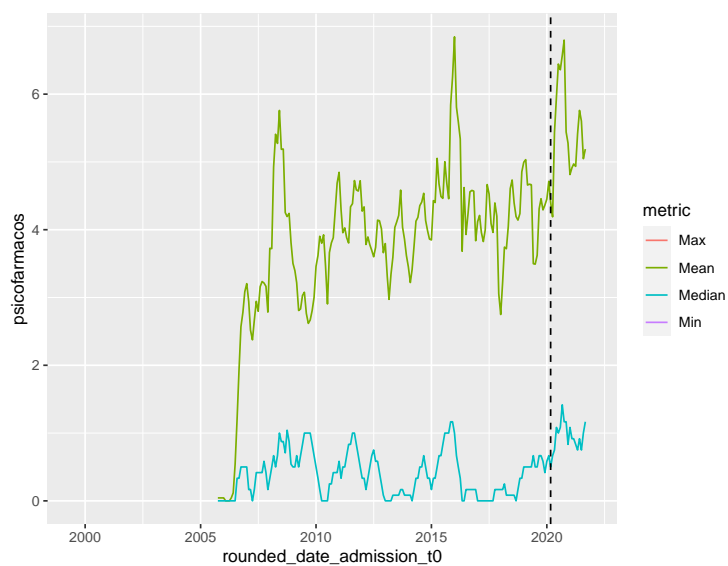
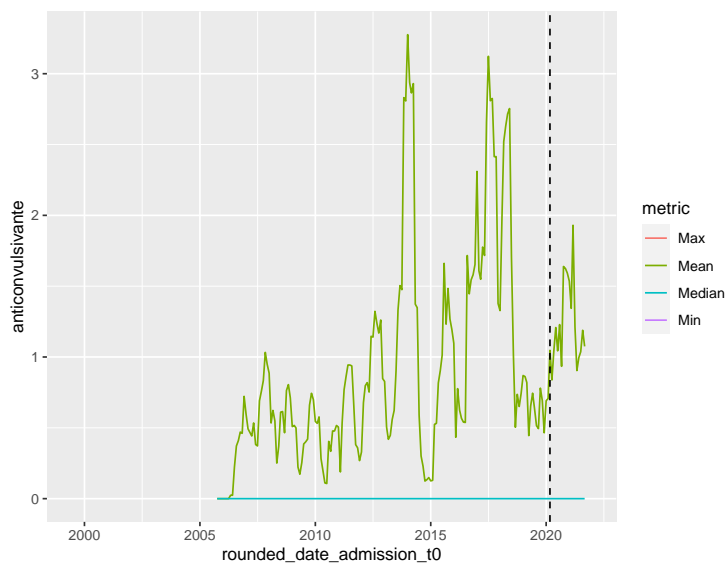
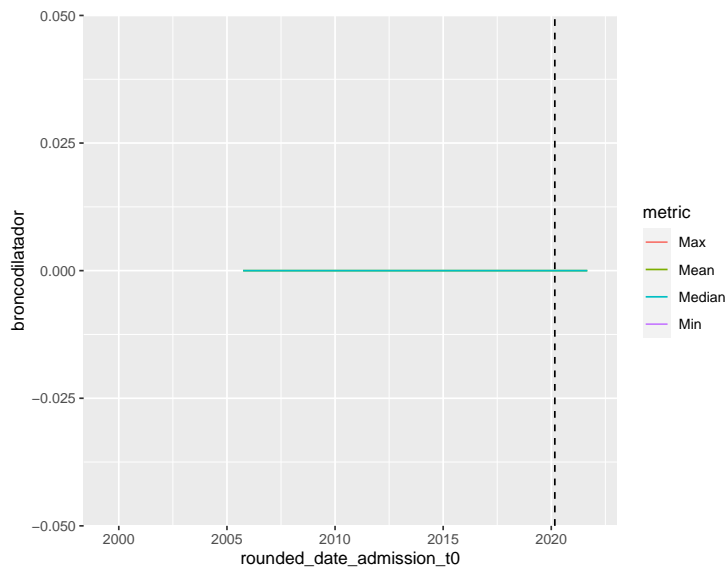
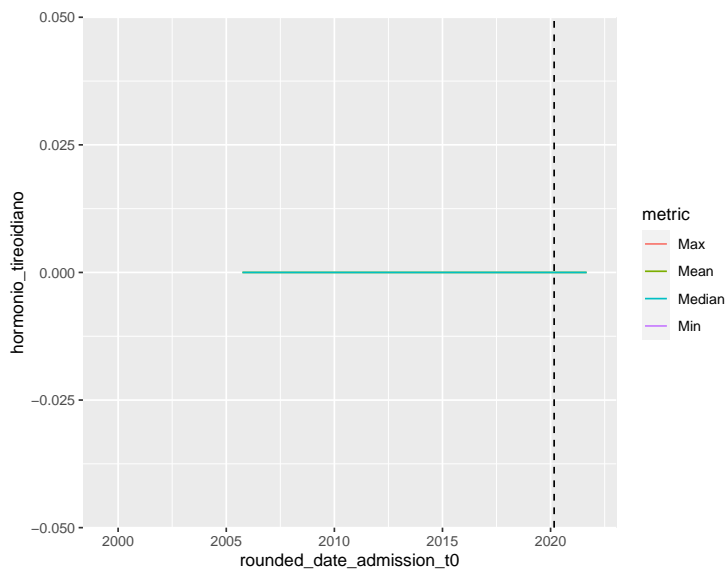
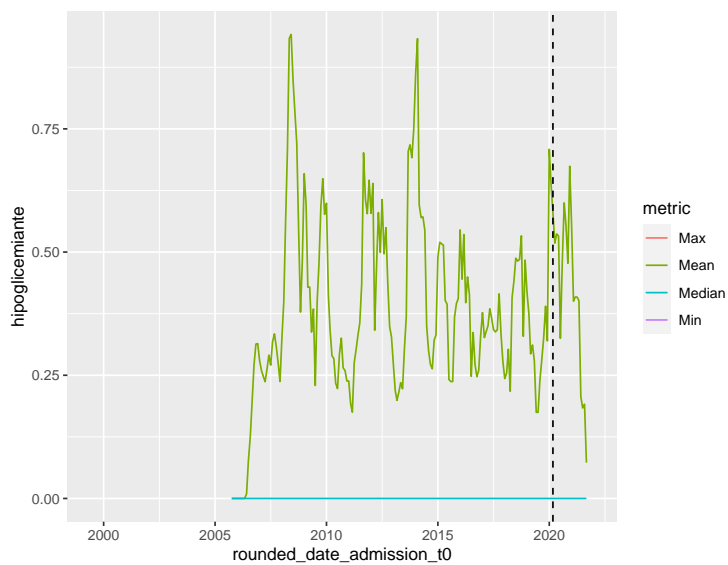


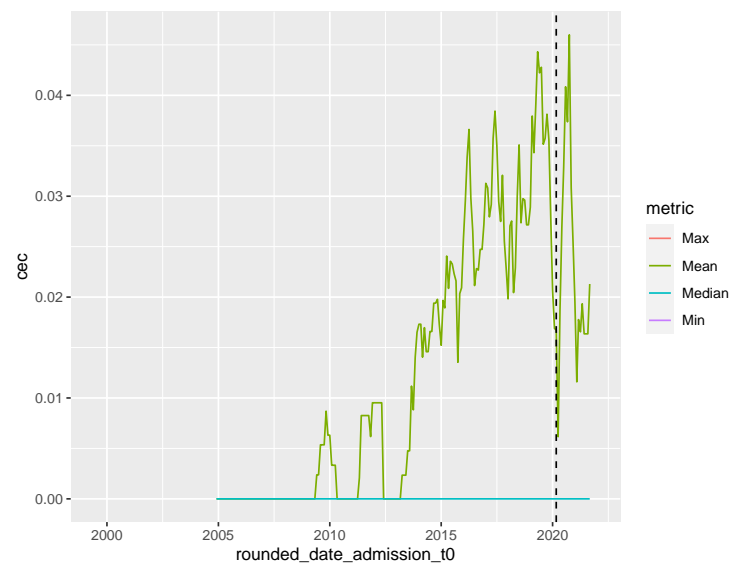
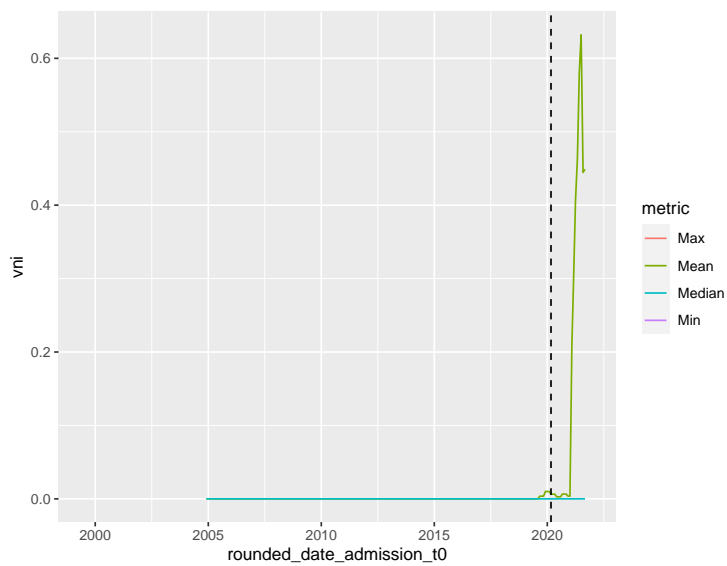
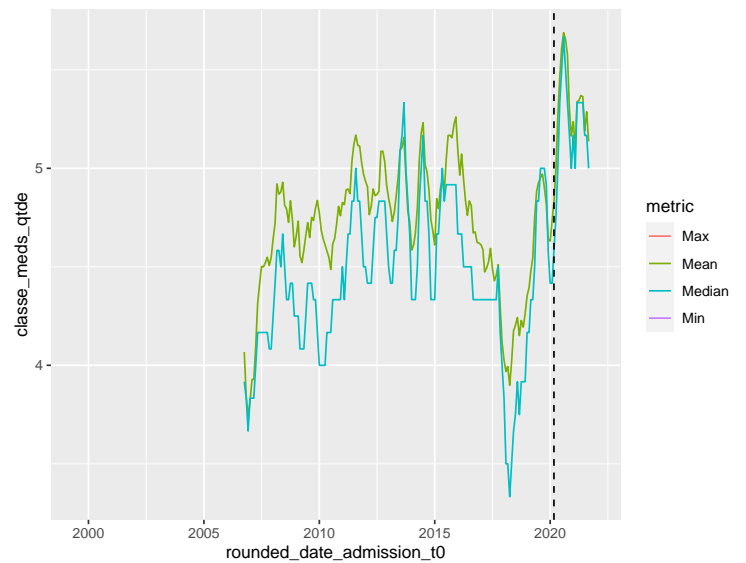
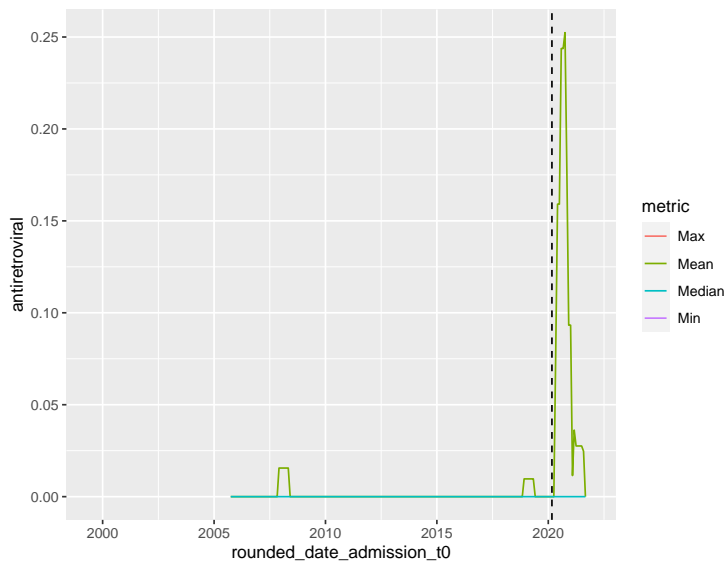
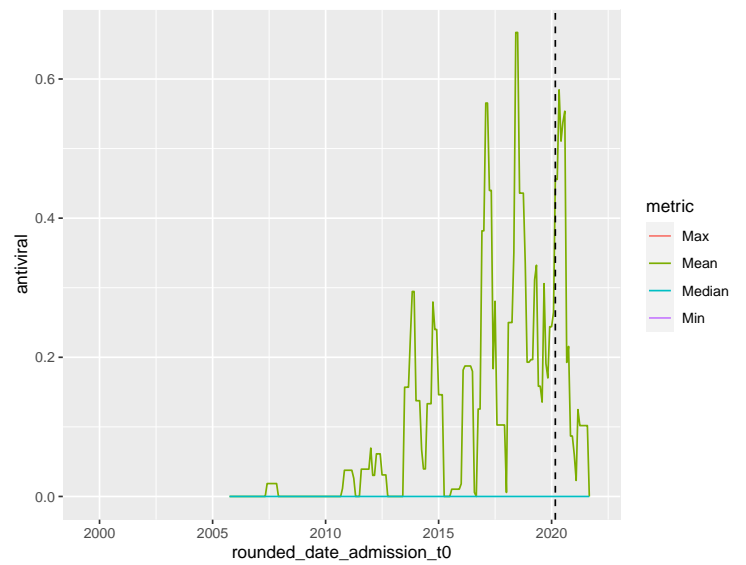
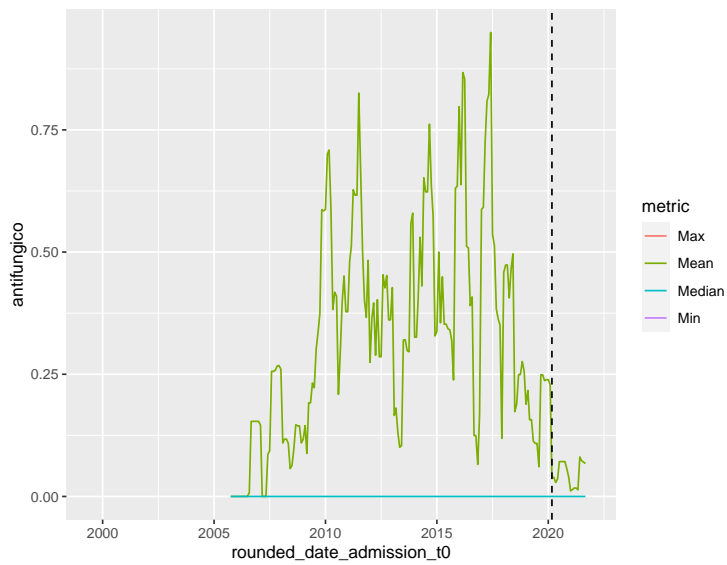


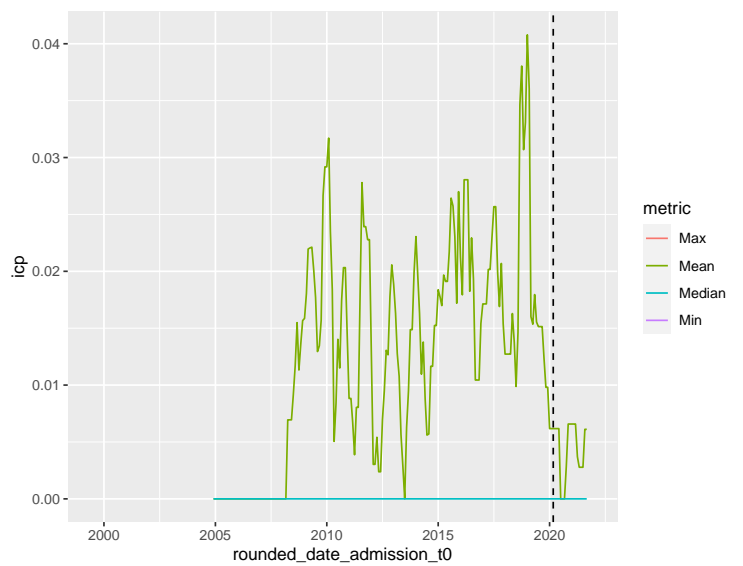
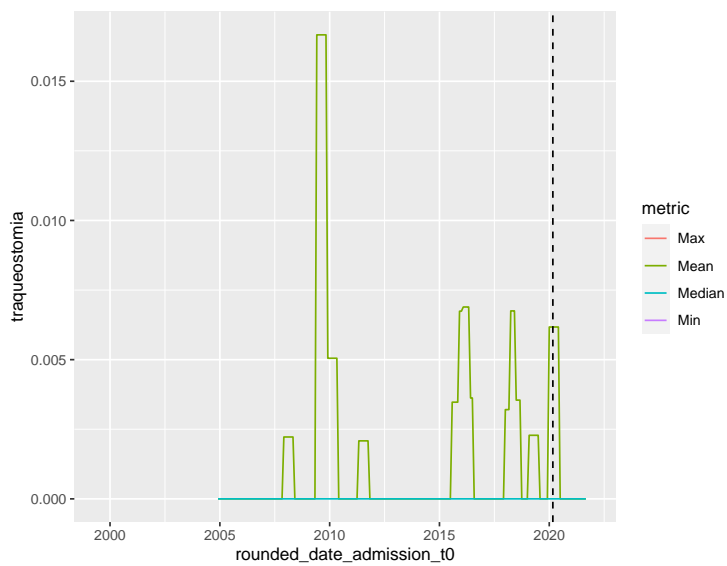
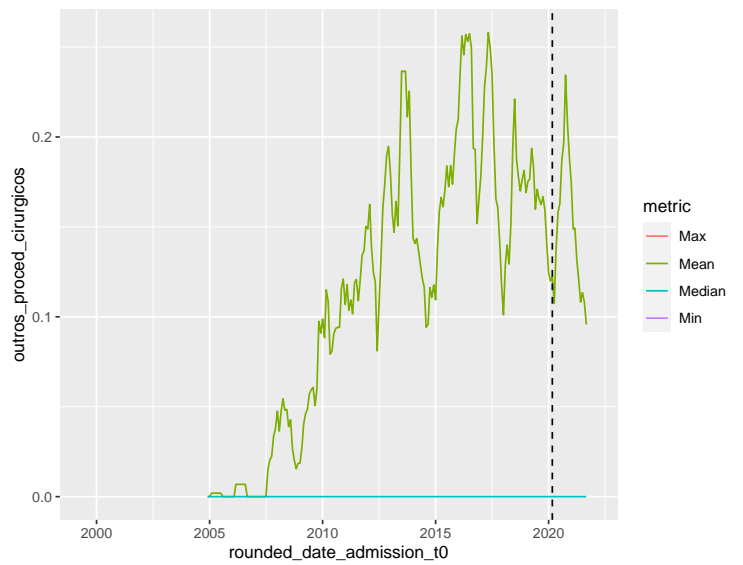
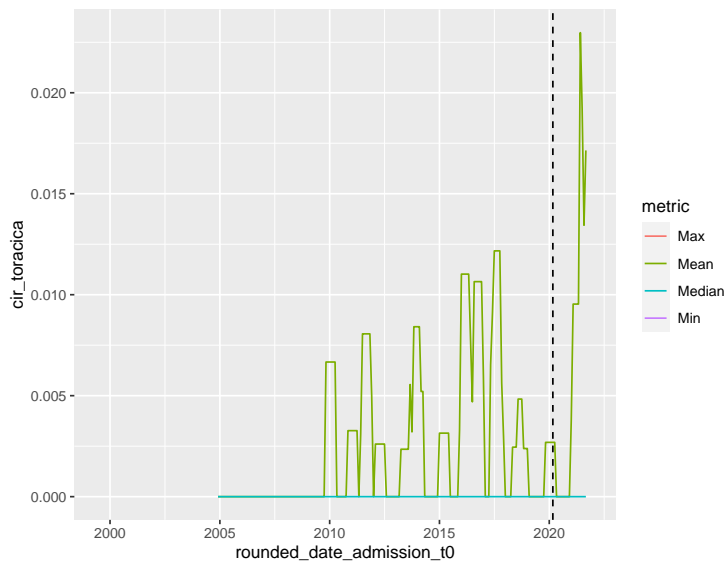
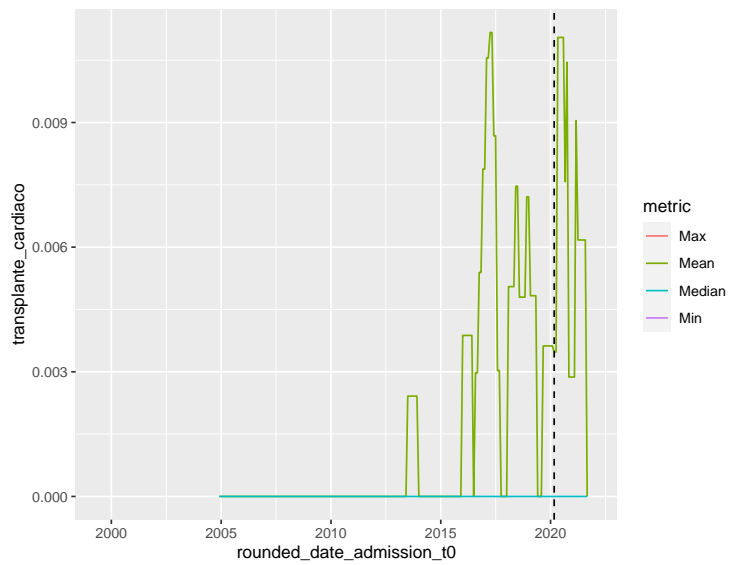
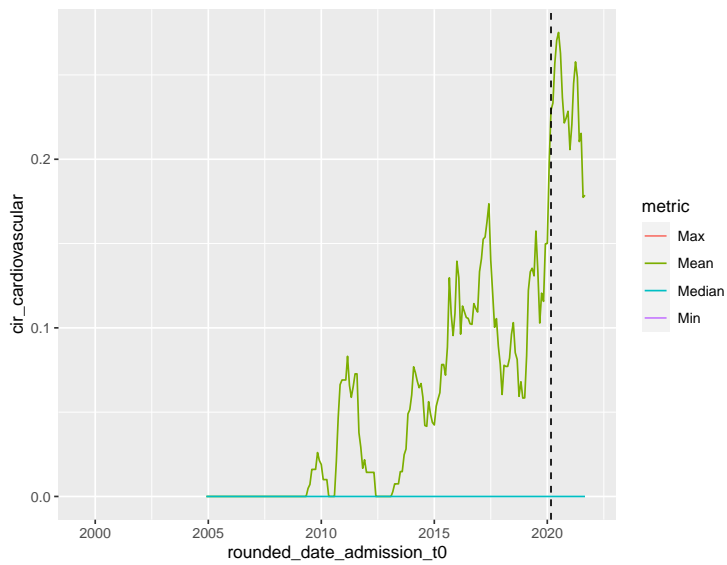


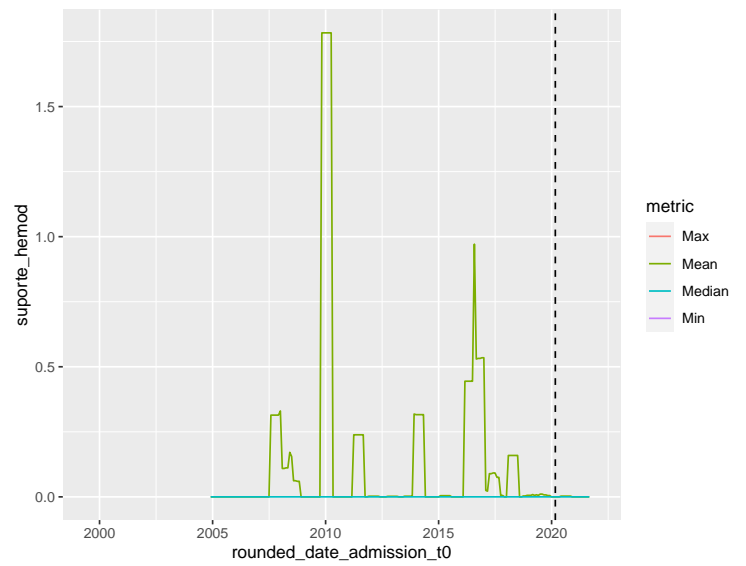
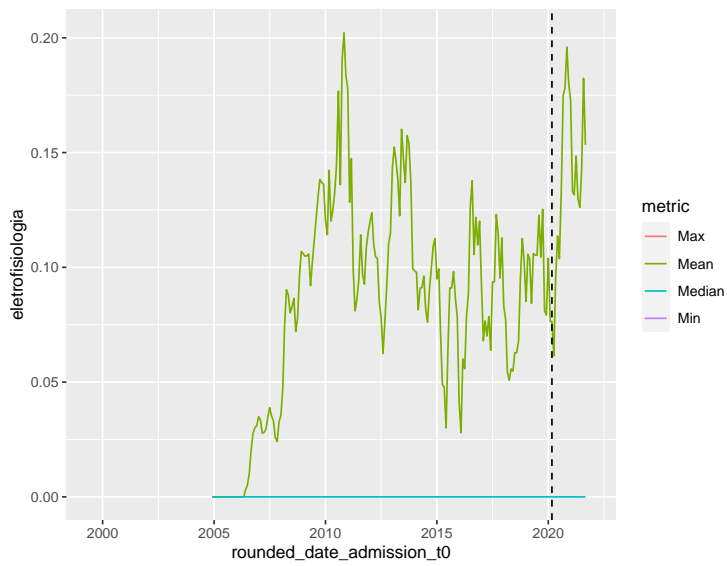
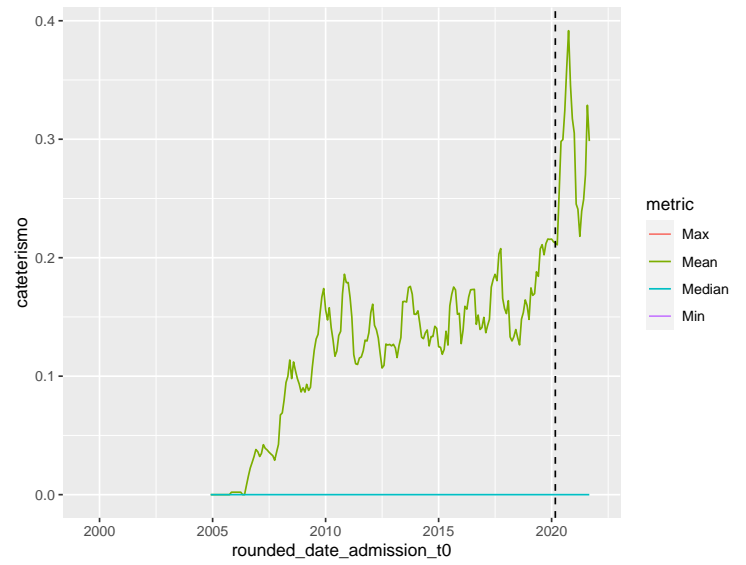
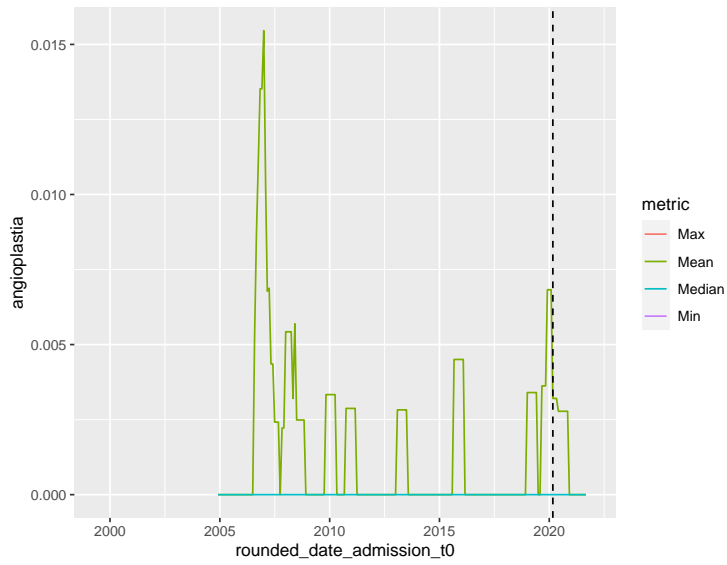
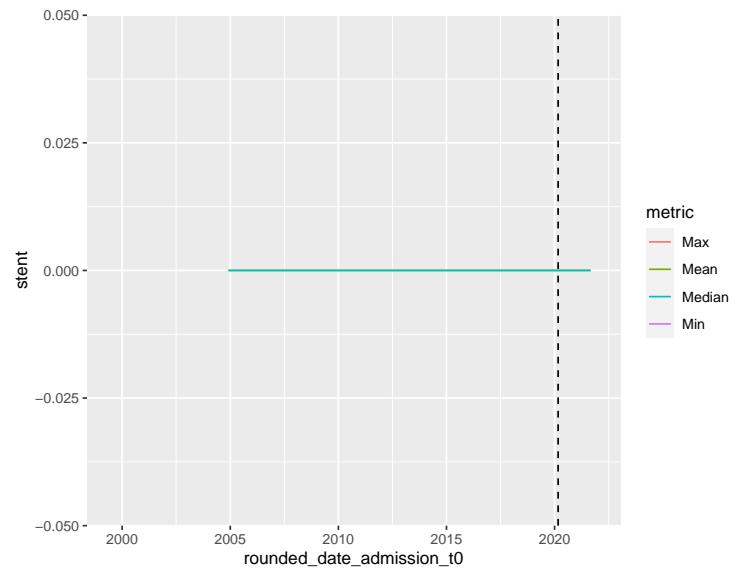
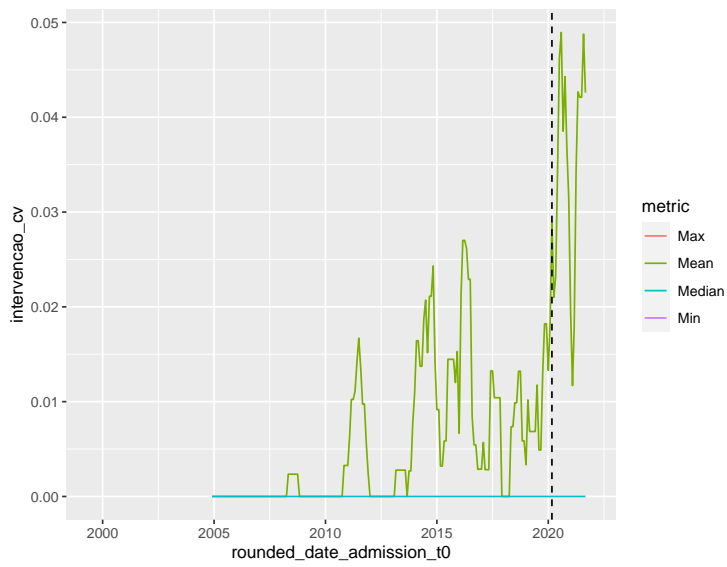


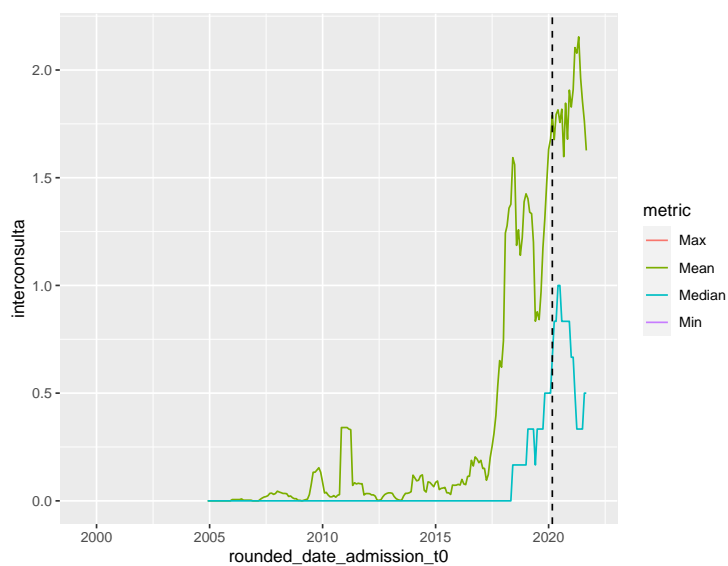
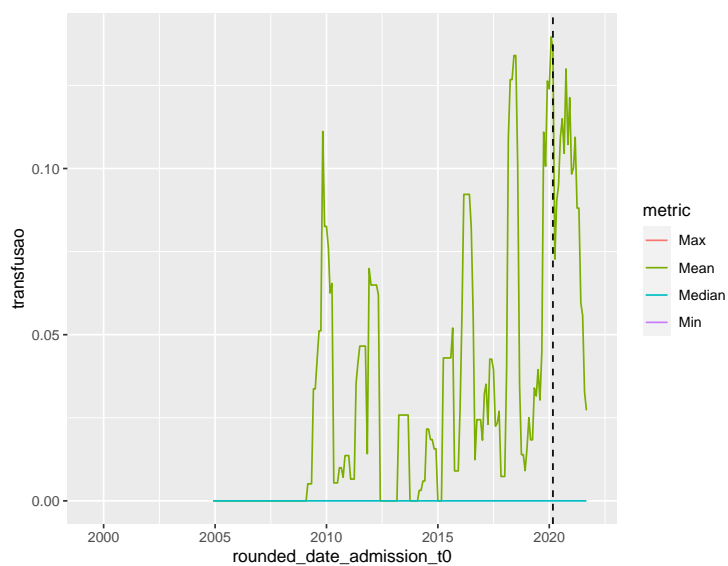
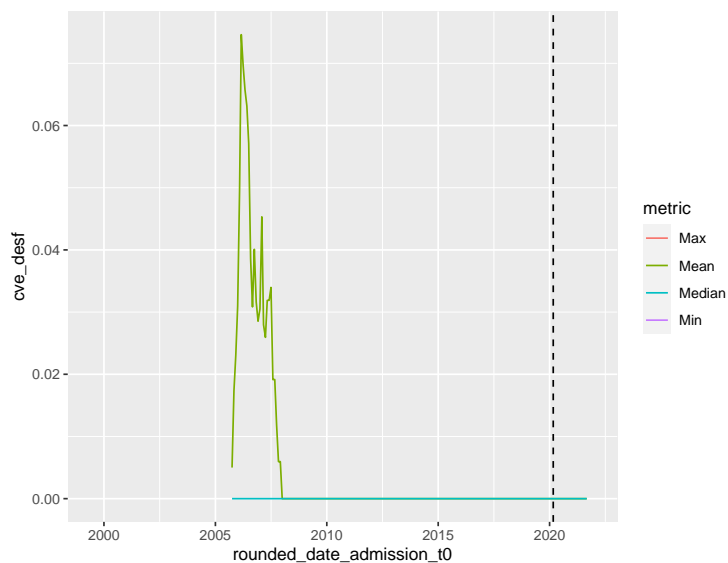
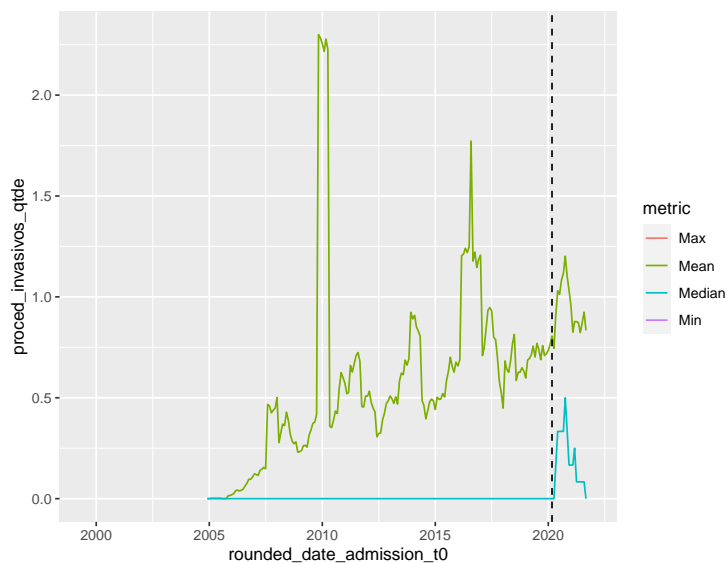
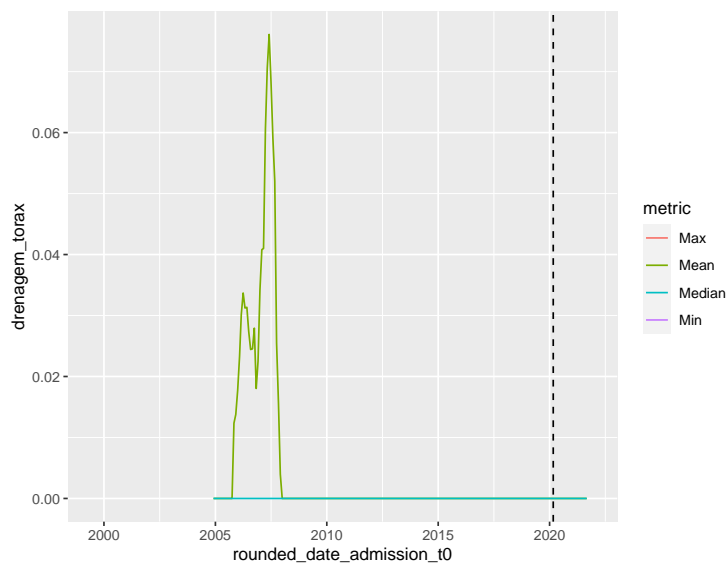
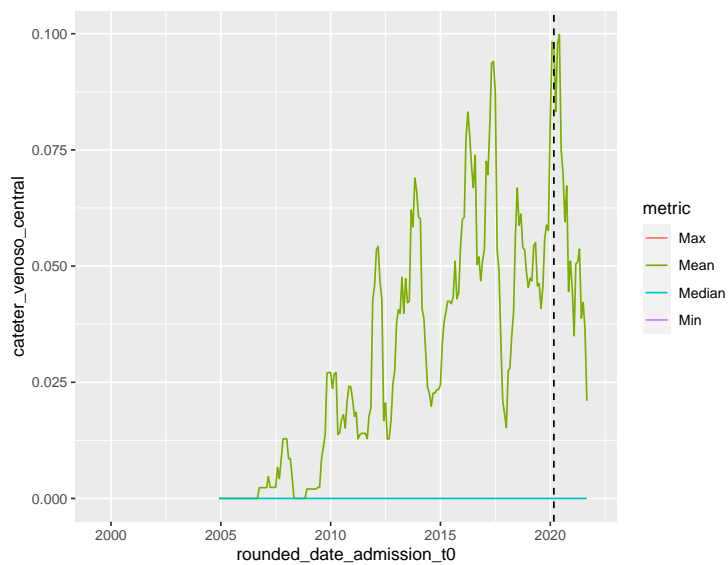


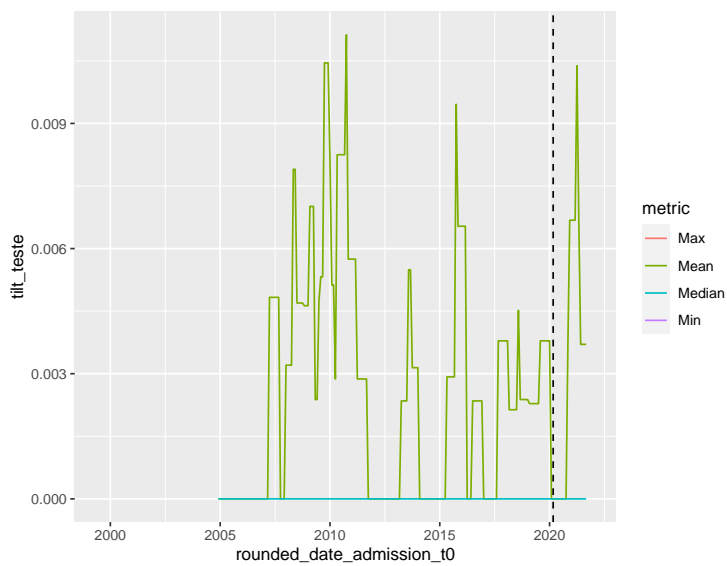
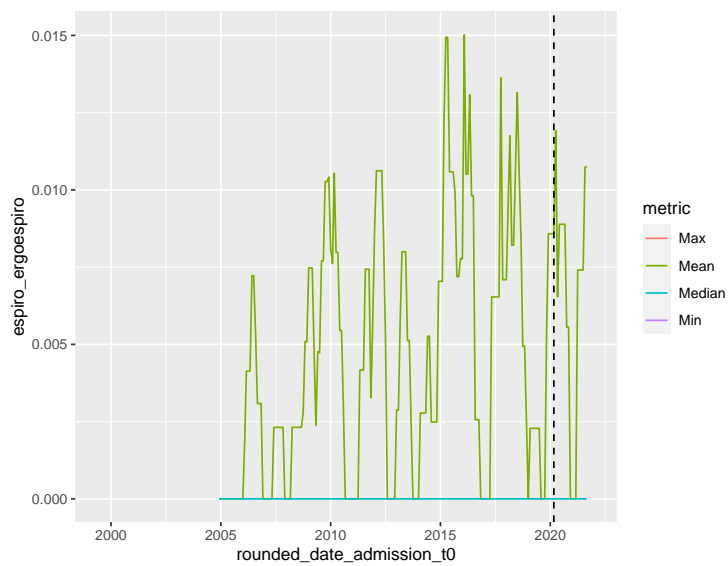
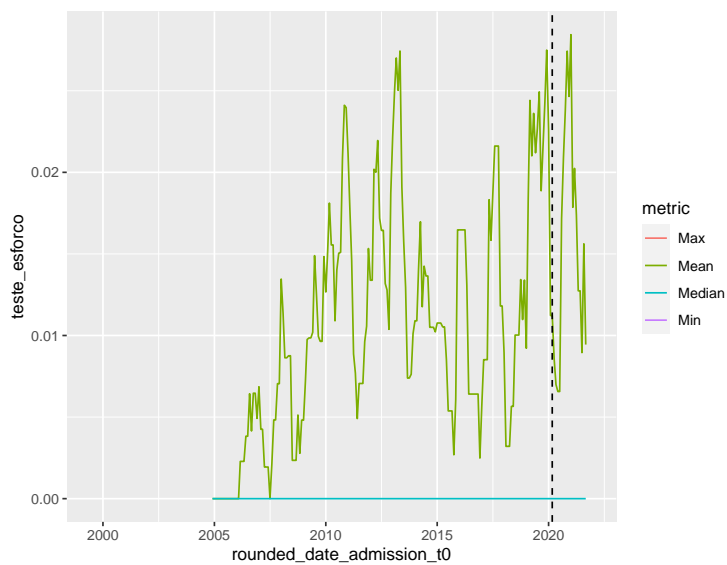
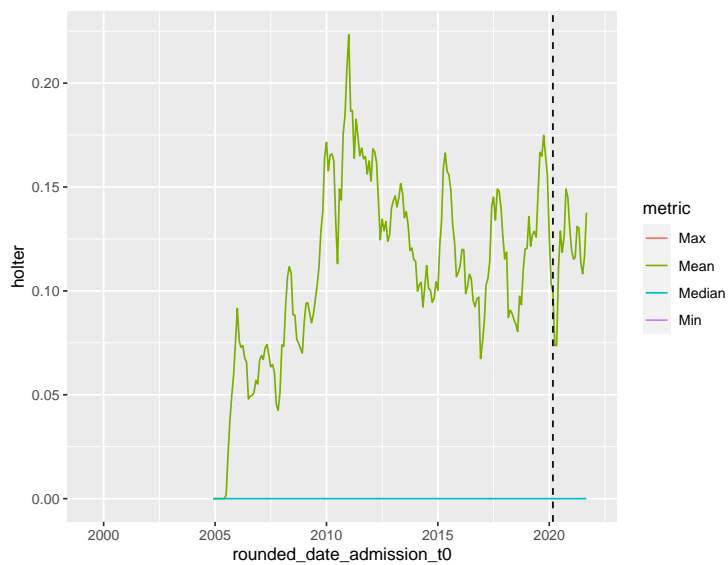
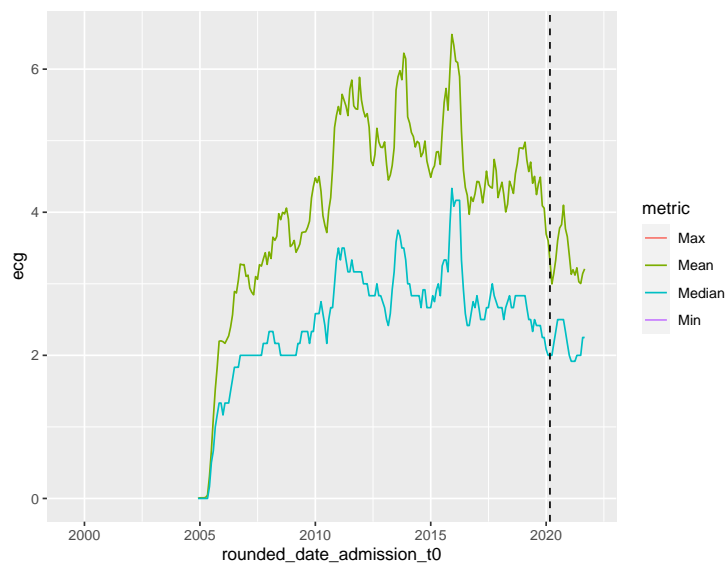
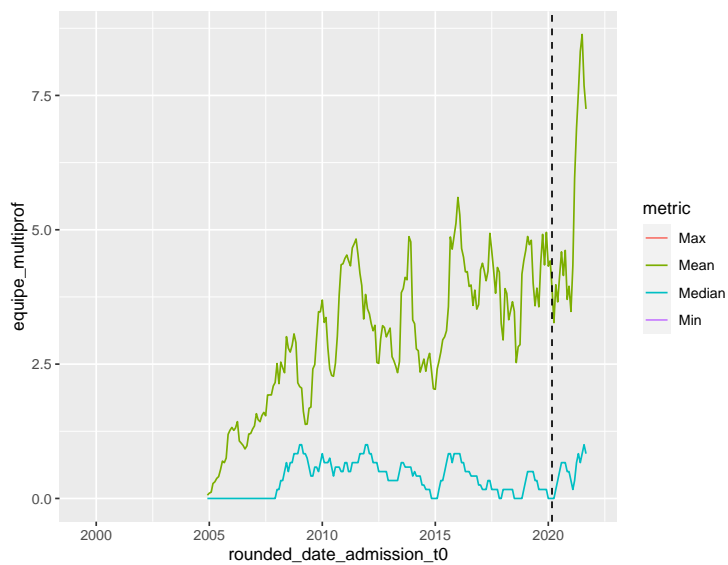


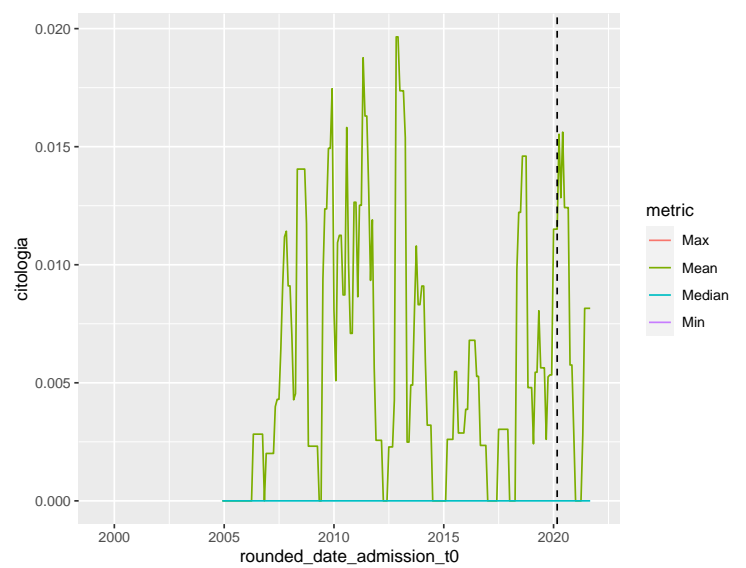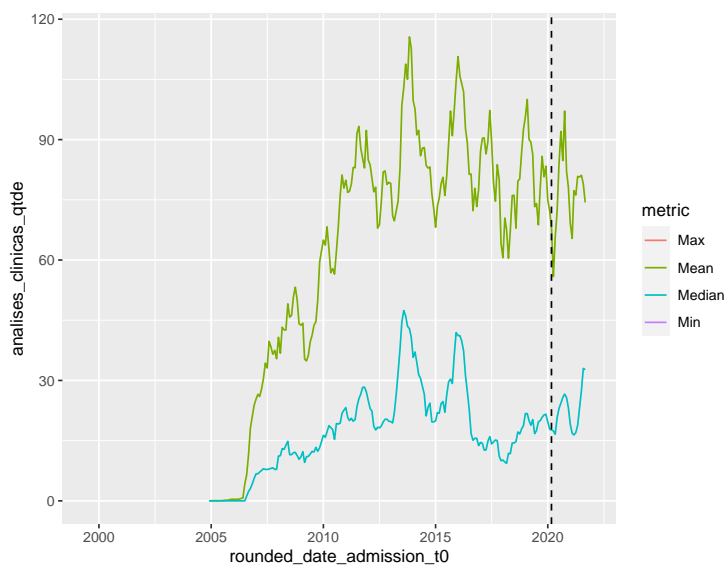
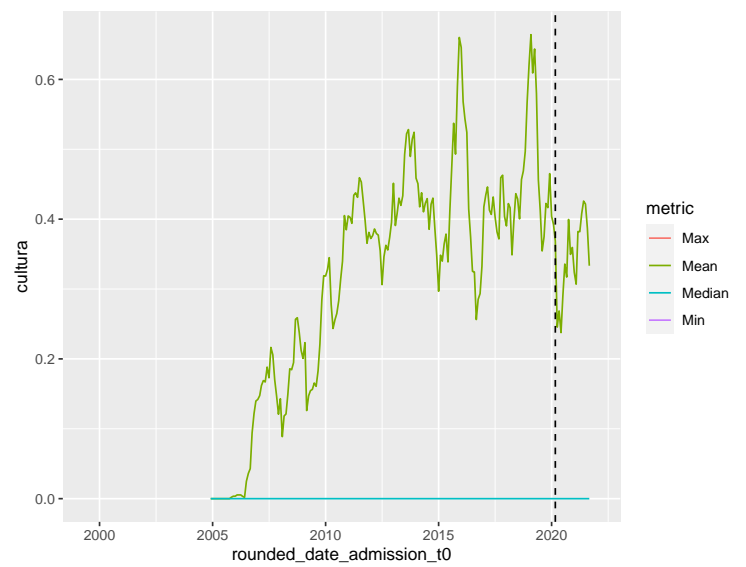
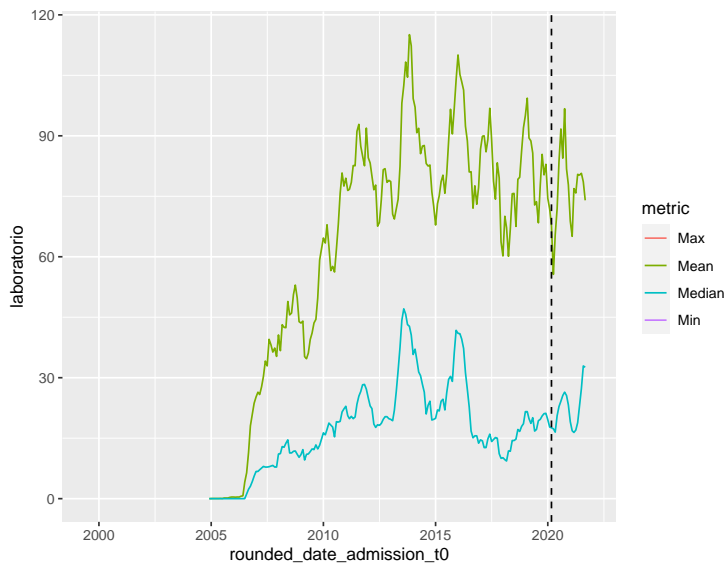
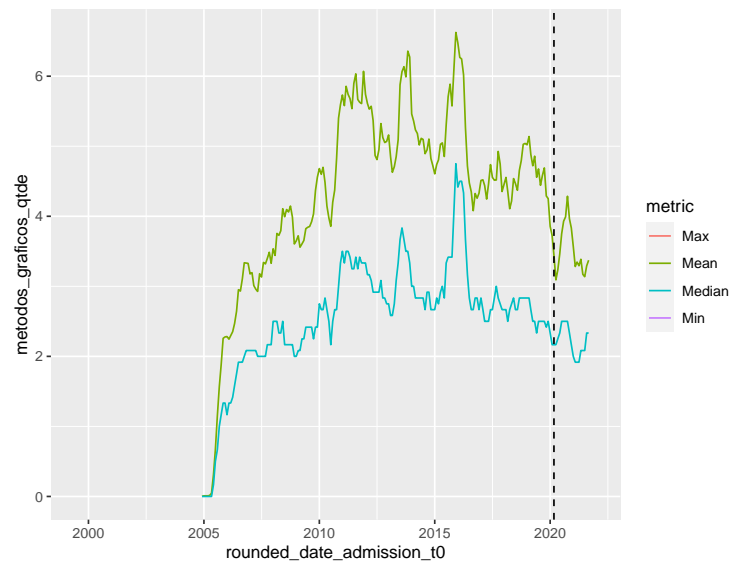
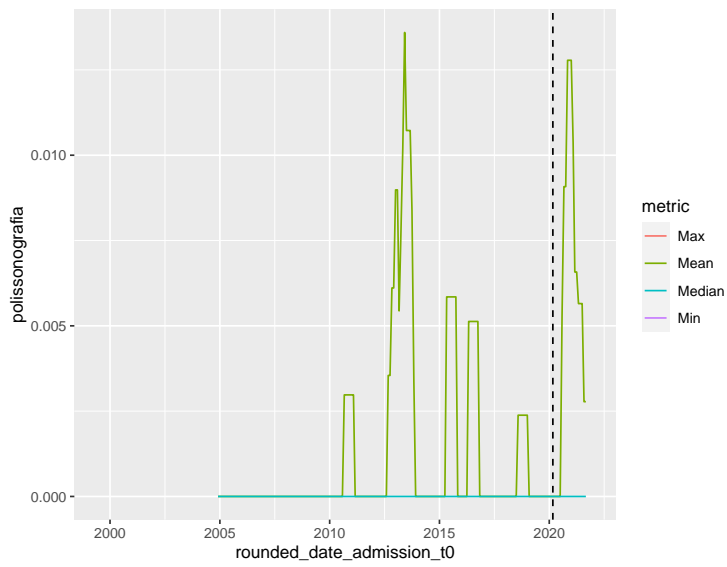


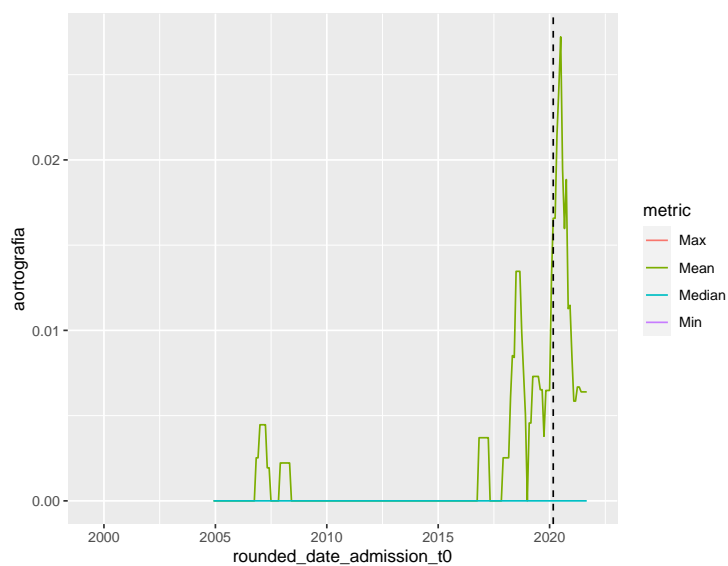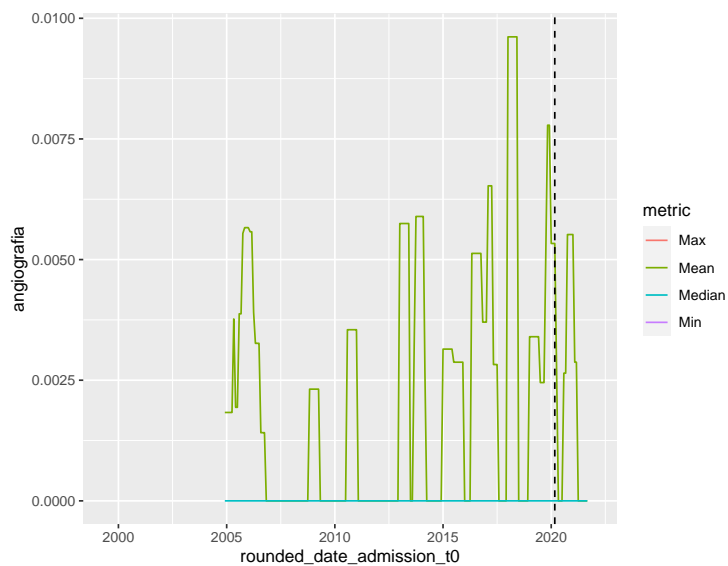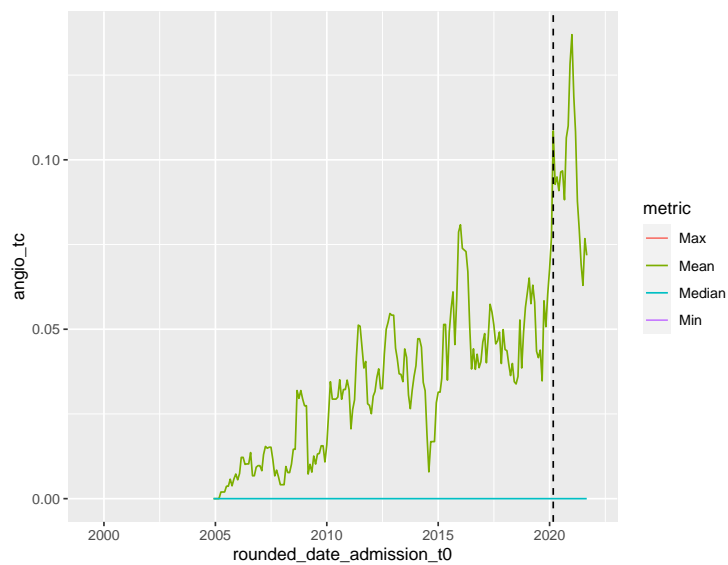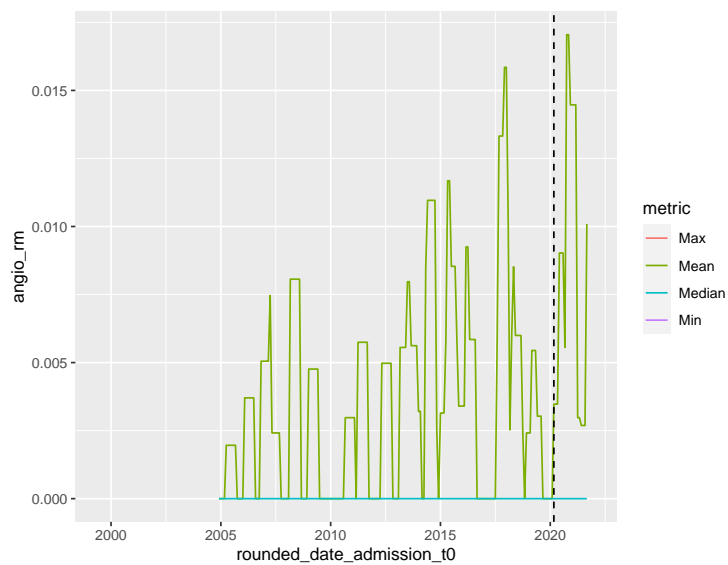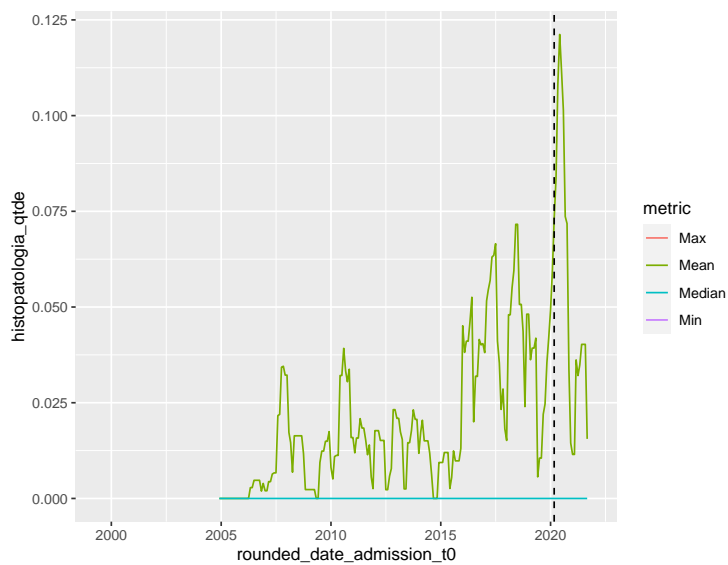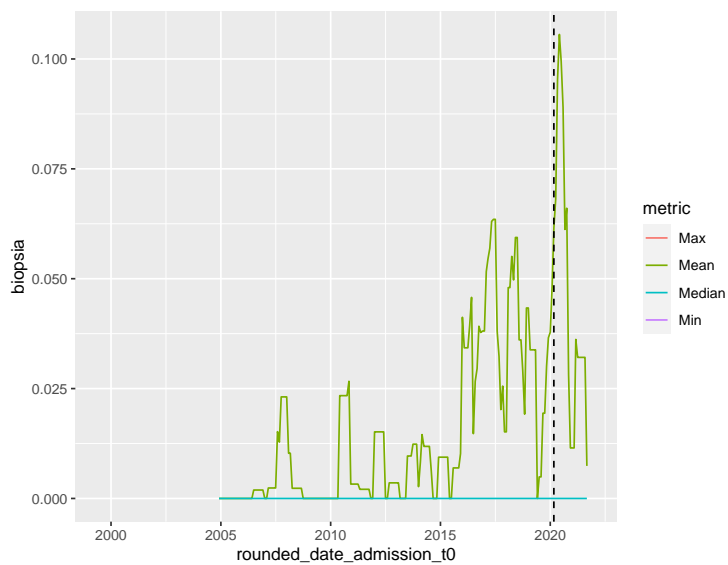

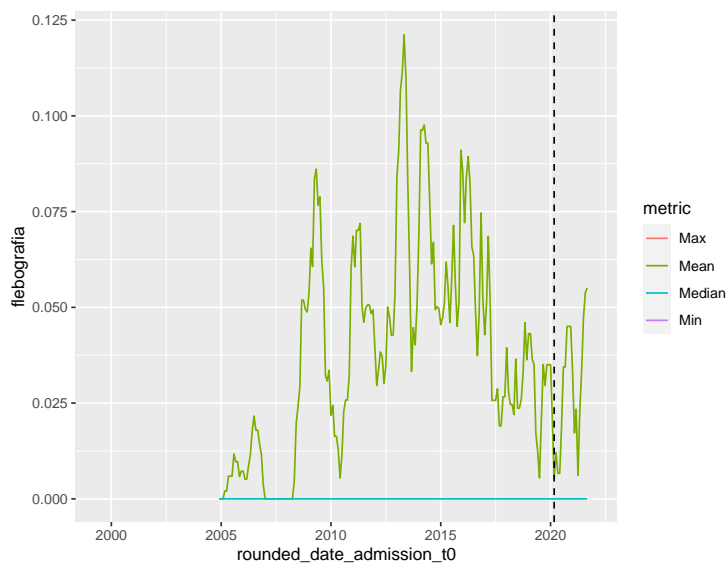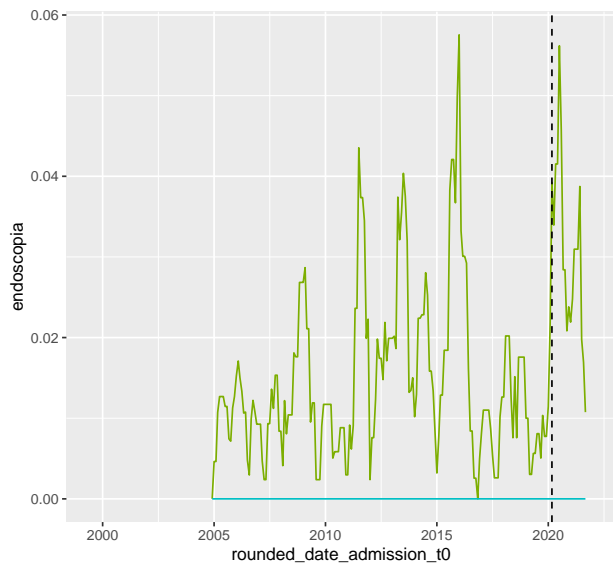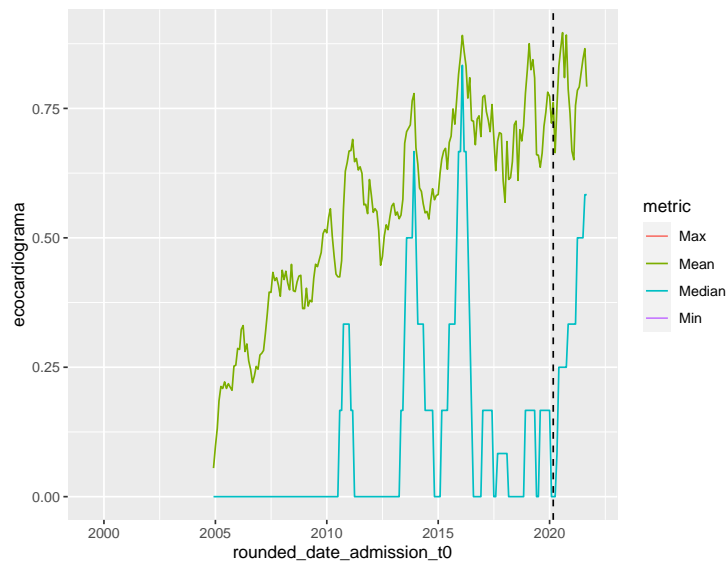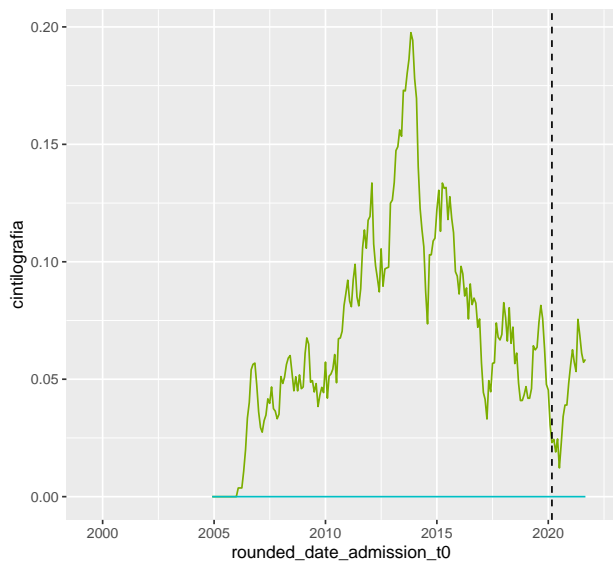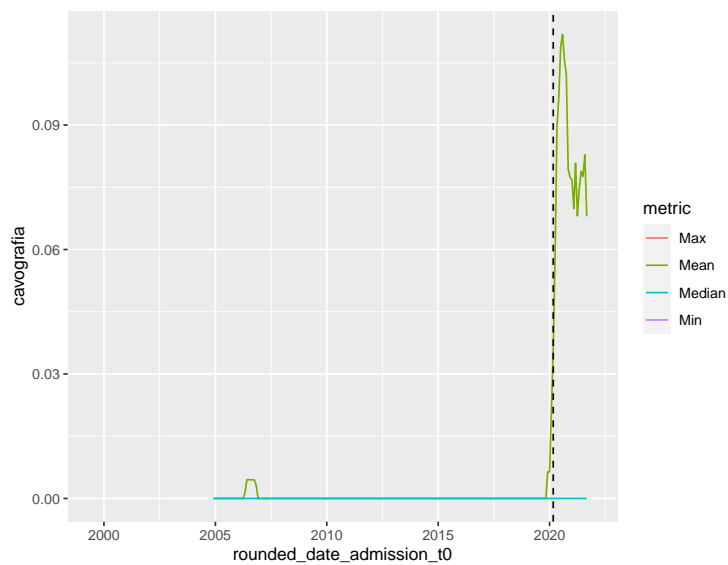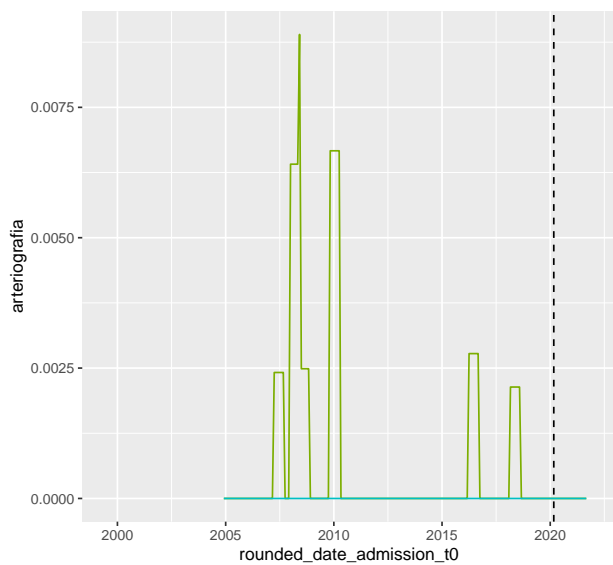

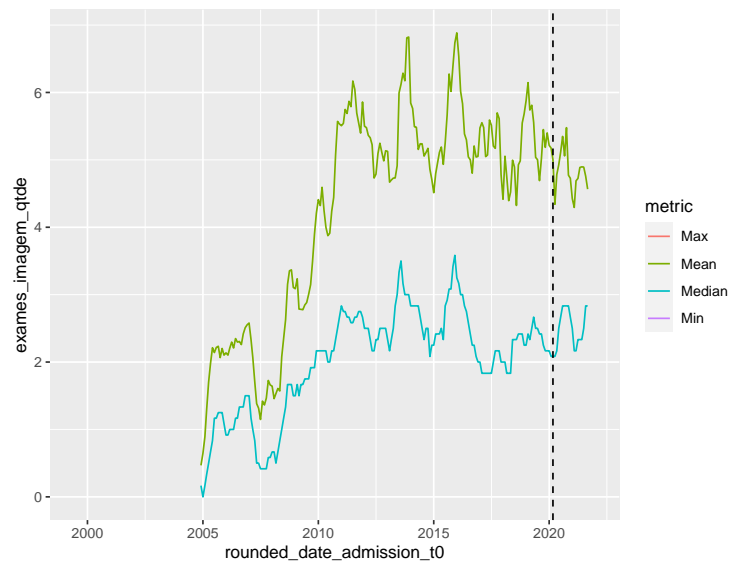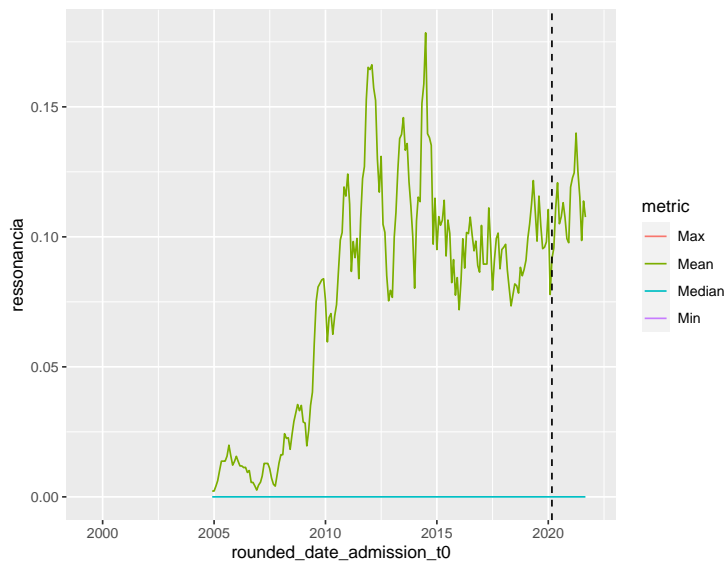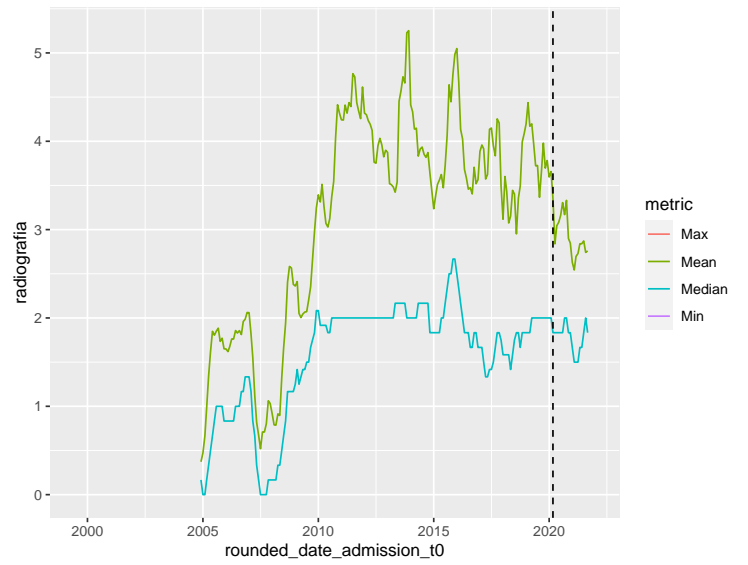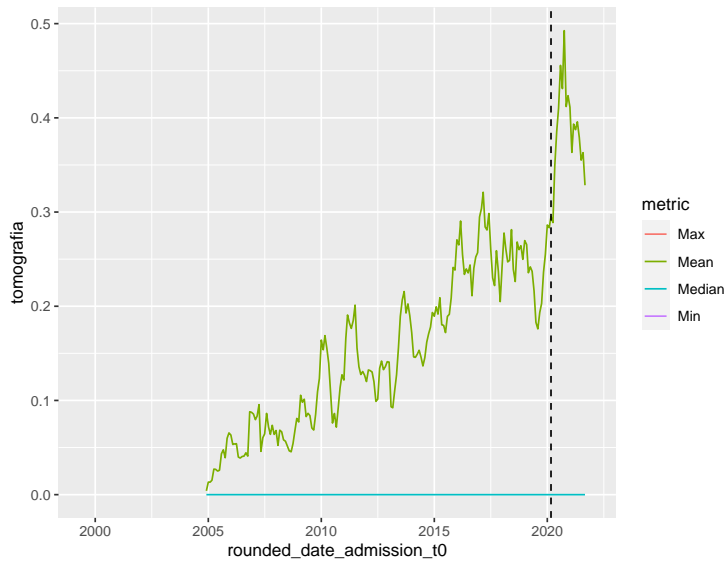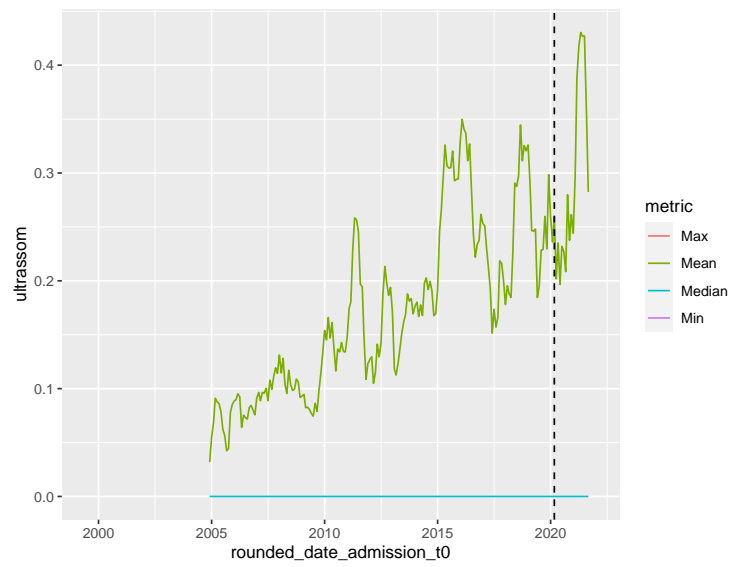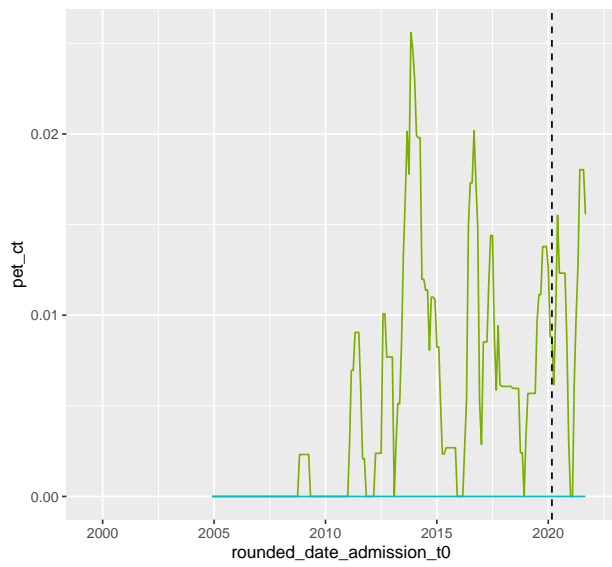

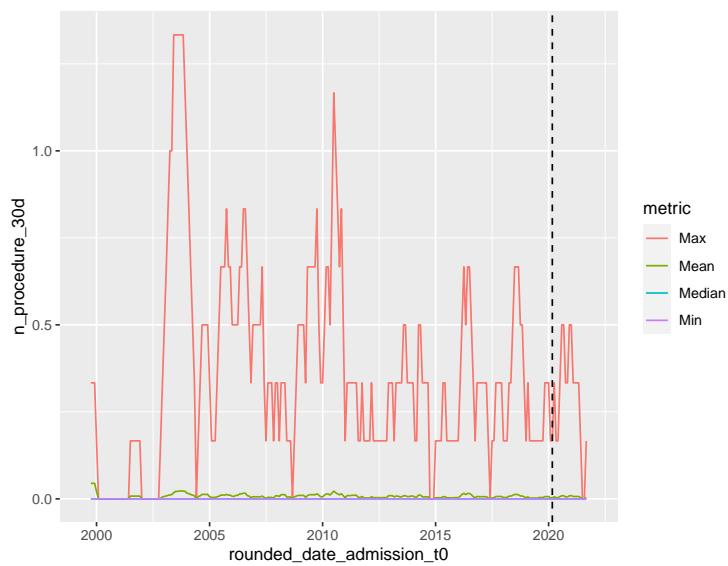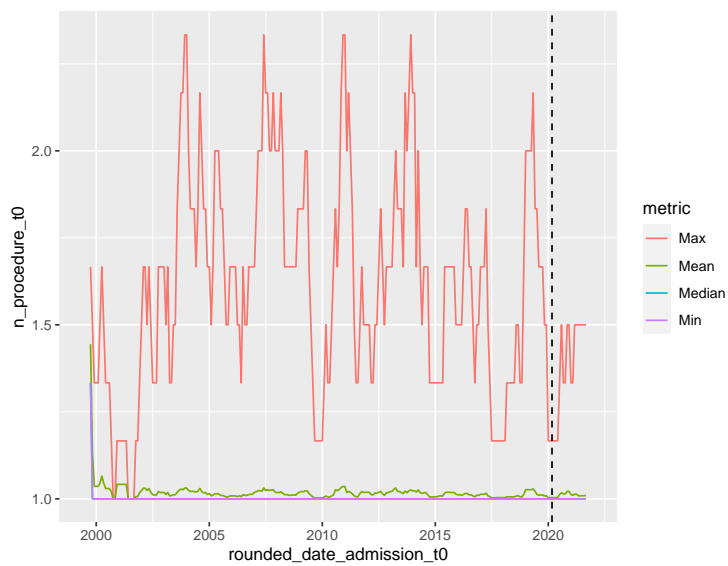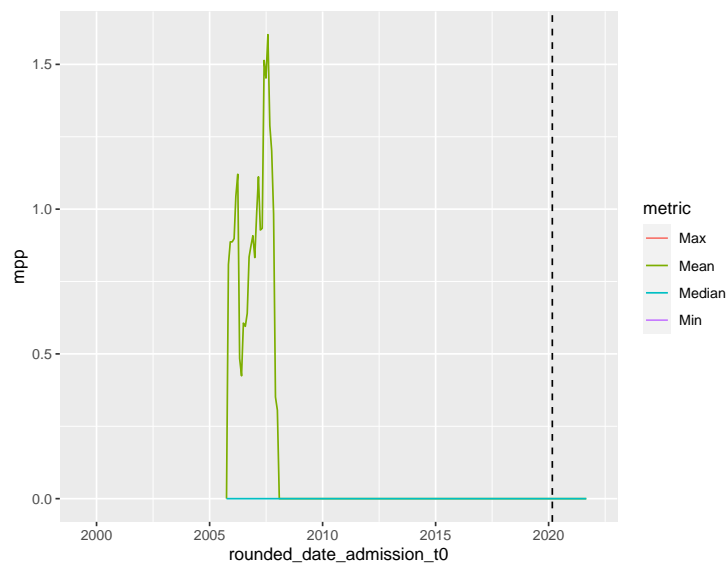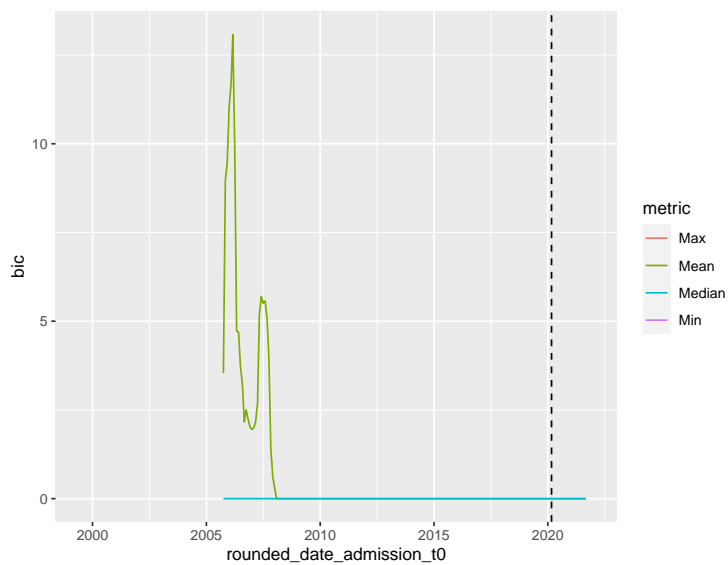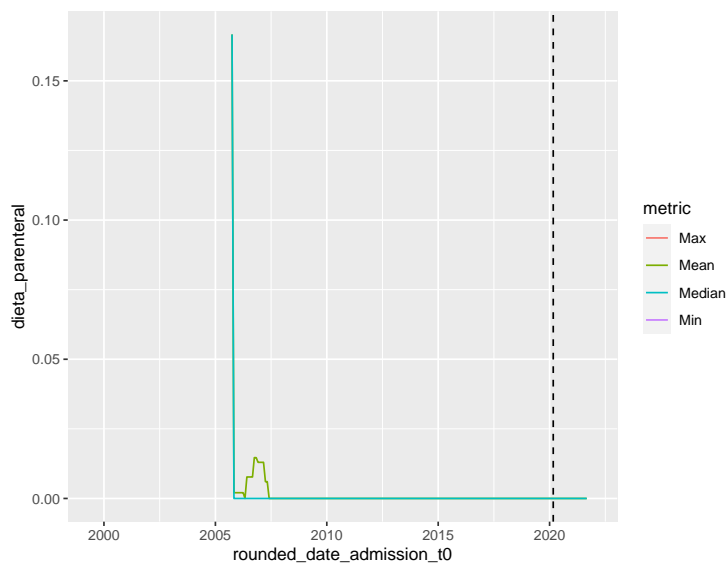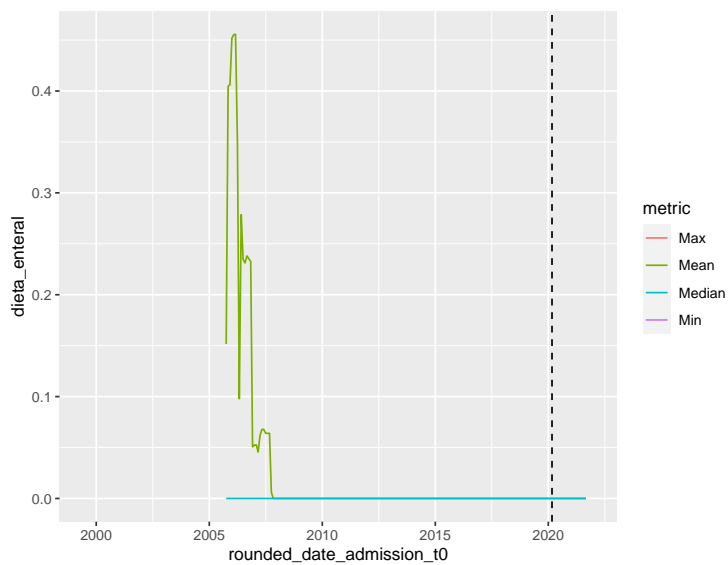

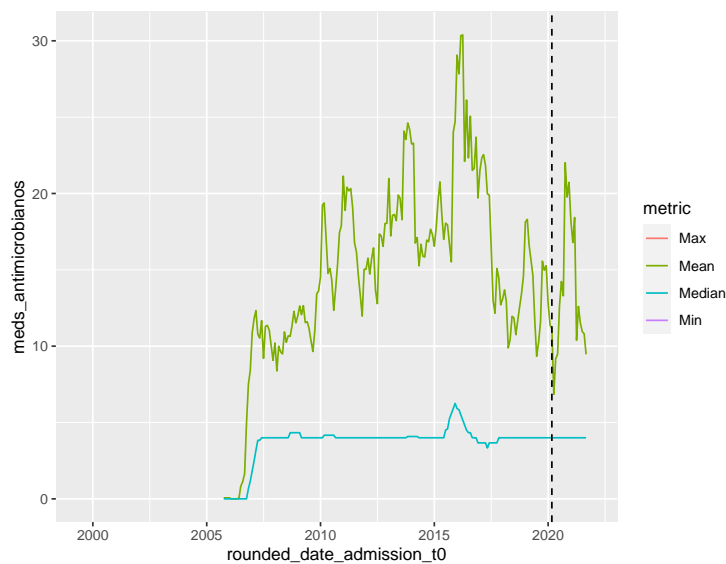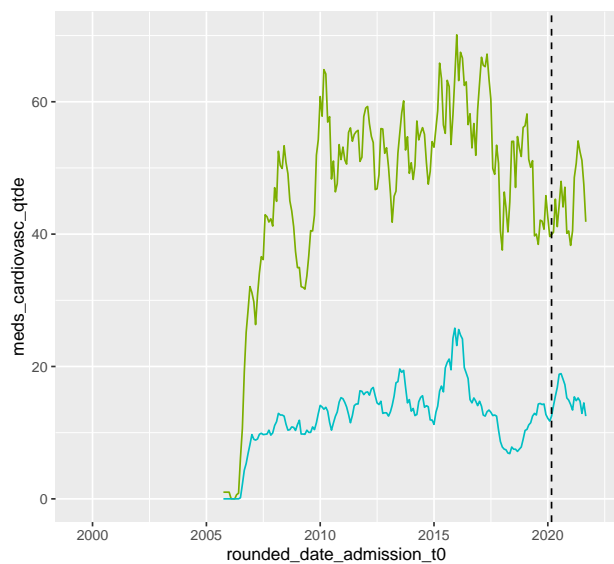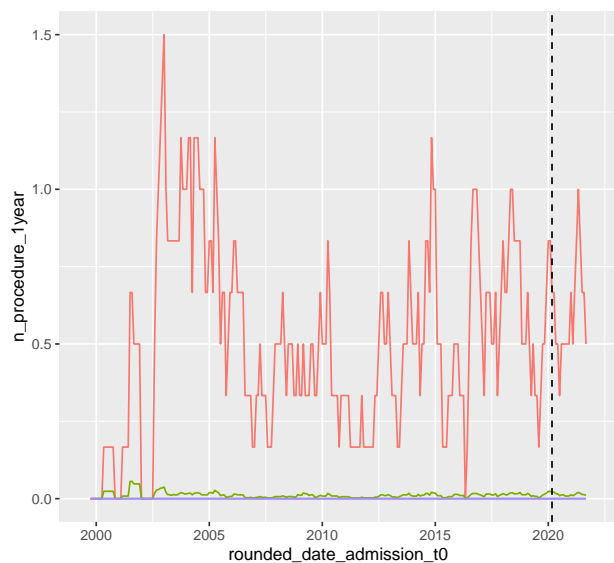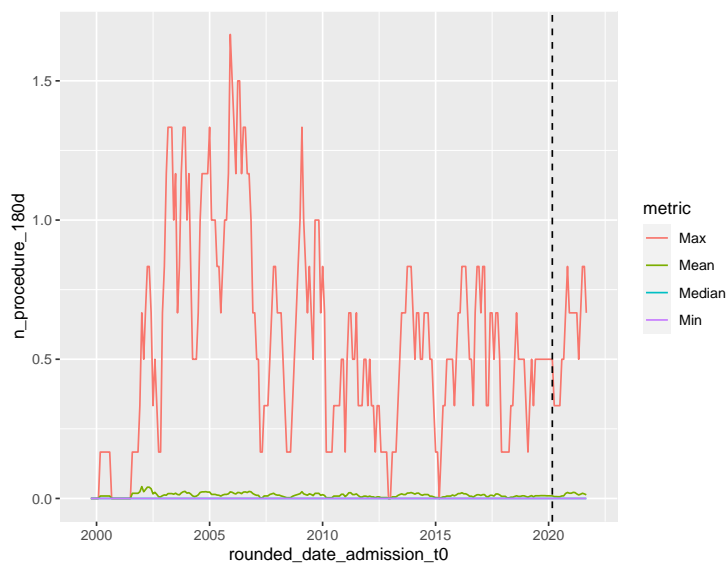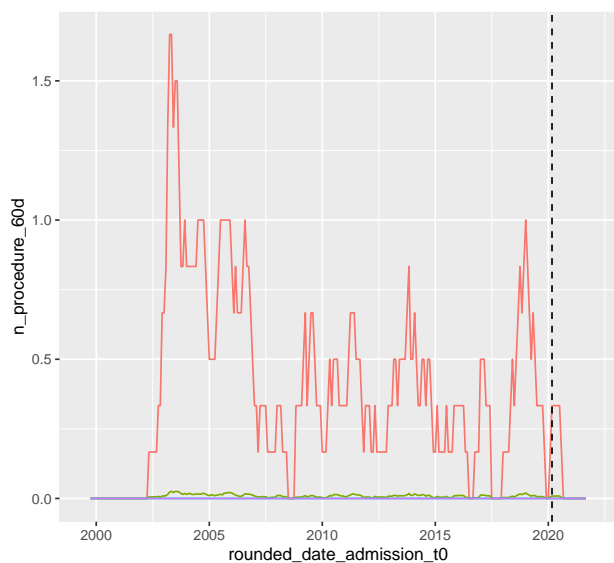

Minutes to run: 0.43

```
column <- 'death_intraop_2'
```

```
df[columns_list$outcome_columns] <- lapply(df[columns_list$outcome_columns], factor)
```

```
for (column in c(columns_list$categorical_columns, columns_list$outcome_columns)){
  if (mean(is.na(df[[column]])) > 0.5) next
}
```

```

if (length(unique(df[[column]])) > 10) print(column)



df %>%
  mutate(rounded_date_admission_t0 = lubridate::floor_date(date_admission_t0,
                                                         'month')) %>%







  group_by(rounded_date_admission_t0, !!sym(column)) %>%
  summarise(N = n()) %>%
  ungroup %>%
  arrange(rounded_date_admission_t0) %>%
  mutate(N = zoo::rollmean(N, k = k, fill = NA)) %>%
  group_by(rounded_date_admission_t0) %>%
  mutate(percentage = N / sum(N)) %>%
  ungroup %>%
  tidyr::complete(rounded_date_admission_t0, !!sym(column),
                  fill = list(N = 0, percentage = 0)) %>%
  ggplot(aes(x = rounded_date_admission_t0, y = percentage,
            color = !!sym(column), fill = !!sym(column))) +
    geom_area(alpha=0.6) +
    scale_y_continuous(labels = scales::percent) +
    labs(y = column)-> p







print(p)
}







```







```
## [1] "patient_state"
```





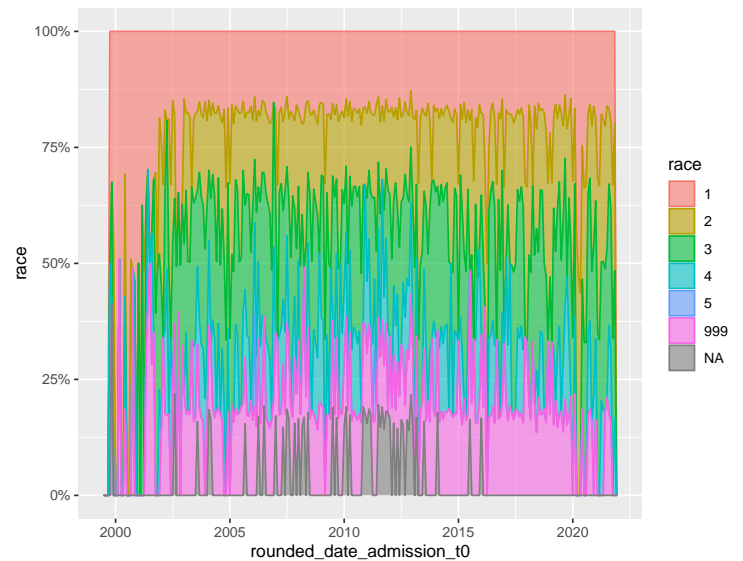
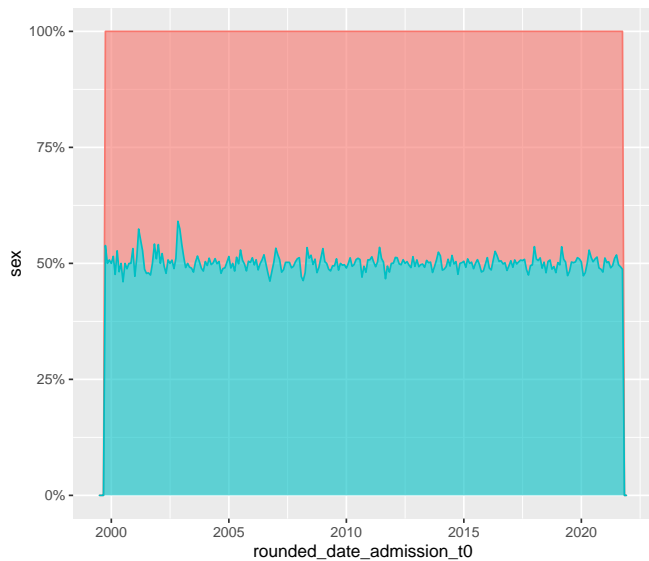


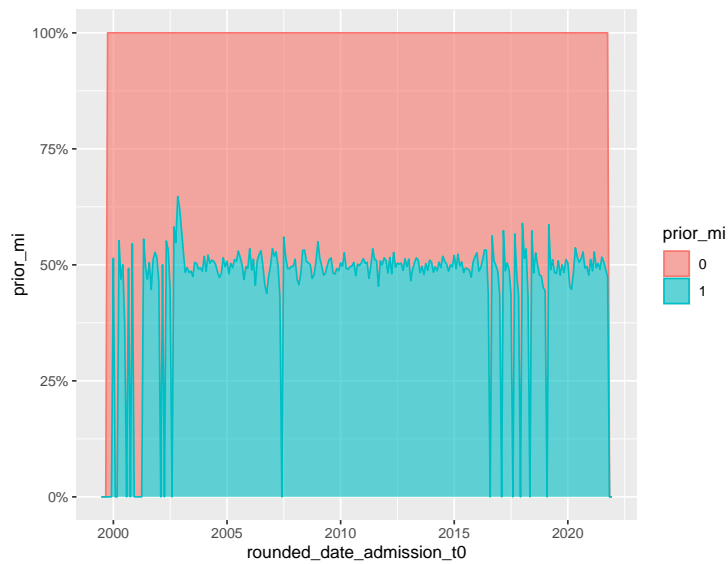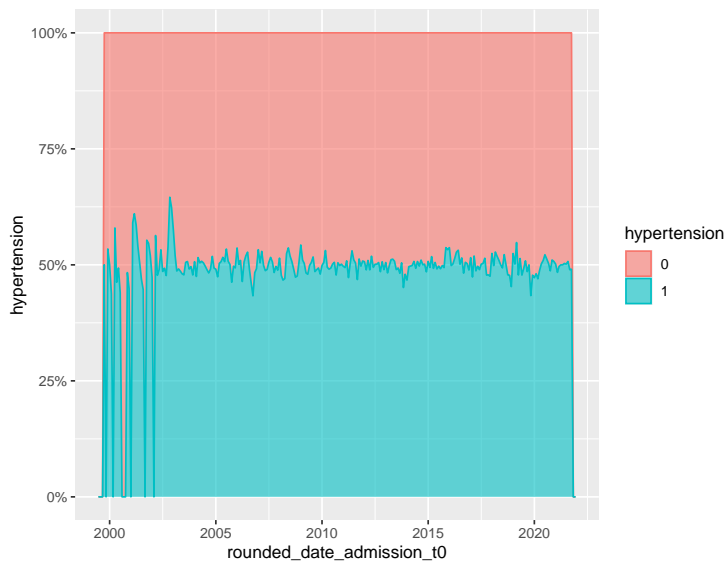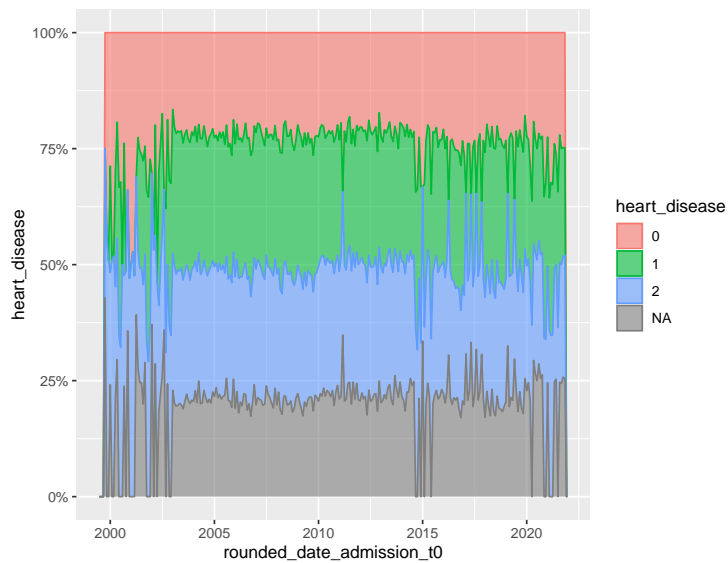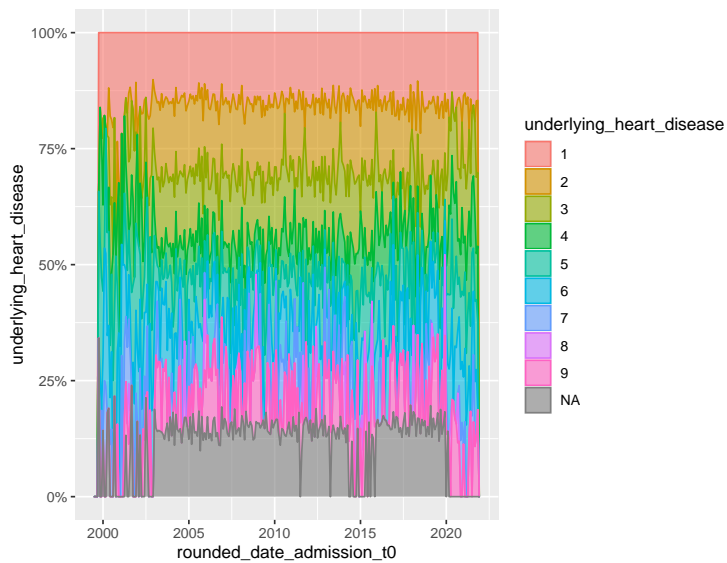
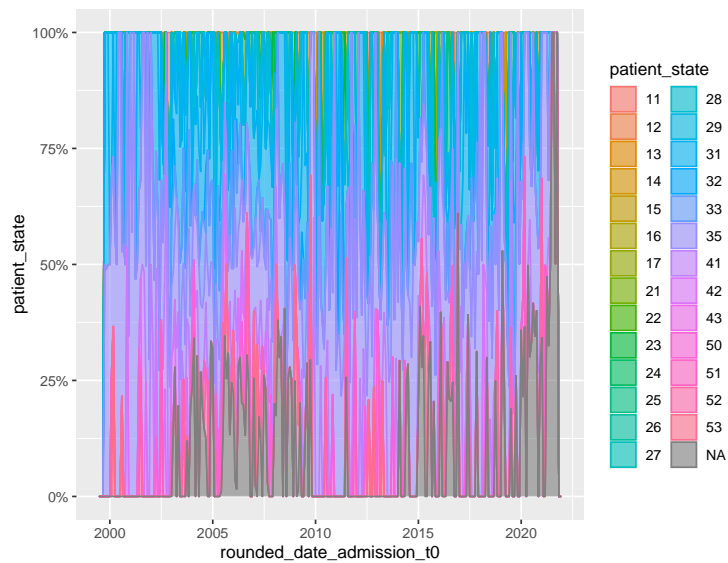
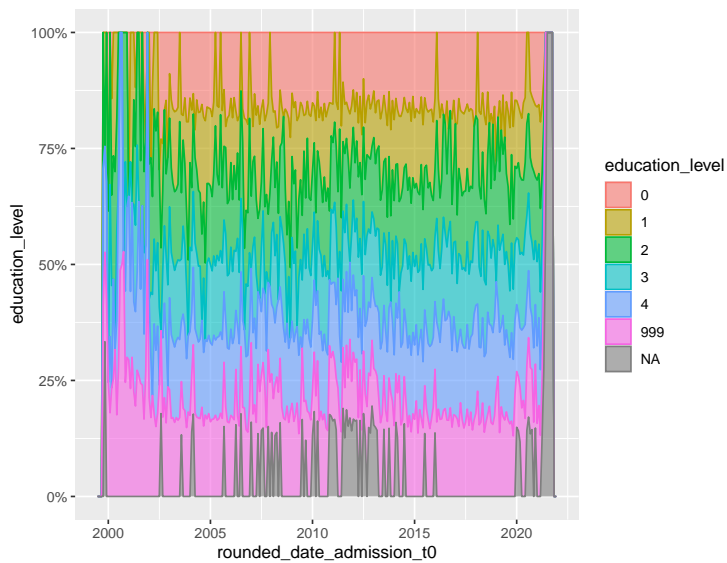


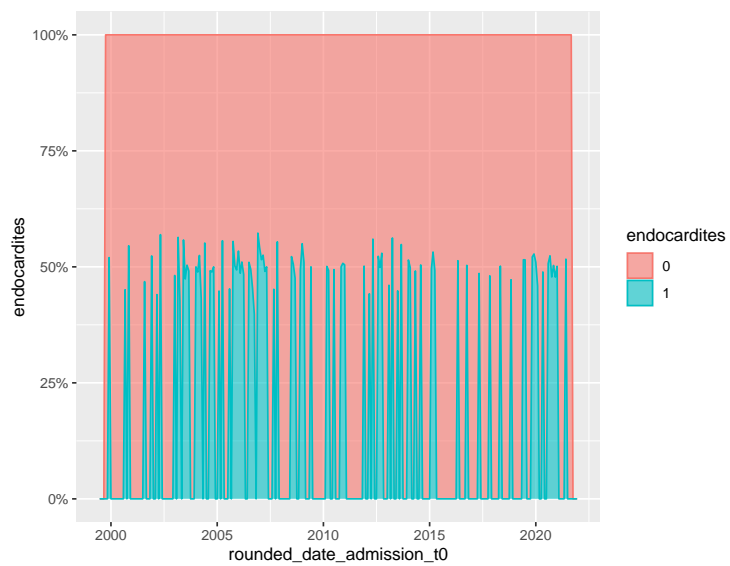
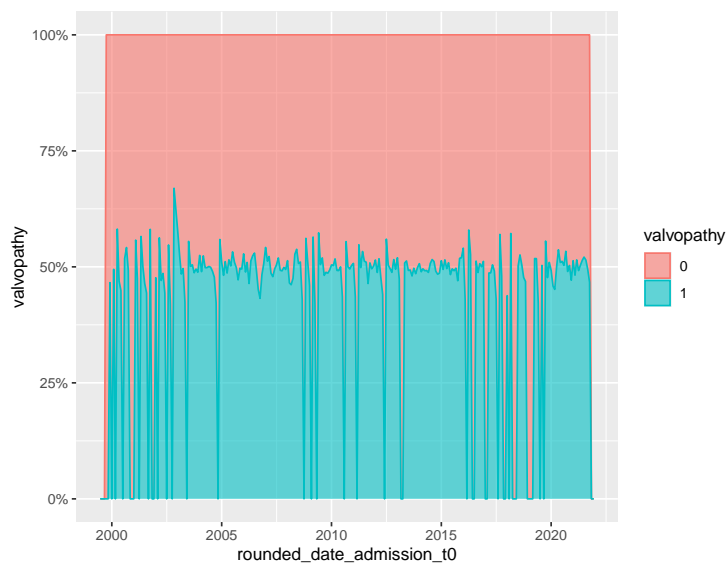
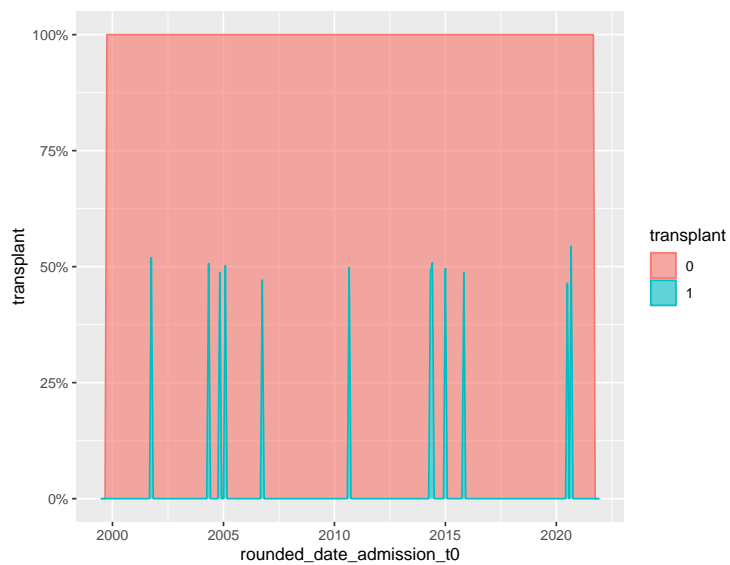
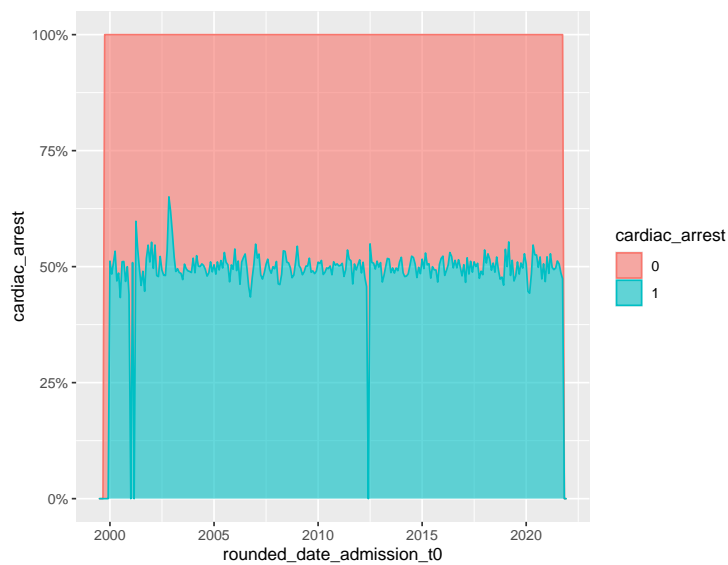
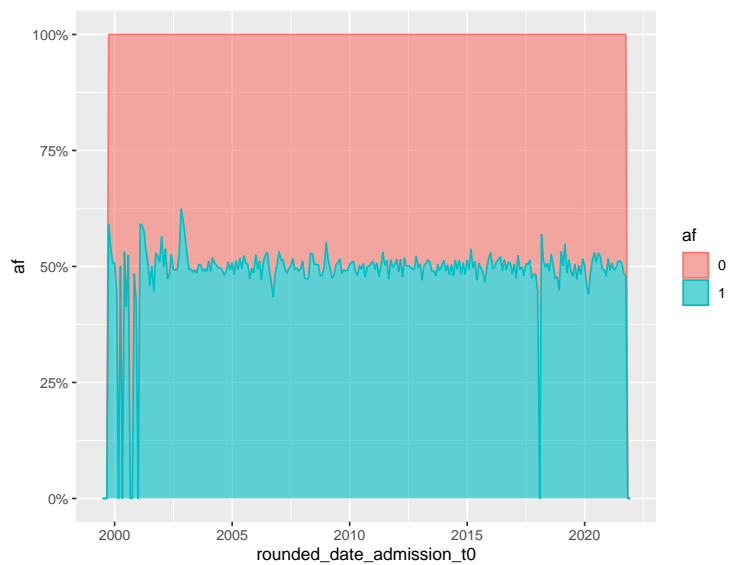
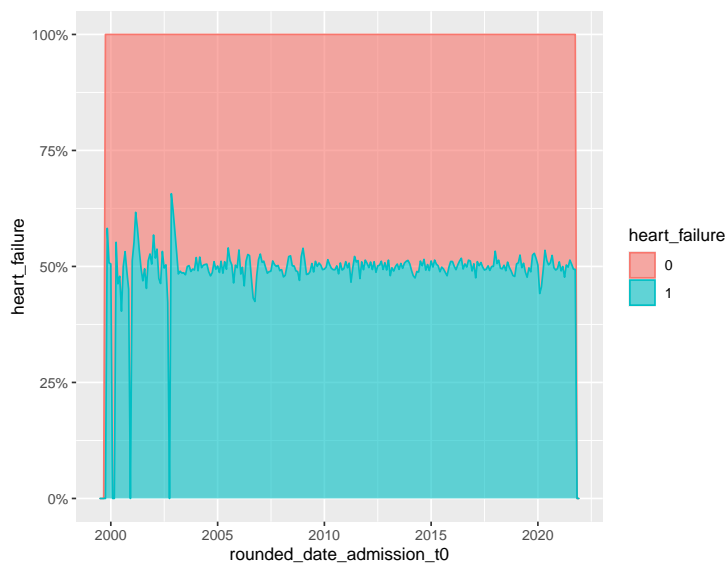


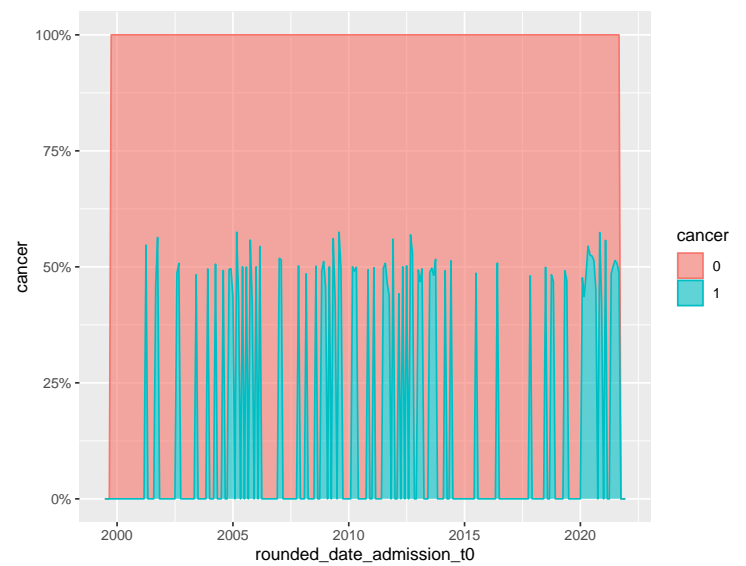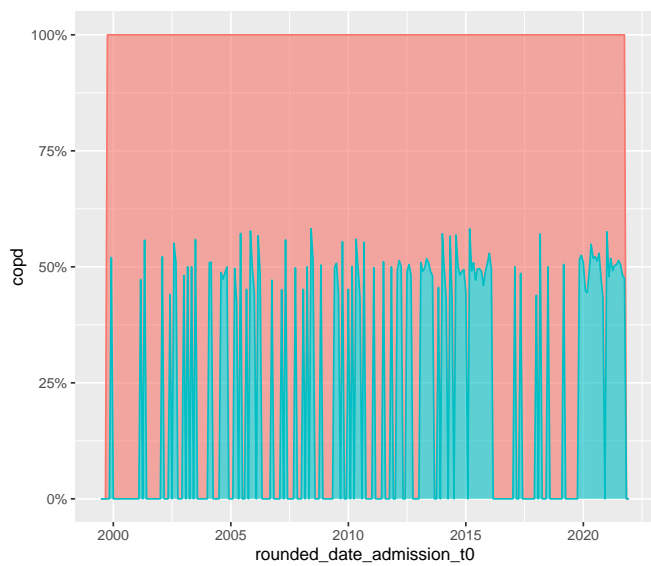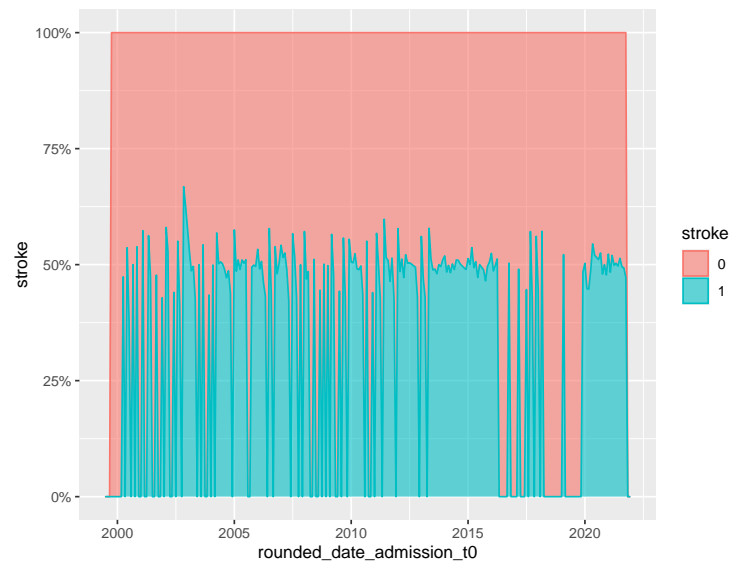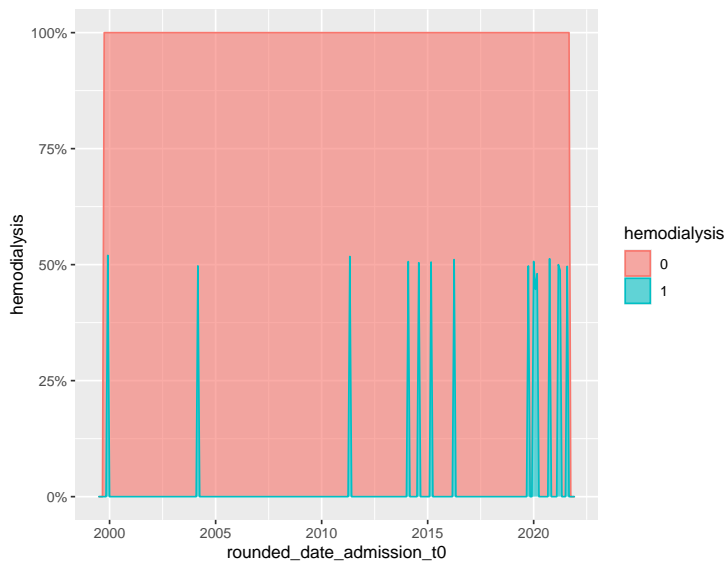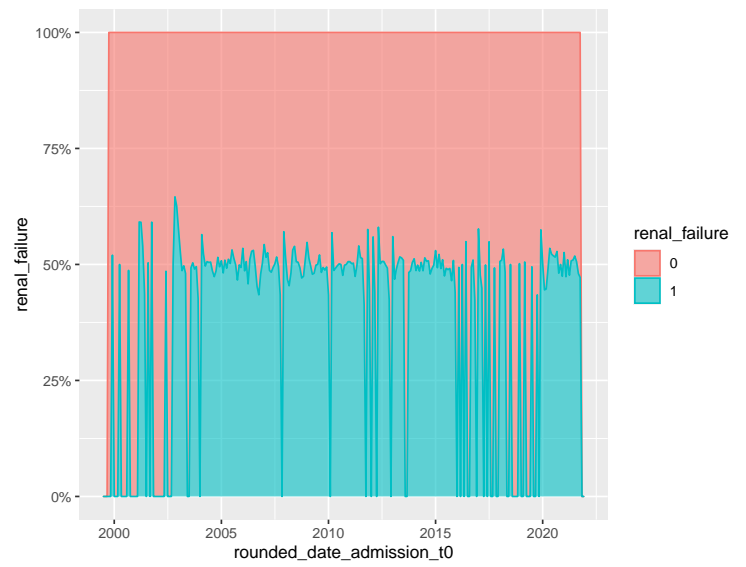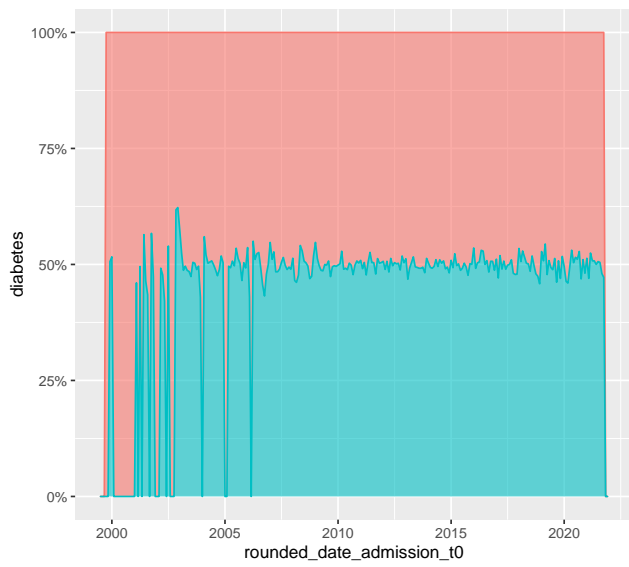


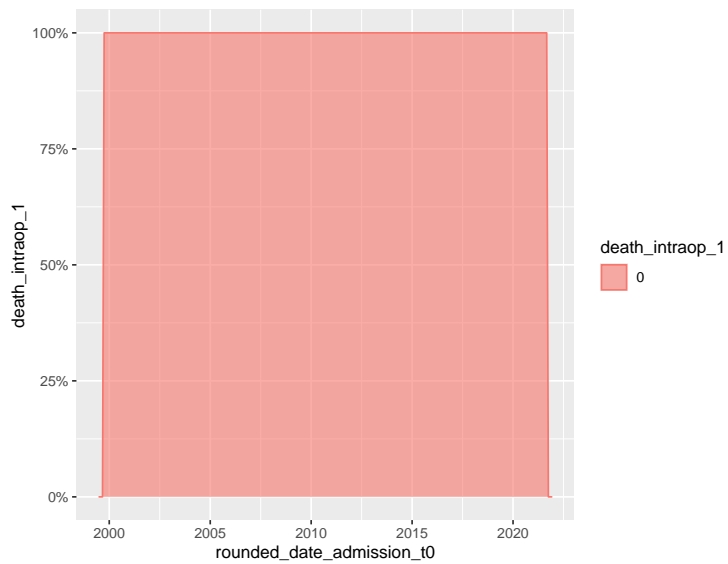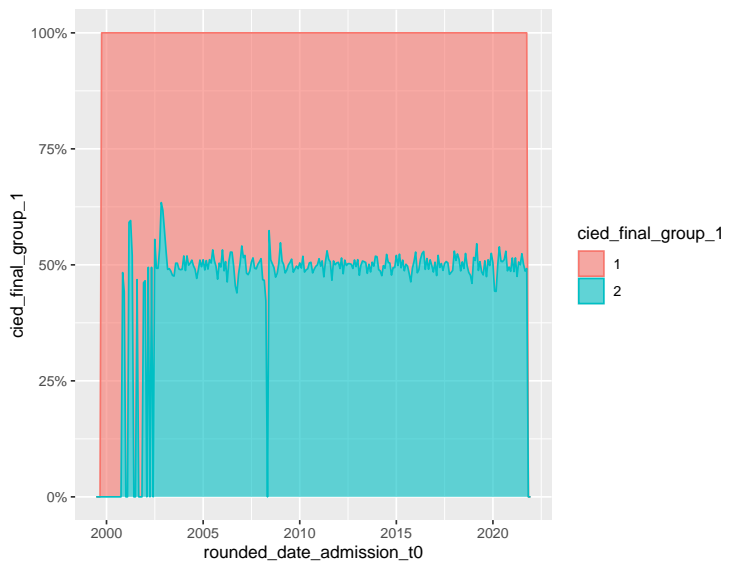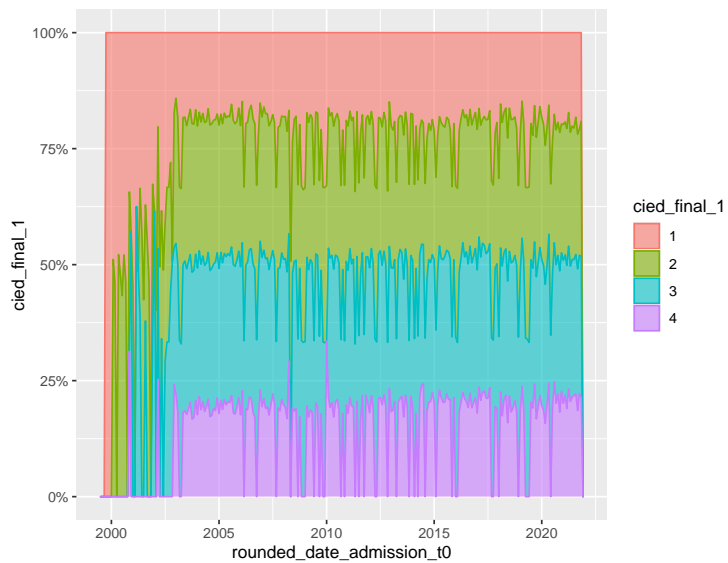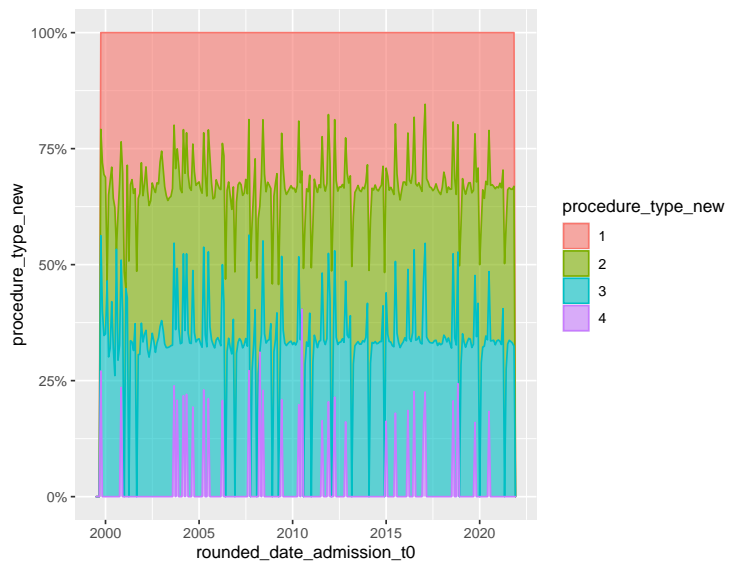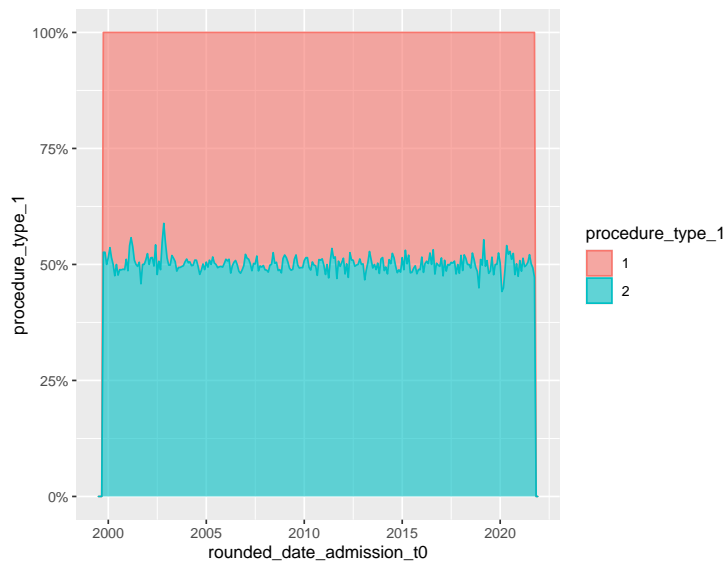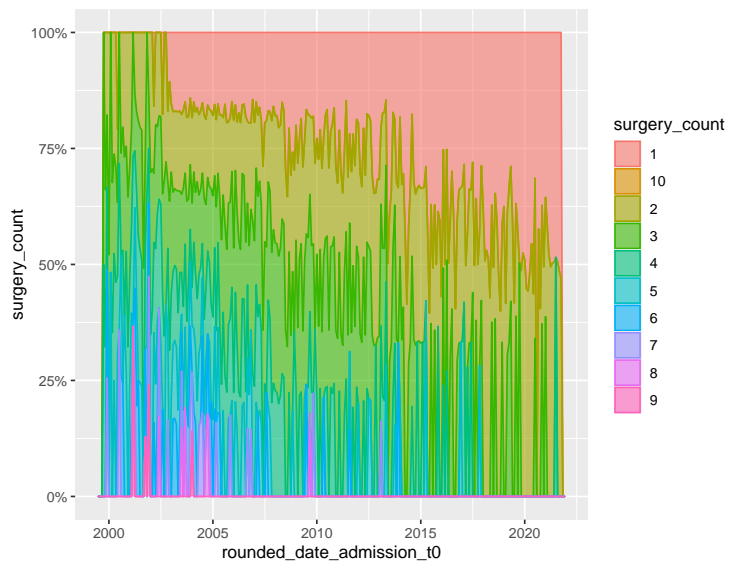

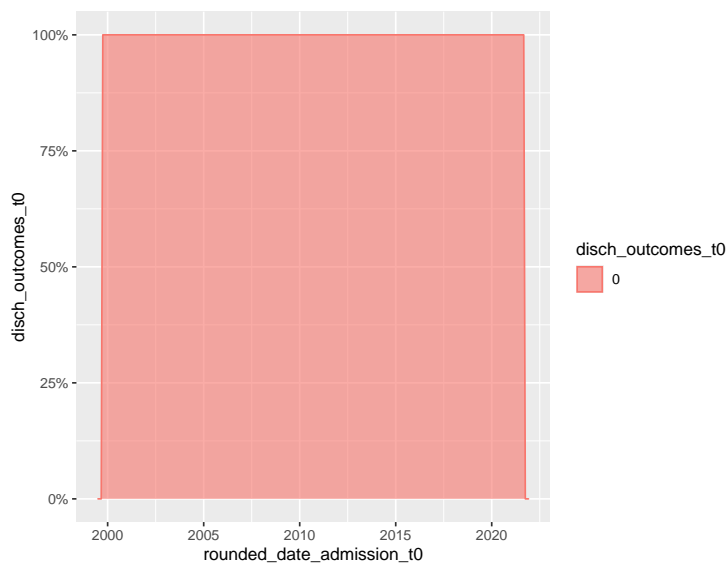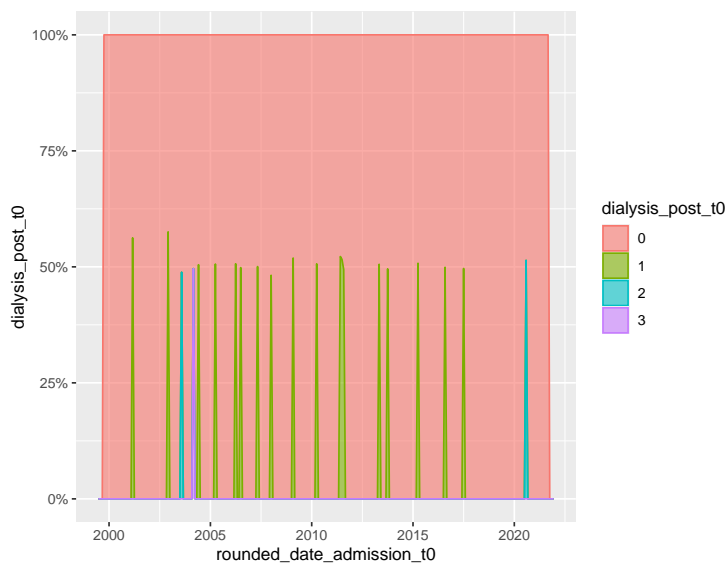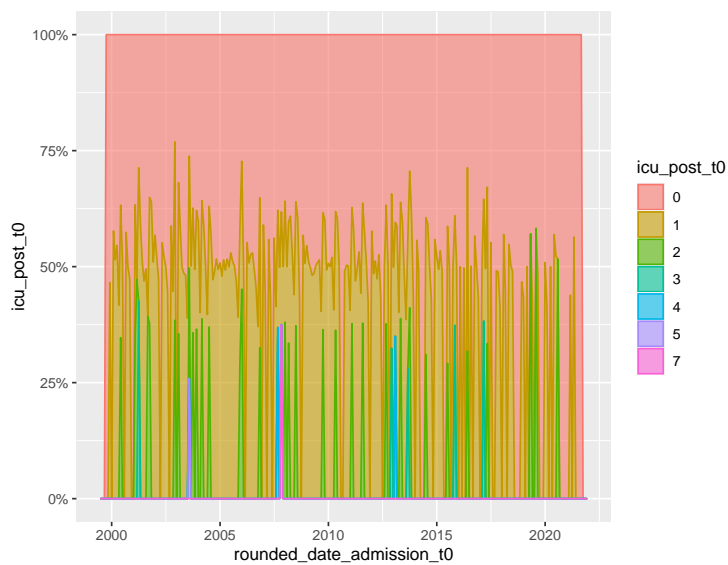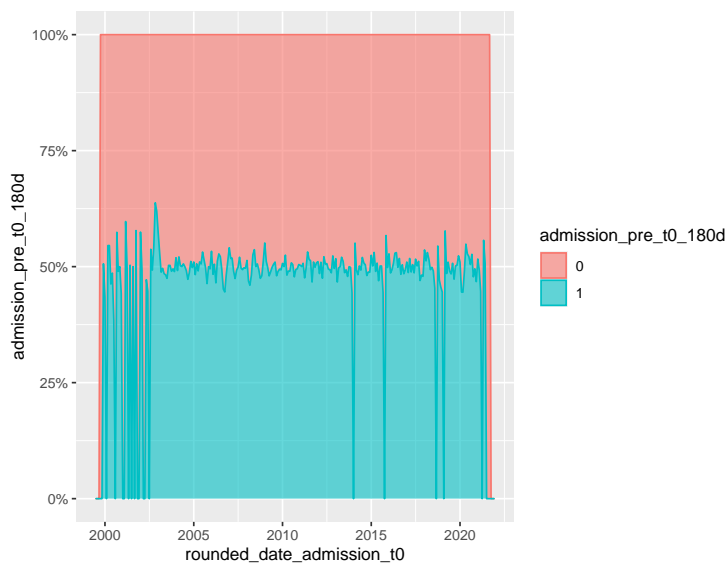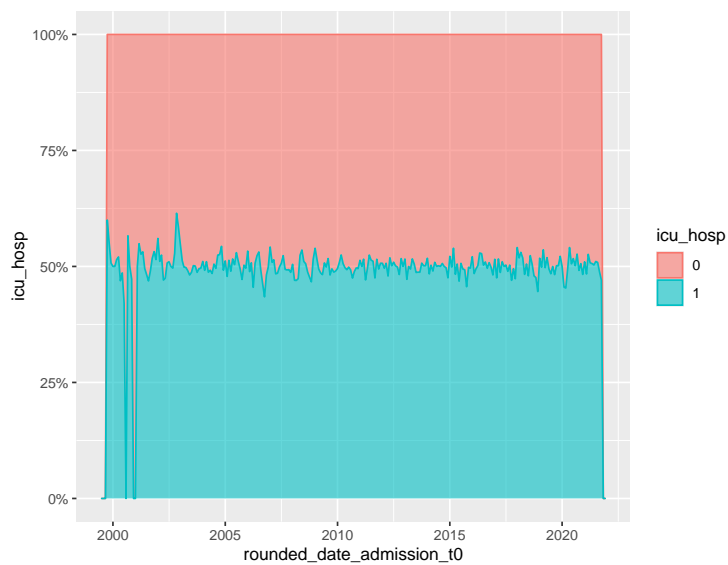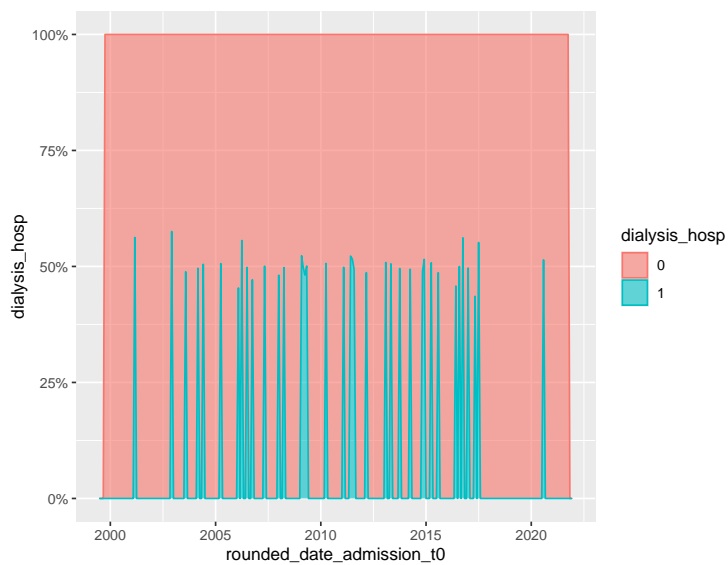

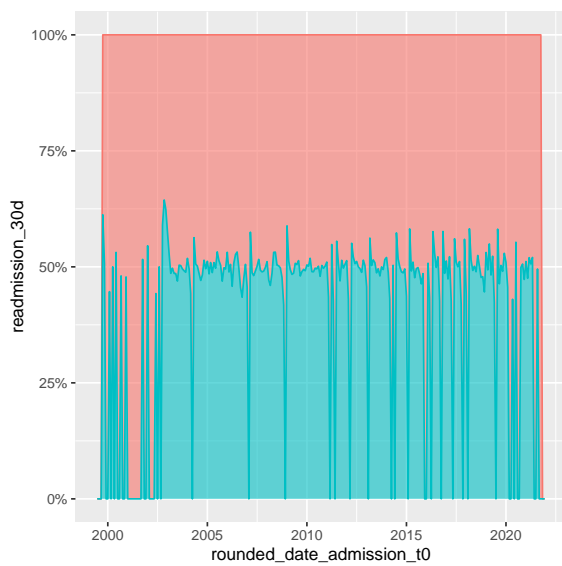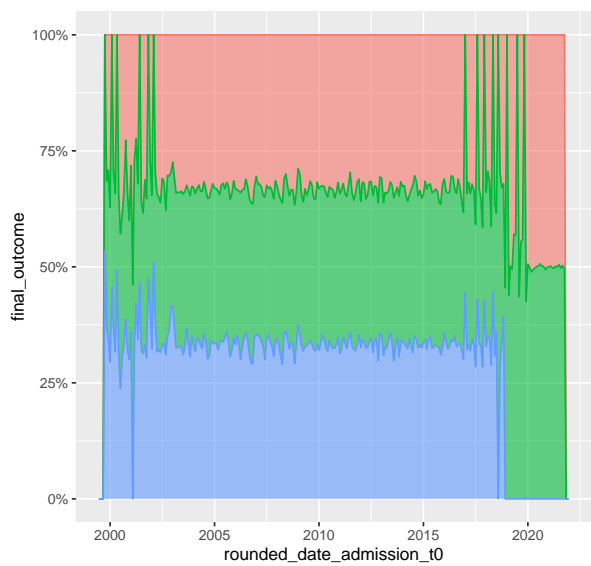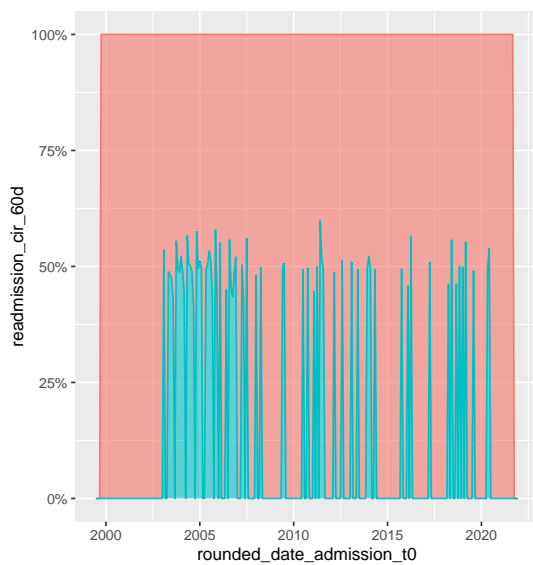

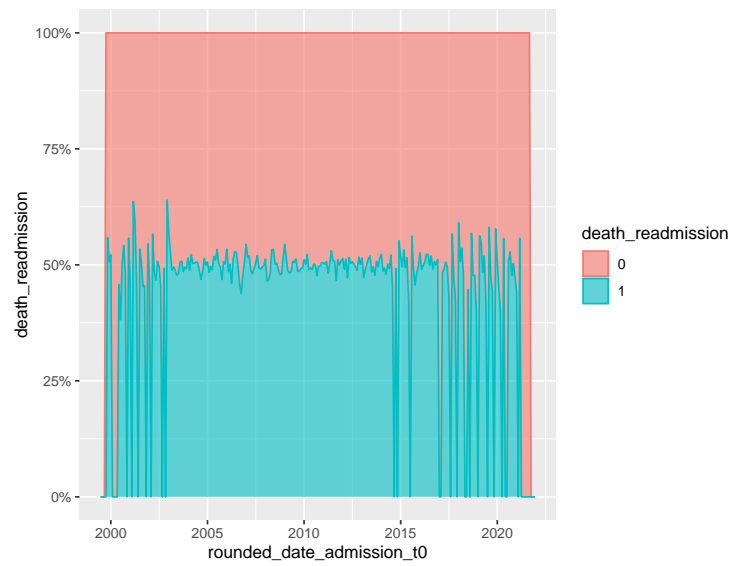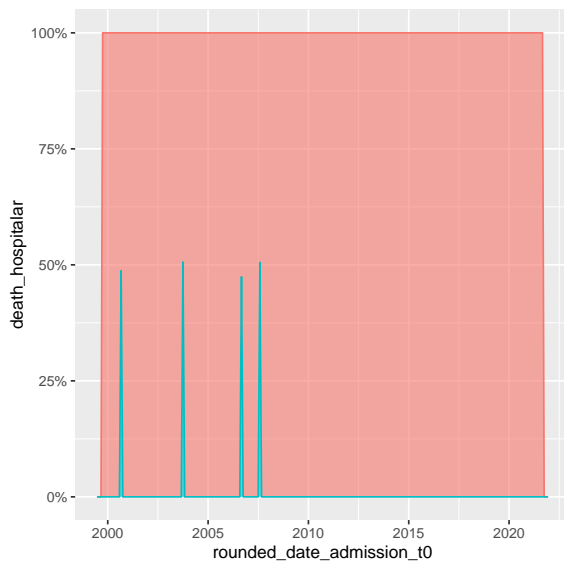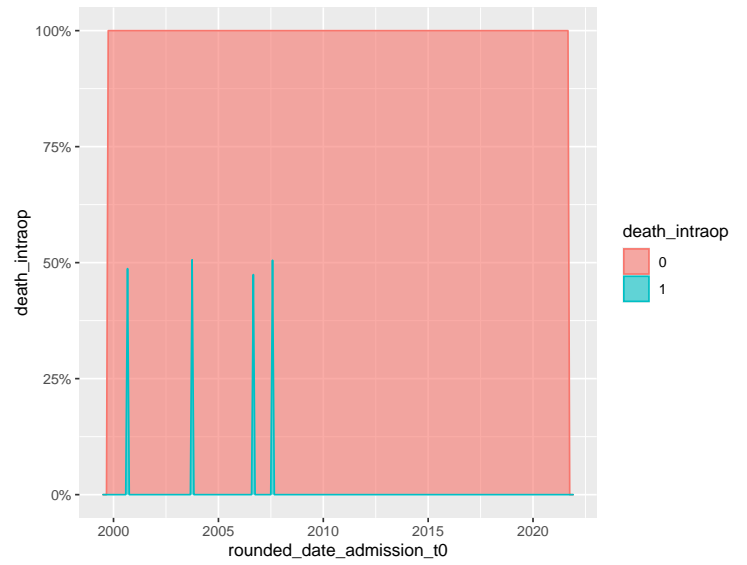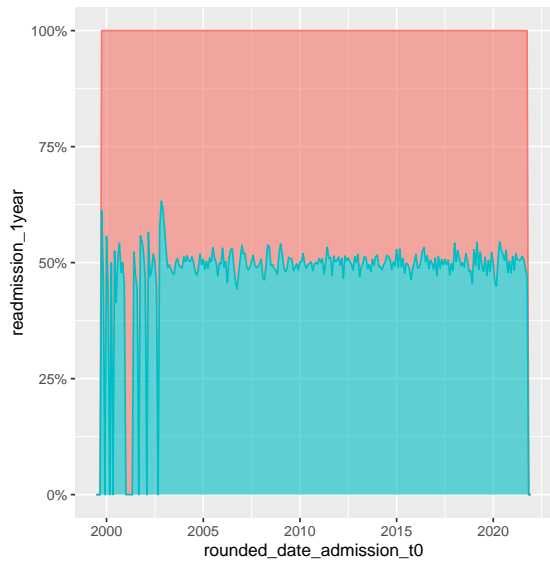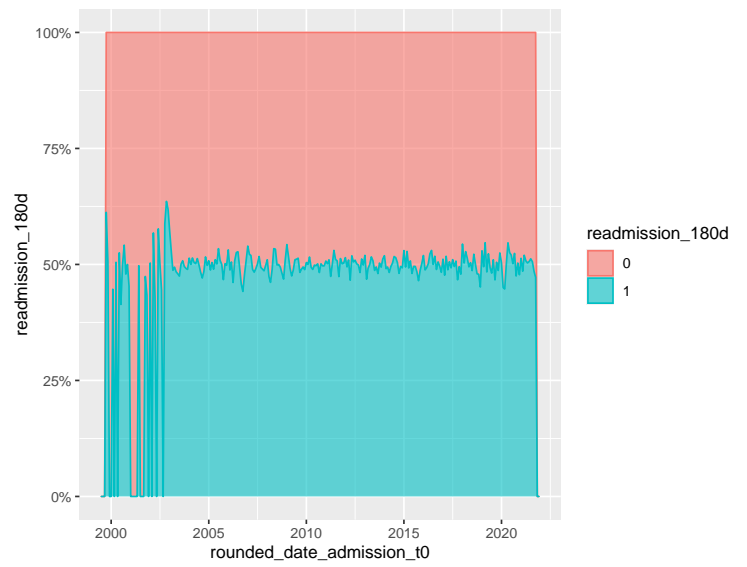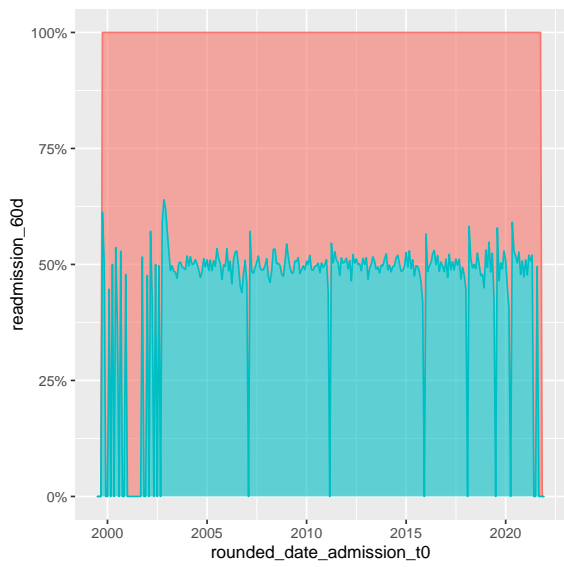

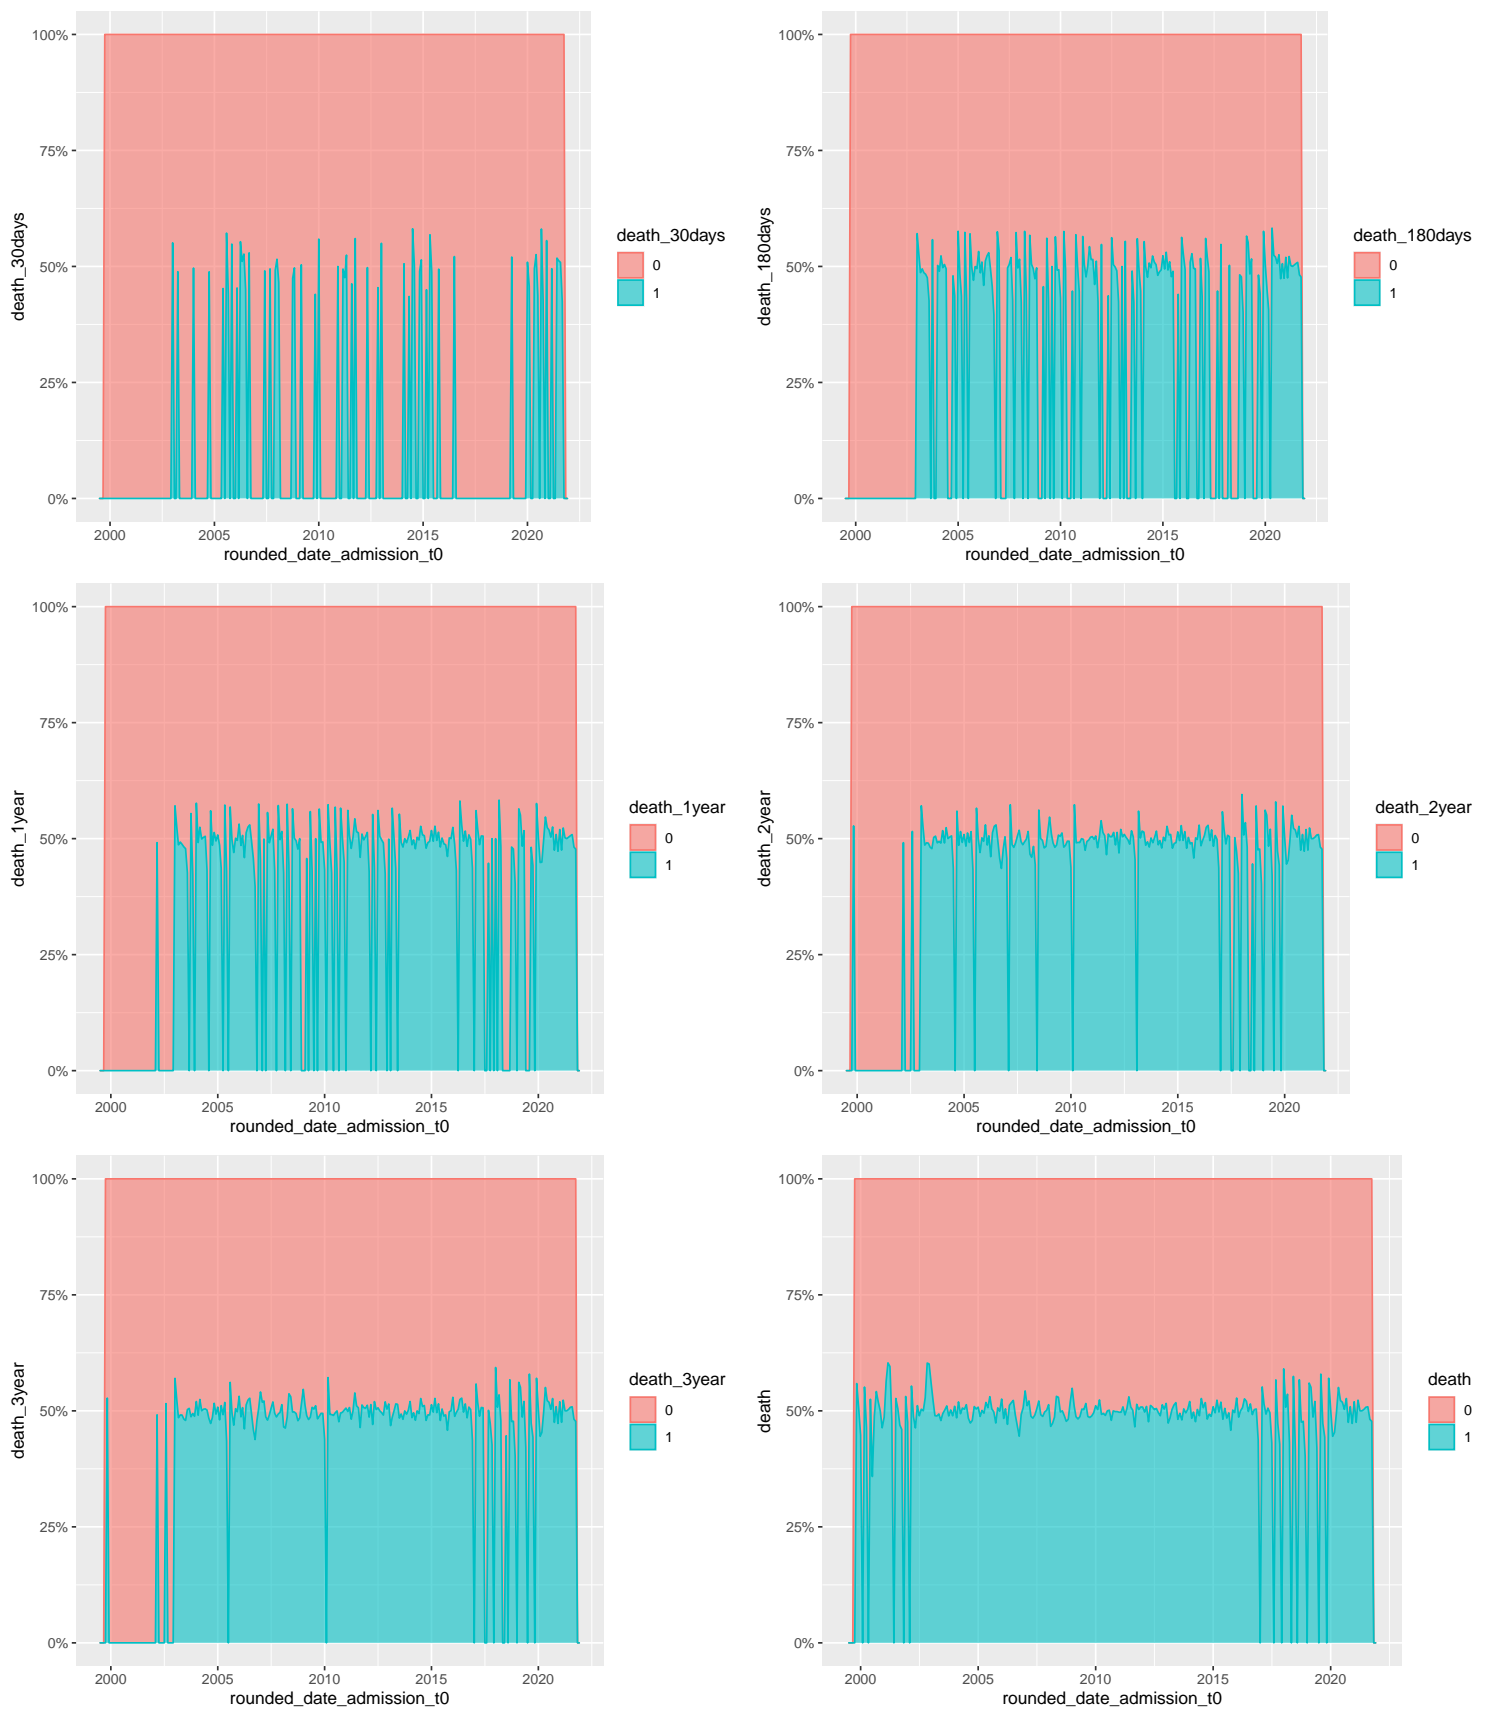

Minutes to run: 0.33

```
df %>%
  mutate(rounded_date_admission_t0 = lubridate::floor_date(date_admission_t0,
                                                         'month')) %>%
  filter(rounded_date_admission_t0 <= lubridate::ymd('2021-08-01'),
         rounded_date_admission_t0 <= lubridate::ymd('2021-01-01')) %>%
  .$aco %>%
```

```

max(na.rm=T)

## [1] 98
column <- 'aco'
df %>%
  mutate(rounded_date_admission_t0 = lubridate::floor_date(date_admission_t0,
                                                         'month')) %>%

  group_by(rounded_date_admission_t0) %>%
  summarise('Mean' = mean(!sym(column), na.rm = T),
            'Min' = min(!sym(column), na.rm = T),
            'Median' = medianWithoutNA(!sym(column)),
            'Max' = max(!sym(column), na.rm = T)) %>%
  ungroup %>%
  arrange(rounded_date_admission_t0) %>%
  mutate(Mean = zoo::rollmean(Mean, k = k, fill = NA),
         Min = zoo::rollmean(Min, k = k, fill = NA),
         Median = zoo::rollmean(Median, k = k, fill = NA),
         Max = zoo::rollmean(Max, k = k, fill = NA)) %>%
  filter(rounded_date_admission_t0 <= lubridate::ymd('2021-12-01'),
         rounded_date_admission_t0 >= lubridate::ymd('2021-01-01'))

```

```

## # A tibble: 12 x 5
##   rounded_date_admission_t0   Mean   Min Median   Max
##   <date>                  <dbl> <dbl>   <dbl> <dbl>
## 1 2021-01-01             0.441   NaN     0     NaN
## 2 2021-02-01             0.565   NaN     0     NaN
## 3 2021-03-01             0.630   NaN     0     NaN
## 4 2021-04-01             0.738   NaN     0     NaN
## 5 2021-05-01             0.740   NaN     0     NaN
## 6 2021-06-01             0.709   NaN     0     NaN
## 7 2021-07-01             0.569   NaN     0     NaN
## 8 2021-08-01             0.415   NaN     0     NaN
## 9 2021-09-01             0.439   NaN     0     NaN
## 10 2021-10-01            NA       NA     NA     NA
## 11 2021-11-01            NA       NA     NA     NA
## 12 2021-12-01            NA       NA     NA     NA

```

Minutes to run: 0.002