

cse332-13wi-lec04-BinMinHeaps-day2.cp3



CSE 332: Data Abstractions

Lecture 4: Priority Queues

Ruth Anderson
Winter 2013

Announcements

- **Project 1** – phase A due Wed Jan 16th, 11pm via catalyst
- **Homework 1** – due Friday Jan 18th at **beginning** of class
- Links to materials from section – useful for project 1
- Info sheets?

Today

- Finish up Asymptotic Analysis
- New ADT! Priority Queues

1/14/2013

3

Scenario

What is the difference between waiting for service at a pharmacy versus an ER?

→ Pharmacies usually follow the rule
First Come, First Served

Emergency Rooms assign priorities
based on each individual's need

Queue
Priority
Queue

Scenario

What is the difference between waiting for service at a pharmacy versus an ER?

Pharmacies usually follow the rule
First Come, First Served

Queue

Emergency Rooms assign priorities
based on each individual's need

**Priority
Queue**

A new ADT: Priority Queue


- Textbook Chapter 6
 - We will go back to binary search trees (ch4) and hash tables (ch5) later
 - Nice to see a new and surprising data structure first
- A **priority queue** holds *compare-able data*
 - Unlike stacks and queues need to *compare items*
 - Given x and y , is x less than, equal to, or greater than y
 - What this means can depend on your data
 - Much of course will require comparable data: e.g. sorting
 - Integers are comparable, so will use them in examples
 - But the priority queue ADT is much more general
 - Typically two fields, the *priority* and the *data*

Priority Queue ADT

- Assume each item has a “priority”
 - The *lesser* item is the one with the *greater* priority
 - So “priority 1” is more important than “priority 4”
 - Just a convention, could also do a maximum priority

- Main Operations:

- `insert`
- `deleteMin`

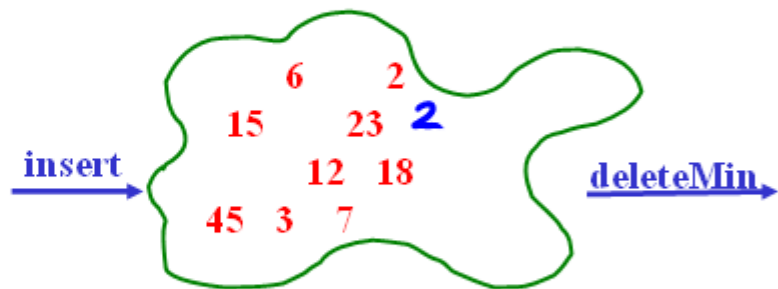

- Key property: `deleteMin` returns and deletes from the queue the item with greatest priority (lowest priority value)
 - Can resolve ties arbitrarily

Aside: We will use ints as data and priority

For simplicity in lecture, we'll often suppose items are just `ints` and the `int` is also the priority

- So an operation sequence could be

```
insert 6
insert 5
x = deleteMin // Now x = 5.
```
- `int` priorities are common, but really just need comparable
- Not having “other data” is very rare
 - Example: print job has a priority *and* the file to print is the data

Priority Queue Example

To simplify our examples,
we will just use the priority
values from now on

insert *a* with priority 5 after execution:
insert *b* with priority 3
insert *c* with priority 4
w = deleteMin 3
x = deleteMin 4
insert *d* with priority 2
insert *e* with priority 6
y = deleteMin 2
z = deleteMin 5

Analogy: insert is like enqueue, deleteMin is like dequeue
But the whole point is to use priorities instead of FIFO

Priority Queue Example

To simplify our examples,
we will just use the priority
values from now on

```
insert a with priority 5  
insert b with priority 3  
insert c with priority 4  
w = deleteMin  
x = deleteMin  
insert d with priority 2  
insert e with priority 6  
y = deleteMin  
z = deleteMin
```

after execution:

```
w = b  
x = c  
y = d  
z = a
```

Analogy: insert is like enqueue, deleteMin is like dequeue
But the whole point is to use priorities instead of FIFO

Applications

Like all good ADTs, the priority queue arises often

- Sometimes “directly”, sometimes less obvious

- Run multiple programs in the operating system
 - “critical” before “interactive” before “compute-intensive”
 - Maybe let users set priority level
- Treat hospital patients in order of severity (or triage)
- Select print jobs in order of decreasing length?
- Forward network packets in order of urgency
- Select most frequent symbols for data compression (cf. CSE143)
- Sort: `insert` all, then repeatedly `deleteMin`
 - Much like Project 1 uses a stack to implement reverse

More applications

- “Greedy” algorithms
 - Select the ‘best-looking’ choice at the moment
 - Will see an example when we study graphs in a few weeks
- Discrete event simulation (system modeling, virtual worlds, ...)
 - Simulate how state changes when events fire
 - Each event e happens at some time t and generates new events e_1, \dots, e_n at times $t+t_1, \dots, t+t_n$
 - Naïve approach: advance “clock” by 1 unit at a time and process any events that happen then
 - Better:
 - *Pending events* in a priority queue (priority = time happens)
 - Repeatedly: `deleteMin` and then `insert` new events
 - Effectively, “set clock ahead to next event”

Preliminary Implementations of Priority Queue ADT

| | insert | deleteMin |
|-----------------------------|-------------|-------------|
| Unsorted Array | $\Theta(1)$ | $\Theta(N)$ |
| Unsorted Linked-List | $\Theta(1)$ | $\Theta(N)$ |
| Sorted Circular Array | $\Theta(N)$ | $\Theta(1)$ |
| Sorted Linked-List | $\Theta(N)$ | $\Theta(1)$ |
| Binary Search Tree (BST) | $\Theta(N)$ | $\Theta(N)$ |

1/14/2013

Notes: Worst case, Assume arrays have enough space

13

Need a good data structure!

- Next we will show an efficient, non-obvious data structure for this ADT
 - But first let's analyze some "obvious" ideas for n data items
 - All times worst-case; assume arrays "have room"

| <i>data</i> | <i>insert algorithm / time</i> | | <i>deleteMin algorithm / time</i> | |
|-----------------------|--------------------------------|--------|-----------------------------------|--------|
| unsorted array | add at end | $O(1)$ | search | $O(n)$ |
| unsorted linked list | add at front | $O(1)$ | search | $O(n)$ |
| sorted circular array | search / shift | $O(n)$ | move front | $O(1)$ |
| sorted linked list | put in right place | $O(n)$ | remove at front | $O(1)$ |
| binary search tree | put in right place | $O(n)$ | leftmost | $O(n)$ |

Aside: More on possibilities

- Note: If priorities are inserted in random order, binary search tree will likely do better than $O(n)$
 - $O(\log n)$ `insert` and $O(\log n)$ `deleteMin` on average
 - Could get same performance from a *balanced* binary search tree (e.g. AVL tree we will study later)
- One more idea: if priorities are $0, 1, \dots, k$ can use array of lists
 - `insert`: add to front of list at `arr[priority]`, $O(1)$
 - `deleteMin`: remove from lowest non-empty list $O(k)$

Our Data Structure: The Heap

The Heap:

- Worst case: $O(\log n)$ for insert
- Worst case: $O(\log n)$ for deleteMin
- If items arrive in random order, then the average-case of insert is $O(1)$
- Very good constant factors

Key idea: Only pay for functionality needed

- We need something better than scanning unsorted items
- But we do not need to maintain a full sorted list
- We will *visualize* our heap as a tree, so we need to review some tree terminology

Reviewing Some Tree Terminology

root(T): A

leaves(T): D E F J I K L M N

children(B): D E F


parent(H): G

siblings(E): D F

ancestors(F): B A


descendants(G):

subtree(G):

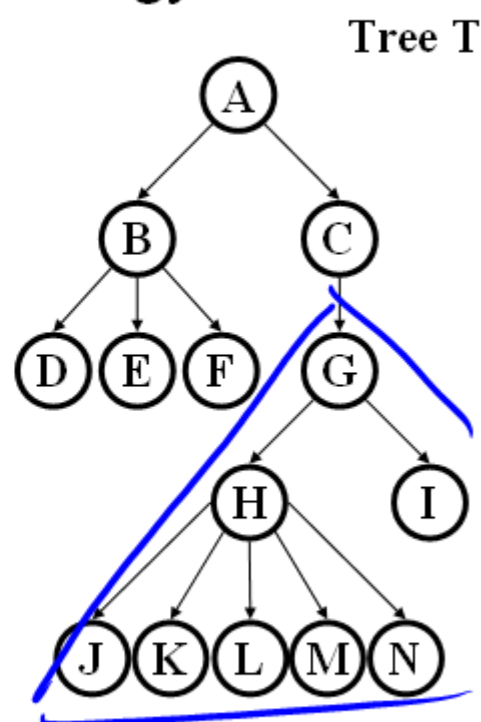


#edges

Some More Tree Terminology

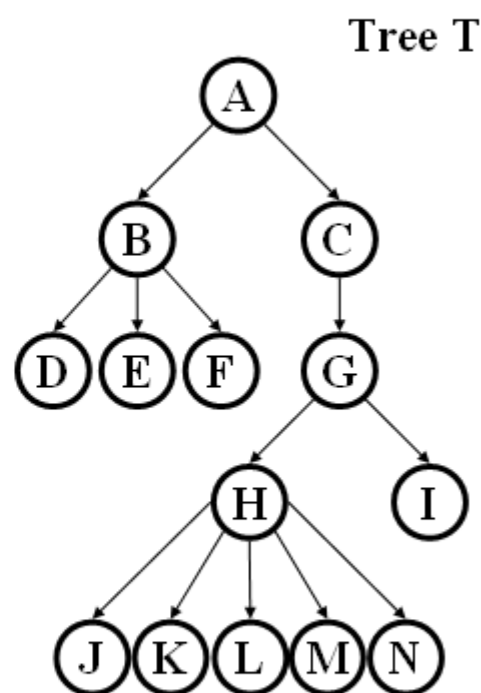 $\text{depth}(\text{B}): 1$ $\text{height}(\text{G}): 2$ $\text{height}(\text{T}): 4$ (height(A)) $\text{degree}(\text{B}): 3$ $\text{branching factor}(\text{T}): 5$ $\text{height}(\text{C}) = 3$ 


Reviewing Some Tree Terminology

| | |
|------------------------|---------------------------|
| <i>root(T):</i> | A |
| <i>leaves(T):</i> | D-F, I, J-N |
| <i>children(B):</i> | D, E, F |
| <i>parent(H):</i> | G |
| <i>siblings(E):</i> | D, F |
| <i>ancestors(F):</i> | B, A |
| <i>descendents(G):</i> | H, I, J-N |
| <i>subtree(G):</i> | G and its children |

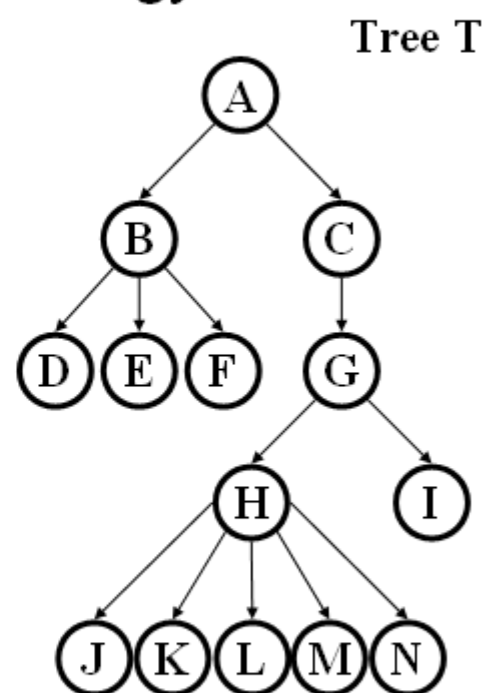

Some More Tree Terminology

| | |
|-----------------------------|------------|
| <i>depth(B):</i> | <i>1</i> |
| <i>height(G):</i> | <i>2</i> |
| <i>height(T):</i> | <i>4</i> |
| <i>degree(B):</i> | <i>3</i> |
| <i>branching factor(T):</i> | <i>0-5</i> |

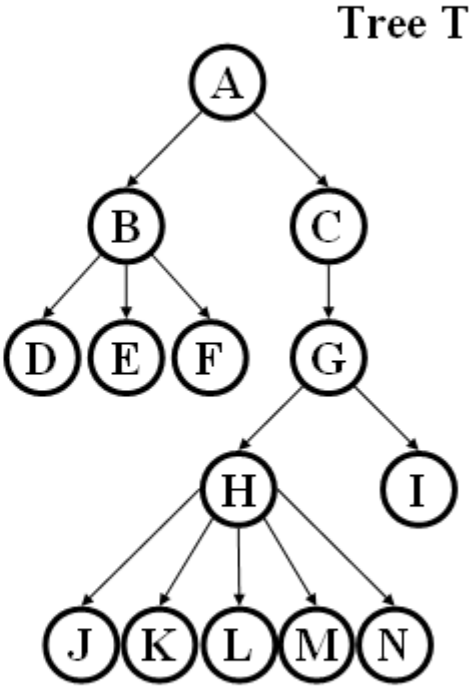

Types of Trees

Binary tree: Every node has ≤ 2 children

n-ary tree: Every node has $\leq n$ children

Perfect tree: Every row is completely full

Complete tree: All rows except possibly the bottom are completely full, and it is filled from left to right



1/14/2013

h=3
leaves=8
nodes=15

h
leaves = 2^h
nodes = $2^{h+1} - 1 = N$

21

Some Basic Tree Properties

Nodes in a perfect binary tree of height h ?

$$2^{h+1}-1$$

Leaf nodes in a perfect binary tree of height h ?

$$2^h$$

Height of a perfect binary tree with n nodes?

$$\lfloor \log_2 n \rfloor$$

Height of a complete binary tree with n nodes?

$$\lfloor \log_2 n \rfloor$$

Properties of a Binary Min-Heap

More commonly known as a **binary heap** or simply a **heap**

- **Structure Property:**

A complete [binary] tree

- **Heap Property:** (Order)


The priority of every non-root node is greater than the priority of its parent

How is this different from a binary search tree?


Properties of a Binary Min-Heap

More commonly known as a **binary heap** or simply a **heap**

- **Structure Property:**
A complete [binary] tree
- **Heap Order Property:**
The priority of every non-root node is greater than the priority of its parent

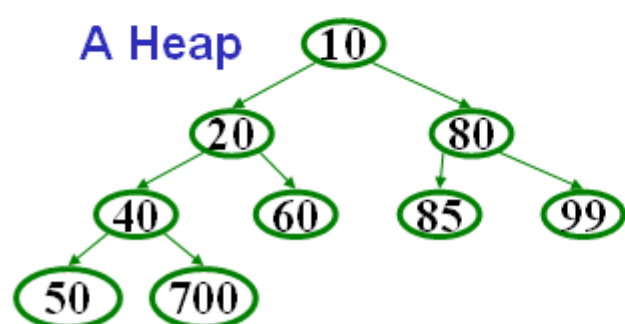

Not a Heap

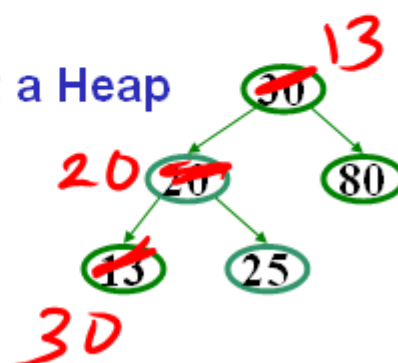

1/14/2013

24


Properties of a Binary Min-Heap

- Where is the minimum priority item?

At the root


- What is the height of a heap with n items?

$\lceil \log_2 n \rceil$

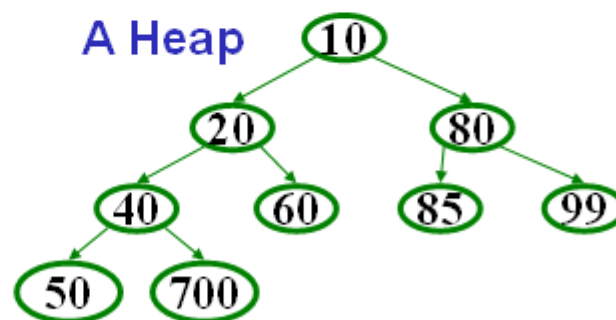


Heap Operations

- findMin:
- deleteMin: percolate down.
- insert(val): percolate up.

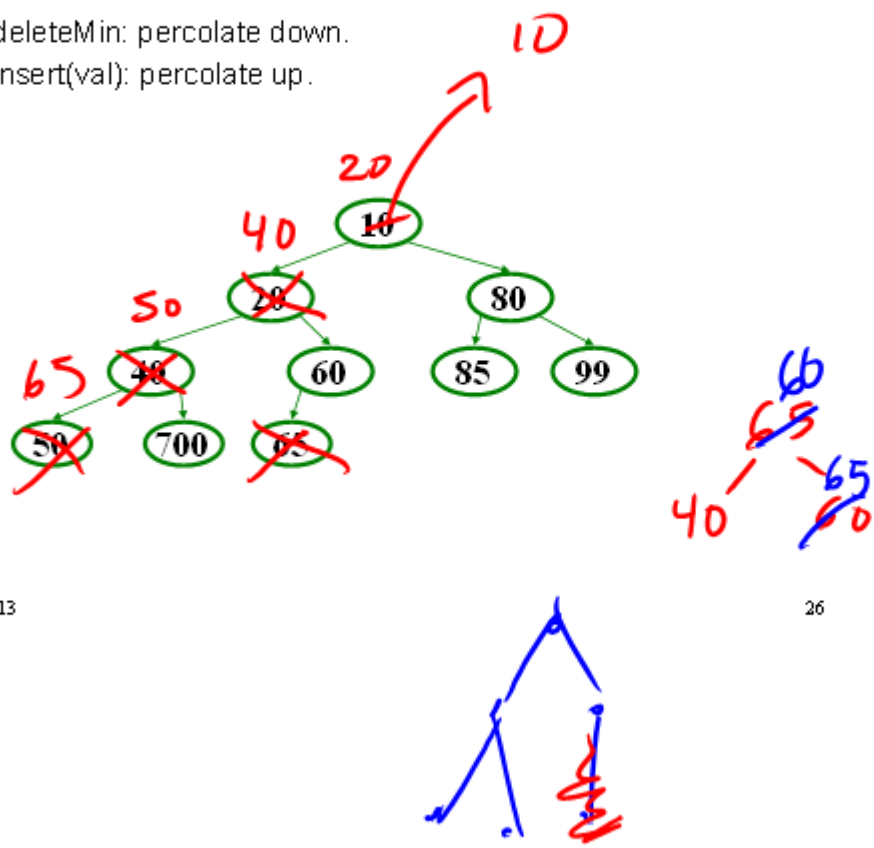

Operations: basic idea

- **findMin:**
 return `root.data`
- **deleteMin:**
 1. `answer = root.data`
 2. Move right-most node in last row to root to restore structure property
 3. “Percolate down” to restore heap order property
- **insert:**
 1. Put new node in next position on bottom row to restore structure property
 2. “Percolate up” to restore heap order property


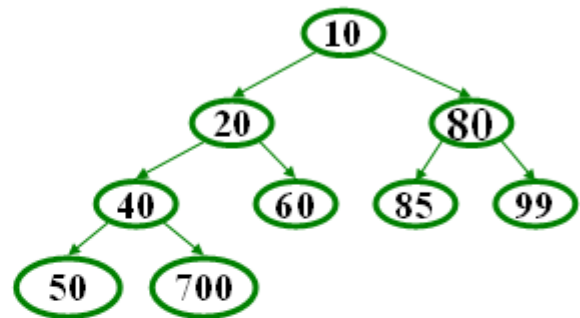


Overall strategy:


- *Preserve complete tree structure property*
- *This may break heap order property*
- *Percolate to restore heap order property*

DeleteMin Implementation

1. Delete value at root node (and store it for later return)
2. There is now a "hole" at the root. We must "fill" the hole with another value, must have a tree with one less node, and it must still be a complete tree
3. The "last" node is the obvious choice, but now the heap order property is violated
4. We **percolate down** to fix the heap order:
While greater than either child
 Swap with smaller child

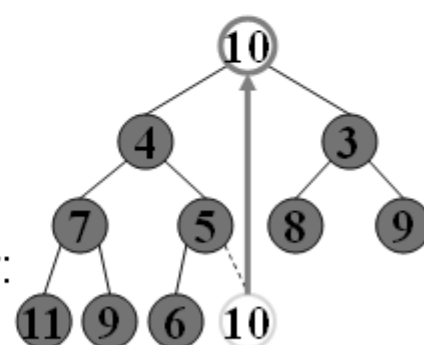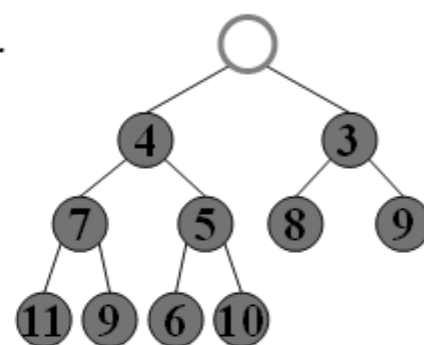

Percolate Down — Delete min

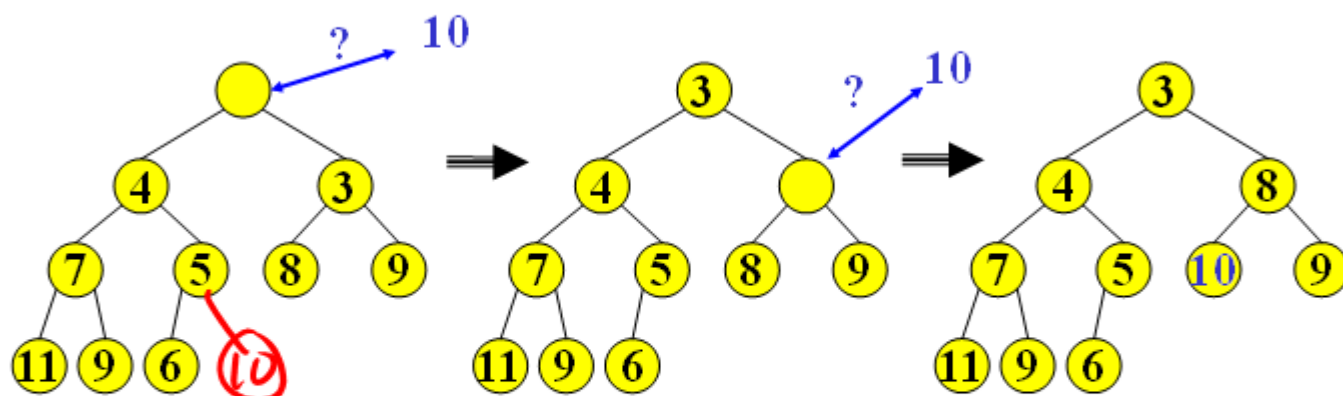

Percolate down:


- Keep comparing with both children
- Move smaller child up and go down one level
- Done if both children are \geq item or reached a leaf node
- Why does this work? What is the run time?

DeleteMin: Run Time Analysis

- Run time is $O(\text{height of heap})$
- A heap is a complete binary tree
- Height of a complete binary tree of n nodes?
 - $\text{height} = \lfloor \log_2(n) \rfloor$
- Run time of `deleteMin` is $O(\log n)$


Insert

- Add a value to the tree
- Structure and heap order properties must still be correct afterwards

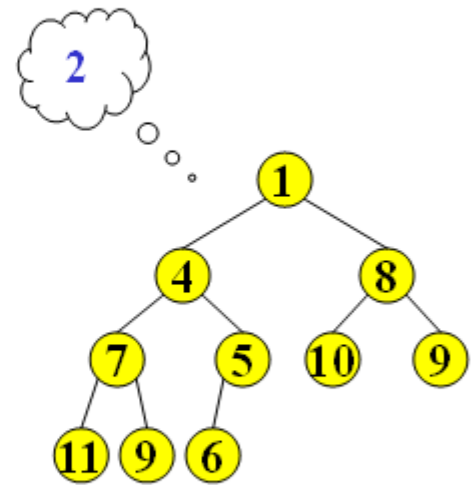


Insert: Maintain the Structure Property

- There is only **one** valid tree shape after we add one more node!
- So put our new data there and then focus on restoring the heap order property

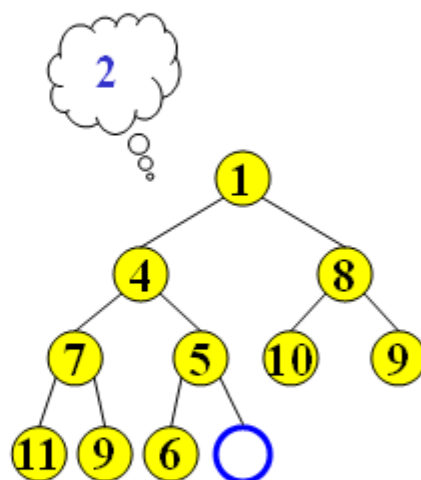

Maintain the heap order property - Insert

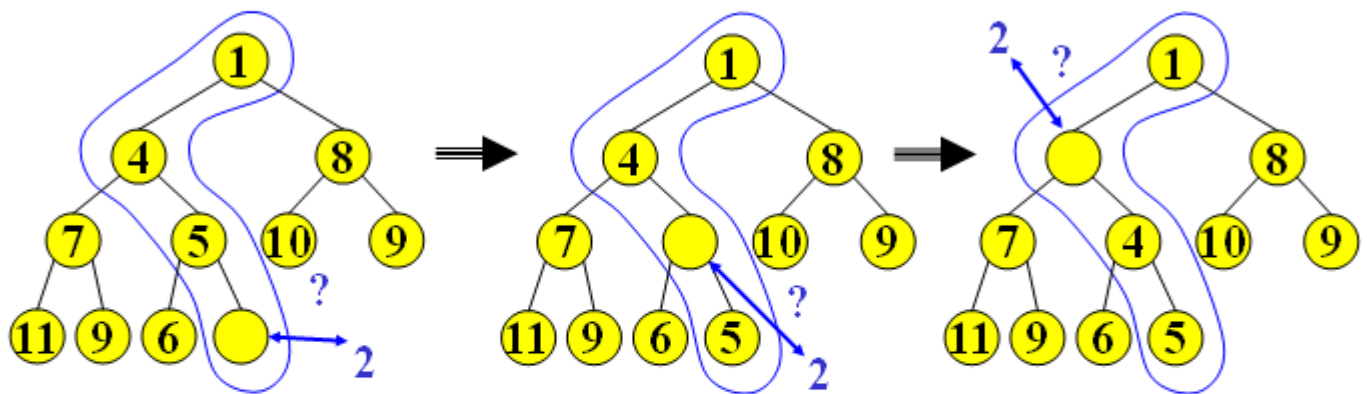

Percolate up:

- Put new data in new location
- If parent larger, swap with parent, and continue
- Done if parent \leq item or reached root
- Why does this work? What is the run time?

$O(\log n)$

A Clever Trick for Storing the Heap...

Clearly, insert and deleteMin are worst-case $O(\log n)$

- But we promised average-case $O(1)$ insert (how??)

Insert requires access to the “next to use” position in the tree

- Walking the tree from root to leaf requires $O(\log n)$ steps
- Insert and Deletemin would have to update the “next to use” reference each time: $O(\log n)$

We should only pay for the functionality we need!!

- Why have we insisted the tree be complete? ☺

All complete trees of size n contain the same edges


- So why are we even representing the edges?

Here comes the really clever bit about implementing heaps!!!

Array Representation of a Binary Heap

From node i :

- left child: $2 \times i$
- right child: $2 \times i + 1$
- parent: $\lfloor i/2 \rfloor$

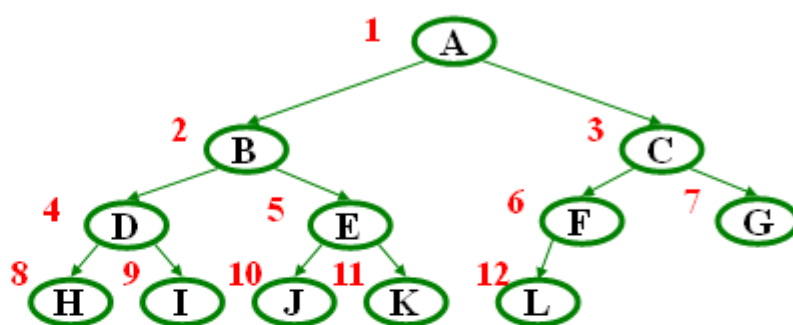


| | A | B | C | D | E | F | G | H | I | J | K | L | |
|---|---|---|---|---|---|---|---|---|---|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |

- We skip index 0 to make the math simpler
- Actually, it can be a good place to store the current size of the heap

Array Representation of a Binary Heap

From node i :

- left child: $2i$
- right child: $2i+1$
- parent: $i / 2$

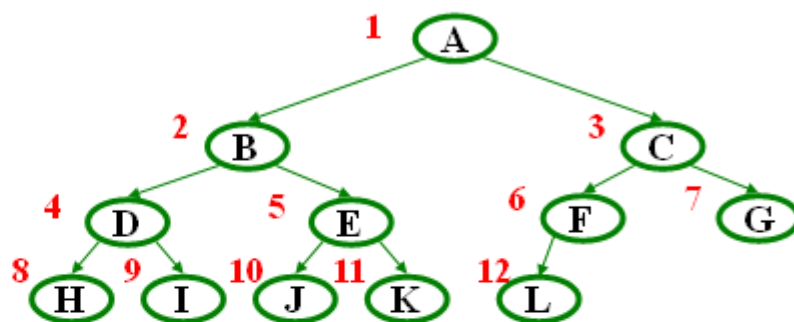

| | A | B | C | D | E | F | G | H | I | J | K | L | |
|---|---|---|---|---|---|---|---|---|---|----|----|----|----|
| 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 |

- We skip index 0 to make the math simpler
- Actually, it can be a good place to store the current size of the heap