

cse332-13wi-lec10-Hashing-day3.cp3



CSE 332: Data Abstractions

Lecture 10: Hashing

Ruth Anderson
Winter 2013

Announcements

- **Project 2** – let us know by tonight if you plan on working with a partner. Phase A due next Wednesday
- **Homework 3**– due Friday Feb 1st at the BEGINNING of lecture

Today

- Dictionaries
 - Hashing

1/30/2013

3

Motivating Hash Tables


For dictionary with n key/value pairs

	insert	find	delete
• Unsorted linked-list	$O(1)$	$O(n)$	$O(n)$
• Unsorted array	$O(1)$	$O(n)$	$O(n)$
• Sorted linked list	$O(n)$	$O(n)$	$O(n)$
• Sorted array	$O(n)$	$O(\log n)$	$O(n)$
• <i>Balanced</i> tree	$O(\log n)$	$O(\log n)$	$O(\log n)$
Big Array Hash Tables	$O(1)$	$O(1)$	$O(1)$

} Avg

Hash Tables

- Aim for constant-time (i.e., $O(1)$) **find**, **insert**, and **delete**
 - “On average” under some reasonable **assumptions**
- A hash table is an array of some fixed size
- Basic idea:

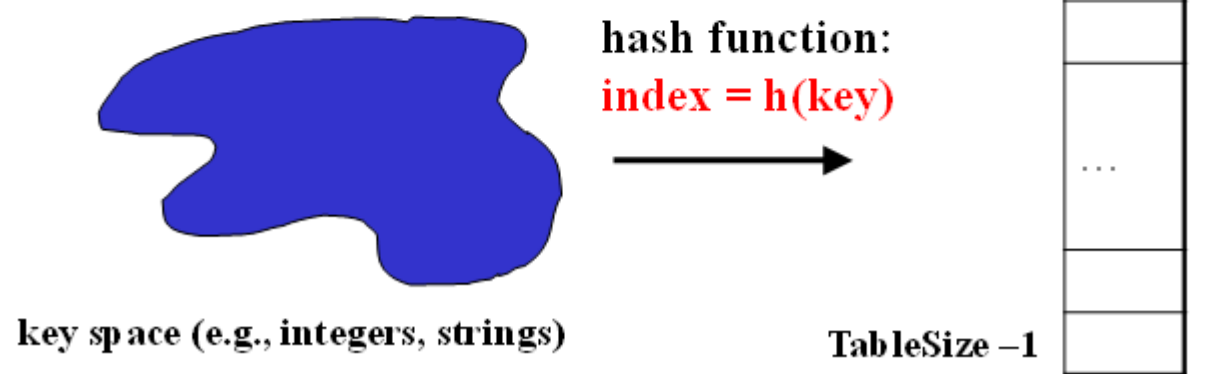

1/30/2013

5

Aside: Hash Tables vs. Balanced Trees

- In terms of a Dictionary ADT for just `insert`, `find`, `delete`, hash tables and balanced trees are just different data structures
 - Hash tables $O(1)$ on average (*assuming* few collisions)
 - Balanced trees $O(\log n)$ worst-case
- Constant-time is better, right?
 - Yes, but you need “hashing to behave” (must avoid collisions)
 - Yes, but `findMin`, `findMax`, `predecessor`, and `successor` go from $O(\log n)$ to $O(n)$, `printSorted` from $O(n)$ to $O(n \log n)$
 - Why your textbook considers this to be a different ADT
 - Not so important to argue over the definitions

Hash Tables

- There are m possible keys (m typically large, even infinite)
- We expect our table to have only n items
- n is much less than m (often written $n \ll m$)


Many dictionaries have this property

- Compiler: All possible identifiers allowed by the language vs. those used in some file of one program
- Database: All possible student names ^{✓ #J} vs. students enrolled
- AI: All possible chess-board configurations vs. those considered by the current player
- ...

Hash functions

An ideal hash function:

- Is fast to compute
- “Rarely” hashes two “used” keys to the same index
 - Often impossible in theory; easy in practice
 - Will handle *collisions* a bit later

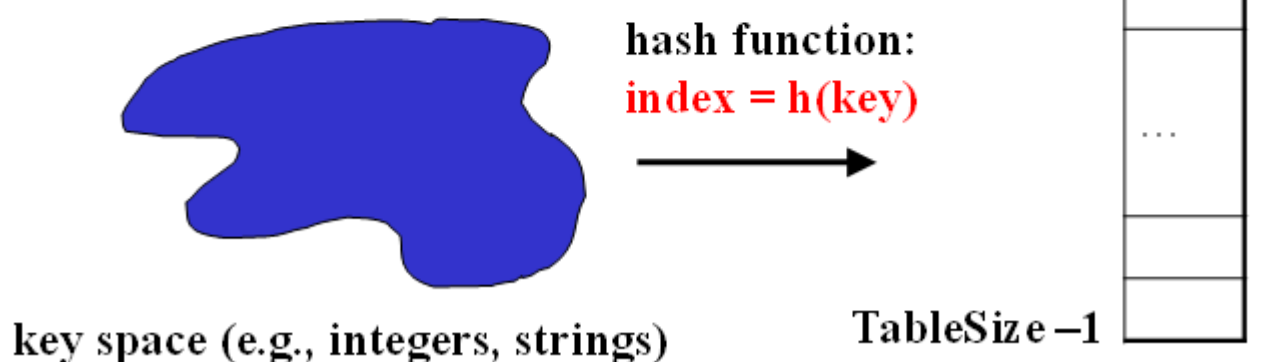


1/30/2013

8

Who hashes what?


- Hash tables can be generic
 - To store elements of type E , we just need E to be:
 1. Comparable: order any two E (like with all dictionaries)
 2. Hashable: convert any E to an `int`
- When hash tables are a reusable library, the division of responsibility generally breaks down into two roles:

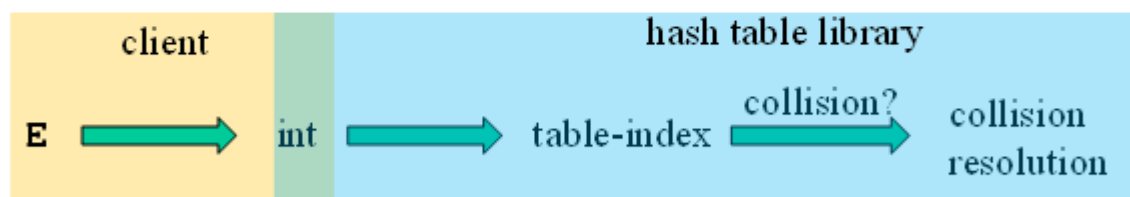

- We will learn both roles, but most programmers “in the real world” spend more time as clients while understanding the library

More on roles

Some ambiguity in terminology on which parts are “hashing”

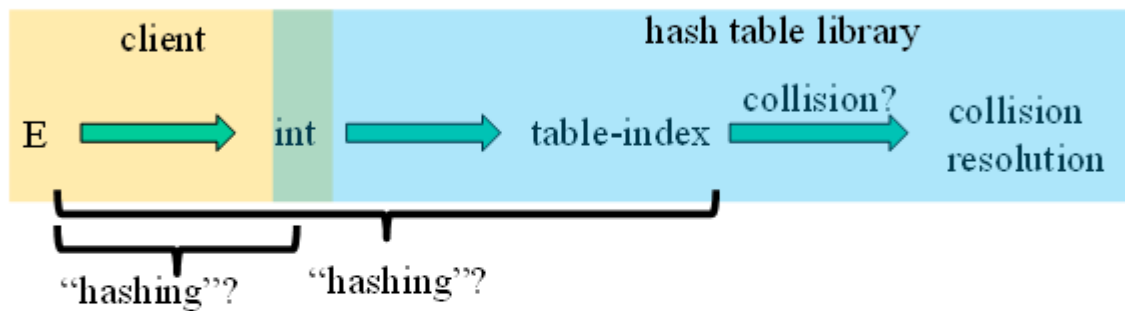

Two roles must both contribute to minimizing collisions (heuristically)

- Client should aim for different ints for expected items
 - Avoid “wasting” any part of `E` or the 32 bits of the `int`
- Library should aim for putting “similar” ints in different indices
 - conversion to index is almost always “mod table-size”
 - using prime numbers for table-size is common

What to hash?

- We will focus on two most common things to hash: ints and strings
- If you have objects with several fields, it is usually best to have most of the “identifying fields” contribute to the hash to avoid collisions
- Example:

```
class Person {  
    String first; String middle; String last;  
    Date birthdate;  
}
```
- An inherent trade-off: hashing-time vs. collision-avoidance
 - Bad idea(?): Only use first name
 - ~~Good idea~~(?): Only use middle initial
 - Admittedly, what-to-hash is often an unprincipled guess ☹

Hashing integers

key space = integers

Simple hash function:

$$h(\text{key}) = \text{key} \% \text{TableSize}$$

- Client: $f(x) = x$
- Library $g(x) = f(x) \% \text{TableSize}$
- Fairly fast and natural

Example:

- TableSize = 10
- Insert 7, 18, 41, 34, 10
- (As usual, ignoring corresponding data)

0	10
1	41
2	
3	
4	34
5	
6	
7	7
8	18 ← 28
9	

Hashing integers (Soln)

key space = integers

Simple hash function:

$$h(\text{key}) = \text{key} \% \text{TableSize}$$

- Client: $f(x) = x$
- Library $g(x) = f(x) \% \text{TableSize}$
- Fairly fast and natural

Example:

- TableSize = 10
- Insert 7, 18, 41, 34, 10
- (As usual, ignoring corresponding data)

0	10
1	41
2	
3	
4	34
5	
6	
7	7
8	18
9	

Collision-avoidance

- With “`x % TableSize`” the number of collisions depends on
 - the ints inserted (obviously)
 - `TableSize`
- Larger table-size tends to help, but not always
 - Example: 70, 24, 56, 43, 10
with `TableSize = 10` and `TableSize = 60`
- Technique: Pick table size to be prime. Why?
 - Real-life data tends to have a pattern
 - “Multiples of 61” are probably less likely than “multiples of 60”
 - We’ll see some collision strategies do better with prime size

More arguments for a prime table size

If `TableSize` is 60 and...

- Lots of data items are multiples of 5, wasting 80% of table
- Lots of data items are multiples of 10, wasting 90% of table
- Lots of data items are multiples of 2, wasting 50% of table

If `TableSize` is 61...

- Collisions can still happen, but 5, 10, 15, 20, ... will fill table
- Collisions can still happen but 10, 20, 30, 40, ... will fill table
- Collisions can still happen but 2, 4, 6, 8, ... will fill table

In general, if x and y are “co-prime” (means $\text{gcd}(x, y) == 1$), then

$(a * x) \% y == (b * x) \% y$ if and only if $a \% y == b \% y$

- Given table size y and keys as multiples of x , we’ll get a decent distribution if x & y are co-prime
- So good to have a `TableSize` that has not common factors with any “likely pattern” x

1/30/2013

15

What if the key is not an int?

- If keys aren't `ints`, the client must convert to an `int`
 - Trade-off: speed and distinct keys hashing to distinct `ints`
 - Common and important example: Strings
 - Key space $K = s_0 s_1 s_2 \dots s_{m-1}$
 - where s_i are chars: $s_i \in [0, 256]$
 - Some choices: Which avoid collisions best?
1. $h(K) = s_0 \% \text{TableSize}$
 2. $h(K) = \left(\sum_{i=0}^{m-1} s_i \right) \% \text{TableSize}$
 3. $h(K) = \left(\sum_{i=0}^{m-1} s_i \cdot 37^i \right) \% \text{TableSize}$

Specializing hash functions

How might you hash differently if all your strings were web addresses (URLs)?

Aside: Combining hash functions

A few rules of thumb / tricks:

1. Use all 32 bits (careful, that includes negative numbers)
2. Use different overlapping bits for different parts of the hash
 - This is why a factor of 37^i works better than 256^i
 - Example: “abcde” and “ebcda”
3. When smashing two hashes into one hash, use bitwise-xor
 - bitwise-and produces too many 0 bits
 - bitwise-or produces too many 1 bits
4. Rely on expertise of others; consult books and other resources
5. If keys are known ahead of time, choose a *perfect hash*

Collision resolution

Collision:

When two keys map to the same location in the hash table

We try to avoid it, but number-of-keys exceeds table size

So hash tables should support **collision resolution**

– Ideas?


Flavors of Collision Resolution

Separate Chaining

Open Addressing

- Linear Probing
- Quadratic Probing
- Double Hashing

Separate Chaining

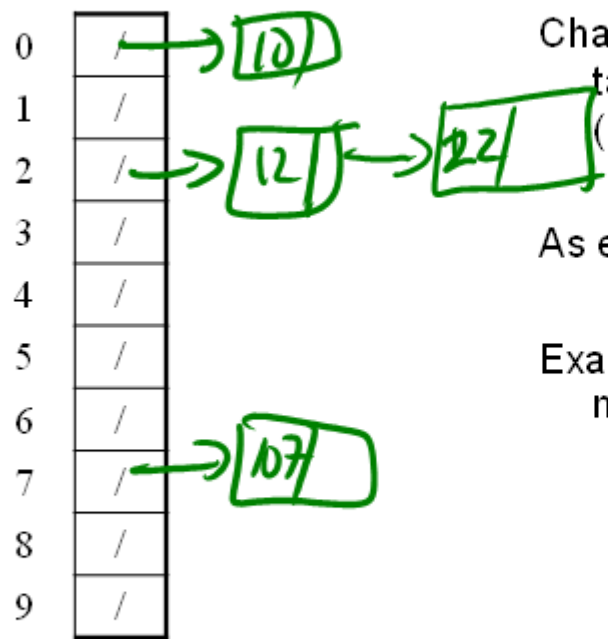


Chaining: All keys that map to the same table location are kept in a list (a.k.a. a “chain” or “bucket”)

As easy as it sounds

Example: insert 10, 22, 107, 12, 42 with mod hashing and `TableSize = 10`

Separate Chaining

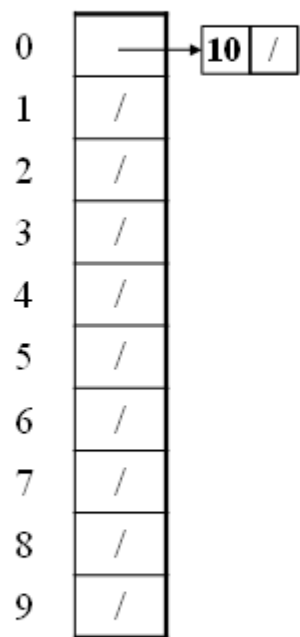


Chaining: All keys that map to the same table location are kept in a list (a.k.a. a “chain” or “bucket”)

As easy as it sounds

Example: insert 10, 22, 107, 12, 42 with mod hashing and `TableSize = 10`

Separate Chaining

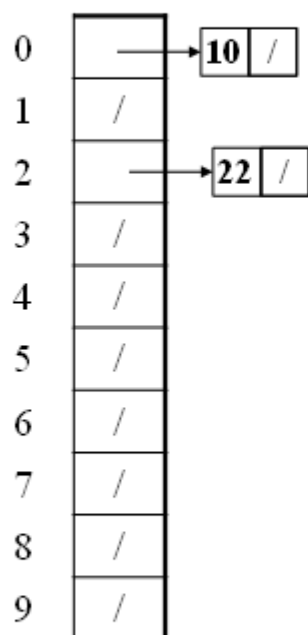


Chaining: All keys that map to the same table location are kept in a list (a.k.a. a “chain” or “bucket”)

As easy as it sounds

Example: insert 10, 22, 107, 12, 42 with mod hashing and `TableSize = 10`

Separate Chaining

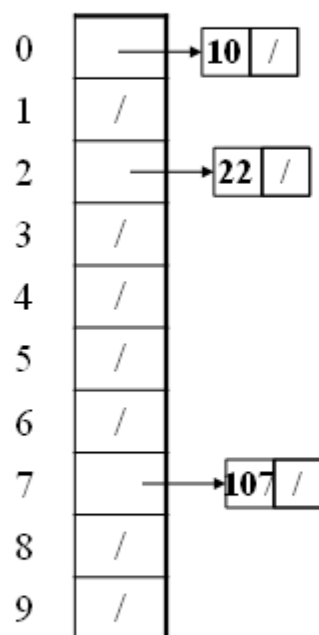


Chaining: All keys that map to the same table location are kept in a list (a.k.a. a “chain” or “bucket”)

As easy as it sounds

Example: insert 10, 22, 107, 12, 42 with mod hashing and `TableSize = 10`

Separate Chaining

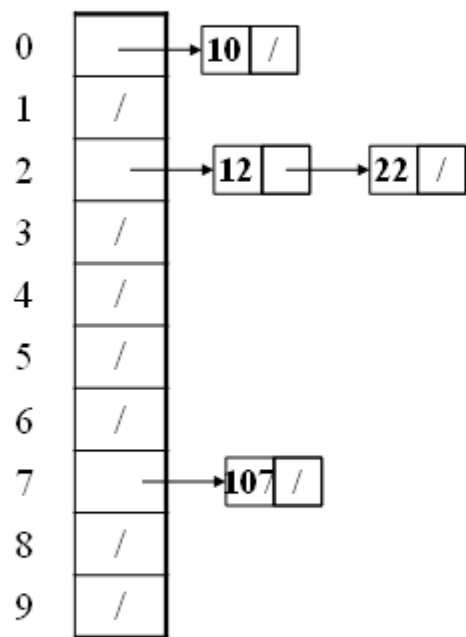


Chaining: All keys that map to the same table location are kept in a list (a.k.a. a “chain” or “bucket”)

As easy as it sounds

Example: insert 10, 22, 107, 12, 42 with mod hashing and `TableSize = 10`

Separate Chaining

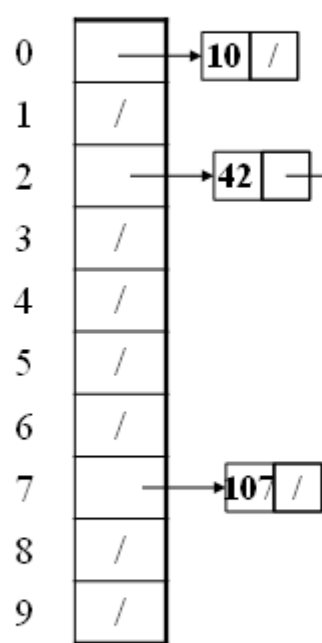

Chaining: All keys that map to the same table location are kept in a list (a.k.a. a “chain” or “bucket”)

As easy as it sounds


Example: insert 10, 22, 107, 12, 42 with mod hashing and `TableSize = 10`

Worst case time for find?

Thoughts on separate chaining

- Worst-case time for find?
 - Linear
 - But only with really bad luck or bad hash function
 - So not worth avoiding (e.g., with balanced trees at each bucket)
 - Keep # of items in each bucket small
 - Overhead of AVL tree, etc. not worth it for small n
- Beyond asymptotic complexity, some “data-structure engineering” can improve constant factors
 - Linked list vs. array or a hybrid of the two
 - Move-to-front (part of Project 2)
 - Leave room for 1 element (or 2?) in the table itself, to optimize constant factors for the common case
 - A time-space trade-off...

Time vs. space (constant factors only here)

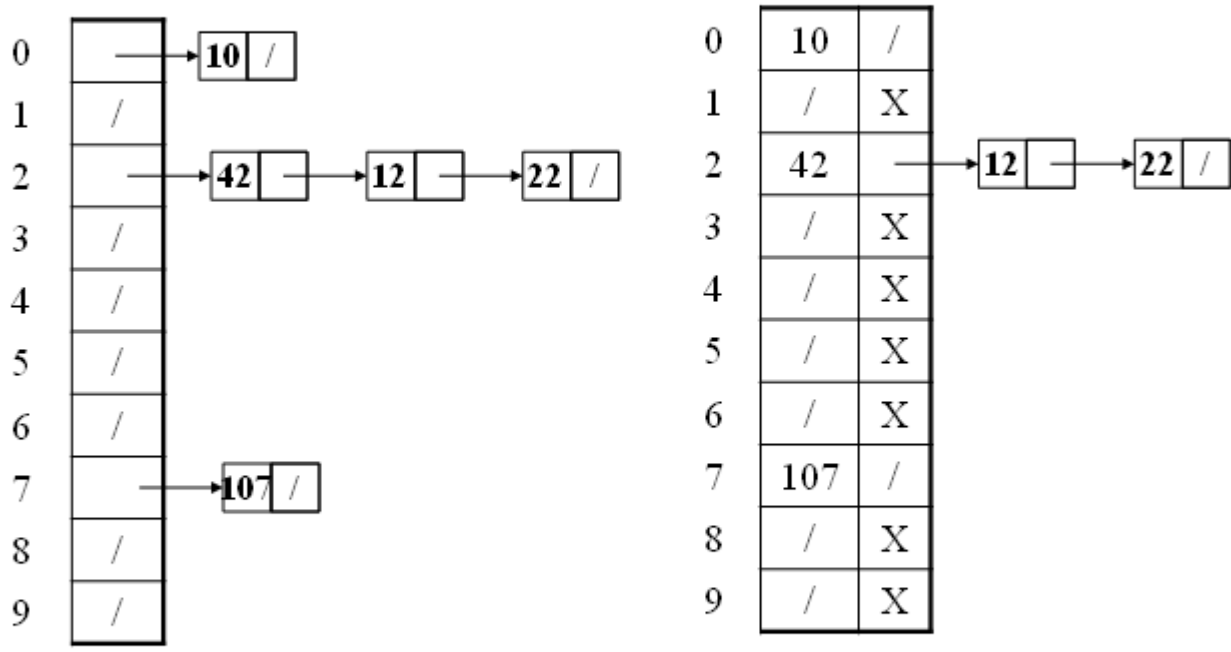

More rigorous separate chaining analysis

Definition: The **load factor**, λ , of a hash table is

$$\lambda = \frac{N}{\text{TableSize}} \quad \leftarrow \text{number of elements}$$

Under chaining, the average number of elements per bucket is λ

So if some inserts are followed by *random* finds, then on average:

- Each unsuccessful **find** compares against λ items
- Each successful **find** compares against $\frac{\lambda}{2}$ items
- How big should TableSize be?? n

More rigorous separate chaining analysis

Definition: The **load factor**, λ , of a hash table is


$$\lambda = \frac{N}{\text{TableSize}} \quad \leftarrow \text{number of elements}$$

Under chaining, the average number of elements per bucket is λ

So if some inserts are followed by *random* finds, then on average:


- Each unsuccessful **find** compares against λ items
- Each successful **find** compares against $\lambda/2$ items
- If λ is low, **find** & **insert** likely to be $O(1)$
- We like to keep λ around 1 for separate chaining

Load Factor?

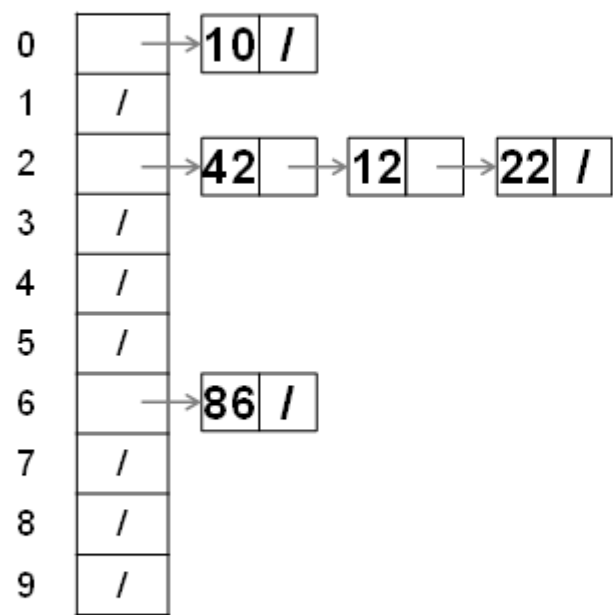

$$\lambda = \frac{n}{TableSize} = \frac{5}{10} = 0.5$$

Load Factor?

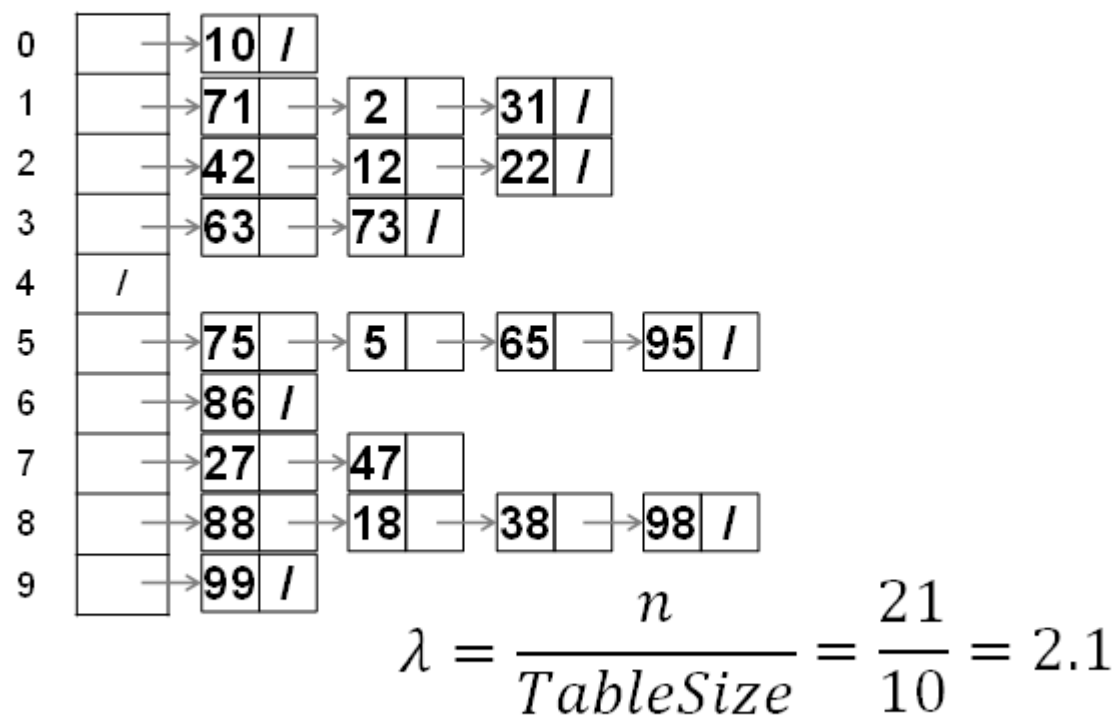

Separate Chaining Deletion?

1/30/2013

34

Separate Chaining Deletion

- Not too bad
 - Find in table
 - Delete from bucket
- Say, delete 12
- Similar run-time as insert

