

Computer Networks

Switch Spanning Tree (§4.8.3)




David Wetherall (djw@uw.edu)

Professor of Computer Science & Engineering

UNIVERSITY *of* WASHINGTON

Topic


- How can we connect switches in any topology so they just work
 - This is part 2 of switched Ethernet

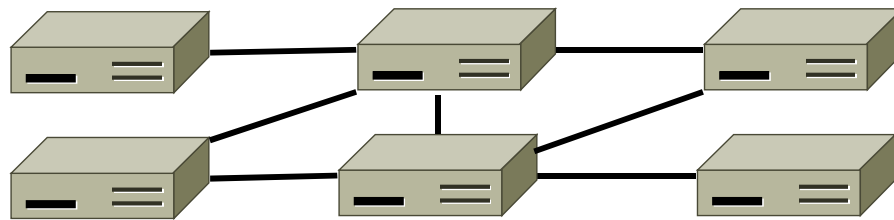

Loops – yikes!


Problem – Forwarding Loops

- May have a loop in the topology
 - Redundancy in case of failures
 - Or a simple mistake
- Want LAN switches to “just work”
 - Plug-and-play, no changes to hosts
 - But loops cause a problem ...

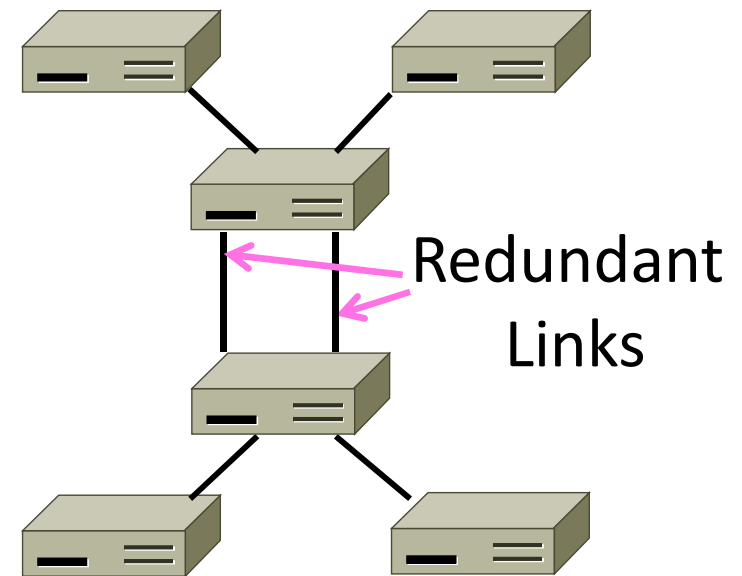

Forwarding Loops (2)


- Suppose the network is started and A sends to F. What happens?

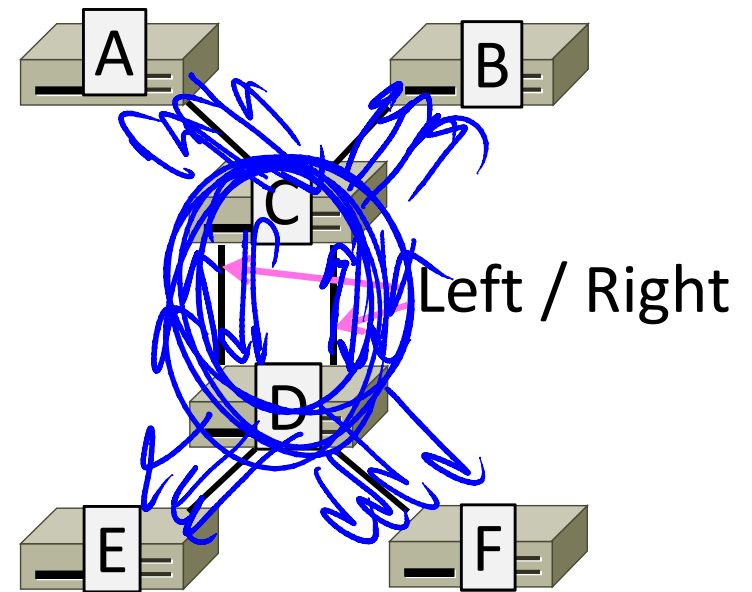

Forwarding Loops (3)

- Suppose the network is started and A sends to F. What happens?

- $A \rightarrow C \rightarrow B, D$ -left, D -right
- D -left $\rightarrow C$ -right, E, F
- D -right $\rightarrow C$ -left, E, F
- C -right $\rightarrow D$ -left, A, B
- C -left $\rightarrow D$ -right, A, B
- D -left $\rightarrow \dots$
- D -right $\rightarrow \dots$

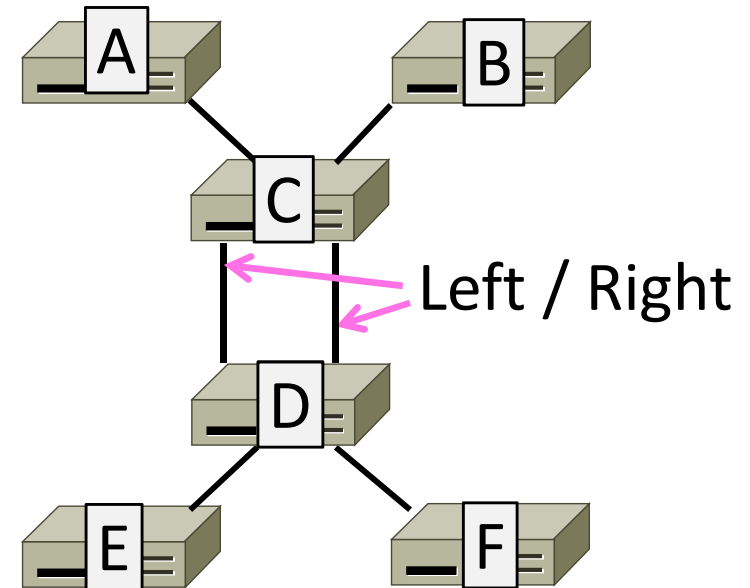


Spanning Tree Solution


- Switches collectively find a spanning tree for the topology
 - A subset of links that is a tree (no loops) and reaches all switches
 - They switches forward as normal on the spanning tree
 - Broadcasts will go up to the root of the tree and down all the branches

Spanning Tree (2)


Topology

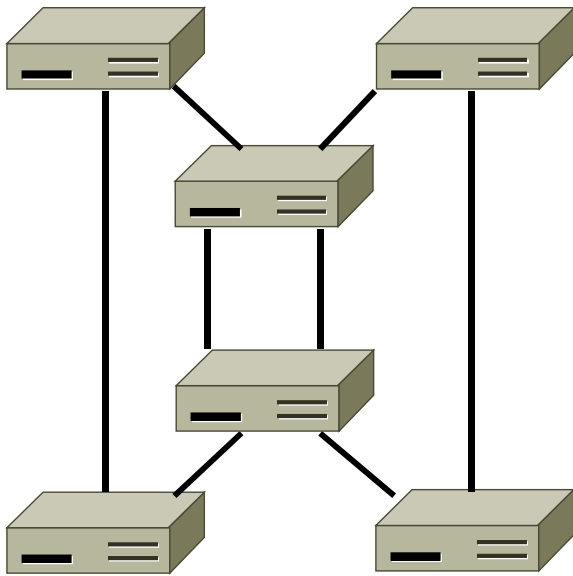

One ST

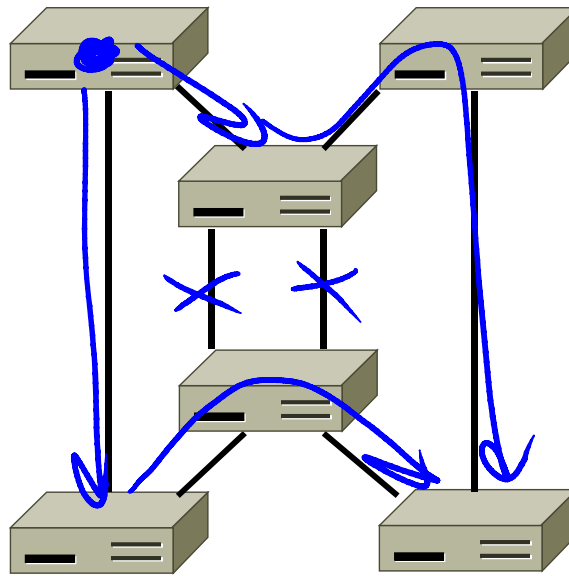


Another ST

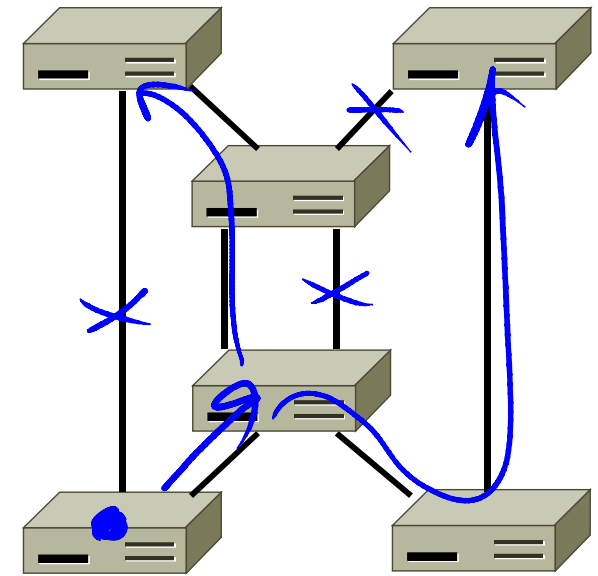


Spanning Tree (3)


Topology

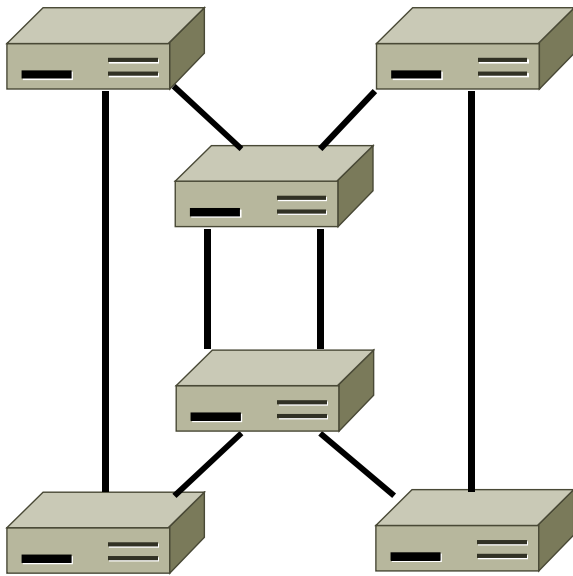

One ST

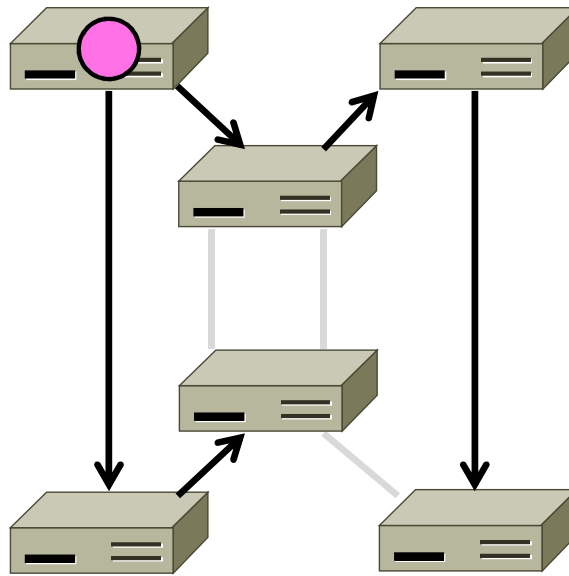

Another ST

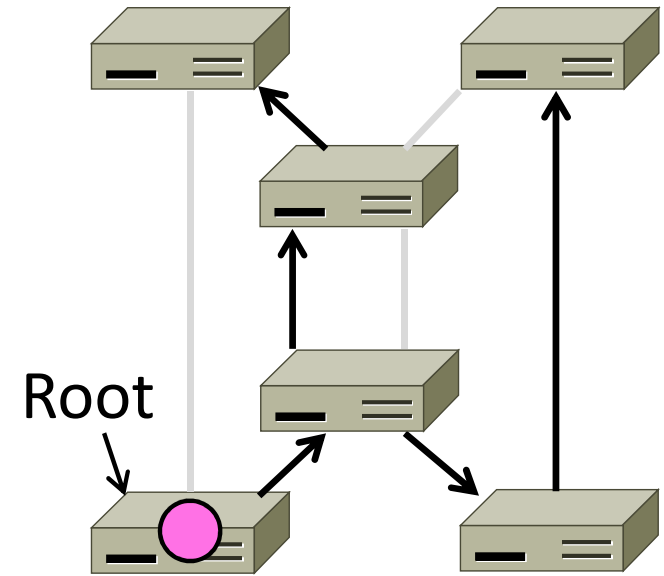

Spanning Tree Algorithm

- Rules of the distributed game:
 - All switches run the same algorithm
 - They start with no information
 - Operate in parallel and send messages
 - Always search for the best solution
- Ensures a highly robust solution
 - Any topology, with no configuration
 - Adapts to link/switch failures, ...


Radia Perlman (1951–)

- Key early work on routing protocols
 - ➔ Routing in the ARPANET
 - ➔ Spanning Tree for switches (next)
 - ➔ Link-state routing (later)
- Now focused on network security




Spanning Tree Algorithm (2)

- Outline:

- 
1. Elect a root node of the tree
(switch with the lowest address)
 2. Grow tree as shortest distances
from the root (using lowest
address to break distance ties)
 3. Turn off ports for forwarding if
they aren't on the spanning tree

Spanning Tree Algorithm (3)


- Details:
 - Each switch initially believes it is the root of the tree
 -  Each switch sends periodic updates to neighbors with:
 - Its address, address of the root, and distance (in hops) to root
 - Switches favors ports with shorter distances to lowest root
 - Uses lowest address as a tie for distances

Hi, I'm C, the root is A, it's 2 hops away or (C, A, 2)




Spanning Tree Example

- 1st round, sending:
 - A sends (A, A, 0) to say it is root
 - B, C, D, E, and F do likewise
- 1st round, receiving:
 - A still thinks it is (A, A, 0)
 - B still thinks (B, B, 0)
 - C updates to (C, A, 1)
 - D updates to (D, C, 1)
 - E updates to (E, A, 1)
 - F updates to (F, B, 1)

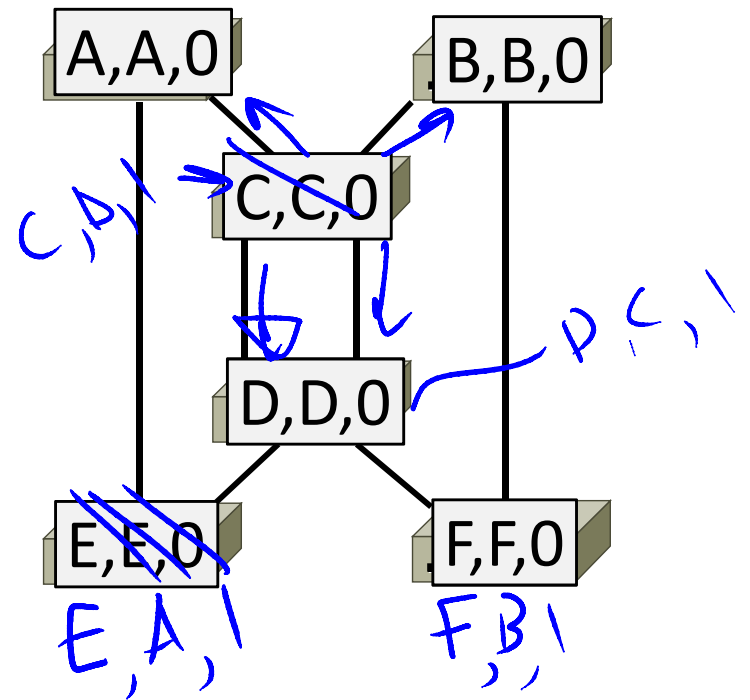


Spanning Tree Example (2)

- 2nd round, sending
 - Nodes send their updated state
- 2nd round receiving:
 - A remains (A, A, 0)
 - B updates to (B, A, 2) via C
 - C remains (C, A, 1)
 - D updates to (D, A, 2) via C
 - E remains (E, A, 1)
 - F remains (F, B, 1)

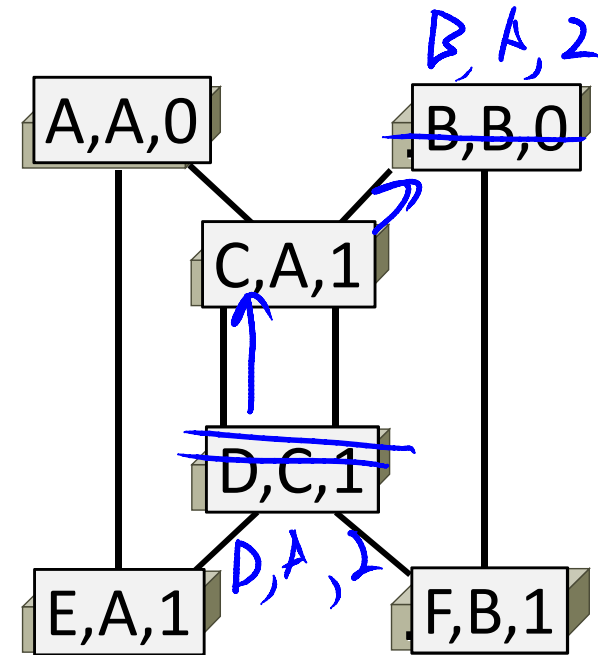


Spanning Tree Example (3)

- 3rd round, sending
 - Nodes send their updated state
- 3rd round receiving:
 - A remains (A, A, 0)
 - B remains (B, A, 2) via C
 - C remains (C, A, 1)
 - D remains (D, A, 2) via C-left
 - E remains (E, A, 1)
 - F updates to (F, A, 3) via B

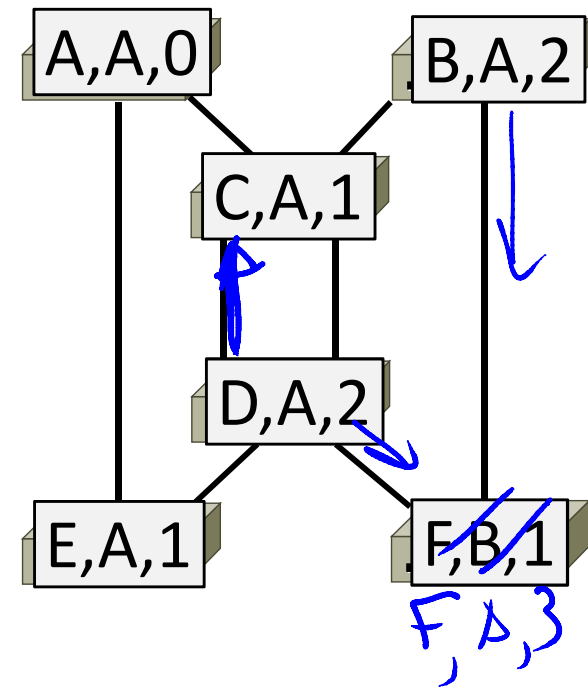


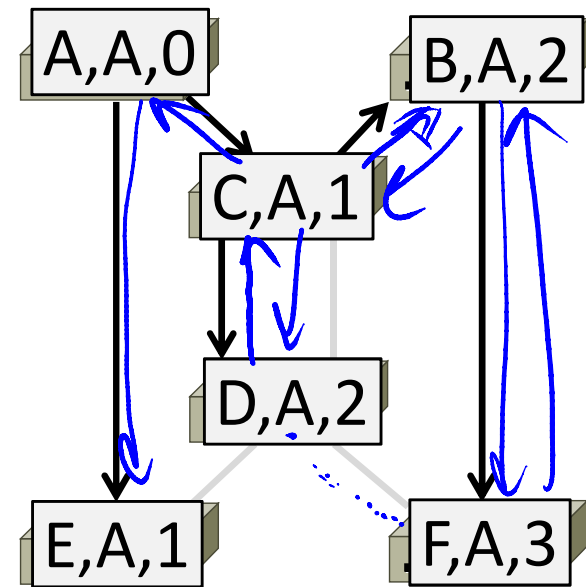
Spanning Tree Example (4)

- 4th round
 - Steady-state has been reached
 - Nodes turn off forwarding that is not on the spanning tree
- Algorithm continues to run
 - Adapts by timing out information
 - E.g., if A fails, other nodes forget it, and B will become the new root

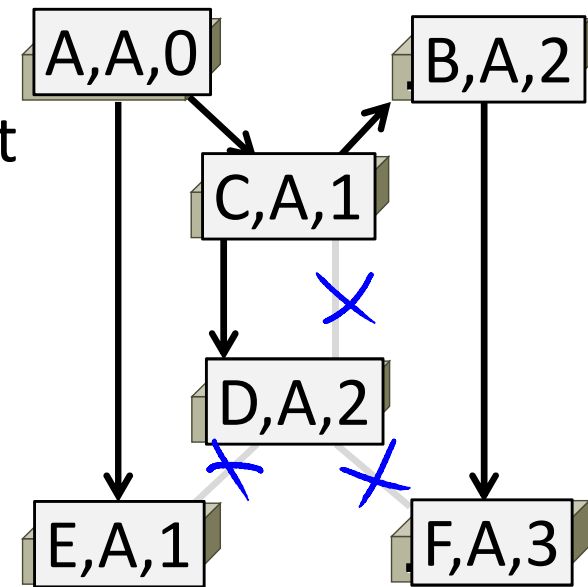


Spanning Tree Example (5)

- Forwarding proceeds as usual on the ST
 - Initially D sends to F:
- 
- And F sends back to D:



Spanning Tree Example (6)

- Forwarding proceeds as usual on the ST
- Initially D sends to F:
 - $D \rightarrow C\text{-left}$
 - $C \rightarrow A, B$
 - $A \rightarrow E$
 - $B \rightarrow F$
- And F sends back to D:
 - $F \rightarrow B$
 - $B \rightarrow C$
 - $C \rightarrow D$(hm, not such a great route)

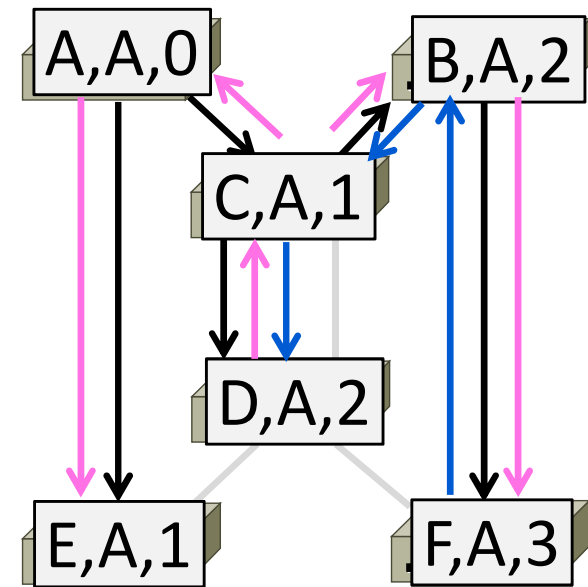

Algorhyme (Radia Perlman, 1985)

*I think that I shall never see
A graph more lovely than a tree.
A tree whose crucial property
Is loop-free connectivity.
A tree that must be sure to span
So packets can reach every LAN.
First, the root must be selected.
By ID, it is elected.
Least-cost paths from root are traced.
In the tree, these paths are placed.
A mesh is made by folks like me,
Then bridges find a spanning tree.*

END

© 2013 D. Wetherall

Slide material from: TANENBAUM, ANDREW S.; WETHERALL, DAVID J., COMPUTER NETWORKS, 5th Edition, © 2011.
Electronically reproduced by permission of Pearson Education, Inc., Upper Saddle River, New Jersey