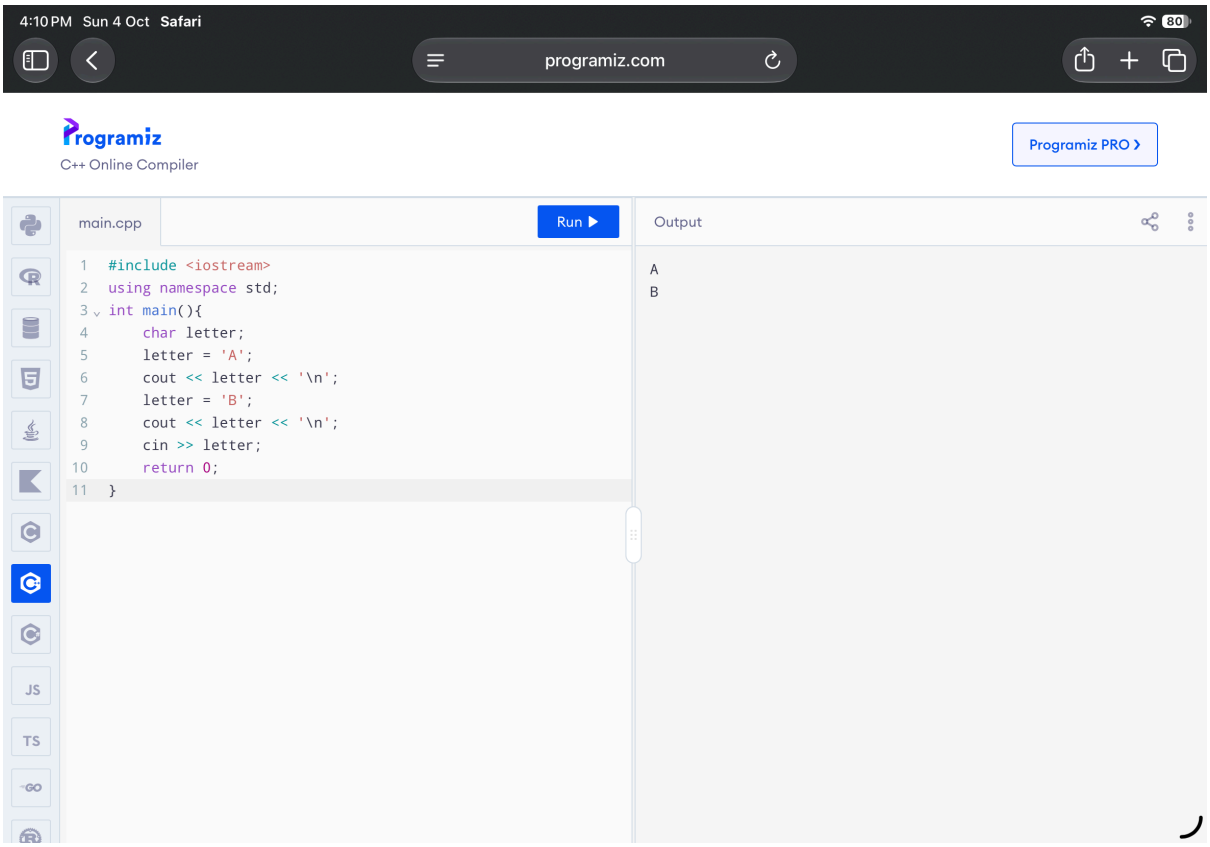
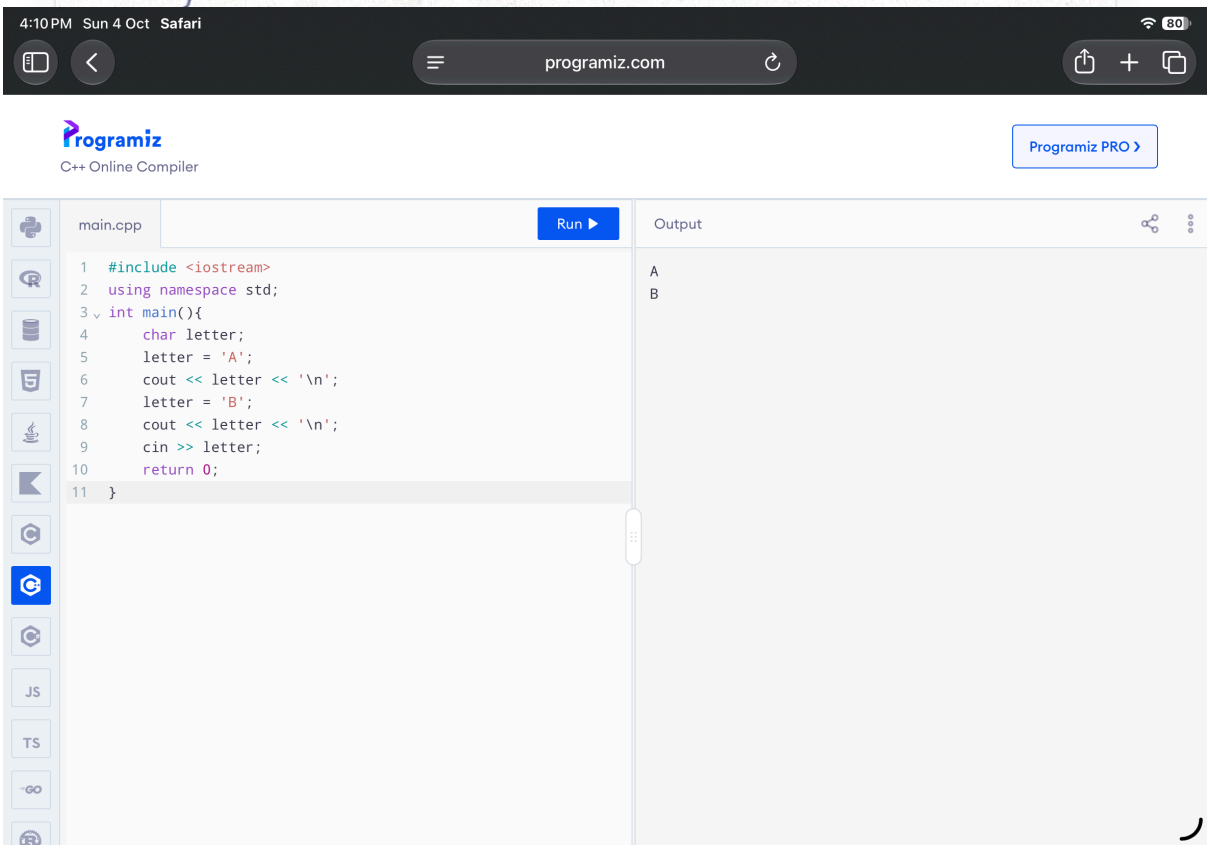
Task 1 :


4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B

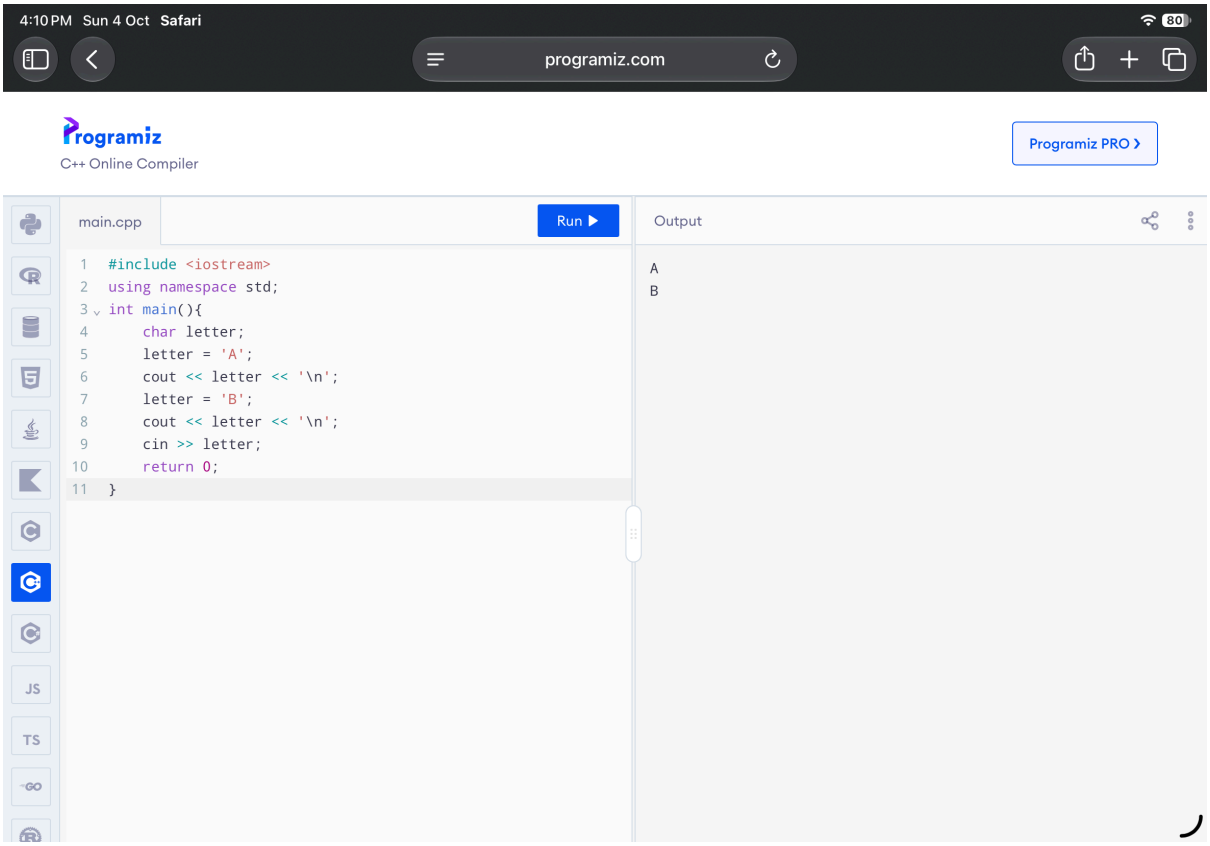
Task 1

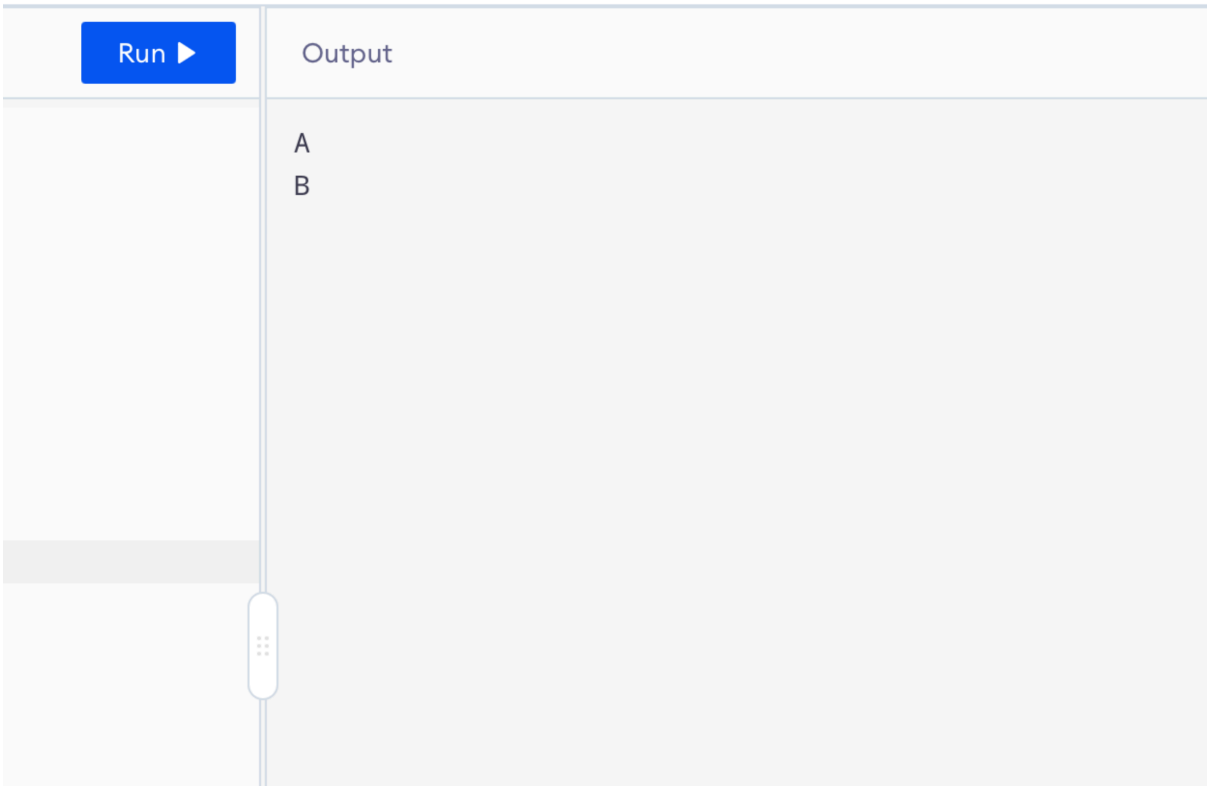
```
#include <iostream>
using namespace std;
int main() {
char letter;
letter = 'A'
cout << letter<< "\n";
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
```

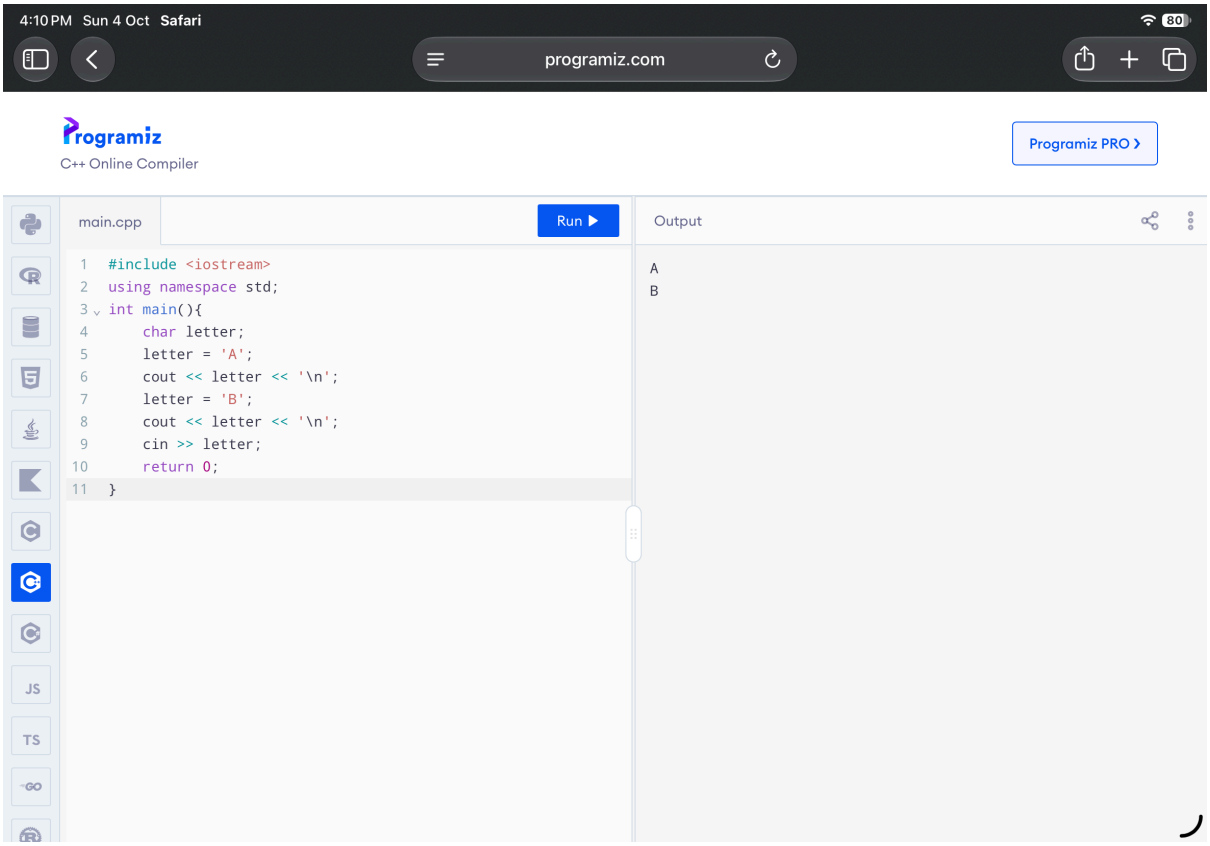
```
#include <iostream>
using namespace std;
int main() {
char letter
letter = 65;
cout << letter << '\n';
letter = 66;
cout << letter << '\n';
cin >> letter;
return 0;
}
```

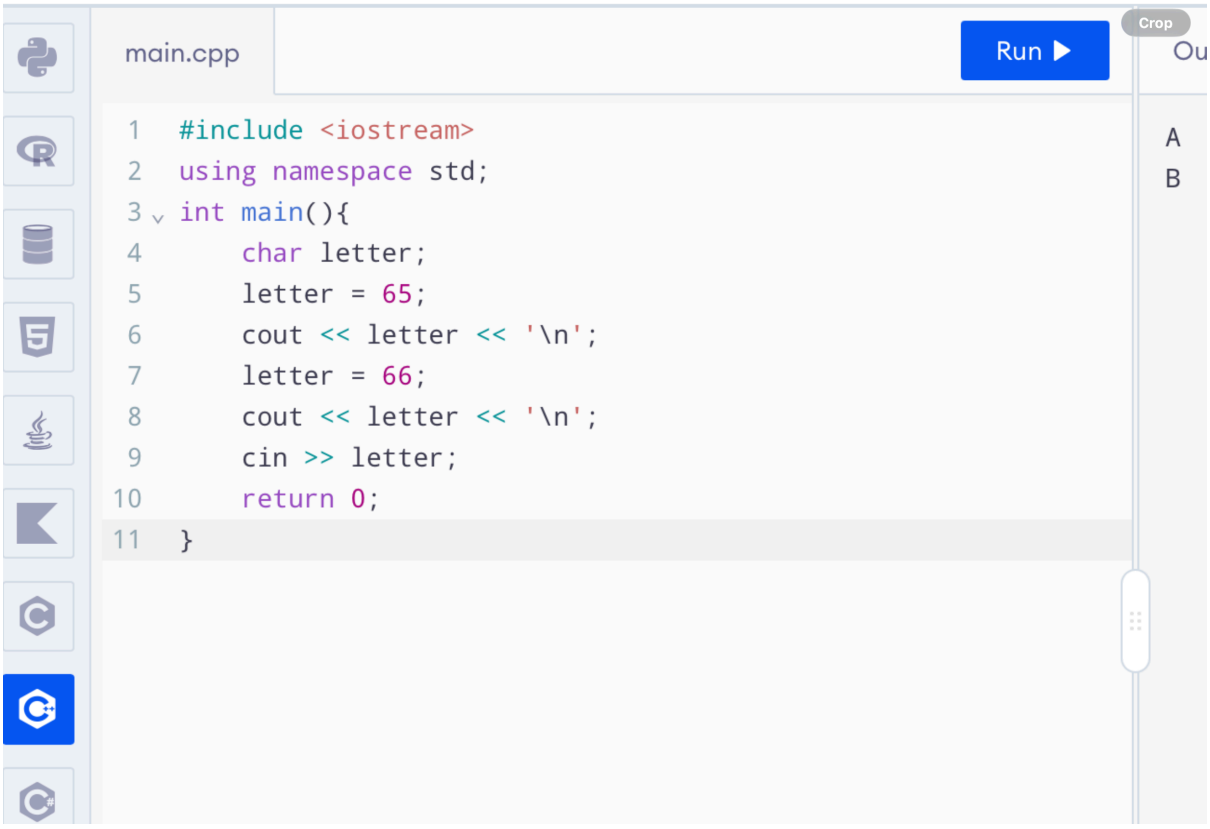


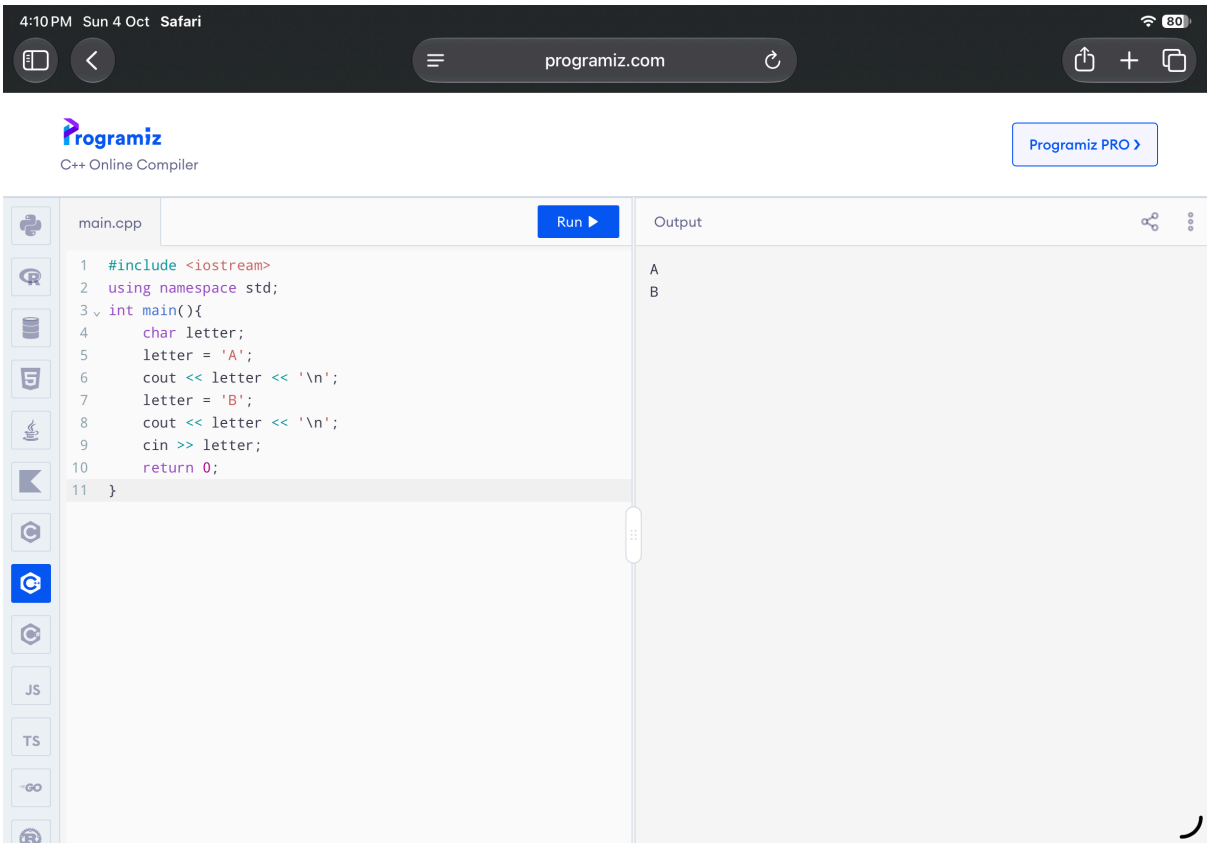

main.cpp
Crop
Run
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}

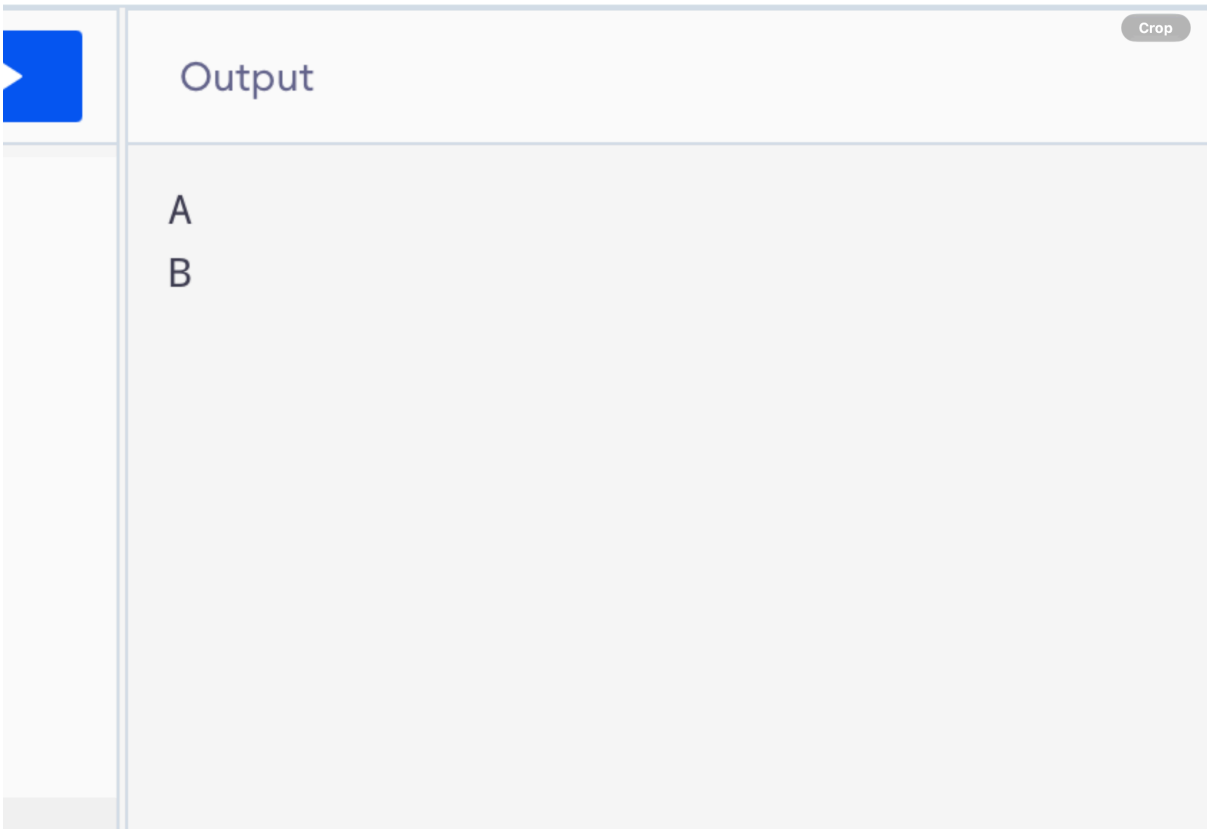

4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B

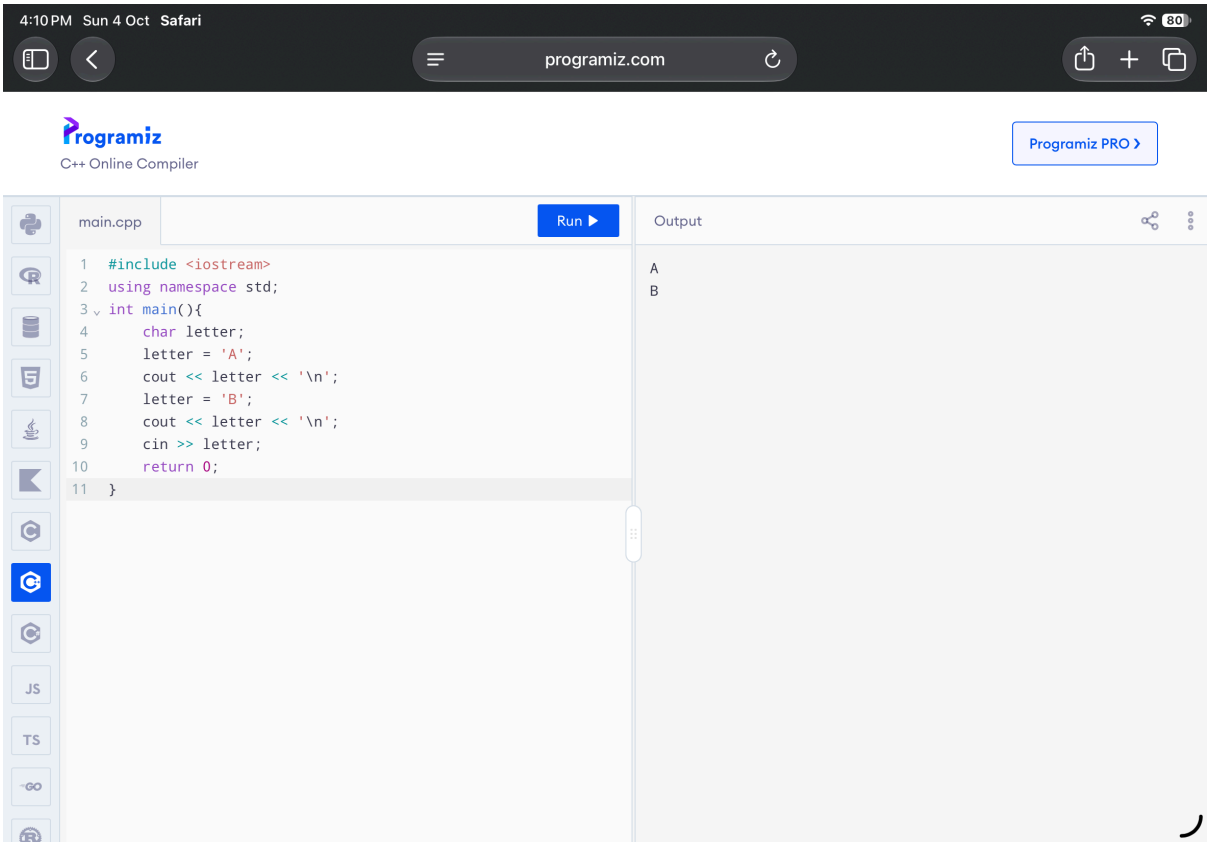

Run
Output
A
B


4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B


main.cpp
Run
Crop
Ou
A
B
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 65;
cout << letter << '\n';
letter = 66;
cout << letter << '\n';
cin >> letter;
return 0;
}


4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
A
B
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}


Crop
Output
A
B


4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B

C++ Online Compiler

Crop

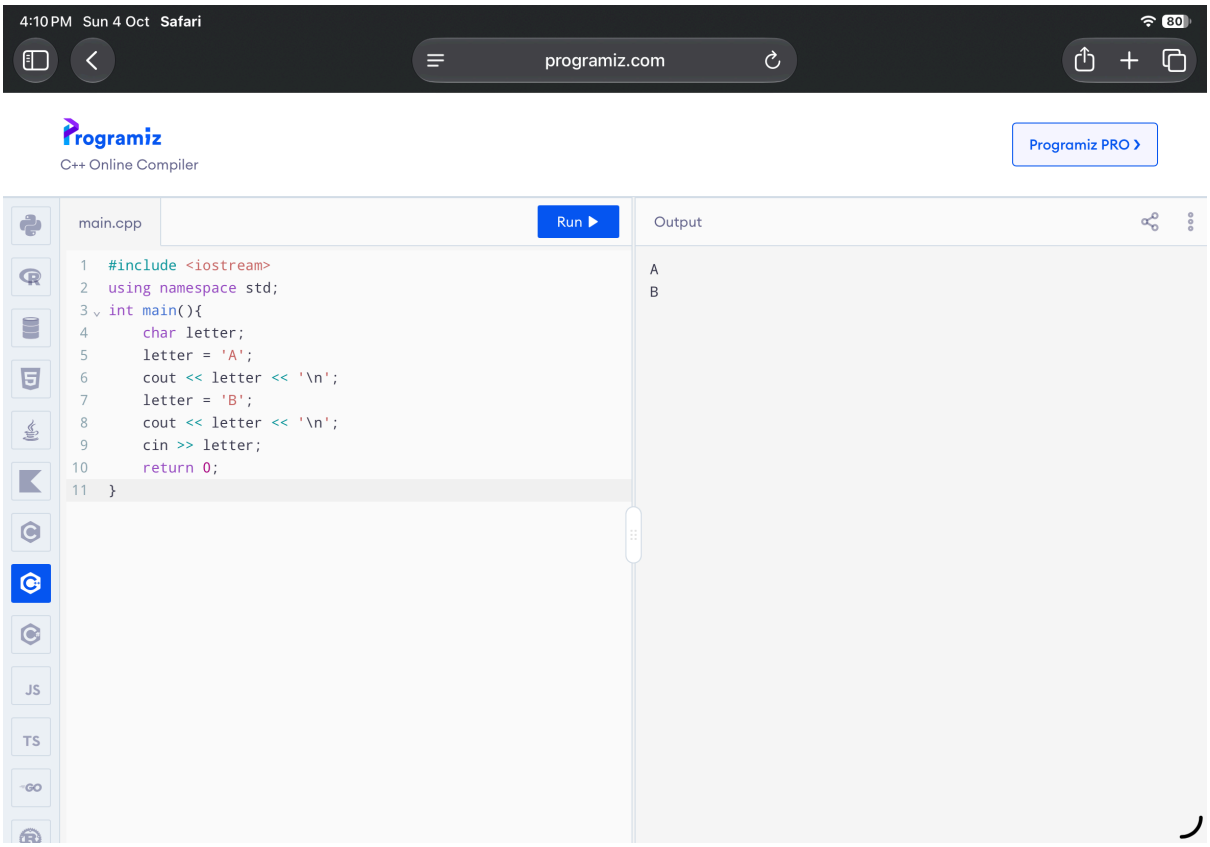
main.cpp

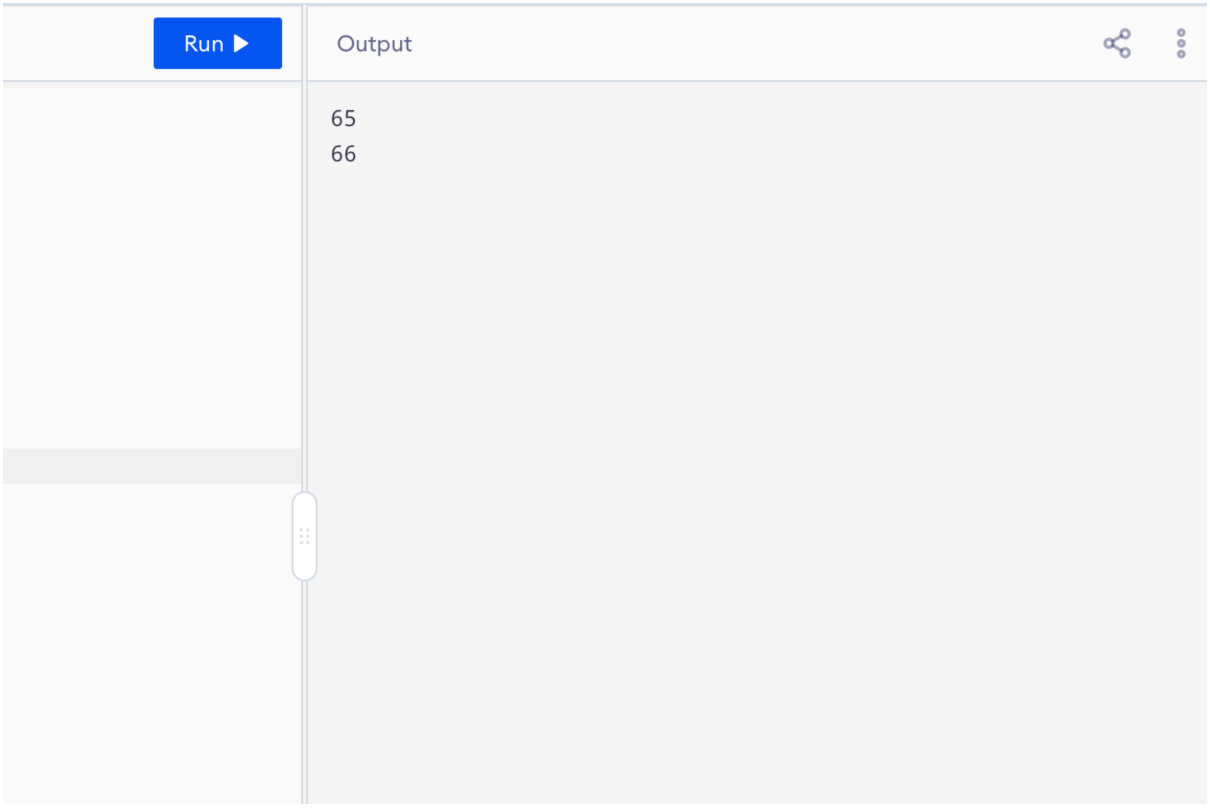
Run ▶

Output

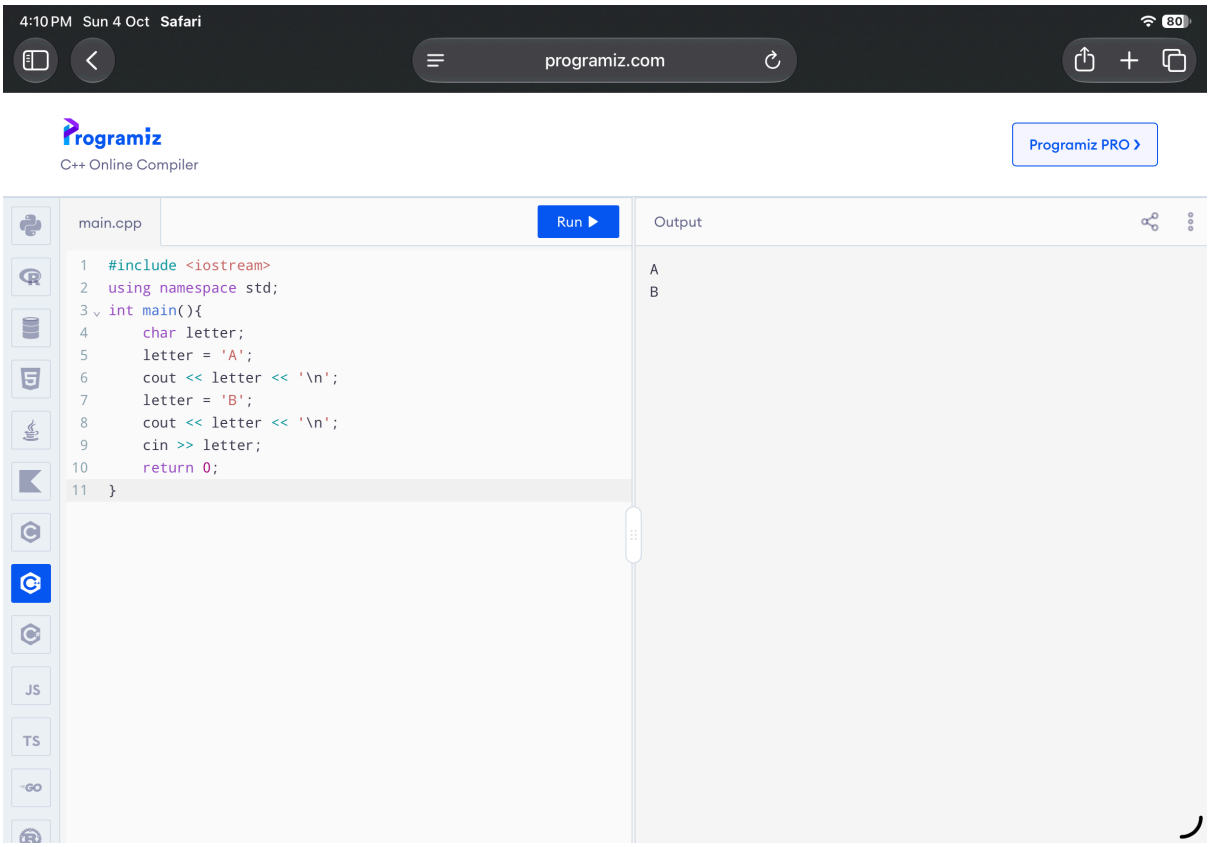
```
#include <iostream>
using namespace std;
int main(){
    int letter;
    letter = 'A';
    cout << letter << '\n';
    letter = 'B';
    cout << letter << '\n';
    cin >> letter;
    return 0;
}
```

```
65
66
```



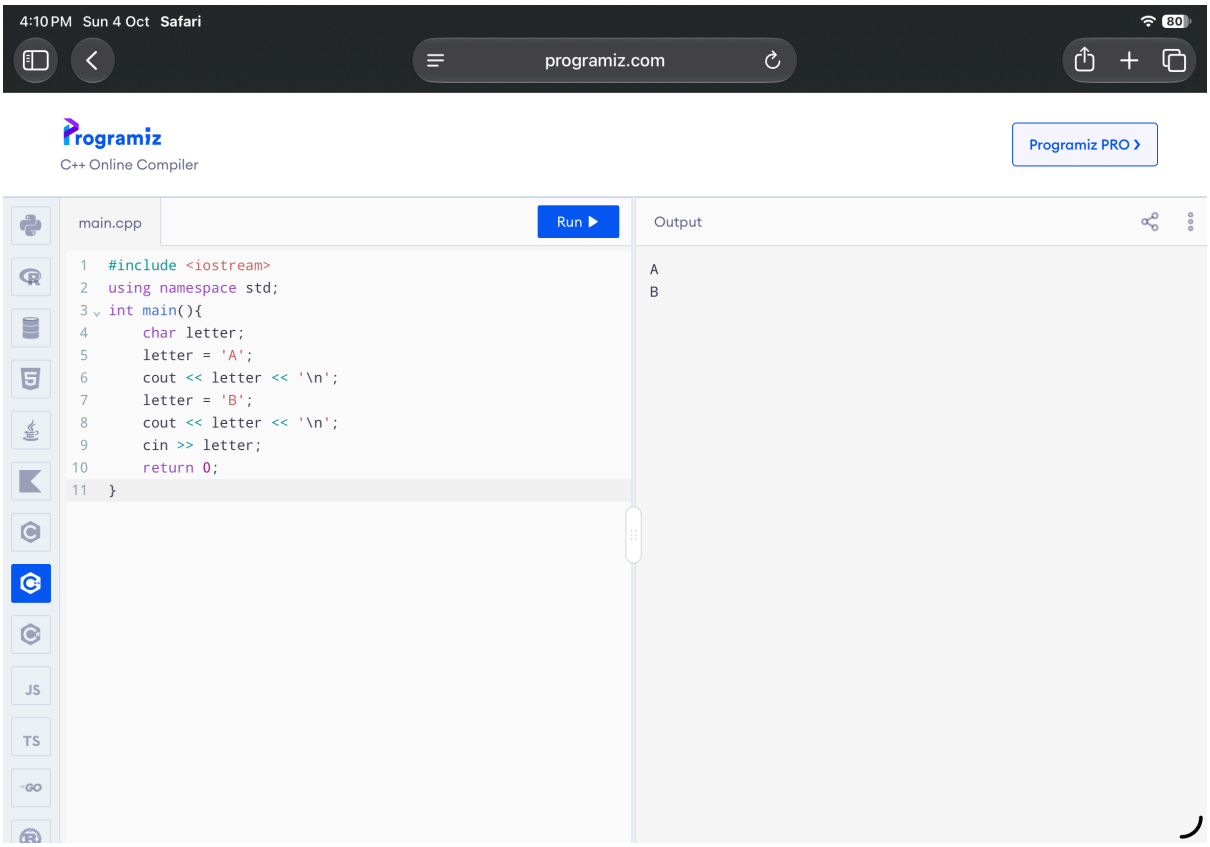

Run
Output
65
66

Task 2 :


4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B

Task 2

```
#include <iostream>
using namespace std;
int main () {
  int num1, num2;
cout << "Enter first number: ";
cin >> num1;
cout << "Inter second number: ";
cin >> num2;
cout << "Addition: " << num1 + num2 << endl;
cout << "Subtraction: " << num1 - num2 << endl;
cout << "Multiplication: " << num1 * num2 << endl;
cout << "Division: " << num1 / num2 << endl;
return 0;
}
```



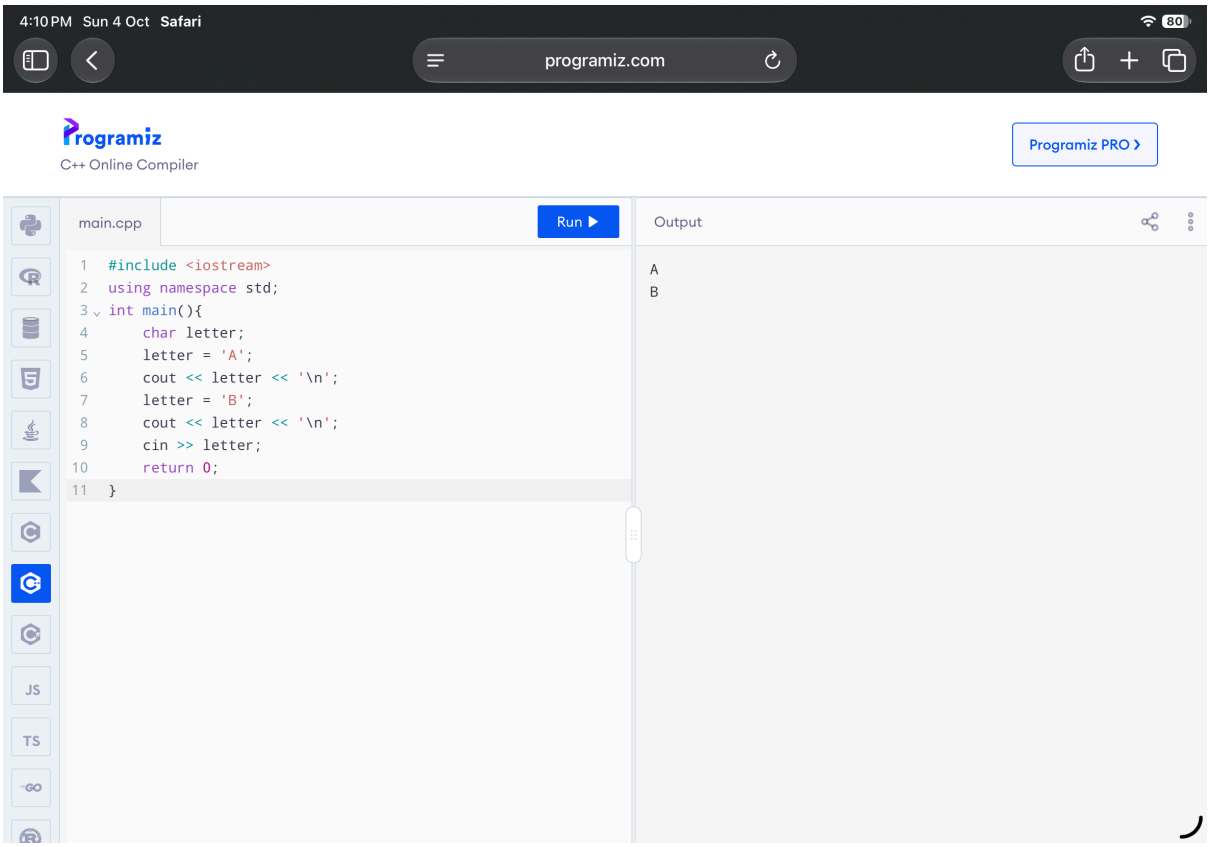
main.cpp

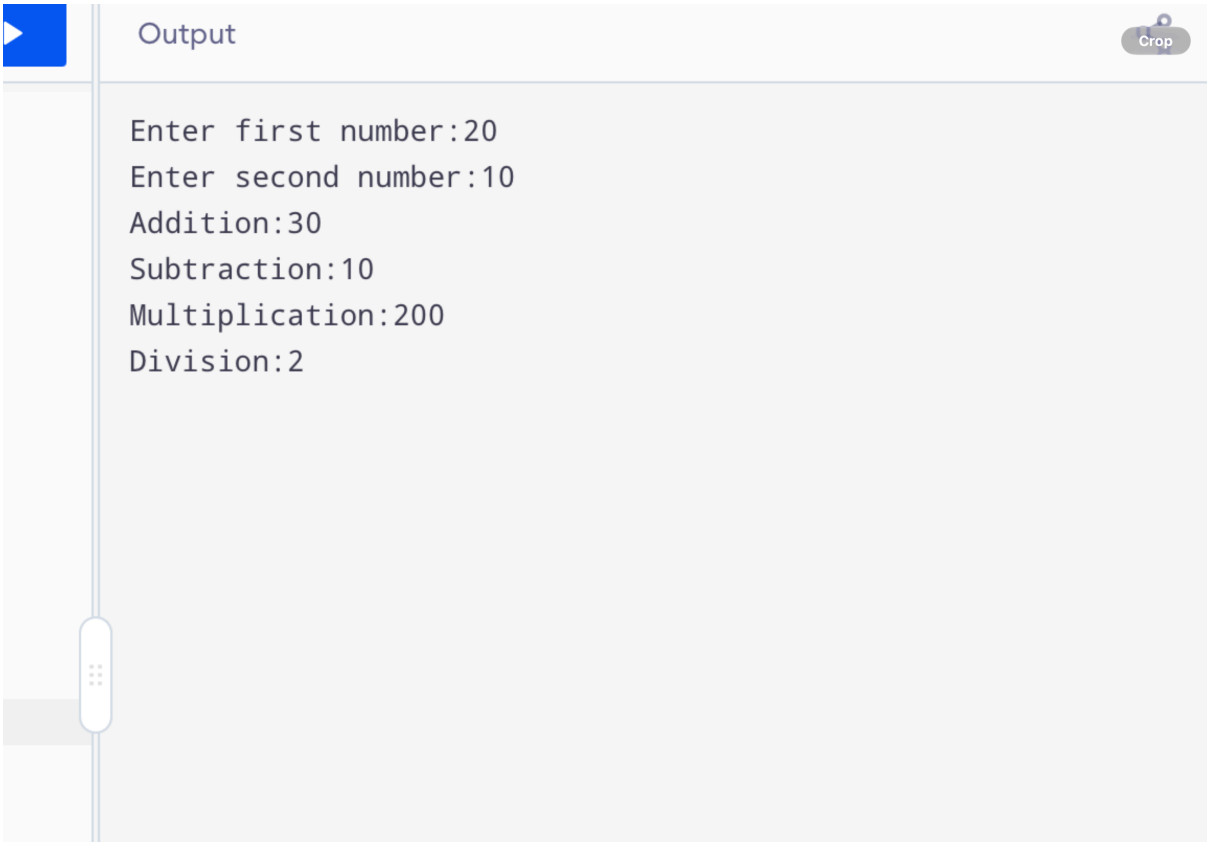
Run

Output

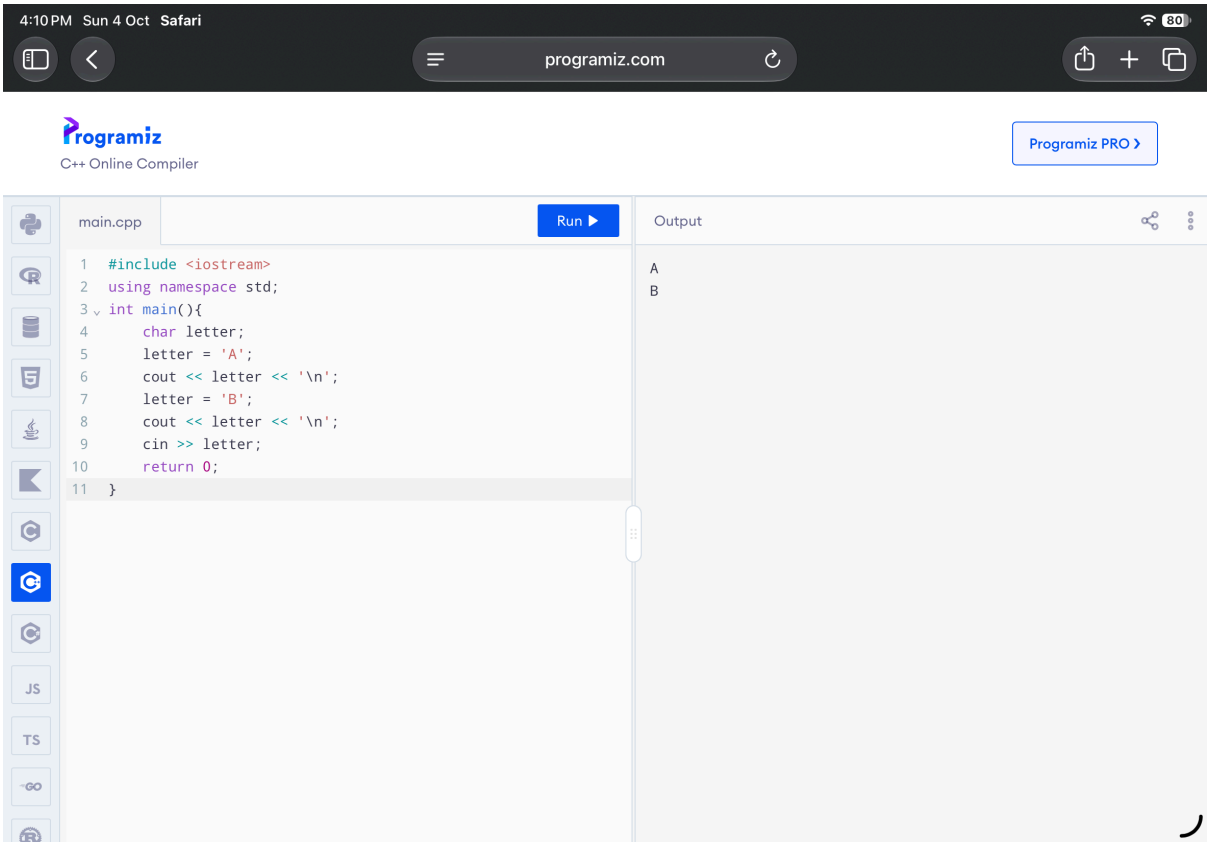
```cpp
#include <iostream>
using namespace std;
int main(){
    int num1, num2;
    cout << "Enter first number:";
    cin >> num1;
    cout << "Enter second number:";
    cin >> num2;
    cout << "Addition:" << num1 + num2 << endl;
    cout << "Subtraction:" << num1 - num2 << endl;
    cout << "Multiplication:" << num1 * num2 << endl;
    cout << "Division:" << num1 / num2 << endl;
    return 0;
}
```

```
Enter first
Enter secon
Addition:30
Subtraction
Multiplicat
Division:2
```




Output
Crop
Enter first number:20
Enter second number:10
Addition:30
Subtraction:10
Multiplication:200
Division:2

Task 3 :

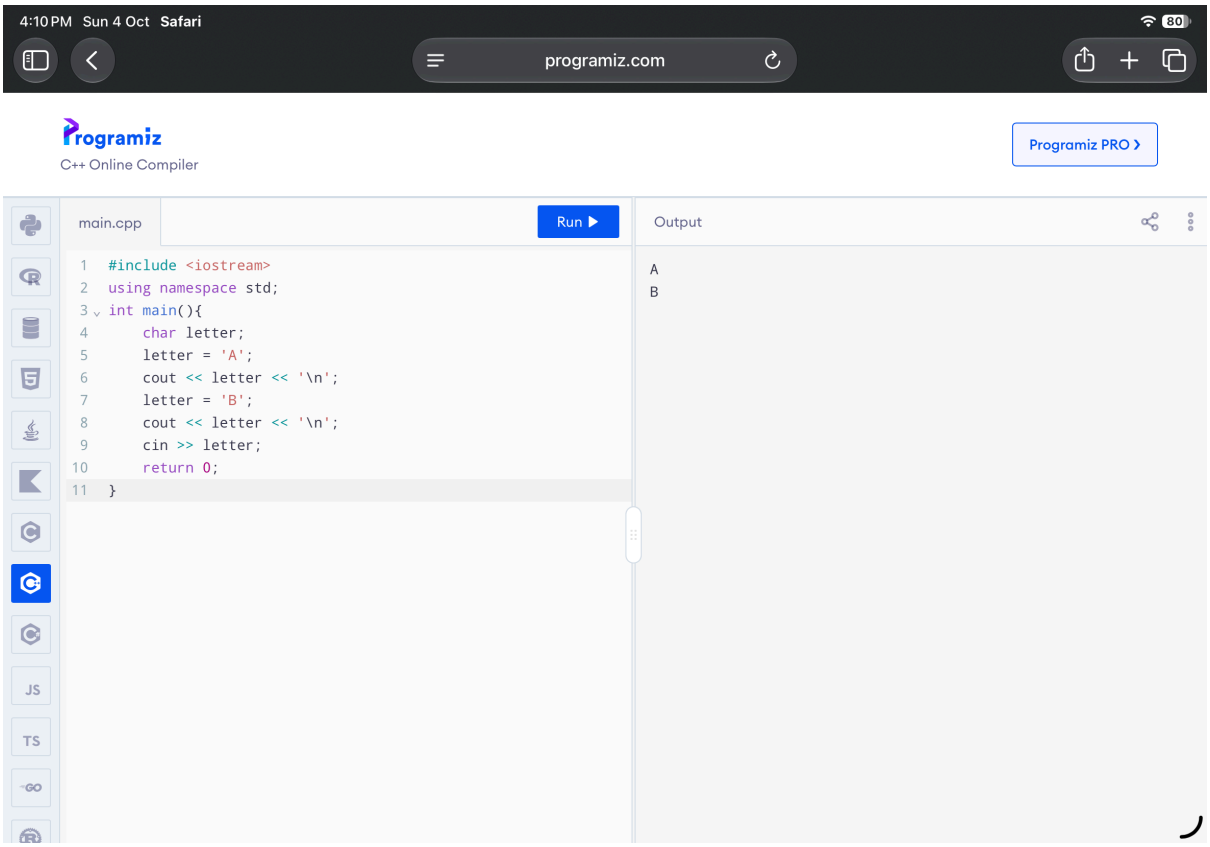

4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B

Task 3

```
#include <iostream>
using namespace std;
int main() {
  int val1;
  int val2;
  int val3;
cout << "Please enter your 3 numbers : ";
cin >> val1 >> val2 >> val3;
cout << val1 << "\n" << val2 << "\n" << val3 << "\n";
 system ("PAUSE");
 return 0;
 }
```

Output

```
Please enter your 3 numbers : 10 20 30
10
20
30
30
20
10
```

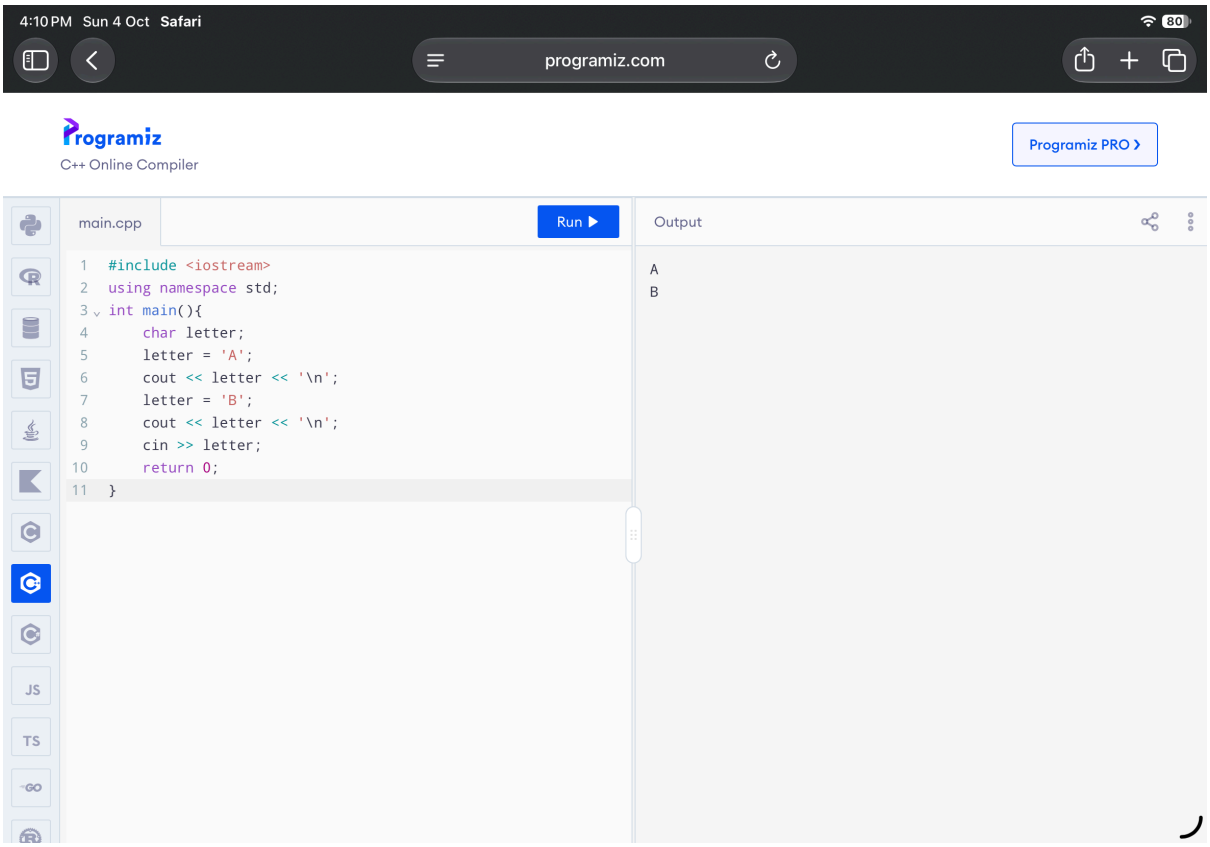


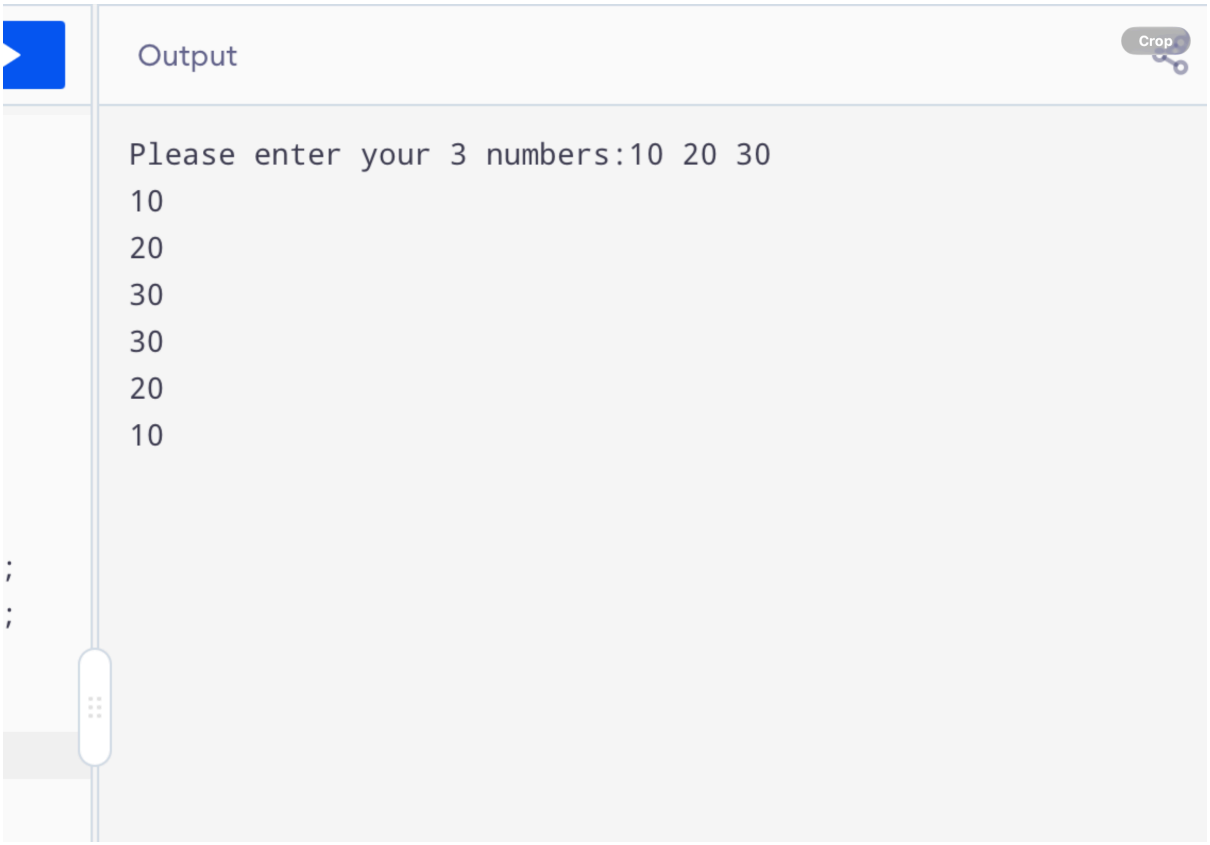
main.cpp

Run ▶ Crop

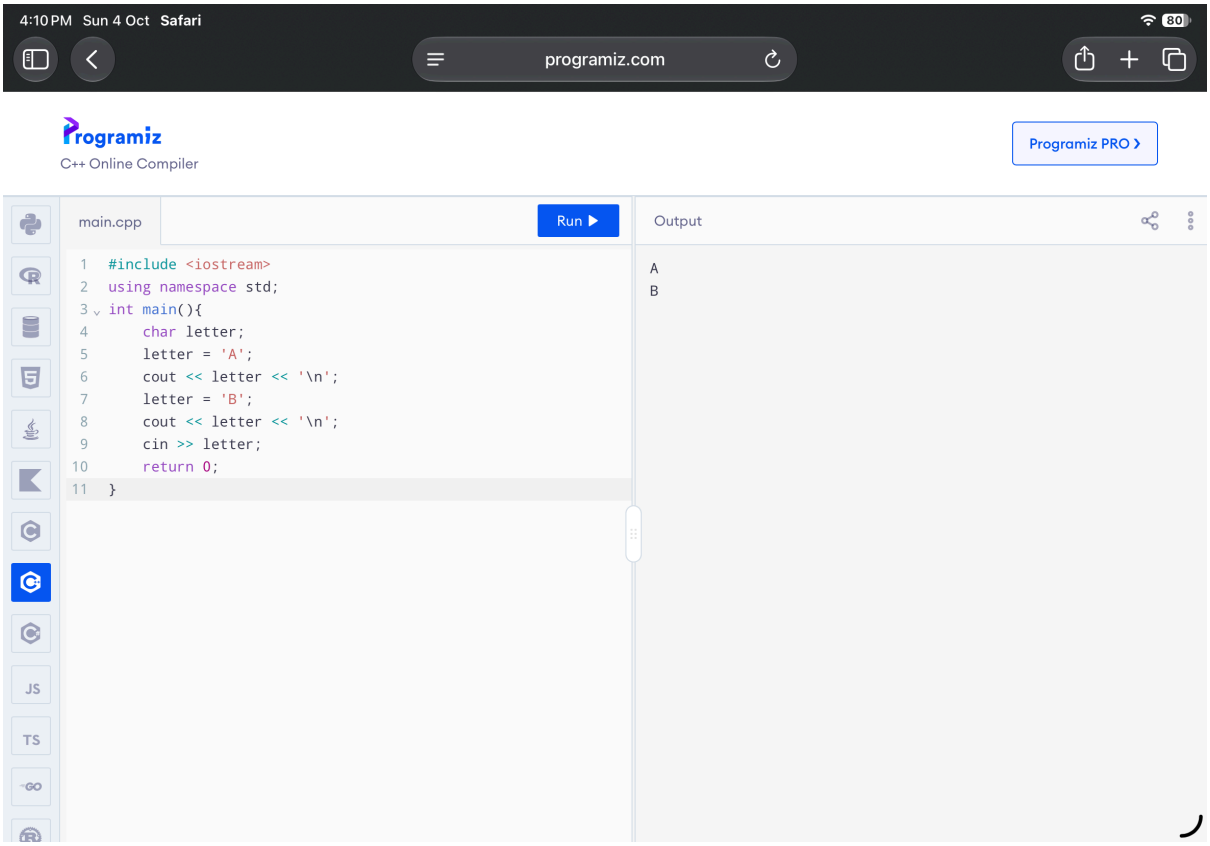
```cpp

#include <iostream>
using namespace std;
int main(){
    int val1;
    int val2;
    int val3;
    cout << "Please enter your 3 numbers:";
    cin >> val1 >> val2 >> val3;
    cout << val1 << "\n" << val2 << "\n" << val3 << "\n";
    cout << val3 << "\n" << val2 << "\n" << val1 << "\n";
    system("PAUSE");
    return 0;
}
```



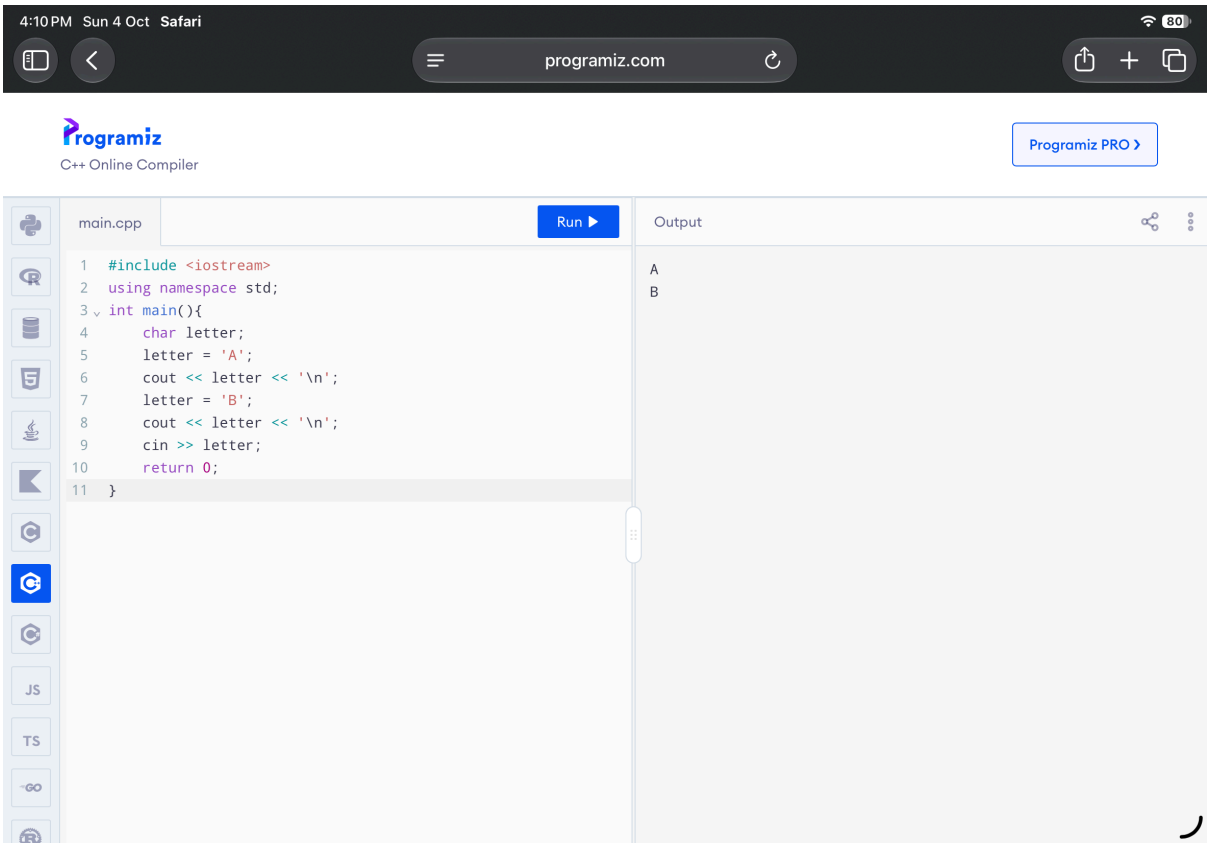

Output
Crop
Please enter your 3 numbers:10 20 30
10
20
30
30
20
10

Task 4 :


4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B

Task 4

```
#include <iostream>
#include <cmath>
using namespace std;
int main(){
double x1, y1, x2, y2, distance;
cout << "Enter x1 and y1 : ";
cin >> x1 >> y1;
cout << "Enter x2 and y2 : ";
cin >> x2 >> y2;
distance = sqr(pow(x2-x1,2) + pow(y2-y1,2));
cout << "Distance between points : "<< distance << endl;
return 0;
}
```



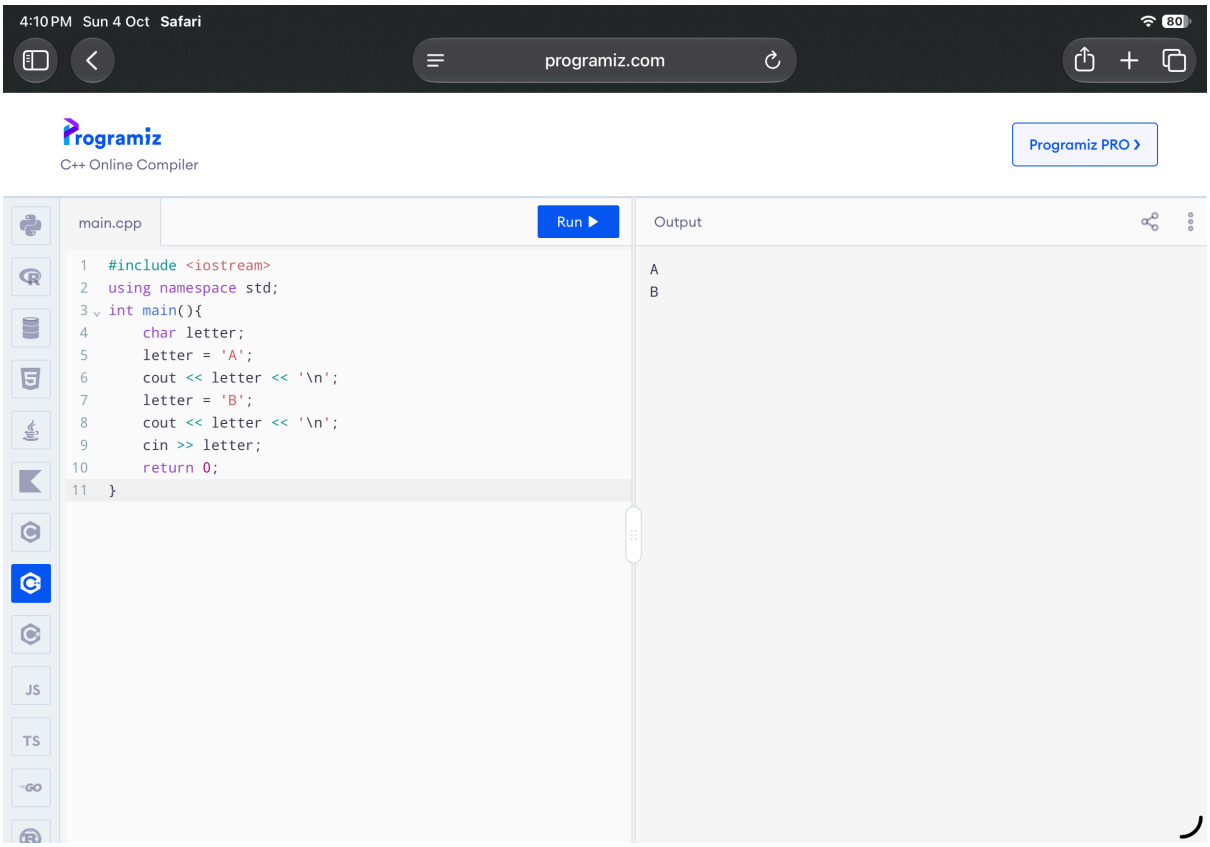
main.cpp

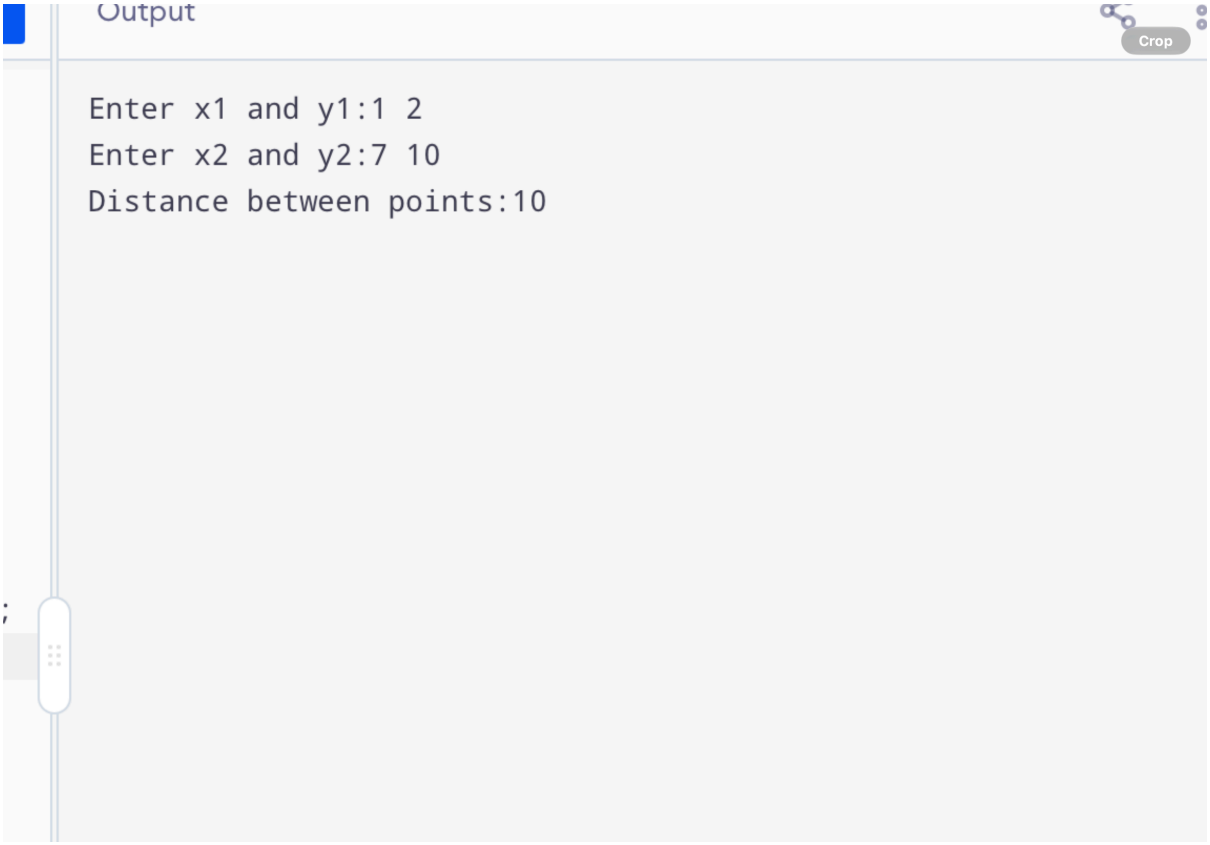
Run ▶

```cpp

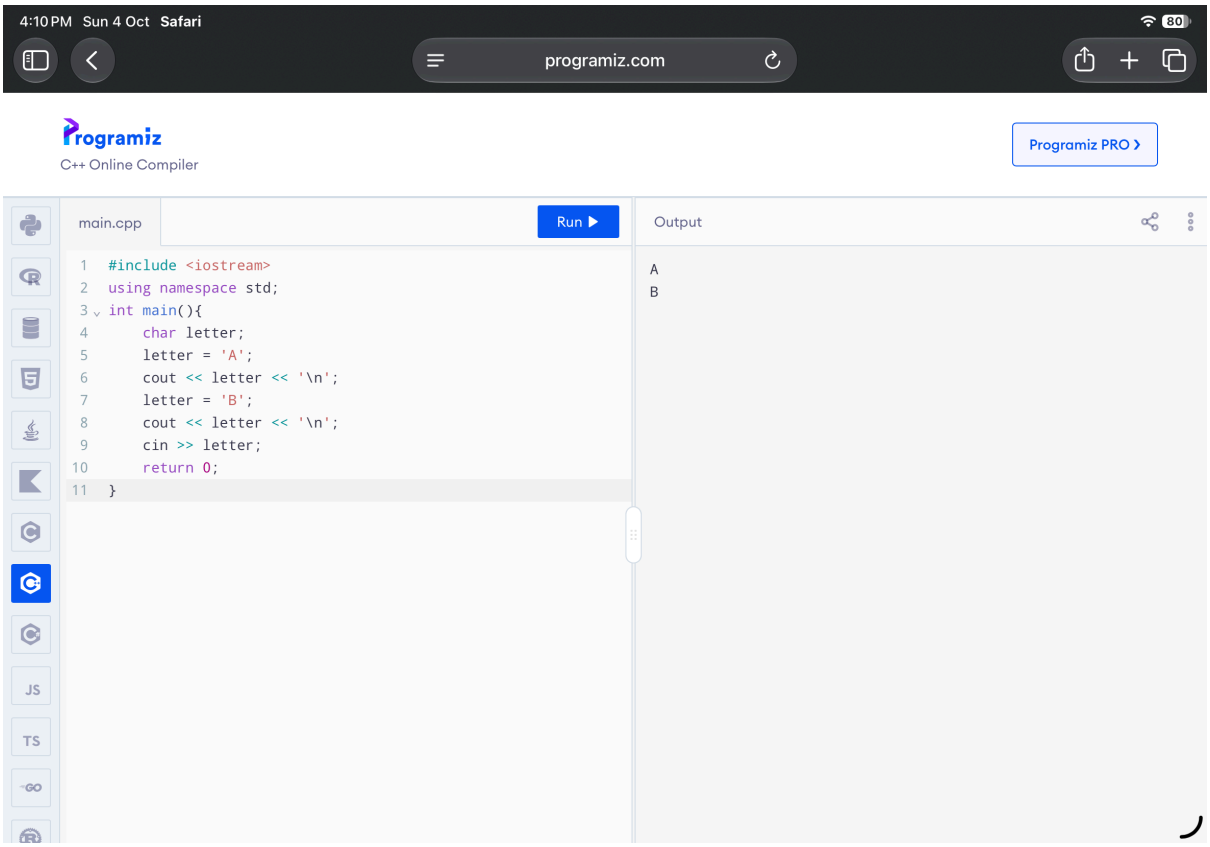
#include <iostream>
#include <cmath>
using namespace std;
int main(){
    double x1, y1, x2, y2, distance;
    cout << "Enter x1 and y1:";
    cin >> x1 >> y1;
    cout << "Enter x2 and y2:";
    cin >> x2 >> y2;
    distance = sqrt(pow(x2 - x1,2) + pow(y2 - y1,2));
    cout << "Distance between points:" << distance << endl;
    return 0;
}

```





Output
Crop
Enter x1 and y1:1 2
Enter x2 and y2:7 10
Distance between points:10

Task 5 :


4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B

Task 5

```
#include <iostream>
using namespace std;
int main () {
const double PI = 3.14159;
double radius;
cout << "Enter radius of Circle : ";
cin >> radius;
cout << "Area of Circle : "<< PI * radius * radius<<endl;
double length , width;
cout << "\n Enter length and width of rectangle : ";
cin >> length >> width ;
cout <<"Area of Rectangle : "<< length * width << endl;
double base , height;
cout << " \n Enter base and height of triangle : ";
cin >> base >> height ;
cout << "Area of Triangle : " << base * height * 0.5 << endl;
return 0;
}
```



Programiz
C++ Online Compiler

Programiz PRO >

main.cpp | Run ▶ | Output

```
1  #include <iostream>
2  using namespace std;
3  int main(){
4      char letter;
5      letter = 'A';
6      cout << letter << '\n';
7      letter = 'B';
8      cout << letter << '\n';
9      cin >> letter;
10     return 0;
11 }
```

```
A
B
```

main.cpp

Run ▶

Output

```cpp
#include <iostream>
using namespace std;
int main(){
    const double PI = 3.14159;
    double radius;
    cout << "Enter radius of circle:";
    cin >> radius;
    cout << "Area of circle: " << PI * radius * radius << endl;
    double length, width;
    cout << "\nEnter length and width of rectangle: ";
    cin >> length >> width;
    cout << "Area of Rextangle: " << length * width << endl;
    double base, height;
    cout << "\nEnter base and height of triangle: ";
    cin >> base >> height;
    cout << "Area of Triangle: " << base * height * 0.5 << endl;
    return 0;

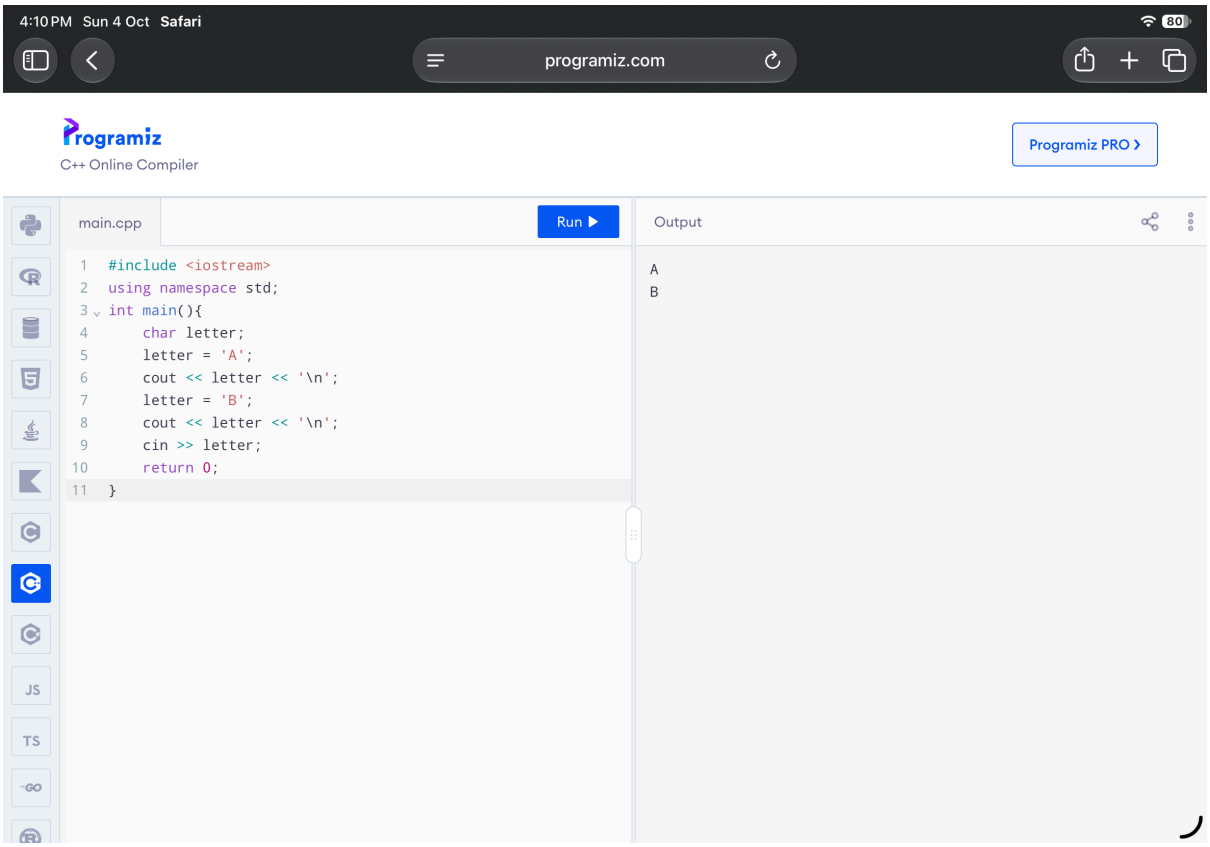
}

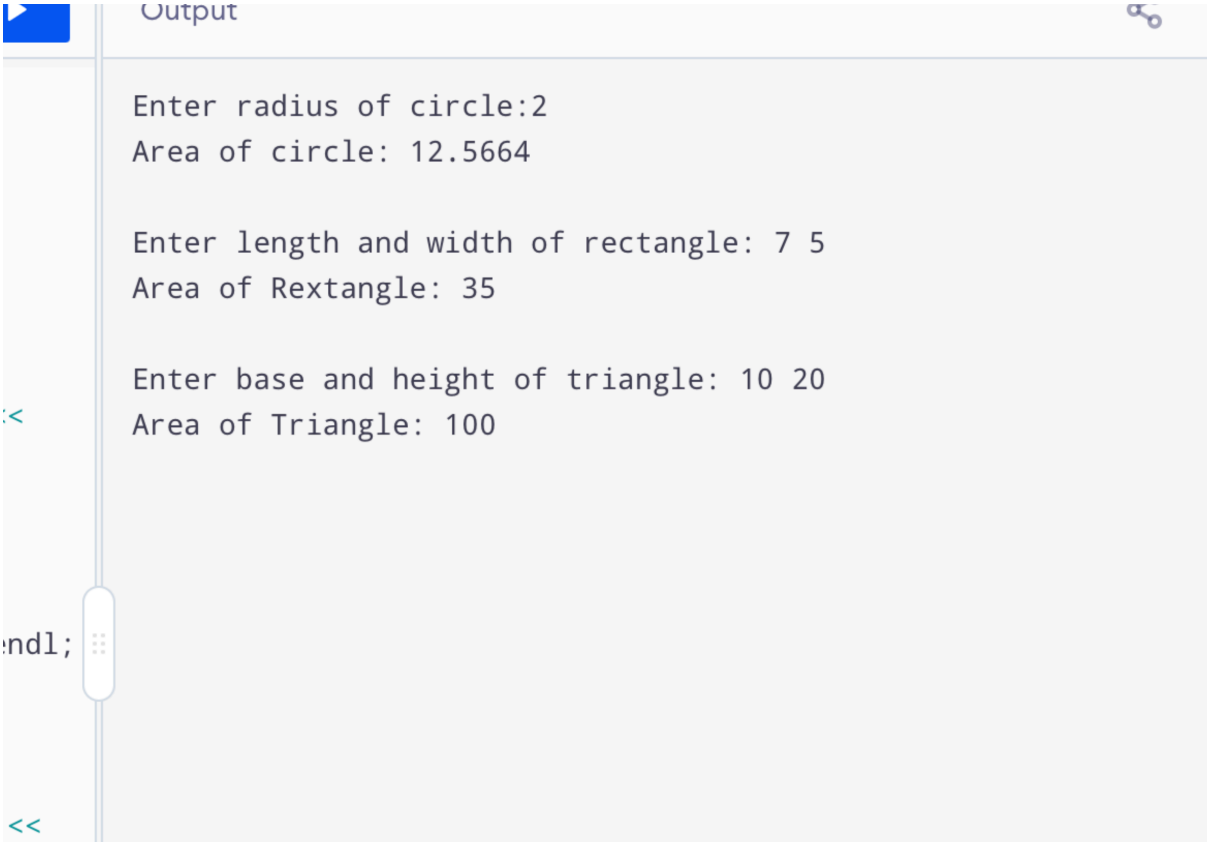
```

```
Enter radius of circ
Area of circle: 12.5

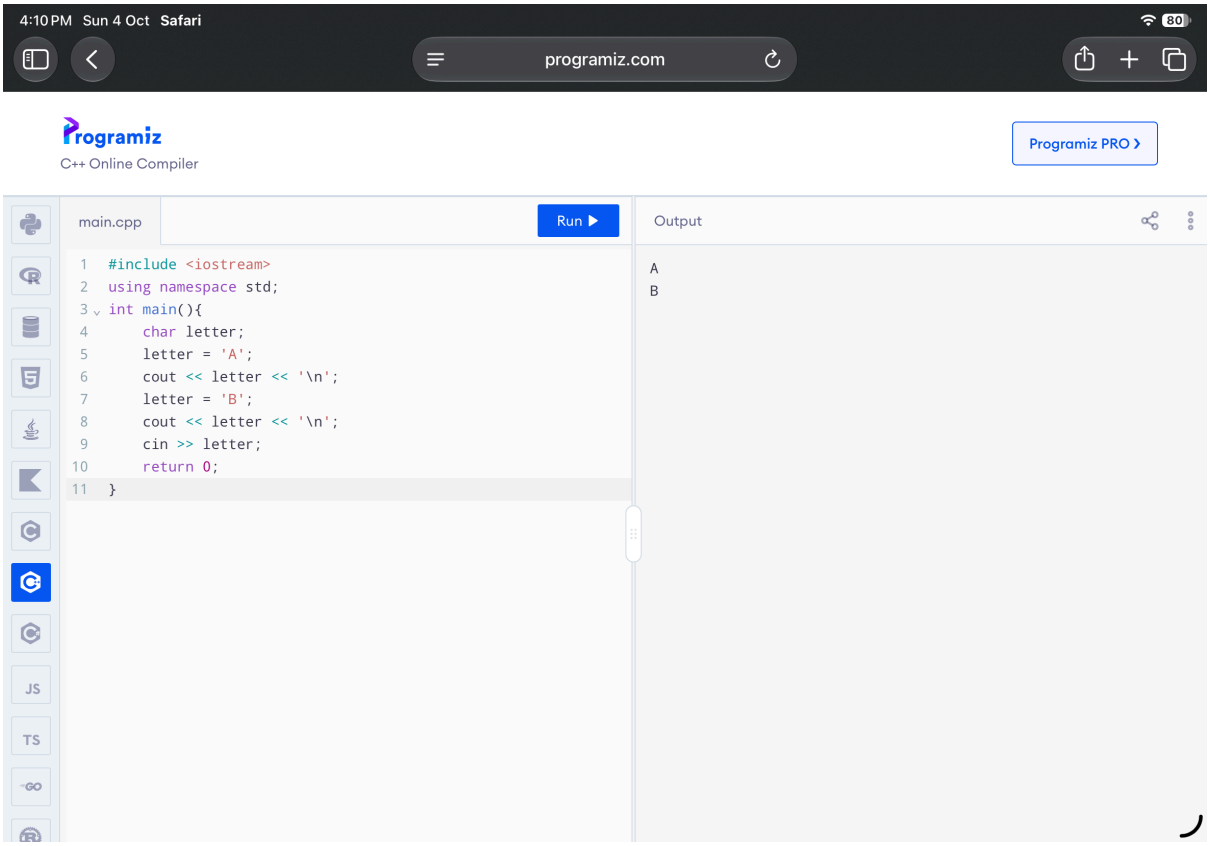
Enter length and wid
Area of Rextangle: 3

Enter base and heigh
Area of Triangle: 10
```




Output
Enter radius of circle:2
Area of circle: 12.5664
Enter length and width of rectangle: 7 5
Area of Rextangle: 35
Enter base and height of triangle: 10 20
Area of Triangle: 100

Task 6 :


4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B

Task 6

```
#include <iostream>
using namespace std;
int main () {
    double item1 = 12.95;
    double item2 = 24.95;
    double item3 = 6.95;
    double item4 = 14.95;
    double item5 = 3.95;
    double subtotal = item1 + item2 + item3 + item4 + item5;
    double salesTax = subtotal * 0.06;
    double total = subtotal + salesTax;
    cout << "Item 1 Price : $" << item1 << endl;
    cout << "Item 2 Price : $" << item2 << endl;
    cout << "Item 3 Price : $" << item3 << endl;
    cout << "Item 4 Price : $" << item4 << endl;
    cout << "Item 5 Price : $" << item5 << endl;
    cout << "subtotal : $" << subtotal << endl;
    cout << "Sales Tax : $" << salesTax << endl;
    cout << "Total : $" << total << endl;
    return 0;
}
```

4:10 PM Sun 4 Oct Safari 80

programiz.com

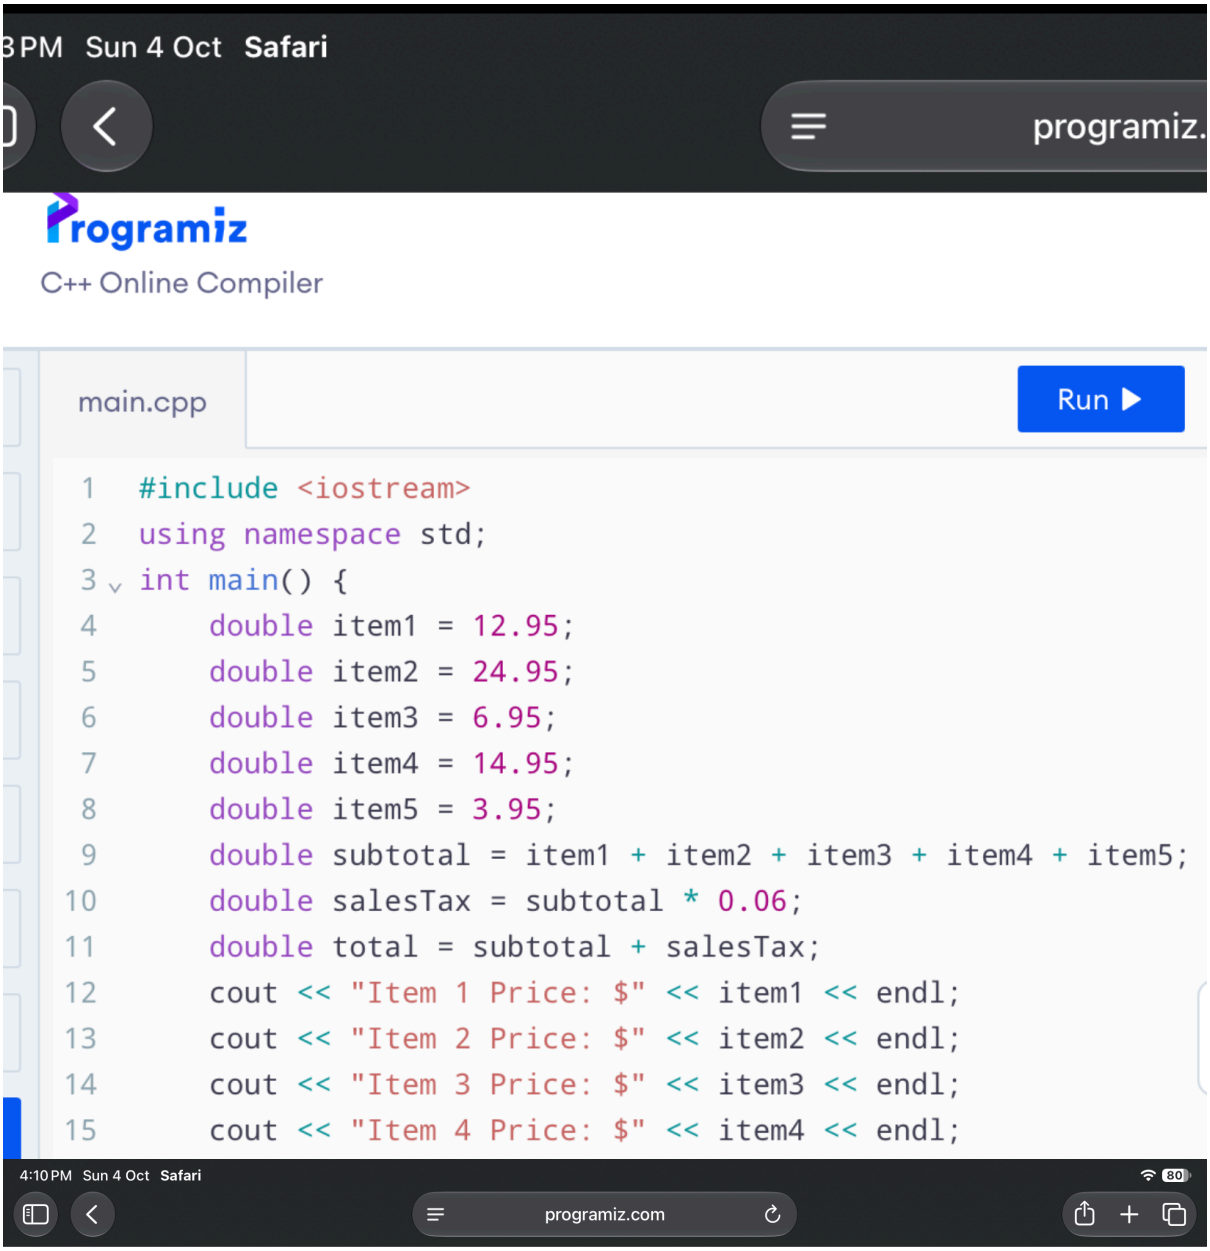
Programiz
C++ Online Compiler

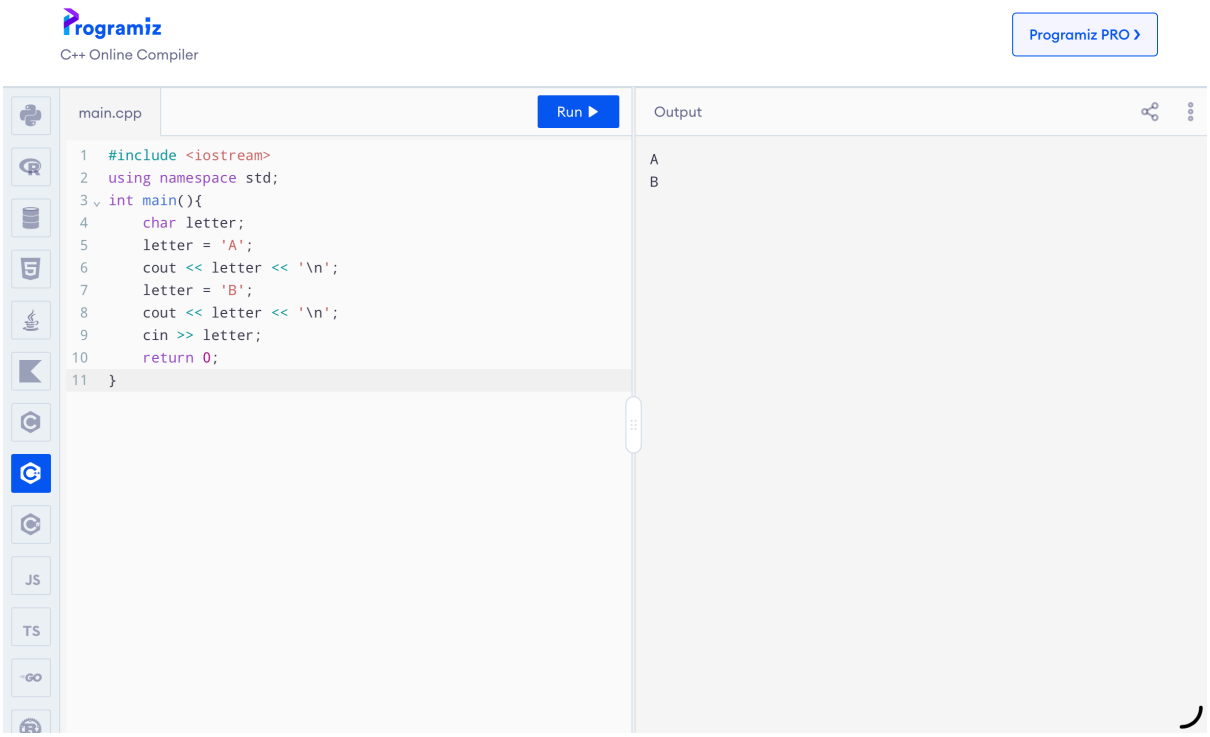
Programiz PRO >

main.cpp | Run ▶ | Output

```
#include <iostream>
using namespace std;
int main(){
    char letter;
    letter = 'A';
    cout << letter << '\n';
    letter = 'B';
    cout << letter << '\n';
    cin >> letter;
    return 0;
}
```

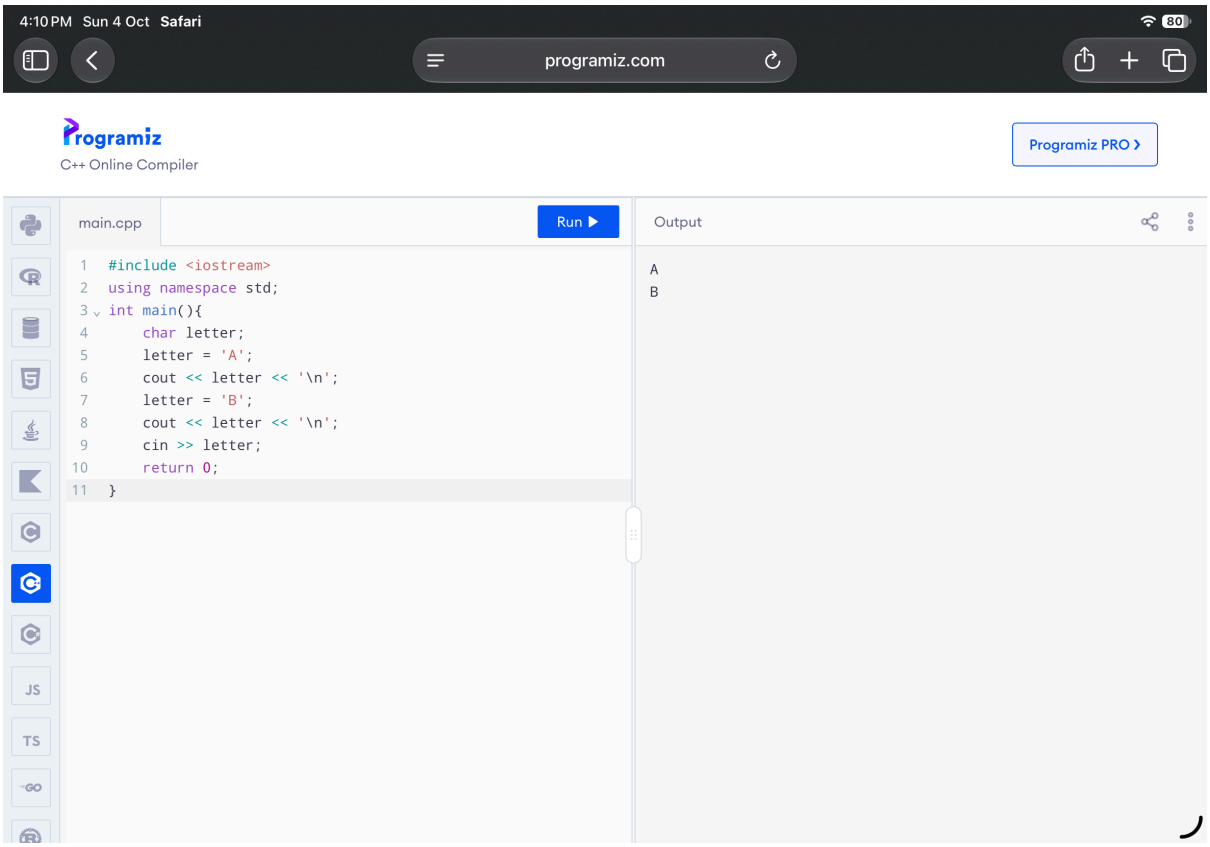
```
A
B
```


3 PM Sun 4 Oct Safari
programiz.
Programiz
C++ Online Compiler
main.cpp
Run
#include <iostream>
using namespace std;
int main() {
double item1 = 12.95;
double item2 = 24.95;
double item3 = 6.95;
double item4 = 14.95;
double item5 = 3.95;
double subtotal = item1 + item2 + item3 + item4 + item5;
double salesTax = subtotal * 0.06;
double total = subtotal + salesTax;
cout << "Item 1 Price: $" << item1 << endl;
cout << "Item 2 Price: $" << item2 << endl;
cout << "Item 3 Price: $" << item3 << endl;
cout << "Item 4 Price: $" << item4 << endl;
4:10 PM Sun 4 Oct Safari
programiz.com


Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B


Crop
Output
Item 1 Price: $12.95
Item 2 Price: $24.95
Item 3 Price: $6.95
Item 4 Price: $14.95
Item 5 Price: $3.95
Subtotal: $63.75
Sales Tax: $3.825
Total: $67.575
item5;

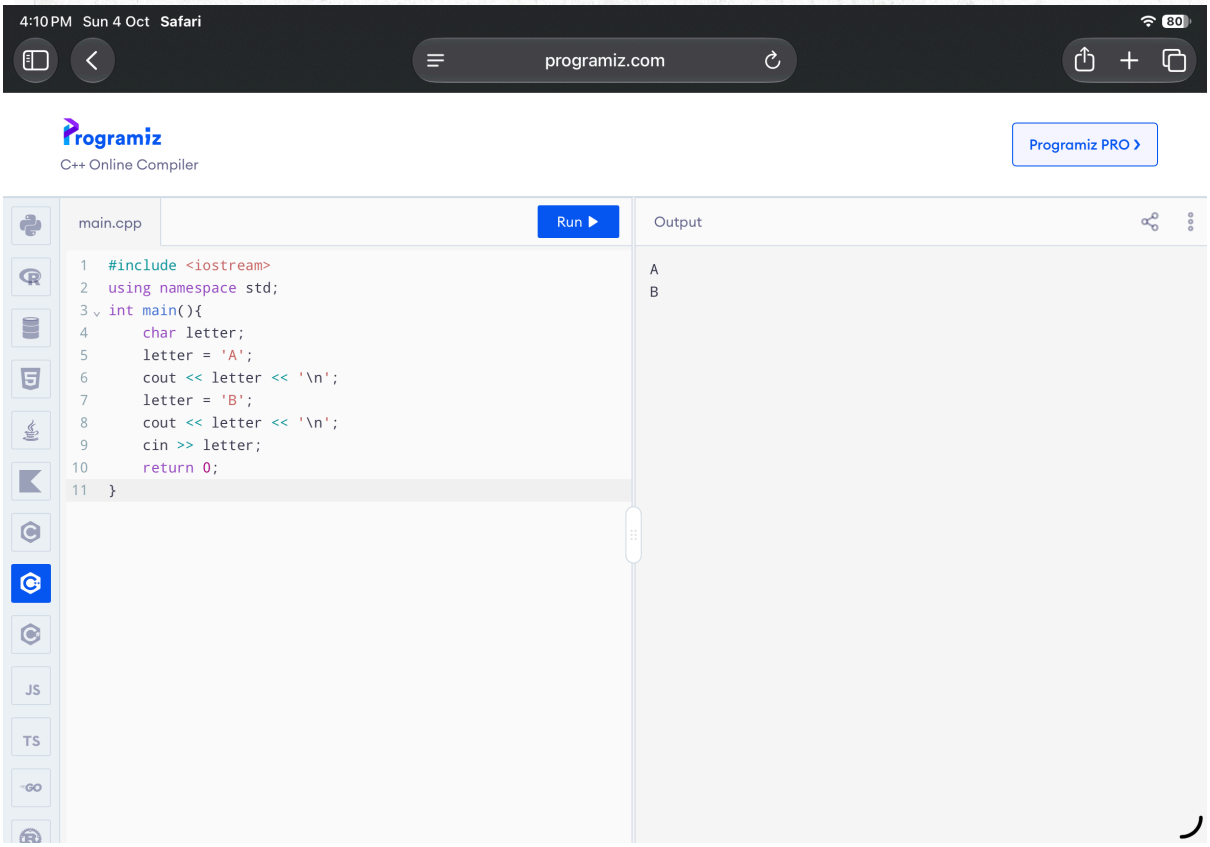
Bonus Task :


4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B

Bonus Task

Break Number

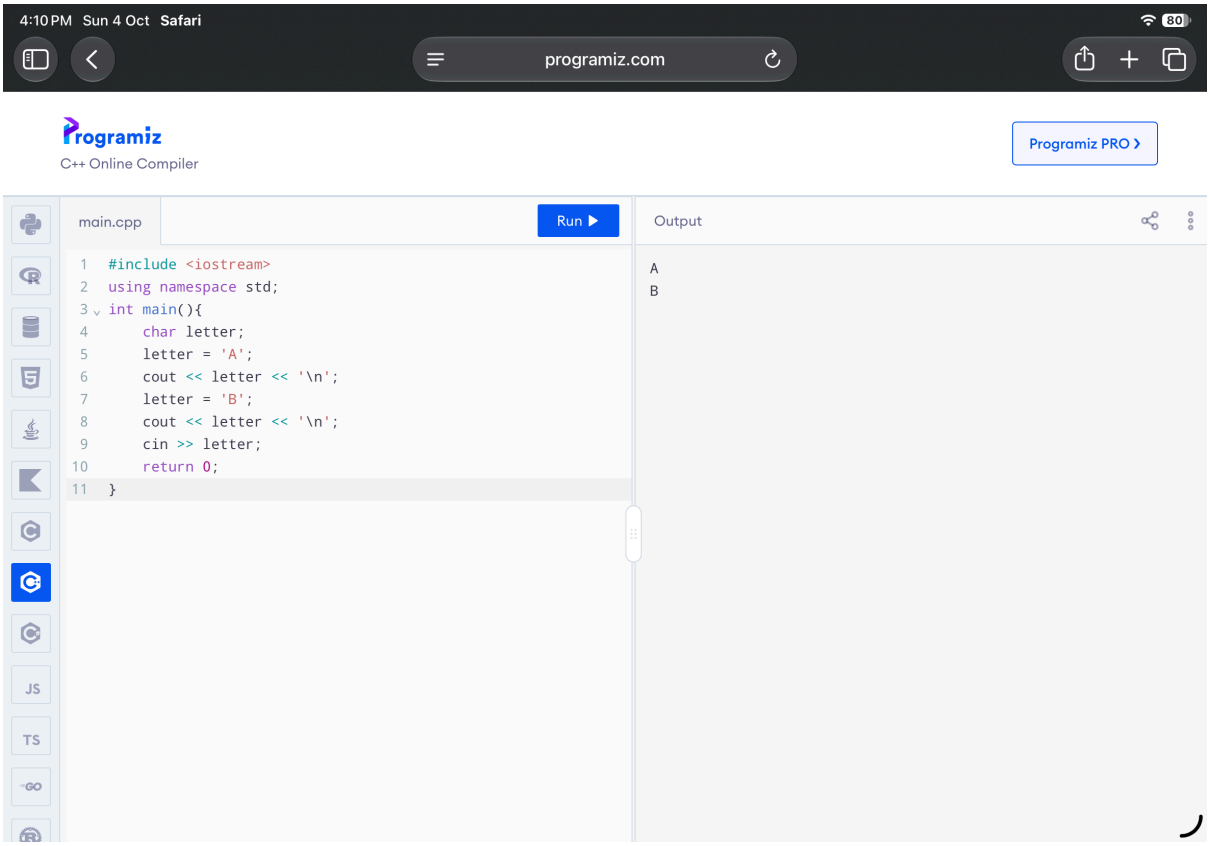
```
#include <iostream>
using namespace std;
int main(){
  int num;
  cout << "Enter a 5 digit integer: ";
  cin >> num;
  int d1 = num/10000;
  int d2 = (num/1000)%10;
  int d3 = (num/100)%10;
  int d4 = (num/10)%10;
  int d5 = num%10;
  cout << d1 << " " << d2 << " " << d3 << " " <<
   d4 << " " << d5 << endl;
  return 0;
}
```

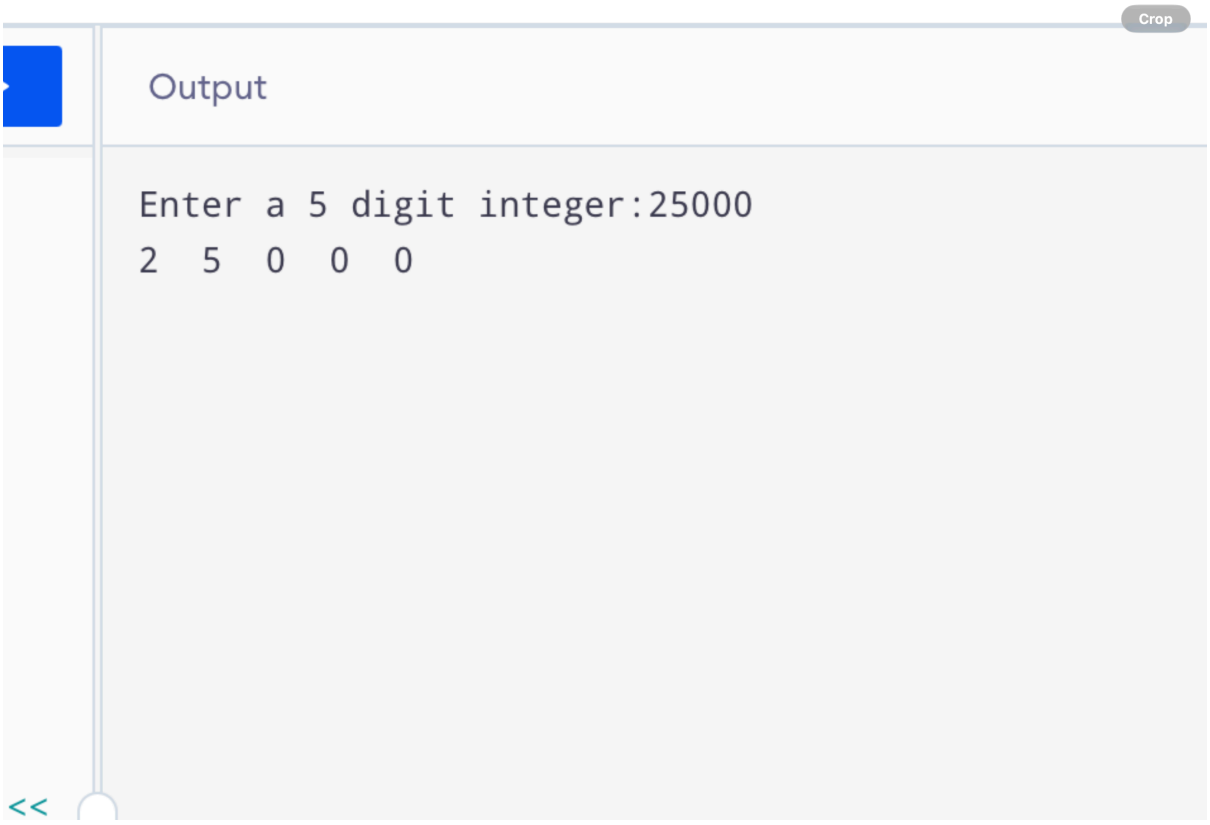


main.cpp

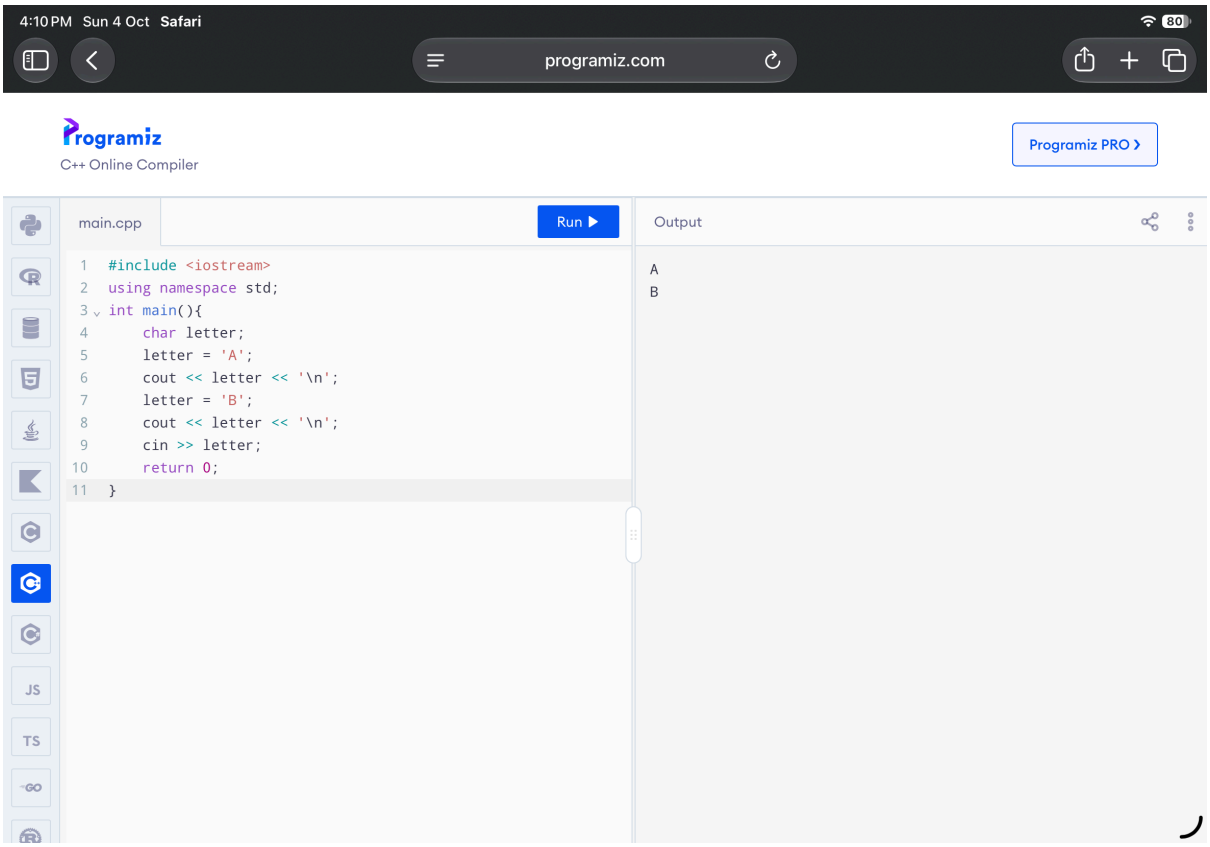
Run

```cpp
#include <iostream>
using namespace std;
int main() {
    int num;
    cout << "Enter a 5 digit integer:";
    cin >> num;
    int d1 = num / 10000;
    int d2 = (num / 1000) % 10;
    int d3 = (num / 100) % 10;
    int d4 = (num / 10) % 10;
    int d5 = num % 10;
    cout << d1 << "  " << d2 << "  " << d3 << "  " << d4 << "  " << d5 << endl;
    return 0;
}
```





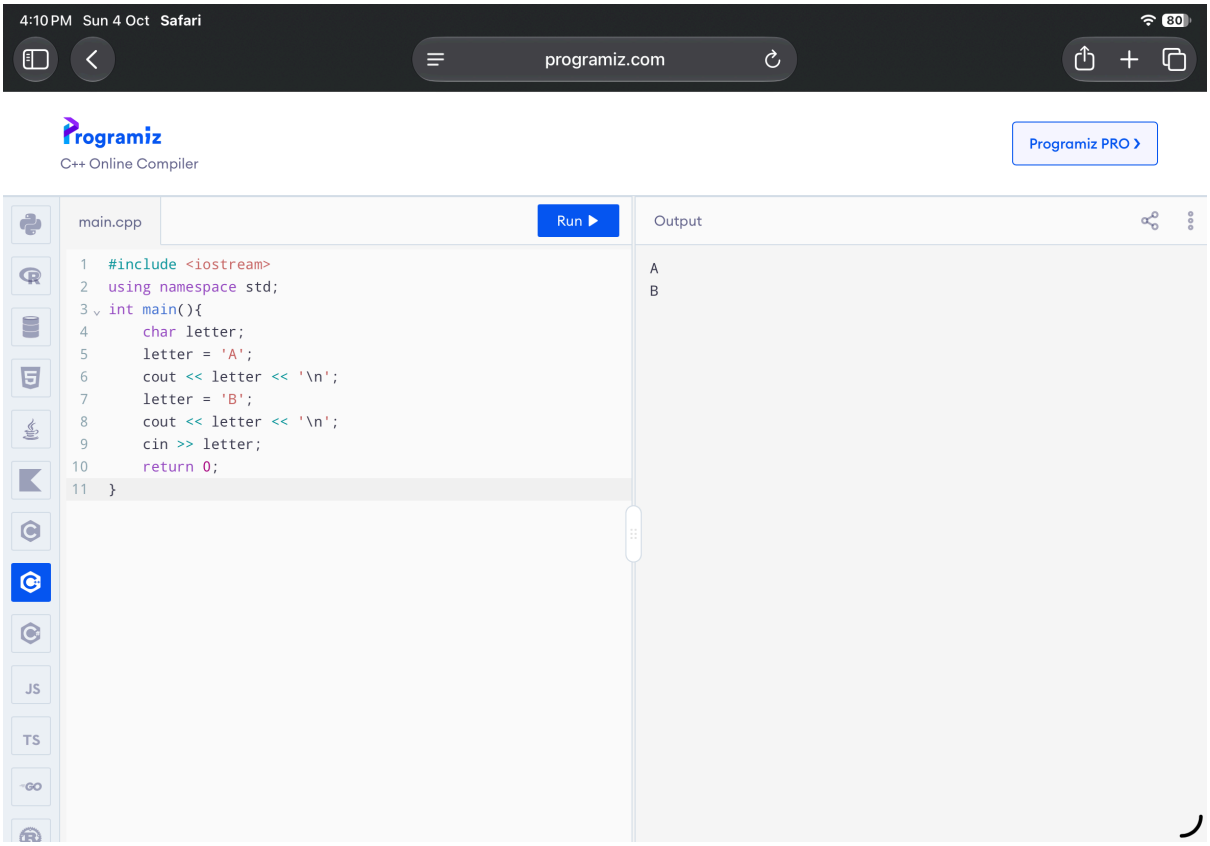
Home Task :
Task 1 :



Home Task

Task 1

```
#include <iostream>
using namespace std;
int main(){
    int var1 = 10, var2 = 20, temp;
    cout << "Before swap: var1= " << var1 << ", var2 = "
    << var2 << endl;
    temp = var1;
    var1 = var2;
    var2 = temp;
    cout << "After swap: var1 = " << var1 << ", var2 = "
    << var2 << endl;
    return 0;
}
```

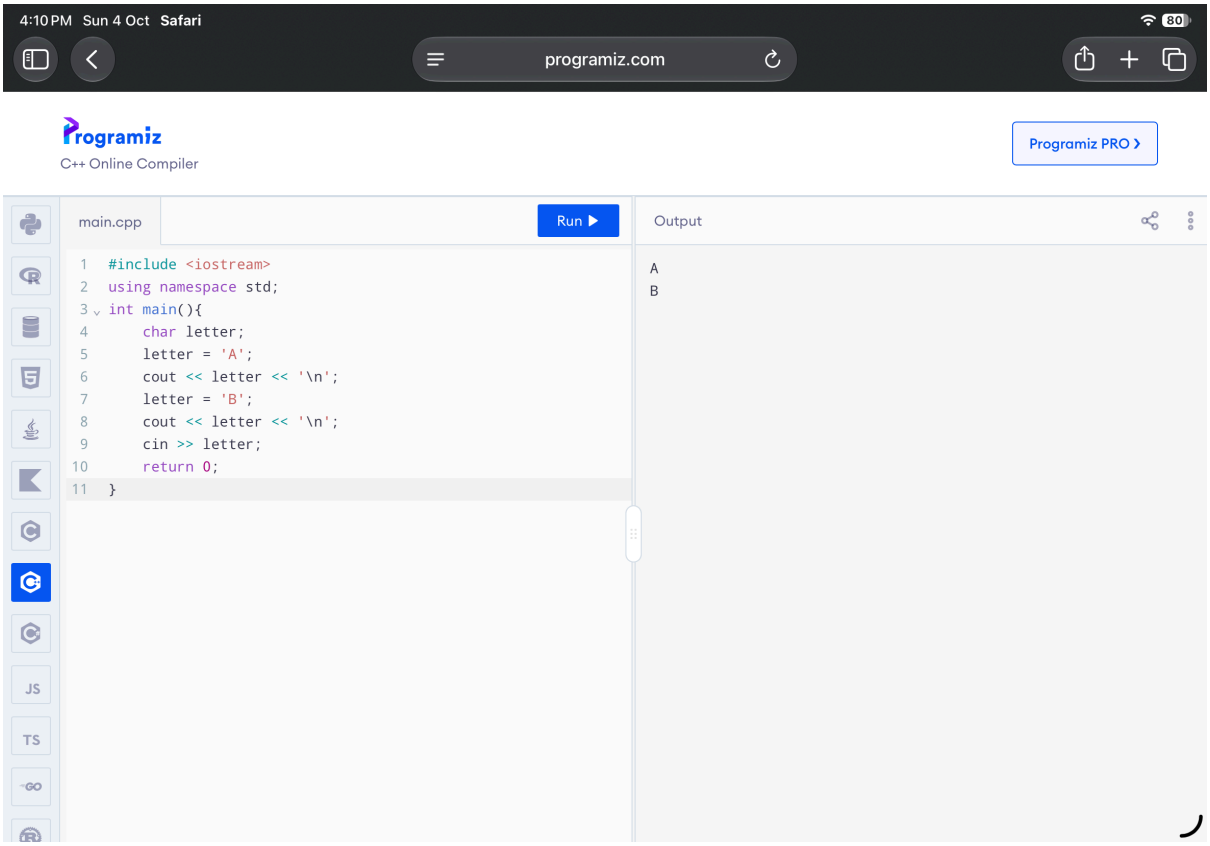


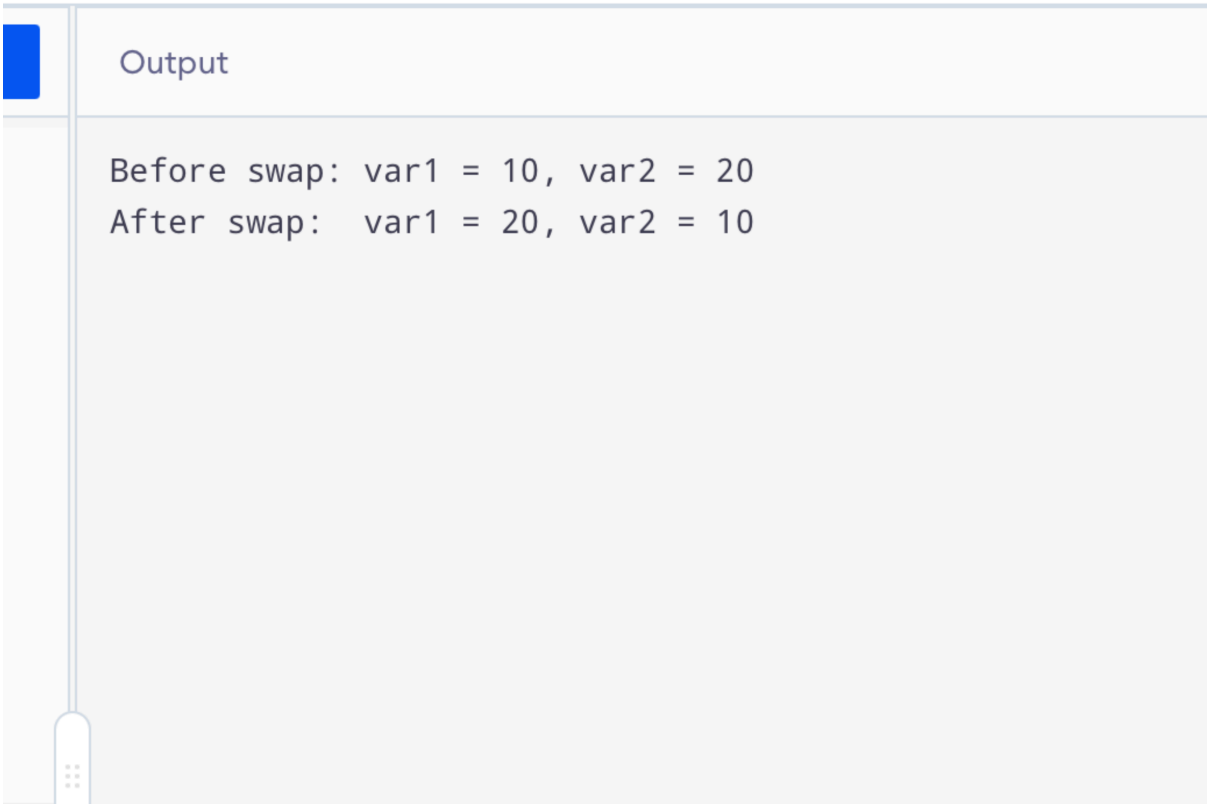
C++ Online Compiler

main.cpp

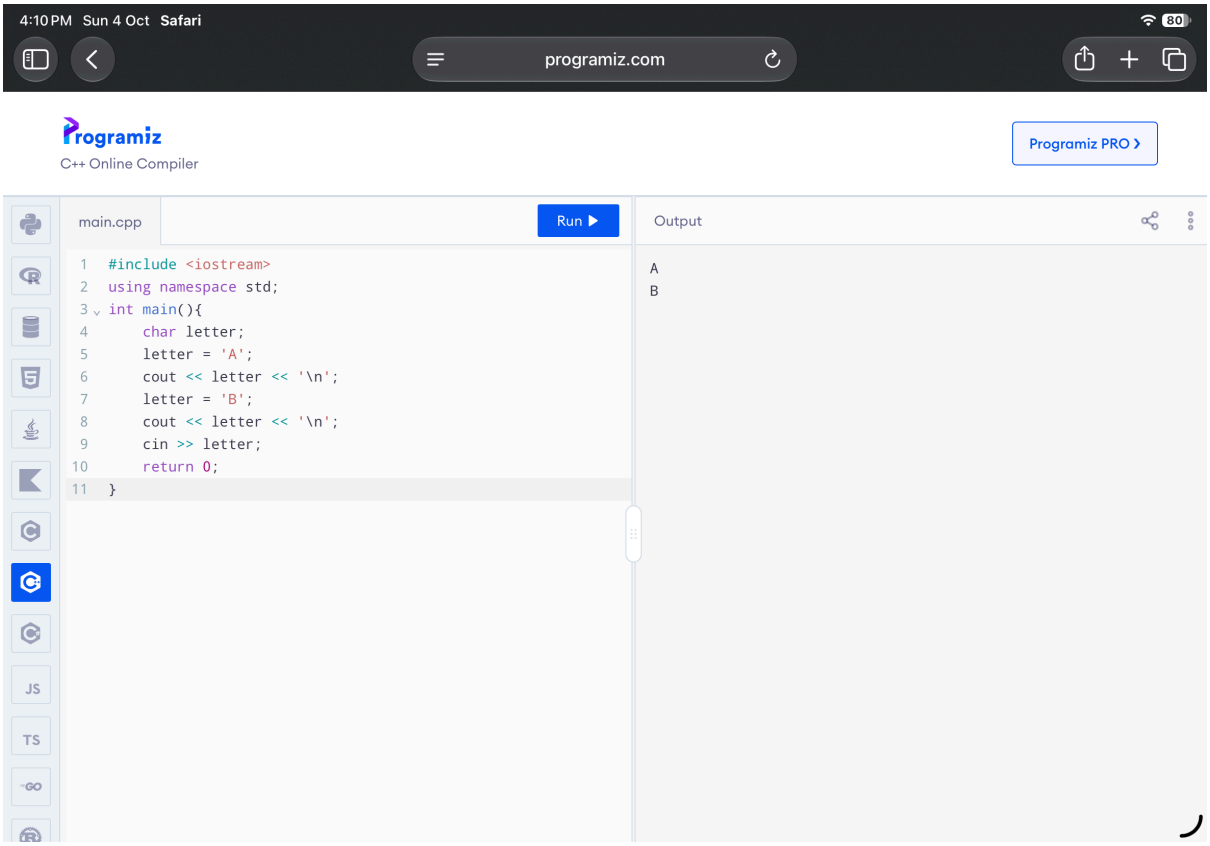
Run ▶

```cpp
#include <iostream>
using namespace std;
int main() {
    int var1 = 10, var2 = 20, temp;
    cout << "Before swap: var1 = " << var1 << ", var2 = "
<< var2 << endl;
    temp = var1;
    var1 = var2;
    var2 = temp;
    cout << "After swap:  var1 = " << var1 << ", var2 = "
<< var2 << endl;
    return 0;
}
```



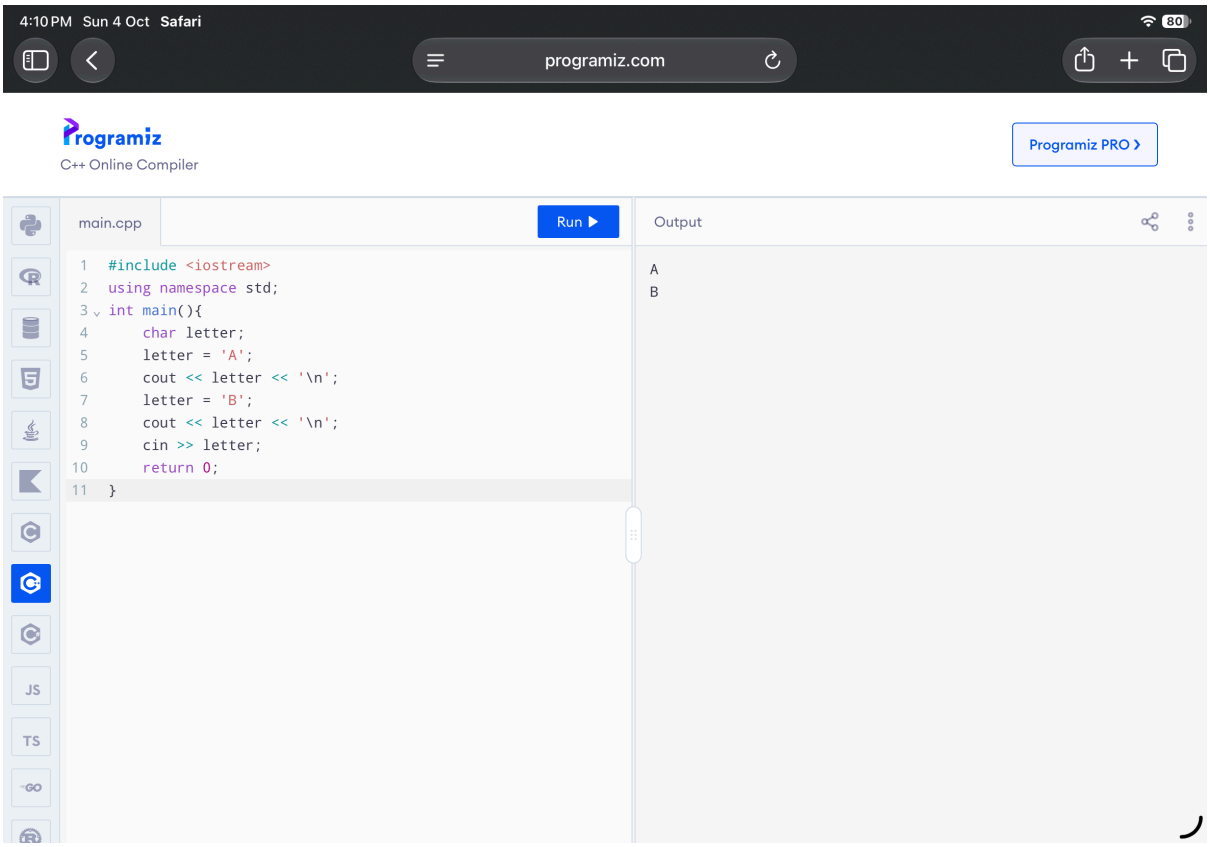

Output
Before swap: var1 = 10, var2 = 20
After swap: var1 = 20, var2 = 10

Task 2 :


4:10 PM Sun 4 Oct Safari
programiz.com
Programiz
C++ Online Compiler
Programiz PRO
main.cpp
Run
Output
#include <iostream>
using namespace std;
int main(){
char letter;
letter = 'A';
cout << letter << '\n';
letter = 'B';
cout << letter << '\n';
cin >> letter;
return 0;
}
A
B

Task 2

```
#include <iostream>
using namespace std;
int main () {
    char lowerChar, upperChar;
cout << " Enter a lowercase Alphabet (a-z): ";
cin >> lowerChar;
upperChar = lowerChar - 32;
cout << " Uppercase alphabet : " << upperChar <<endl;
return 0;
}
```



Programiz

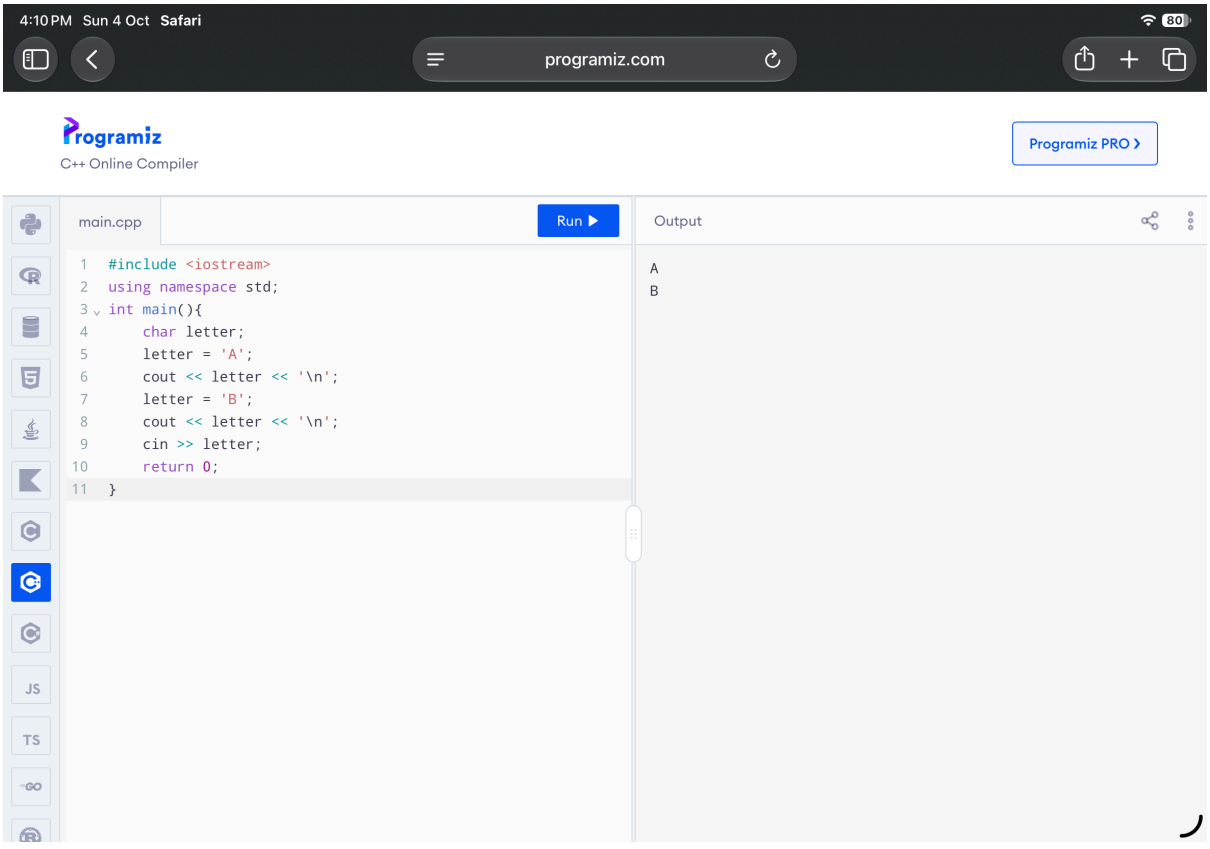
C++ Online Compiler

Crop

main.cpp

Run ▶

```cpp
#include <iostream>
using namespace std;
int main() {
    char lowerChar, upperChar;
    cout << "Enter a lowercase alphabet (a-z): ";
    cin >> lowerChar;
    upperChar = lowerChar - 32;
    cout << "Uppercase alphabet: " << upperChar << endl;
    return 0;
}
```



Crop

Output

```
Enter a lowercase alphabet (a-z): a
Uppercase alphabet: A
```

