
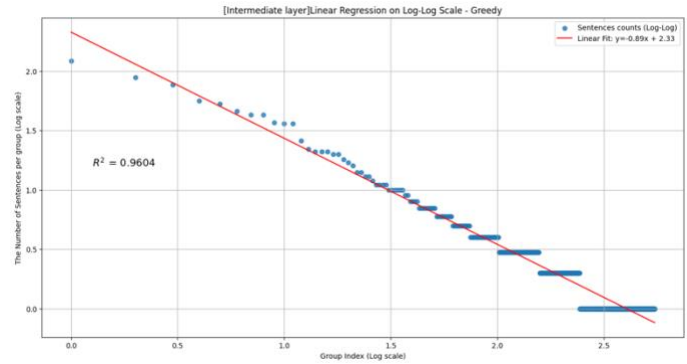


All experiments were conducted under the same conditions, with the only difference being the dataset.



- **Model:** BERT to extract sentence embedding representations
- **Grouping Algorithm:** Greedy clustering
- **Cosine Similarity Threshold:** 0.9, used to group sentences based on embedding similarity

Dataset: Wikipedia, 2000 sentences

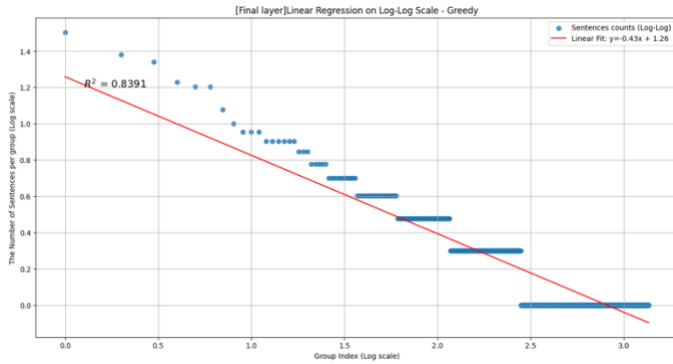



- Slope: -0.43 for the final layer, -0.89 for the intermediate layer

Dataset: Romance Book: *Pride and Prejudice*, 1800 sentences

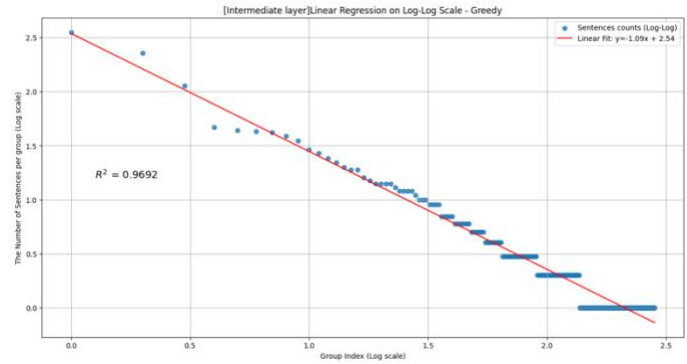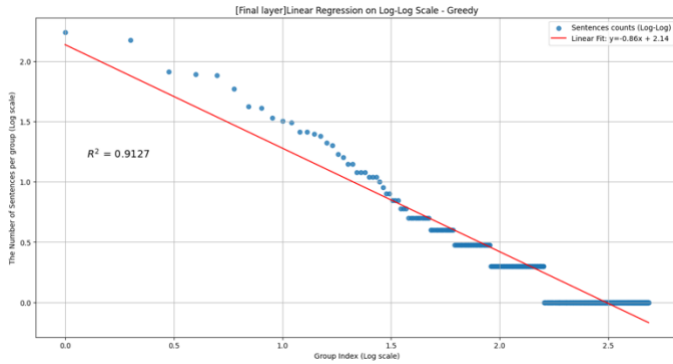

- Slope: -0.86 for the final layer, -1.09 for the intermediate layer

Dataset: Bookcorpus, which contains “love” or “romance.”, 2000 sentences

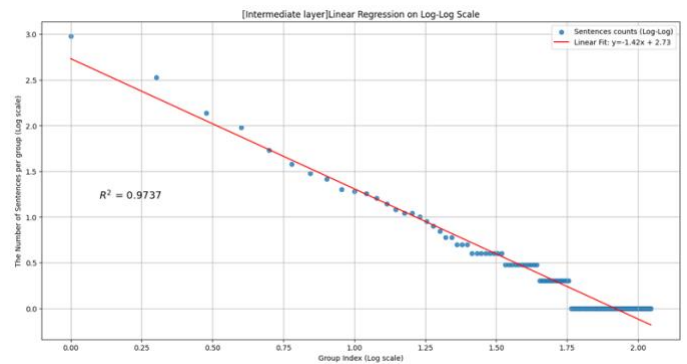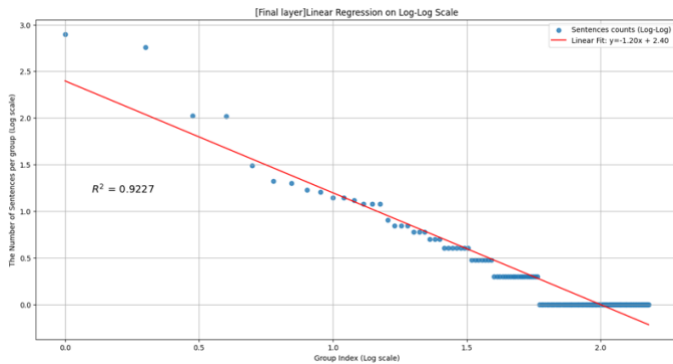

- Slope: -1.20 for the final layer, -1.42 for the intermediate layer

Result: The slope increases as the dataset focuses on more specific topics.