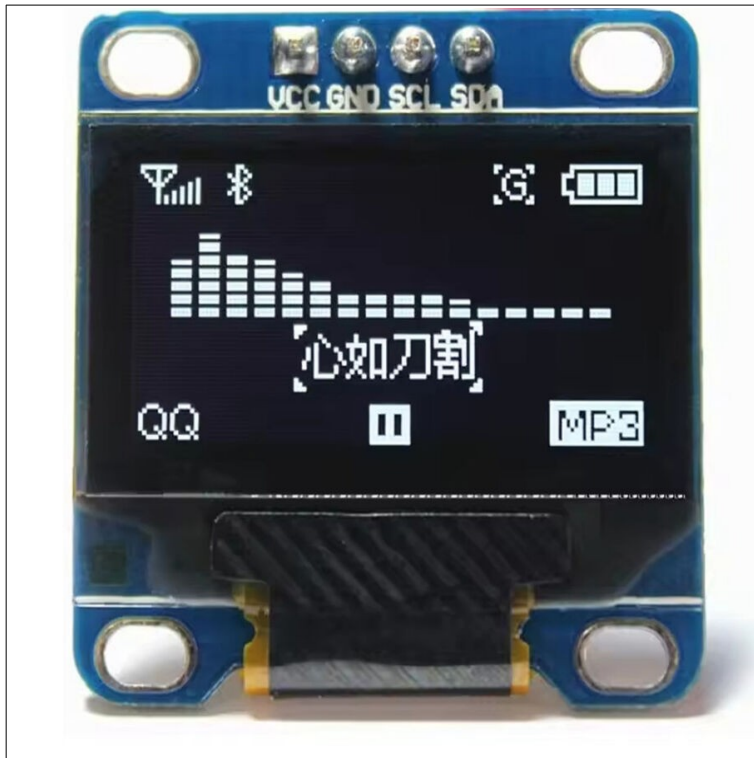


H		G		F		E		D		C		B		A										
DESCRIPTION 0.96-inch SSD1306 I2C OLED Graphic LCD Display Module MANUFACTURER Solomon Systech SPECIFICATION • Display Type: OLED (Organic Light Emitting Diode) • Display Size: 0.96 inch • Resolution: 128 × 64 pixels • Driver IC: SSD1306 • Interface: I2C (4-pin) • Operating Voltage: 3.3V – 5V • Viewing Angle: >160° • Color: White monochrome • Active Area: ~21.7 × 10.8 mm (approx.) • Power Consumption: Low power OLED technology • Operating Temperature: -40°C to +70°C FEATURES • High contrast OLED display (no backlight required) • Wide viewing angle (>160°) • Low power consumption • Compact 0.96" size suitable for embedded systems • Easy I2C communication (only 2 data pins required) • Compatible with Arduino, ESP32, ESP8266, STM32 • Built-in SSD1306 driver IC • Fast response time (no ghosting effect) • Ideal for IoT, sensors, and UI display applications TERMINALS • GND – Ground • VCC – Power supply (3.3V / 5V) • SCL – I2C Clock line • SDA – I2C Data line										SAYFA REV DURUMU						REVIZYONLAR								
										9	8	7	6	5	4	3	2	1	SF	BOLGE	REV	AÇIKLAMALAR	TARİH	ONAY
																		+	REV		+			
4 3 2 1																								
H		G		F		E		D		C		B		A										