Lab 03

Haifa M Albalochi

2 May

Packages

```
library(tidyverse)
library(sf)
```

Data

```
fl_votes <- st_read("data/fl_votes.shp", quiet = TRUE)</pre>
fl_votes %>%
 slice(1:6)
## Simple feature collection with 6 features and 5 fields
## Geometry type: MULTIPOLYGON
## Dimension:
                  XY
## Bounding box:
                  xmin: -85.99989 ymin: 25.95675 xmax: -80.01528 ymax: 30.58427
                  NAD83
  Geodetic CRS:
##
       county rep16
                      dem16
                             rep20
                                    dem20
                                                                 geometry
## 1
      Alachua
               46834
                      75820
                             50972
                                    89704 MULTIPOLYGON (((-82.37389 2...
## 2
               10294
                       2112
                             11911
                                     2037 MULTIPOLYGON (((-82.10107 3...
## 3
          Bay
               62194
                      21797
                             66097
                                    25614 MULTIPOLYGON (((-85.65968 3...
                8913
                       2924
                                     3160 MULTIPOLYGON (((-82.274 29....
## 4 Bradford
                             10334
     Brevard 181848 119679 207883 148549 MULTIPOLYGON (((-80.49977 2...
## 6 Broward 260951 553320 333409 618752 MULTIPOLYGON (((-80.29693 2...
```

Exercise 1


Modify the add-winner code chunk to mutate() a new variable winner20 describing who won each Florida county in the 2020 Presidential election. The function if_else will be helpful. if_else(condition, true, false) assigns true if the first condition is TRUE and assigns false if the first condition is FALSE.

```
fl_votes <- fl_votes %>% mutate(winner20 = if_else(rep20 > dem20, "Donald Trump", "joe Byeden"))
```

Exercise 2

Modify the fl-plot-1 code chunk to create a plot of Florida's 2020 U.S. Presidential election results by county, with counties colored by winner20. Use informative colors with the scale_fill_manual() function. The colors "#DE0100" and "#0015BC" look good for Republicans and Democrats, respectively, but the choice is yours.

The Winner Of Each Country In 2020 Election

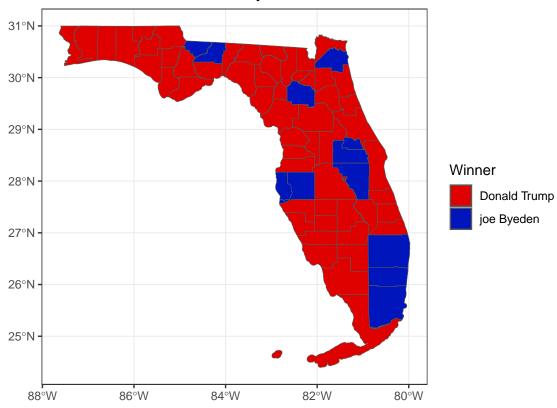

Exercise #3


Create two new variables using mutate() in the fl-props code chunk. prop_rep16 is the Republican share of the two party vote in the 2016 Presidential election and prop_rep20 is the Republican share of the two party vote in the 2020 Presidential election.

```
fl_votes <- fl_votes %>% mutate(prop_rep16 = rep16/(rep16 + dem16))
fl_votes <- fl_votes %>% mutate(prop_rep20 = rep20/(rep20 + dem20))
```

Exercise 4

Modify the fl-plot-2 code chunk to create a plot of the 2020 U.S. Presidential results by county, with counties colored according to the proportion of the two party vote cast for the Republican candidate. The scale_fill_gradient() function will be helpful for effective coloring (but there are other possibilities).



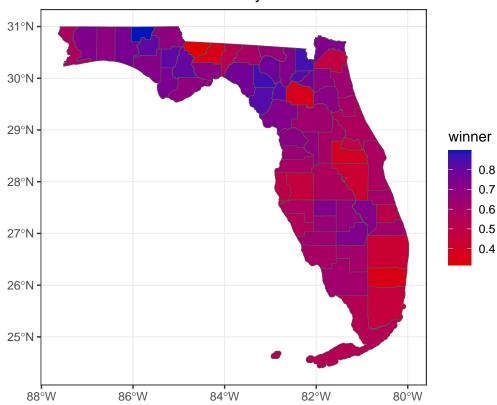

Exercise 5


Create a new variable diff_rep using mutate() in the fl-change code chunk, representing the change in the two party vote share between 2016 and 2020 (prop_rep20 - prop_rep16).

```
fl_votes <- fl_votes %>% mutate(diff_rep = prop_rep20 - prop_rep16)
```

Exercise 6

Modify the fl-plot-3 code chunk to plot the change in Republican vote share by county between 2016 and 2020. The scale_fill_gradient2() function will be helpful for effective coloring.

Republican Vote Share By County Between 2016 And 2020

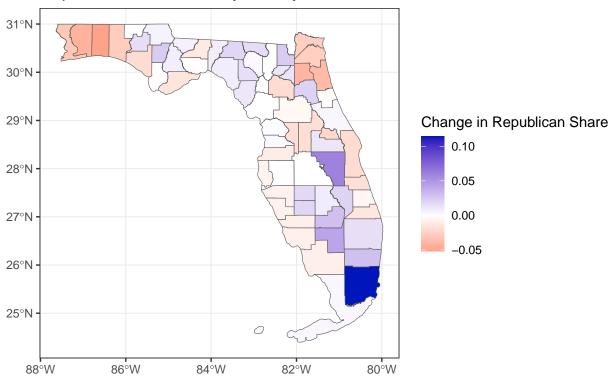

Exercise 7

What do the visualizations you developed tell you about the 2016 and 2020 Presidential election in Florida? What are limitations of these visualizations?

As we see that they preferred Donald trump over joe byeden