

2/20/2026

PRÁCTICA 08

Angular-Servicios-Mongo

MAESTRA: DIANA XÓCHITL RUANO VARGAS

MATERIA: APLICACIONES WEB

DIEGO EFRAÍN HERNÁNDEZ HERNÁNDEZ

TIID_04_01

ENERO - ABRIL 2026

CMD

```
PS C:\Users\shado\OneDrive\Documentos\GitHub\Practicas_web_Diego_Efrain_Hernandez_Hernandez\flask_practica_07> python app.py
File "C:\Users\shado\OneDrive\Documentos\GitHub\Practicas_web_Diego_Efrain_Hernandez_Hernandez\flask_practica_07\app.py", line 5
    return "Hola mundo desde Flask"
    ^^^^^
IndentationError: expected an indented block after function definition on line 4

PS C:\Users\shado\OneDrive\Documentos\GitHub\Practicas_web_Diego_Efrain_Hernandez_Hernandez\flask_practica_07> python app.py
* Serving Flask app 'app'
* Debug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
* Restarting with stat
* Debugger is active!
* Debugger PIN: 554-382-332
127.0.0.1 - - [18/Feb/2026 09:20:47] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [18/Feb/2026 09:20:47] "GET /favicon.ico HTTP/1.1" 404 -
```

MONGO

```
> db.eventos.insertMany([
  {
    "titulo": "Concierto Sinfónico",
    "fecha": "2026-03-15",
    "lugar": "Teatro Hidalgo",
    "precio": 250
  },
  {
    "titulo": "Concierto Sinfónico",
    "fecha": "2026-03-15",
    "lugar": "Teatro Hidalgo",
    "precio": 250
  },
  {
    "titulo": "Concierto Sinfónico",
    "fecha": "2026-03-15",
    "lugar": "Teatro Hidalgo",
    "precio": 250
  }
])
```

```
])
< {
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6996897297f339bbdd23e962'),
    '1': ObjectId('6996897297f339bbdd23e963'),
    '2': ObjectId('6996897297f339bbdd23e964')
  }
}
> db.eventos.find().pretty()
< {
  _id: ObjectId('6996897297f339bbdd23e962'),
  titulo: 'Concierto Sinfónico',
  fecha: '2026-03-15',
  lugar: 'Teatro Hidalgo',
  precio: 250
}
{
  _id: ObjectId('6996897297f339bbdd23e963'),
  titulo: 'Concierto Sinfónico',
  fecha: '2026-03-15',
  lugar: 'Teatro Hidalgo',
  precio: 250
}
{
  _id: ObjectId('6996897297f339bbdd23e964'),
  titulo: 'Concierto Sinfónico',
  fecha: '2026-03-15',
  lugar: 'Teatro Hidalgo',
  precio: 250
}
cartelera_cultural> |
```

VISUAL

```
PS C:\Users\shado\OneDrive\Documentos\GitHub\Practicas_web_Diego_Efrain_Hernandez_Hernandez\ask_practica_07> python -m pip install flask pymongo flask-cors
Defaulting to user installation because normal site-packages is not writeable
Requirement already satisfied: flask in C:\Users\shado\AppData\Roaming\Python\Python314\site-packages (3.1.2)
Collecting pymongo
  Downloading pymongo-4.16.0-cp314-cp314-win_amd64.whl.metadata (10.0 kB)
Collecting flask-cors
  Downloading flask_cors-6.0.2-py3-none-any.whl.metadata (5.3 kB)
Requirement already satisfied: blinker>=1.9.0 in C:\Users\shado\AppData\Roaming\Python\Python314\site-packages (from flask) (1.9.0)
Requirement already satisfied: click>=8.1.3 in C:\Users\shado\AppData\Roaming\Python\Python314\site-packages (from flask) (8.3.1)
Requirement already satisfied: itsdangerous>=2.2.0 in C:\Users\shado\AppData\Roaming\Python\Python314\site-packages (from flask) (2.2.0)
Requirement already satisfied: jinja2>=3.1.2 in C:\Users\shado\AppData\Roaming\Python\Python314\site-packages (from flask) (3.1.6)
Requirement already satisfied: markupsafe>=2.1.1 in C:\Users\shado\AppData\Roaming\Python\Python314\site-packages (from flask) (3.0.3)
Requirement already satisfied: werkzeug>=3.1.0 in C:\Users\shado\AppData\Roaming\Python\Python314\site-packages (from flask) (3.1.5)
Collecting dnspython<3.0.0,>=2.6.1 (from pymongo)
  Downloading dnspython-2.8.0-py3-none-any.whl.metadata (5.7 kB)
Requirement already satisfied: colorama in C:\Users\shado\AppData\Roaming\Python\Python314\site-packages (from click>=8.1.3->flask) (0.4.6)
Downloading pymongo-4.16.0-cp314-cp314-win_amd64.whl (1.0 MB)
  1.0/1.0 MB 7.5 MB/s 0:00:00
Downloading dnspython-2.8.0-py3-none-any.whl (331 kB)
Downloading flask_cors-6.0.2-py3-none-any.whl (13 kB)
Installing collected packages: dnspython, pymongo, flask-cors
Successfully installed dnspython-2.8.0 flask-cors-6.0.2 pymongo-4.16.0
PS C:\Users\shado\OneDrive\Documentos\GitHub\Practicas_web_Diego_Efrain_Hernandez_Hernandez\ask_practica_07>
PS C:\Users\shado\OneDrive\Documentos\GitHub\Practicas_web_Diego_Efrain_Hernandez_Hernandez\ask_practica_07> python app.py
* Serving Flask app 'app'
* Debug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use a production WSGI server instead.
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
* Restarting with stat
* Debugger is active!
* Debugger PIN: 554-382-332
127.0.0.1 - - [18/Feb/2026 22:31:52] "GET / HTTP/1.1" 200 -
□
```

PREUBITA

```
← ↻ ⓘ 127.0.0.1:5000/eventos
Impresión con sangría ☐

[
  {
    "fecha": "2026-03-15",
    "lugar": "Teatro Hidalgo",
    "precio": 250,
    "titulo": "Concierto Sinf\u00f3nico"
  },
  {
    "fecha": "2026-03-15",
    "lugar": "Teatro Hidalgo",
    "precio": 250,
    "titulo": "Concierto Sinf\u00f3nico"
  },
  {
    "fecha": "2026-03-15",
    "lugar": "Teatro Hidalgo",
    "precio": 250,
    "titulo": "Concierto Sinf\u00f3nico"
  }
]
```


VISUAL

TS app.ts



app.html

TS app.config.ts

TS app.config.server.ts

TS tabla.ts



src > app > TS app.ts > App

```
1  import { Component } from '@angular/core';
2  import { Eventos } from '../components/tabla/tabla';
3  import { CommonModule } from '@angular/common';
4
5  @Component({
6    selector: 'app-root',
7    standalone: true,
8    imports: [CommonModule, Eventos],
9    templateUrl: './app.html',
10   styleUrls: ['./app.css']
11 })
12 export class App {
13   title = 'Practica8';
14 }
```

```
TS app.ts    app.html  TS app.config.ts  TS app.config.server.ts  TS tabla.ts

src > app > app.html > app-eventos
  Go to component
1  <app-eventos></app-eventos>
```

```
TS app.ts    app.html  TS app.config.ts  TS app.config.server.ts  TS tabla.ts

src > app > TS app.config.ts > ...
1  import { ApplicationConfig } from '@angular/core';
2  import { provideRouter } from '@angular/router';
3  import { provideHttpClient, withFetch } from '@angular/common/http';
4  import { routes } from './app.routes';
5
6  export const appConfig: ApplicationConfig = {
7    providers: [
8      provideRouter(routes),
9      provideHttpClient(withFetch())
10   ]
11  };
```

TS app.ts

app.html

TS app.config.ts

TS app.config.server.ts X

TS tabla.ts

src > app > TS app.config.server.ts > ...

```
1  import { mergeApplicationConfig, ApplicationConfig } from '@angular/core';
2  import { provideServerRendering } from '@angular/platform-server';
3  import { appConfig } from '../app.config';
4
5  const serverConfig: ApplicationConfig = {
6    providers: [
7      provideServerRendering()
8    ]
9  };
10
11  export const config = mergeApplicationConfig(appConfig, serverConfig);
```


TS app.ts

<> app.html

TS app.config.ts

TS app.config.server.ts

TS tabla.ts

X

<> tabla.html

src > app > components > tabla > TS tabla.ts > Eventos > ngOnInit

```
1  import { Component, OnInit, ChangeDetectorRef } from '@angular/core';
2  import { HttpClient } from '@angular/common/http';
3  import { CommonModule } from '@angular/common';
4
5  @Component({
6    selector: 'app-eventos',
7    standalone: true,
8    imports: [CommonModule],
9    templateUrl: './tabla.html',
10   styleUrls: ['./tabla.css']
11 })
12 export class Eventos implements OnInit {
13   listaEventos: any[] = [];
14
15   constructor(
16     private http: HttpClient,
17     private cdr: ChangeDetectorRef
18   ) {}
19
20   ngOnInit() {
21     console.log('Antes de la petición:', this.listaEventos);
22
23     this.http.get<any[]>('http://127.0.0.1:5000/eventos')
24       .subscribe(data => {
25         console.log('Datos recibidos:', data);
26         this.listaEventos = data;
27         this.cdr.detectChanges();
28         console.log('Después de asignar:', this.listaEventos);
29       });
30   }
31 }
```

src > app > components > tabla >  tabla.html >  div.container.mt-4

Go to component

```
1  <div class="container mt-4">
2    <h2>Cartelera Cultural</h2>
3
4    <table class="table table-bordered table-striped mt-3">
5      <thead class="table-dark">
6        <tr>
7          <th>Título</th>
8          <th>Fecha</th>
9          <th>Lugar</th>
10         <th>Precio</th>
11       </tr>
12     </thead>
13     <tbody>
14       <tr *ngFor="let evento of listaEventos">
15         <td>{{ evento.titulo }}</td>
16         <td>{{ evento.fecha }}</td>
17         <td>{{ evento.lugar }}</td>
18         <td>
19           <span *ngIf="evento.precio > 0">{{ evento.precio }}</span>
20           <span *ngIf="evento.precio == 0">Gratis</span>
21         </td>
22       </tr>
23     </tbody>
24   </table>
25 </div>
```

TS app.ts

app.html

TS app.config.ts

TS app.config.server

src > app > TS app.routes.ts > ...

```
1 import { Routes } from '@angular/router';
2 import { Eventos } from '../components/tabla/tabla';
3
4 export const routes: Routes = [
5   { path: '', component: Eventos },
6   { path: 'eventos', component: Eventos }
7 ];
```

TS app.ts

app.html

TS app.config.ts

TS app.config.server.ts

TS tabla.ts

tabla.html

TS app.routes.ts

index.html


TS main.ts

esbuild

src > index.html > html

```
1 <!doctype html>
2 <html lang="es">
3 <head>
4   <meta charset="utf-8">
5   <title>Practica8</title>
6   <base href="/">
7   <meta name="viewport" content="width=device-width, initial-scale=1">
8   <link rel="icon" type="image/x-icon" href="favicon.ico">
9   <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.3.0/dist/css/bootstrap.min.css" rel="stylesheet">
10 </head>
11 <body>
12   <app-root></app-root>
13 </body>
14 </html>
```

PÁGINA

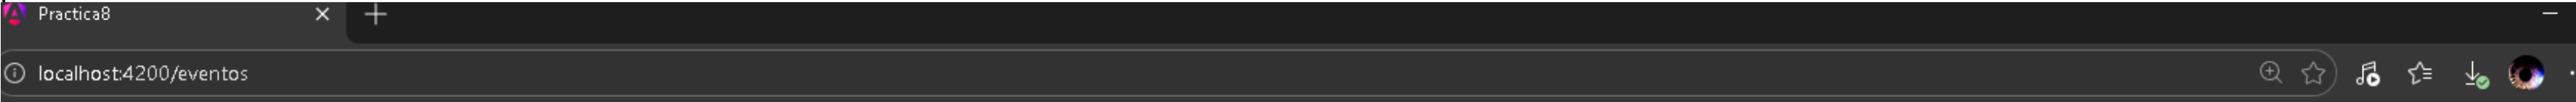

Cartelera Cultural

Título	Fecha	Lugar	Precio
José José	2026-04-20	Estadio Hidalgo	\$500
Luis Miguel	2026-09-15	Teatro Morelos	\$550
Juan Gabriel	2026-03-15	Teatro Hidalgo	\$600