LAPORAN UTS
PEMROGRAMAN WEB LANJUT



Disusun Oleh:

Efrant Gunawan Emmanuel 71230973

PROGRAM STUDI INFORMATIKA

FAKULTAS TEKNOLOGI INFORMASI

UNIVERSITAS KRISTEN DUTA WACANA

YOGYAKARTA

2026

1. Gunakan Laravel 12 untuk menyelesaikan permasalahan berikut! (Skor: 40)
   a. Buatlah skenario pengiriman data NIM dan Nama melalui sebuah form menggunakan metode POST! (Skor 10)
   b. Buatlah layout seperti pada gambar berikut ini menggunakan Bootstrap!
   c. Gunakan layout pada poin 2.b untuk mengembangkan konsep template inheritance pada Laravel dengan ketentuan terdapat base sebagai parent dan courses, students, grades serta assignments sebagai child. Semua child dapat ditampilkan pada content! (Skor 10)
   d. Tambahkan vertical navigation sebagai navigasi courses, students, grades serta assignments pada content sesuai layout yang anda kembangkan pada poin 2.c! (Skor 10)

Code :

PageController.php

a.

app > Http > Controllers > PageController.php

```php
<?php

namespace App\Http\Controllers;

use Illuminate\Http\Request;

Windsurf: Refactor | Explain
class PageController extends Controller
{
    Windsurf: Refactor | Explain | Generate Function Comment | ×
    public function home()
    {
        return view('pages.home');
    }
    Windsurf: Refactor | Explain | Generate Function Comment | ×
    public function form()
    {
        return view('pages.nim-form');
    }

    Windsurf: Refactor | Explain | Generate Function Comment | ×
    public function submit(Request $request)
    {
        $data = $request->validate([
            'nim' => ['required', 'digits_between:1,20'],
            'nama' => ['required', 'string', 'max:100'],
        ]);

        return view('pages.nim-result', $data);
    }


}

```

Nim-form.blade.php:

```blade
<h1 class="h3">Kirim NIM dan Nama</h1>
<form action="/result" method="POST">
    <table>
        <tr>
            <td>NIM</td>
            <td><input type="number" name="nim"></td>
        </tr>
        <tr>
            <td>Nama</td>
            <td><input type="text" name="nama"></td>
        </tr>
        <tr>
            <td colspan="2"><input type="submit" value="Kirim"></td>
        </tr>
    </table>
</form>
```

Hasil :

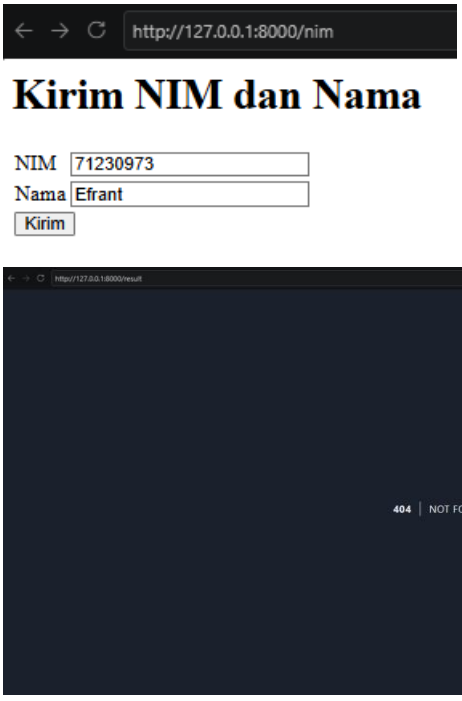

b. Code :
Base.blade.php :

resources > views > layouts > base.blade.php

```
<!doctype html>
<html lang="id">
<head>
    <meta charset="utf-8"><meta name="viewport" content="width=device-width, initial-scale=1">
    <style>
        body { margin: 16px; color: #222; }
        header, .columns, footer { margin-bottom: 0px; }
        header, .columns { display: flex; gap: 0px; }
        .header-box, aside, main, footer { border: 1px solid #999; padding: 12px; }
        .header-box { flex: 1; }
        aside { width: 180px; }
        main { flex: 1; min-height: 260px; }
        footer { text-align: center; }
        .content-nav { margin: 16px 0 20px; }
        .content-nav a { display: block; padding: 0px 0; }
        input { display: block; margin: 4px 0 12px; padding: 5px; }
        button { padding: 6px 12px; }
        @media (max-width: 700px) { header, .columns { display: block; } aside, main { width: auto; margin-bottom: 10px; } }
    </style>
</head>
<body>
<header>
    <div class="header-box"><strong>LEFT HEADER</strong></div>
    <div class="header-box"><strong>RIGHT HEADER</strong></div>
</header>
<div class="columns">
    <aside><strong>LEFT NAVIGATION</strong>
        <p><a href="{{ route('home') }}">Beranda</a></p><p><a href="{{ route('nim.form') }}">Form NIM</a></p>
    </aside>
    <main><strong>CONTENT</strong>
        <nav class="content-nav" aria-label="Navigasi konten">
            <strong>NAVIGASI KONTEN</strong>
        </nav>
        @yield('content')
    </main>
    <aside><strong>Kanan</strong></aside>
</div>
<footer>Footer</footer>
</body>
</html>

```

Home.blade.php :

resources > views > pages > home.blade.php

```
@extends('layouts.base')
@section('title', 'Beranda')
@section('content')
<p>TES</p>
@endsection
```

Section.blade.php :

resources > views > pages > section.blade.php

```
@extends('layouts.base')
@section('title', $title)
@section('content')
<h1 class="h3">{{ $title }}</h1><p>{{ $description }}.</p><p class="text-secondary"
```

Hasil :

http://127.0.0.1:8000/

LEFT HEADER		RIGHT HEADER>
LEFT NAVIGATION Beranda Form NIM	**CONTENT** **NAVIGASI KONTEN** TES	**Kanan**
Footer		

c. Code :

Base.blade.php :

```
resources > views > layouts > base.blade.php
<!doctype html>
<html lang="id">
<head>
    <meta charset="utf-8"><meta name="viewport" content="width=device-width, initial-scale=1">
    <style>
        body { margin: 16px; color: #222; }
        header, .columns, footer { margin-bottom: 0px; }
        header, .columns { display: flex; gap: 0px; }
        .header-box, aside, main, footer { border: 1px solid #999; padding: 12px; }
        .header-box { flex: 1; }
        aside { width: 180px; }
        main { flex: 1; min-height: 260px; }
        footer { text-align: center; }
        input { display: block; margin: 4px 0 12px; padding: 5px; }
        button { padding: 6px 12px; }
        @media (max-width: 700px) { header, .columns { display: block; } aside, main { width: auto; margin-bottom: 10px; } }
    </style>
</head>
<body>
<header>
    <div class="header-box"><strong>LEFT HEADER</strong></div>
    <div class="header-box"><strong>RIGHT HEADER</strong>></div>
</header>
<div class="columns">
    <aside><strong>LEFT NAVIGATION</strong>
        <p><a href="{{ route('home') }}">Beranda</a></p><p><a href="{{ route('nim.form') }}">Form NIM</a></p>
        <p><a href="{{ route('courses') }}">Courses</a></p><p><a href="{{ route('students') }}">Students</a></p>
        <p><a href="{{ route('grades') }}">Grades</a></p><p><a href="{{ route('assignments') }}">Assignments</a></p>
    </aside>
    <main><strong>CONTENT</strong>
        @yield('content')
    </main>
    <aside><strong>Kanan</strong></aside>
</div>
<footer>Footer</footer>
</body>
</html>

```

Assignments.blade.php :

```
resources > views > pages > assignments.blade.php
@extends('layouts.base')
@section('title', 'Assignments')
@section('content')
<h1>Assignments</h1>
@endsection

```

Course.blade.php :

resources > views > pages > courses.blade.php

```
@extends('layouts.base')
@section('title', 'Courses')
@section('content')
<h1>Courses</h1>
@endsection
```

Grades.blade.php :

resources > views > pages > grades.blade.php

```
@extends('layouts.base')
@section('title', 'Grades')
@section('content')
<h1>Grades</h1>
@endsection
```

Students.blade.php:

resources > views > pages > students.blade.php

```
@extends('layouts.base')
@section('title', 'Students')
@section('content')
<h1>Students</h1>
@endsection
```

Hasil :

LEFT HEADER		RIGHT HEADER>
LEFT NAVIGATION Beranda Form NIM Courses Students Grades Assignments	**CONTENT** **Courses**	**Kanan**
Footer		


d. Code :


```
<main><strong>CONTENT</strong>
    <div class="content-area">
        <nav class="content-links" aria-label="Navigasi Courses, Students, Grades, Assignments">
            <a href="{{ route('courses') }}">Courses</a>
            <a href="{{ route('students') }}">Students</a>
            <a href="{{ route('grades') }}">Grades</a>
            <a href="{{ route('assignments') }}">Assignments</a>
        </nav>
        <section class="child-content">
            @yield('content')
        </section>
    </div>
```

Hasil :

LEFT HEADER		RIGHT HEADER>
LEFT NAVIGATION Beranda Form NIM Courses Students Grades Assignments	**CONTENT** Courses Students Grades Assignments **Grades**	**Kanan**
Footer		

2. A. code :

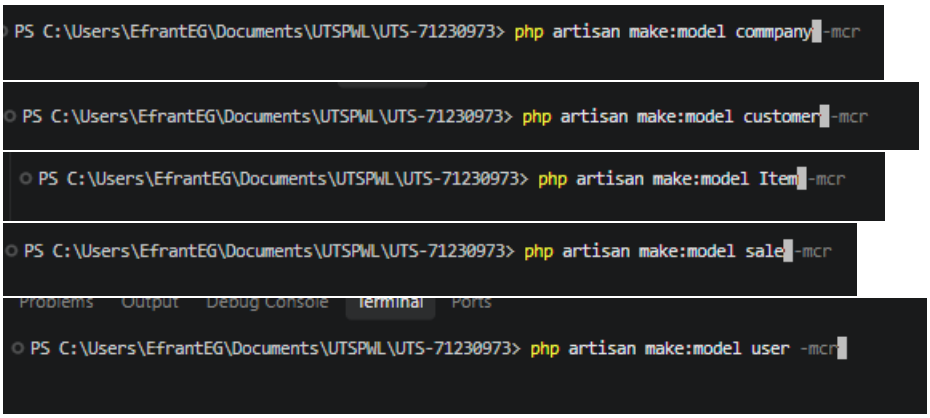

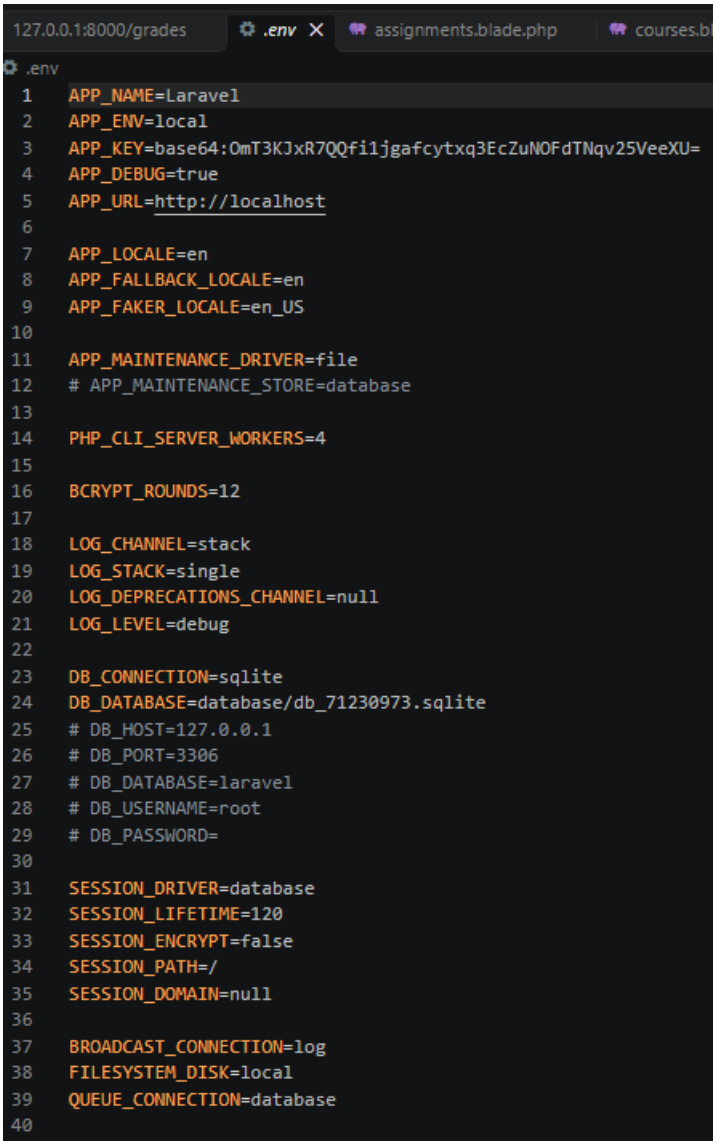
127.0.0.1:8000/grades
.env
assignments.blade.php
courses.b
.env
APP_NAME=Laravel
APP_ENV=local
APP_KEY=base64:OmT3KJxR7QQfi1jgafcytxq3EcZuNOFdTNqv25VeeXU=
APP_DEBUG=true
APP_URL=http://localhost
APP_LOCALE=en
APP_FALLBACK_LOCALE=en
APP_FAKER_LOCALE=en_US
APP_MAINTENANCE_DRIVER=file
APP_MAINTENANCE_STORE=database
PHP_CLI_SERVER_WORKERS=4
BCRYPT_ROUNDS=12
LOG_CHANNEL=stack
LOG_STACK=single
LOG_DEPRECATIONS_CHANNEL=null
LOG_LEVEL=debug
DB_CONNECTION=sqlite
DB_DATABASE=database/db_71230973.sqlite
DB_HOST=127.0.0.1
DB_PORT=3306
DB_DATABASE=laravel
DB_USERNAME=root
DB_PASSWORD=
SESSION_DRIVER=database
SESSION_LIFETIME=120
SESSION_ENCRYPT=false
SESSION_PATH=/
SESSION_DOMAIN=null
BROADCAST_CONNECTION=log
FILESYSTEM_DISK=local
QUEUE_CONNECTION=database

User :

```php
<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

return new class extends Migration
{
    /**
     * Run the migrations.
     */
    Windsurf: Refactor | Explain | ×
    public function up(): void
    {
        Schema::create('users', function (Blueprint $table) {
            $table->id();
            $table->string('name');
            $table->string('email')->unique();
            $table->timestamp('email_verified_at')->nullable();
            $table->string('password');
            $table->rememberToken();
            $table->timestamps();
        });

        Schema::create('password_reset_tokens', function (Blueprint $table) {
            $table->string('email')->primary();
            $table->string('token');
            $table->timestamp('created_at')->nullable();
        });

        Schema::create('sessions', function (Blueprint $table) {
            $table->string('id')->primary();
            $table->foreignId('user_id')->nullable()->index();
            $table->string('ip_address', 45)->nullable();
            $table->text('user_agent')->nullable();
            $table->longText('payload');
            $table->integer('last_activity')->index();
        });
    }

    /**
     * Reverse the migrations.
     */
    Windsurf: Refactor | Explain | ×
    public function down(): void
    {
        Schema::dropIfExists('users');
        Schema::dropIfExists('password_reset_tokens');
        Schema::dropIfExists('sessions');
    }
};
```

Companies :

```php
<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

return new class extends Migration {
    public function up(): void { Schema::create('companies', function (Blueprint $table) { $table->id('company_id'); $table->string('company_name'); $table->string('headquarters_phone_number', 30); $table->timestamps(); }); }
    public function down(): void { Schema::dropIfExists('companies'); }
};
```

Customers :

```php
database > migrations > 2026_10_19_000002_create_customers_table.php
<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

return new class extends Migration {
    public function up(): void { Schema::create('customers', function (Blueprint $table) { $table->id('customer_id'); $table->string('first_name'); $table->string('last_name'); $table->string('email_address')->unique(); $table->unsignedInteger('number_of_complaints')->default(0); $table->tim
    public function down(): void { Schema::dropIfExists('customers'); }
};
```

Items :

```php
database > migrations > 2026_10_19_000003_create_items_table.php
<?php

use Illuminate\Database\Migrations\Migration;
use Illuminate\Database\Schema\Blueprint;
use Illuminate\Support\Facades\Schema;

return new class extends Migration {
    public function up(): void { Schema::create('items', function (Blueprint $table) { $table->string('item_code')->primary(); $table->string('item'); $table->decimal('unit_price', 12, 2); $table->foreignId('company_id')->constrained('companies', 'company_id')->cascadeOnUpdate()->restrictOnD
    public function down(): void { Schema::dropIfExists('items'); }
};
```

Link github : https://github.com/EfrantEmmanuelG/UTSPWL