Сервер Vscale

Babylon5 💉

SPB



Параметры сервера Статистика История Бэкапы

Имя хоста и теги

Имя хоста 🥎 babylon5

Теги 🤊 Добавить теги 🖍

Параметры публичной сети

IP-адрес 5.53.125.5 Маска подсе⁻

РТК-запись Укажите значение 🖋 Шлюз

SSH-ключи пользователя root

Установка и запуск easy-wg-quick





Проверка того, что система активна

```
root@babylon5:~# systemctl status wg-quick@wghub
• wg-quick@wghub.service - WireGuard via wg-quick(8) for wghub
    Loaded: loaded (/lib/systemd/system/wg-quick@.service; enabled; vendor preset: enabled)
    Active: active (exited) since Thu 2022-06-23 05:54:53 UTC; 13s ago
    Docs: man:wg-quick(8)
        man:wg(8)
        https://www.wireguard.com/
        https://www.wireguard.com/quickstart/
        https://git.zx2c4.com/wireguard-tools/about/src/man/wg-quick.8
        https://git.zx2c4.com/wireguard-tools/about/src/man/wg.8

Process: 2310 ExecStart=/usr/bin/wg-quick up wghub (code=exited, status=0/SUCCESS)
Main PID: 2310 (code=exited, status=0/SUCCESS)
```

Копирование и перенос Wgclient10.conf в Wireguard

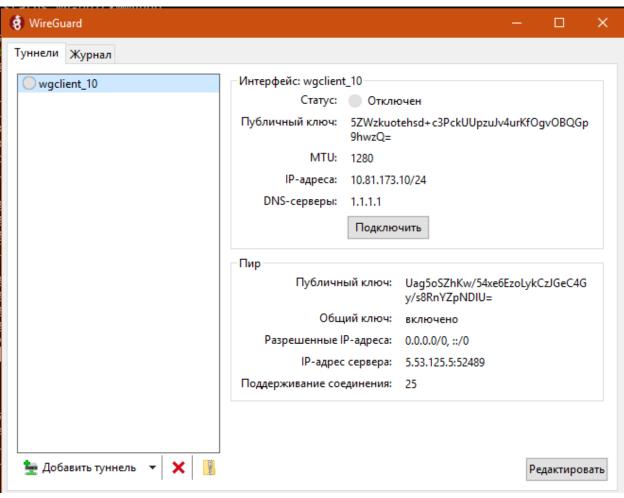

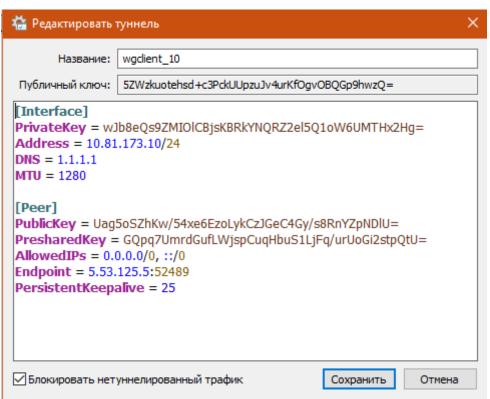

Результат

