

Module 3 - Lecture 11 Introduction to Vue & **Data Binding** 

## **Traditional Web Page**



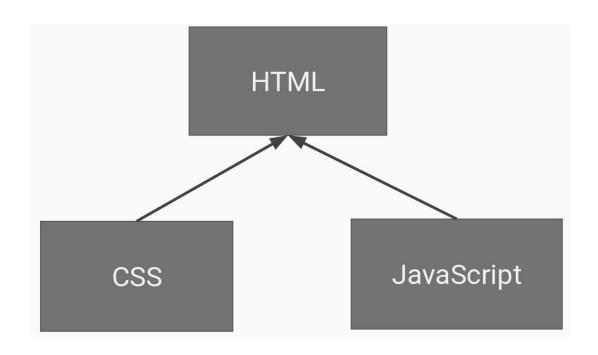


## **Modern Web Page**

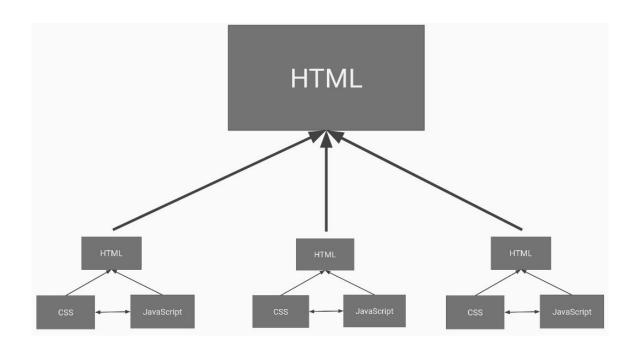



#### **Modern Web Page**

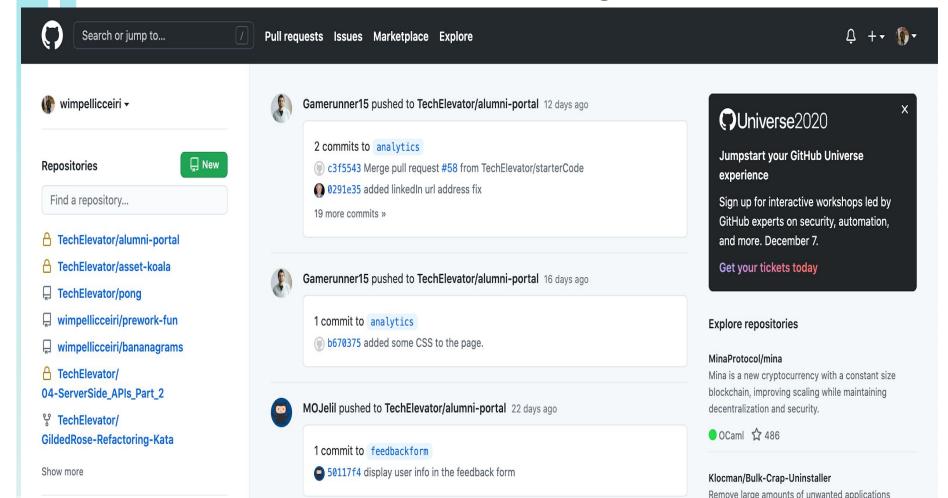

#### **Parts of a Vue Component**

```
<script>
export default {
  name: 'app'
}
</script>
```

```
#app {
  font-family: 'Avenir', Helvetica, Arial, sans-serif;
  -webkit-font-smoothing: antialiased;
  -moz-osx-font-smoothing: grayscale;
  text-align: center;
  color: #2c3e50;
  margin-top: 60px;
}
</style>
```



### **One-Way Data Binding**

Assume you have a JavaScript object in your Vue component

```
data() {
  return { name: 'Walt', title: 'Instructor' };
}
```

Bind data to your HTML template using one-way data binding.

```
<h1>{{ name }}</h1><h2>My title is: {{ title }}</h2>
```



#### **Vue Directives**

- Vue prefaces directives with v-
- Directives can contain simple variable interpolation or complex JavaScript code.
- Directives that we'll explore:
  - v-bind bind data to an HTML attribute e.g. id, class, src, value, etc
  - v-model two-way data binding
  - v-if & v-else / v-show & v-hide conditionally render HTML
  - v-for render an HTML element repetitively



# QUESTIONS?

