I have changed my initial repository to switch pokemons, where I added a pokemon class to make Pokemon objects to have multiple pets.

Message Logging

- Log Info

```
Name: Joe Balone                    script.js:416
Weight: 21                          script.js:417
Happiness: 38                       script.js:418
IQ: 14                              script.js:419
```

- Log Warning

```
▶You haven't caught this            script.js:413
Pokemon yet! Catch it to see more info.
```

- Log Error

```
▶Current Party is empty!            script.js:453
```

- Log Table

script.js:430

(index)	Slot	Species	Name	Weight	Happiness	IQ	Stage
0	1	'Turtwig'	'Joe Bal…'	7	6	8	1
1	2	'Charman…'	'Sinkly'	13	9	2	1

▶ Array(2)

- Log Group

```
▼ Current Party                     script.js:451
    Joe Balone                      script.js:457
    Sinkly                          script.js:457
```

- Log Custom

🔥 Pokemon Ready! script.js:466

View messages logged by the browser

- 404 Error

```
GET http://127.0.0.1:5500/pokemon-data 404 (Not Found)                    script.js:474
```

- Type Error

```
Uncaught TypeError: Cannot read properties of undefined (reading          script.js:480
'toString')
    at typeError (script.js:480:26)
    at HTMLButtonElement.onclick (index.html:127:47)

>
```

- Violation Error

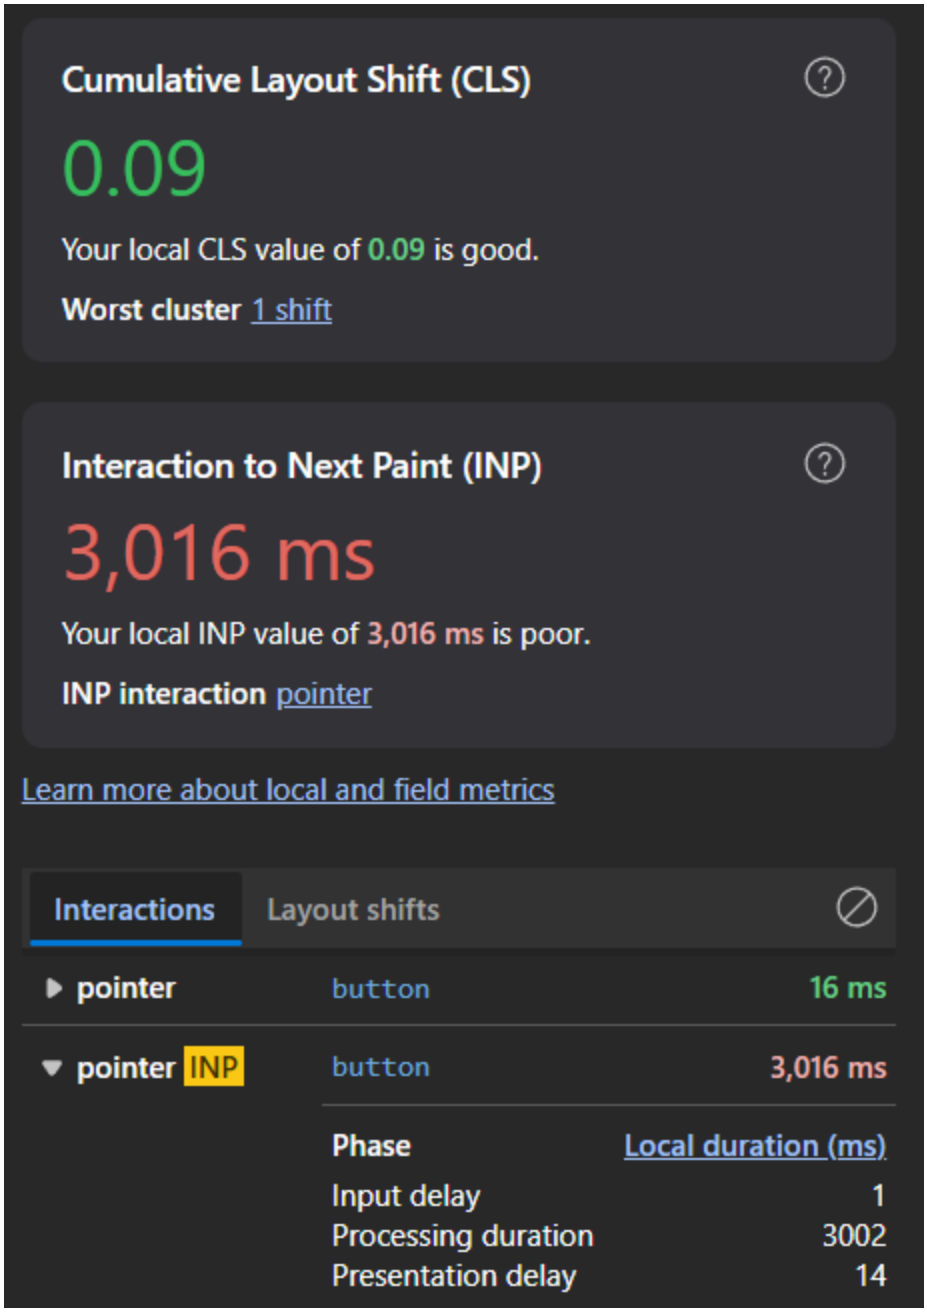

Filter Messages

- Filter by logs

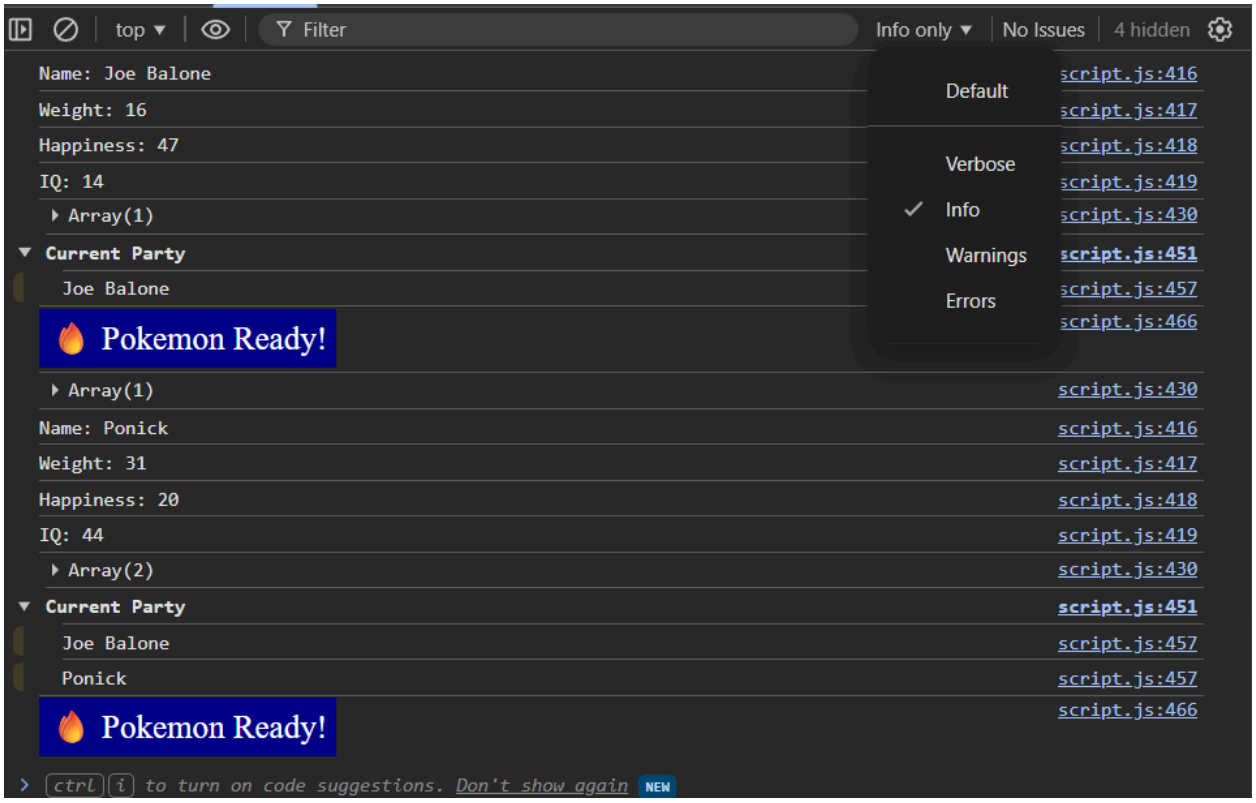

- Filter by Text

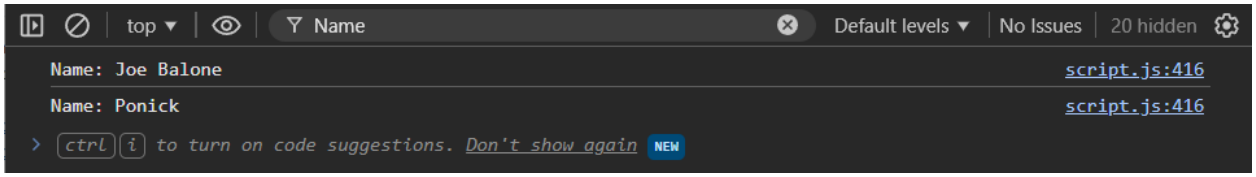

- Filter by regular expression

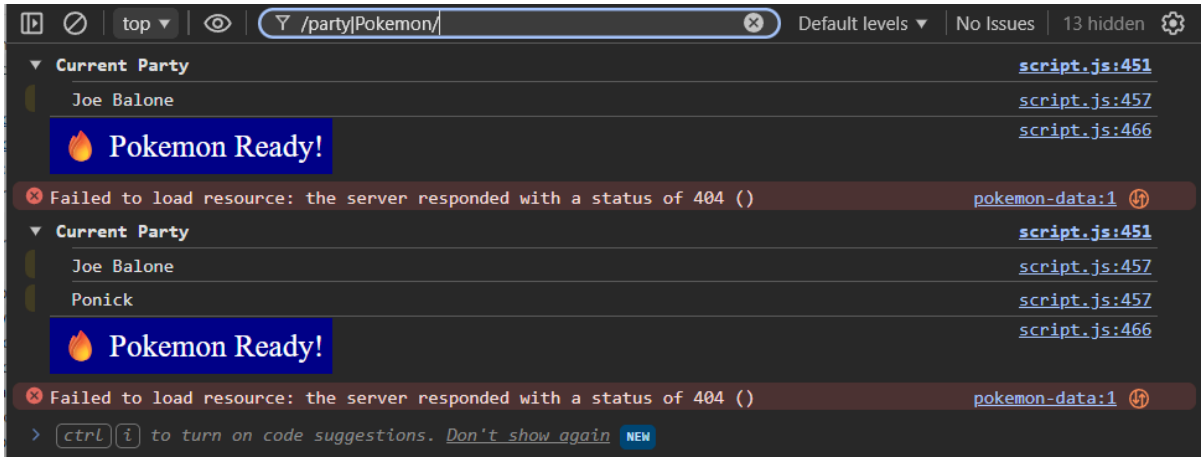

- Filter by user messages

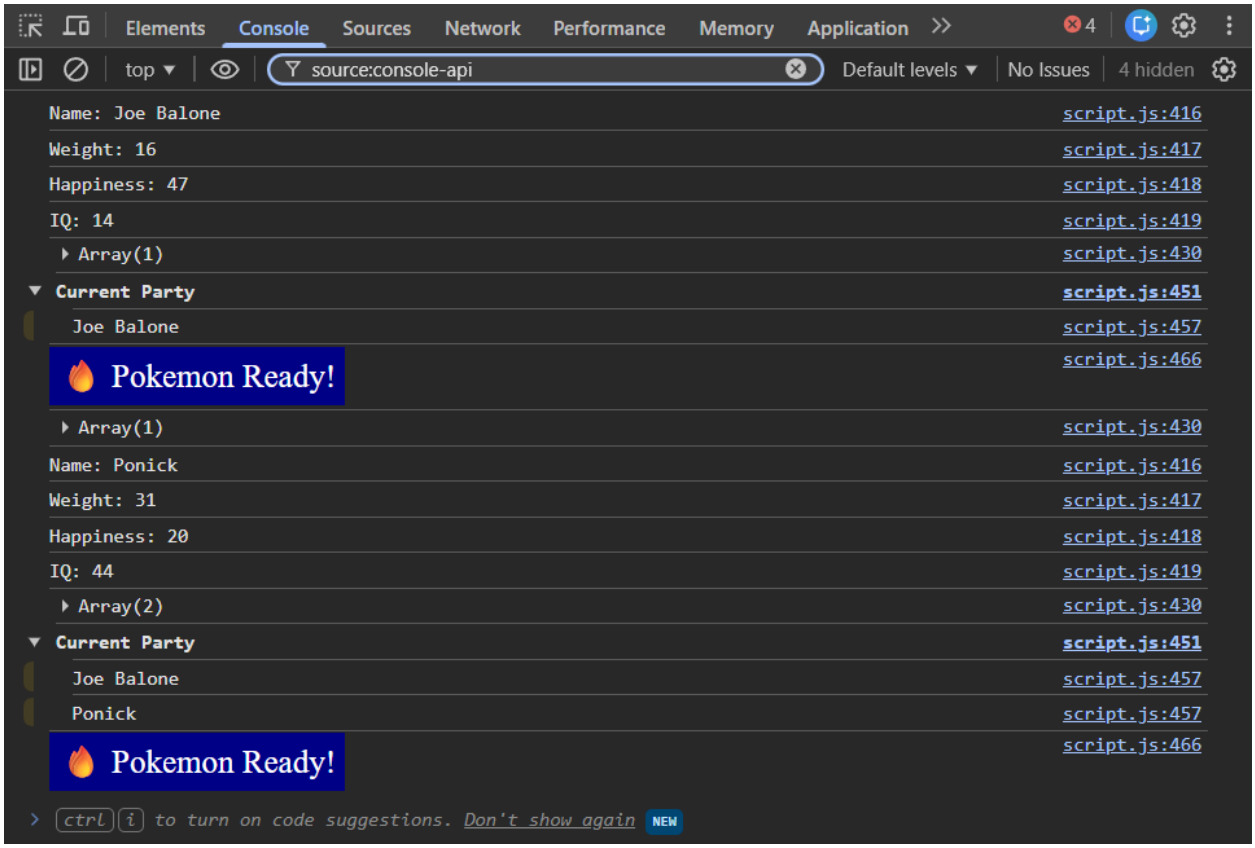

Sources UI

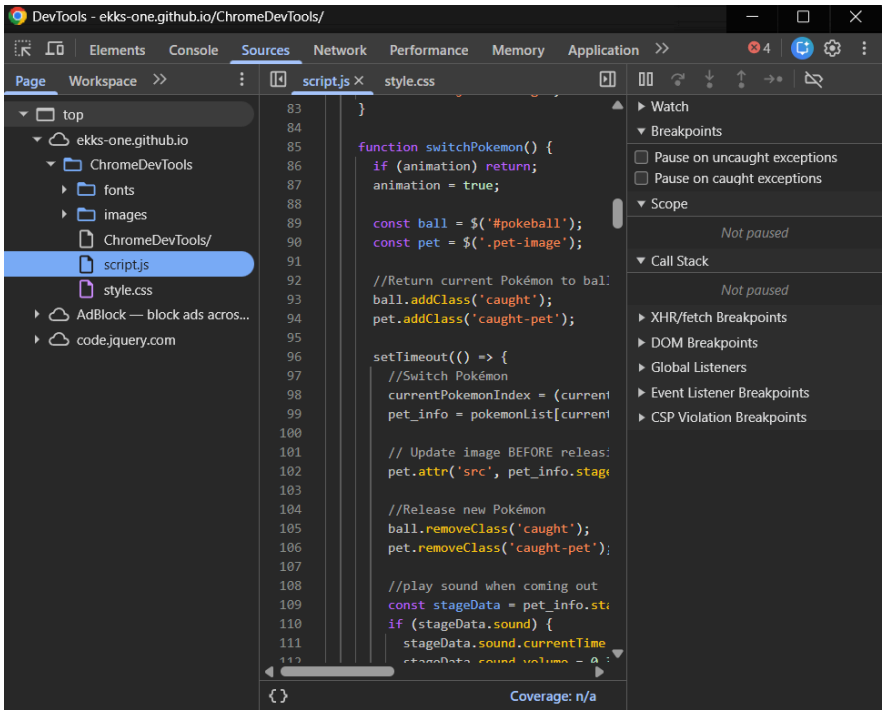

Line-of-code Breakpoints

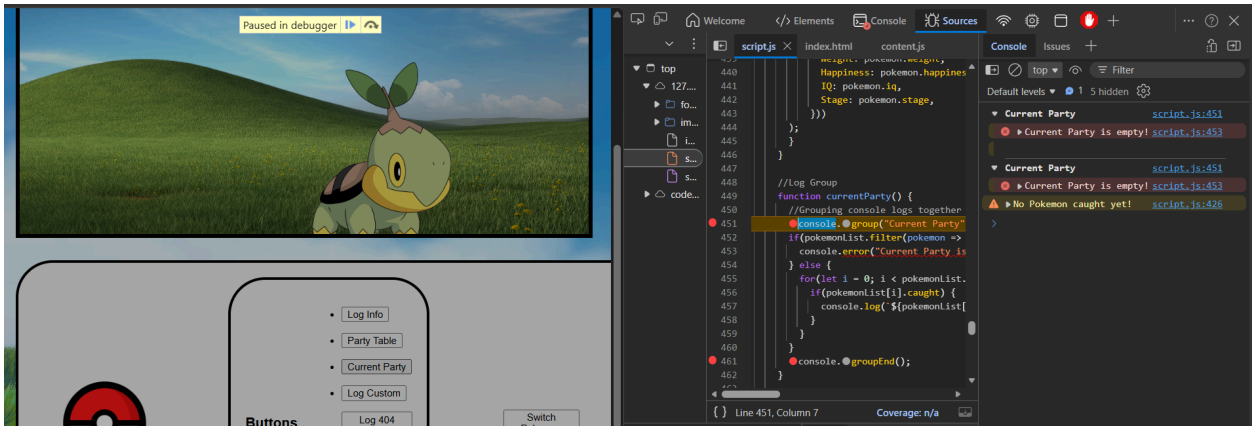

Pause on breakpoint

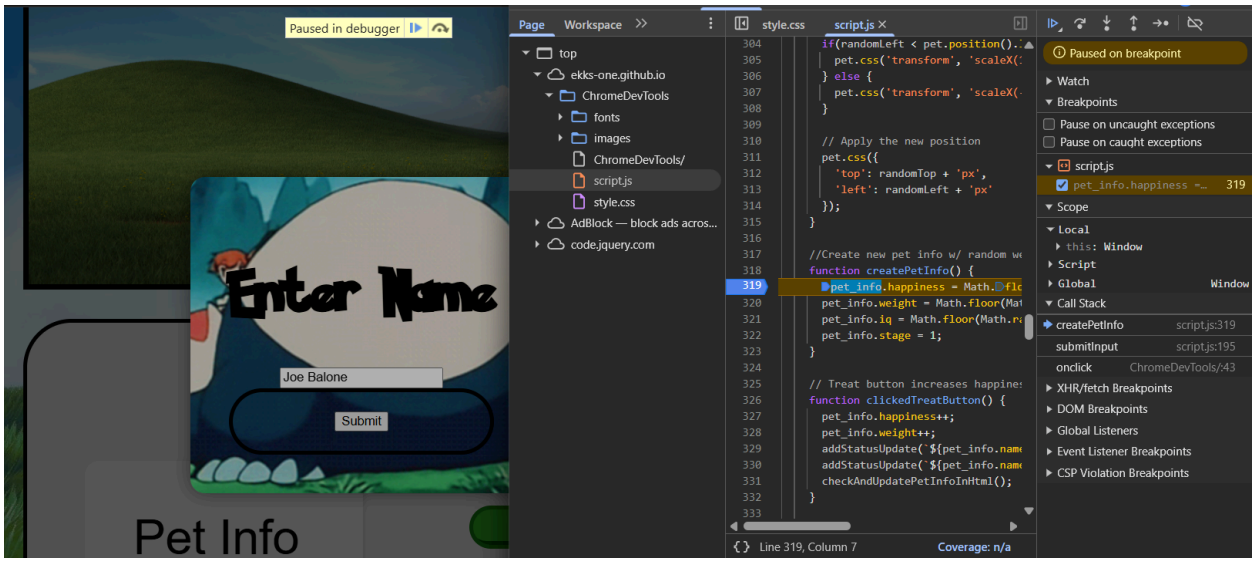

Check variable values

- Scope Pane

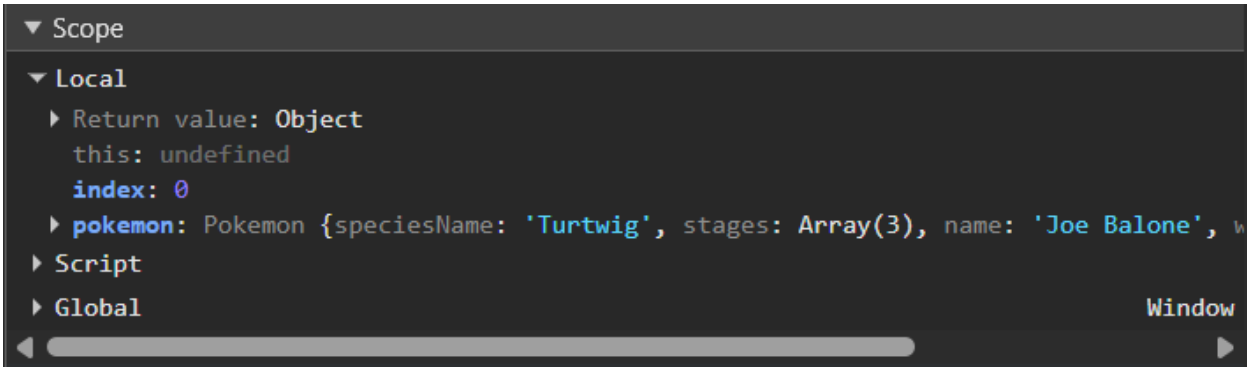

- Watch Expressions

```
Watch
pet_info.happiness: 22
pet_info.weight: 7
pet_info.iq: 20
pet_info.stage: 1
```

- The Console

```
> pet_info
<· ▸ Pokemon {speciesName: 'Turtwig', stages: Array(3), name: 'Joe Balone', weight: 31, happiness: 28, …}
>
```