

I

NMS API METHOD

2.0

May 2026
Version 2.0.2.2



Total pages: 54, including this page.

DESCRIPTION

About This Software API Document

This software API document explains the NMS system API as a reference manual, containing all the information required to work with the API. When a user refers to the documentation with the effectively communicate and to empower the developers / users to understand precisely how to use, test and deploy the software API fast and effectively also enable teams to collaborate effectively, creating standards, and reusing including improve team performance.

NMS

NMS Software is a web based that enables secure remote management and automated cross-connecting of physical fiber infrastructures that are interconnected through XSOS systems. The application provides a comprehensive view of the XSOS network configuration and status at various levels through tree browser views that show the network architecture, and through drill-down navigational map displays that can be used to show the geographical locations of elements and interconnections between them. A range of fault indications, monitoring and alert options enable continuous network status analysis and fault sourcing.

Compatible version

This API document supports:

1. NMS software version 2.0.2.2

Contents

DESCRIPTION	2
Using API with postman	4
Using API with command prompt	6
Using API with cURL	7
1.User Authentication	10
1.1 Login.....	11
1.2 Refresh token.....	16
1.3 Logout	19
2.Connectivity.....	21
2.1 Create connection.....	22
2.2 Create disconnection.	27
2.3 Create disconnection by connection ID.	30
3.Tasks.....	32
3.1 View remaining tasks.	33
3.2 View current connections.	36
4.Port information.....	39
4.1 View port information	40
4.2 View port summary.....	46
5.System Information	48
5.1 View system information.....	49
5.2 View inventory.....	51

Using API with postman




NOTE


For better performance in this document required to use APIs with Postman version v11.84.2 or newer.

➤ Postman installation


- Go to download link: <https://www.postman.com/downloads/>
- Click on **“Windows 64-bit”**

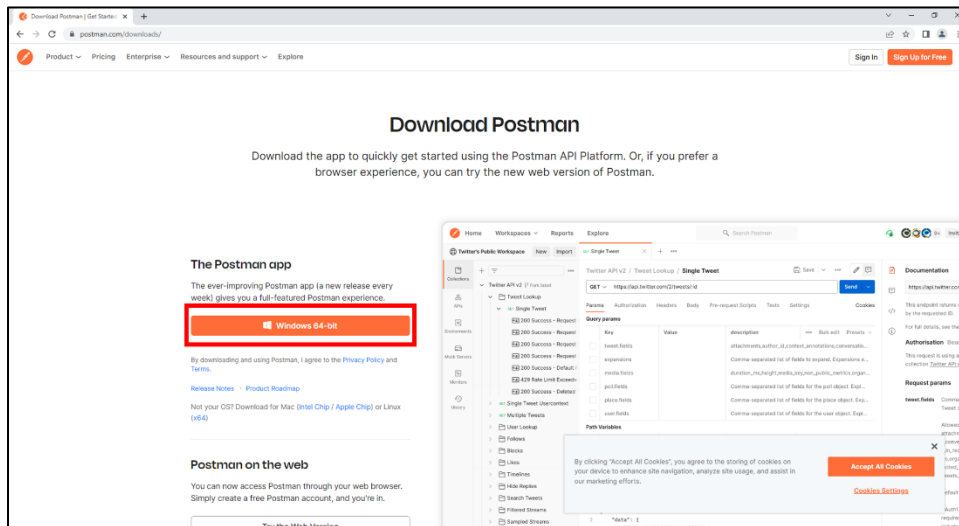

- After installed and launched the Postman app you can either click on **“Sign In”** to sign in with your postman account or click **“Skip and go to the app”** to continue using postman without the account.

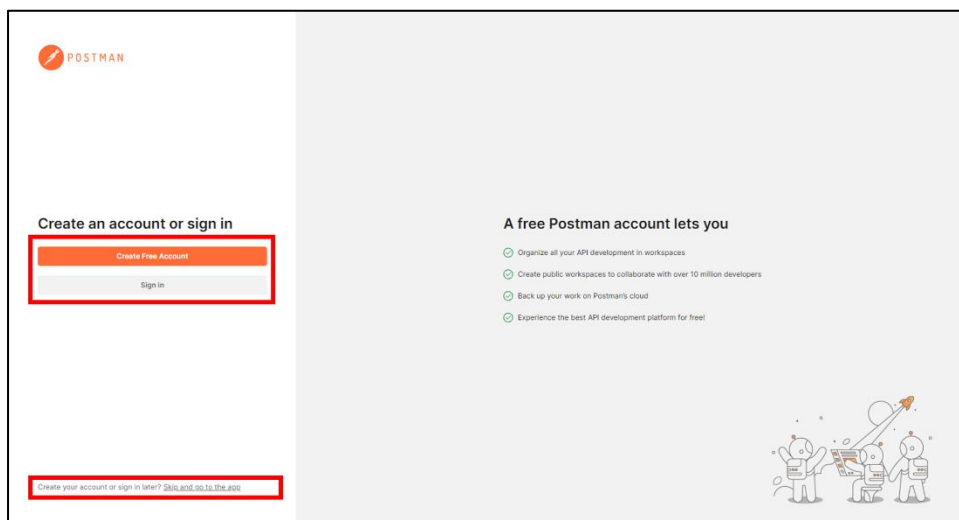

➤ Steps on using Postman with APIs

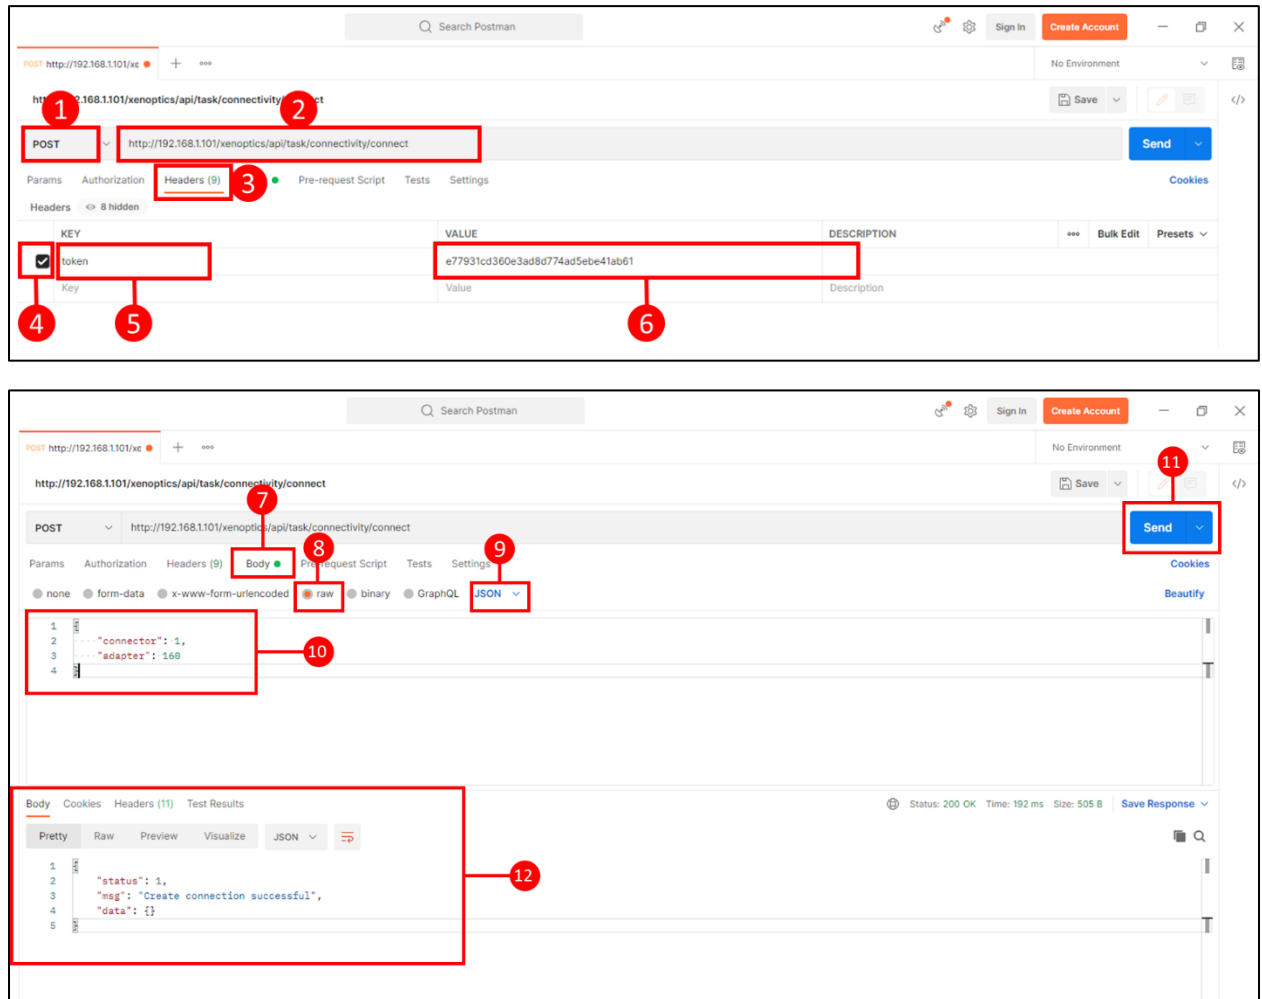

1. Set your HTTP request, clicking this will display a dropdown list of different requests such as GET, POST, PUT, DELETE, etc.
2. Input the IP address in the request URL to identify the link to where the API will communicate with.
3. Select “**Headers**”.
4. Enable key checkbox.
5. Input in KEY column “**token**”.
6. Input VALUE column “**(token key)**”.
7. Select “**Body**” customize details in a request commonly used in POST request.
8. Select “**Raw**”.
9. Select “**JSON**”.
10. Input required parameter.
11. Click on “**Send**” button.
12. If the API runs successfully, a response will appear. See figure above as an example.

Using API with command prompt

**NOTE**

For better performance in this document required to use APIs with Windows command prompt version 10.0.19045.3930 or newer.

➤ **Steps on using APIs with command prompt.**

1. Launch a command prompt by type “**cmd**” from start menu and press “**Enter**”.




2. **Important:** For testing APIs, the parameters to be entered into the command line will be:

```
curl --location --request POST "(Insert URL here)"
--header "Content-Type:application/json"
--data-raw
(Insert parameter here)
```

3. When entered in the command line, the format should look like the picture below. After the **--data-raw** part, user must create new lines for the **params** part and therest of the data, by clicking on **Enter**.


***Also, take note of the spaces and symbols entered**

(e.g. opening/closing braces, single/double quotationmarks), as seen.

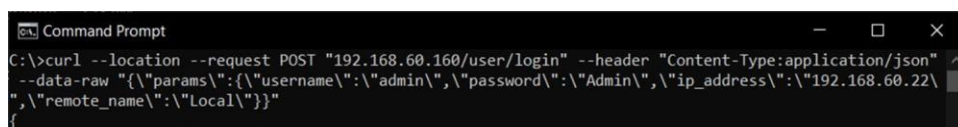

```
curl --location --request POST "192.168.1.250/xenoptics/api/auth/login" --header "Content-Type:application/json" --data-raw "{\"username\":\"admin\",\"password\":\"Admin\"}"
```

4. If the API runs successfully, a response will appear. See figure below as an example.

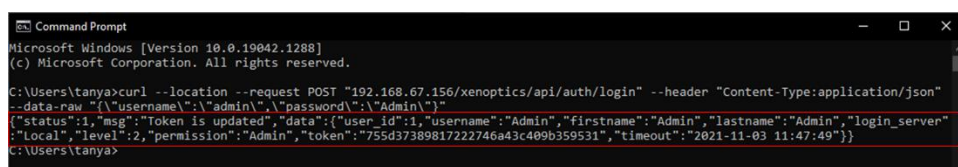

Using API with cURL




NOTE


For better performance in this document required to use APIs with Windows command prompt version 7.83.0 or newer.

➤ cURL installation.

- Go to download link: <https://git-scm.com/download/win>
- Click on “**64-bit Git for Windows Setup.**”

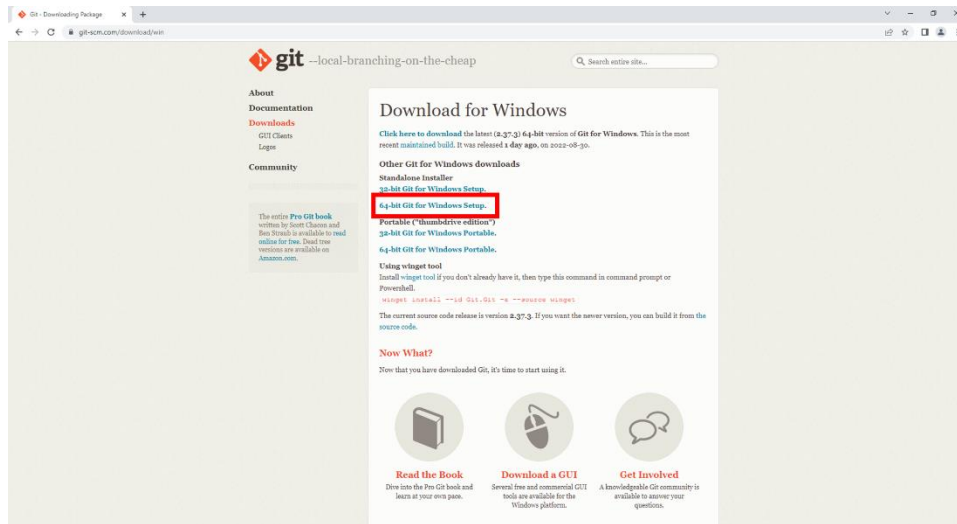


- To open the program after installed, search “**Git bash**” on windows search bar.

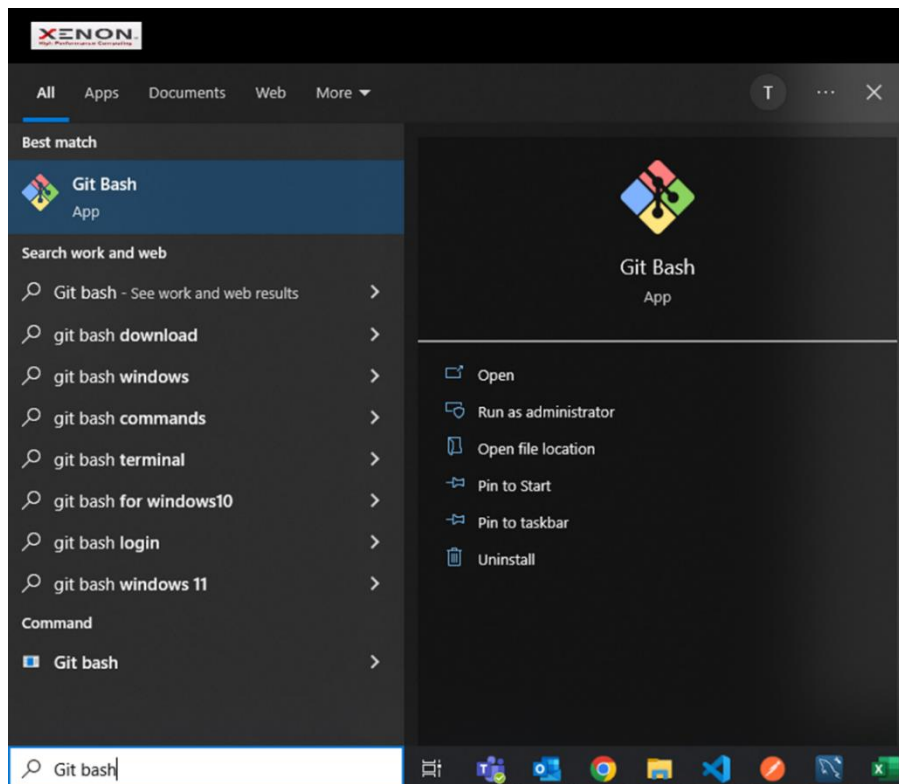

➤ **Steps on using APIs with cURL git bash.**

- Launch a cURL gitbash command line interface by type in “**git bash**” from the Start menu.

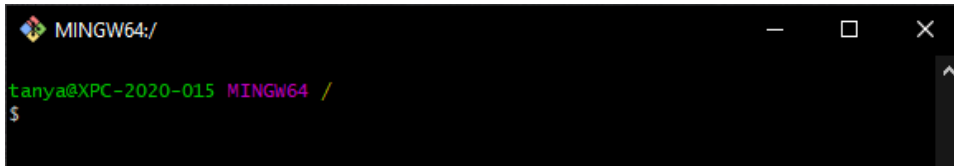


```

MINGW64:/
tanya@XPC-2020-015 MINGW64 /
$

```

- To know if cURL has been installed in the system, type in **curl --help**

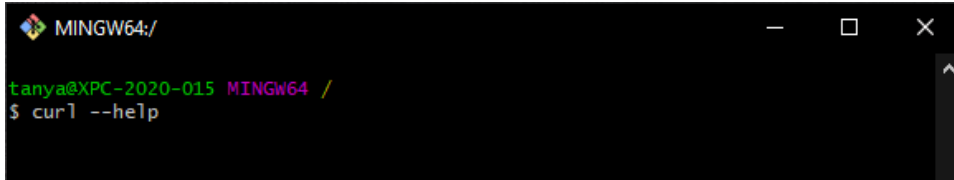


```

MINGW64:/
tanya@XPC-2020-015 MINGW64 /
$ curl --help

```

- List of functions under curl will appear. This particular step ensures that cURL is working on the system.

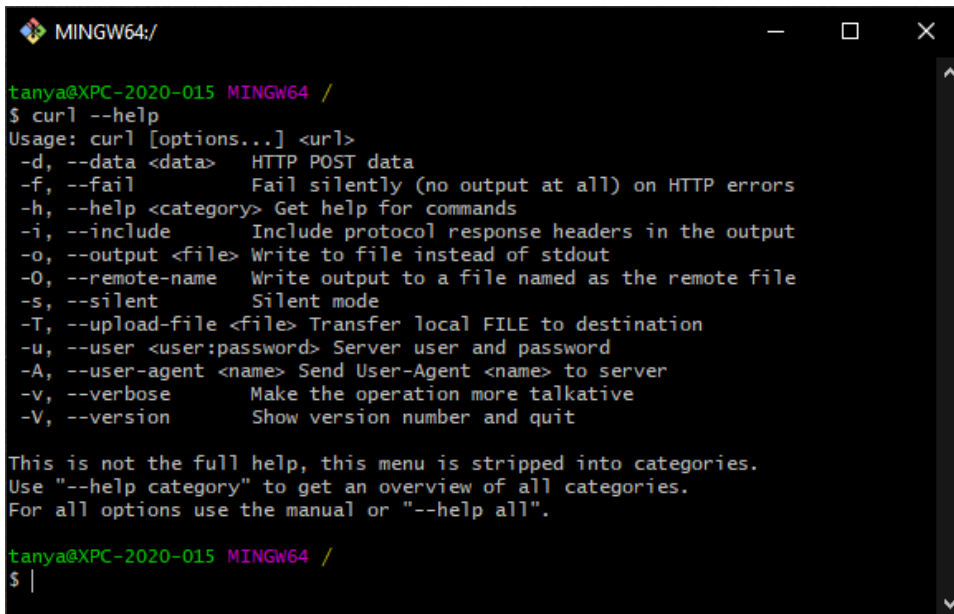

```


MINGW64:/
tanya@XPC-2020-015 MINGW64 /
$ curl --help
Usage: curl [options...] <url>
-d, --data <data>      HTTP POST data
-f, --fail             Fail silently (no output at all) on HTTP errors
-h, --help <category> Get help for commands
-i, --include          Include protocol response headers in the output
-o, --output <file>    Write to file instead of stdout
-O, --remote-name      Write output to a file named as the remote file
-s, --silent           Silent mode
-T, --upload-file <file> Transfer local FILE to destination
-u, --user <user:password> Server user and password
-A, --user-agent <name> Send User-Agent <name> to server
-v, --verbose          Make the operation more talkative
-V, --version          Show version number and quit

This is not the full help, this menu is stripped into categories.
Use "--help category" to get an overview of all categories.
For all options use the manual or "--help all".

tanya@XPC-2020-015 MINGW64 /
$ |

```

- To know cURL version, type in “**curl --version**”

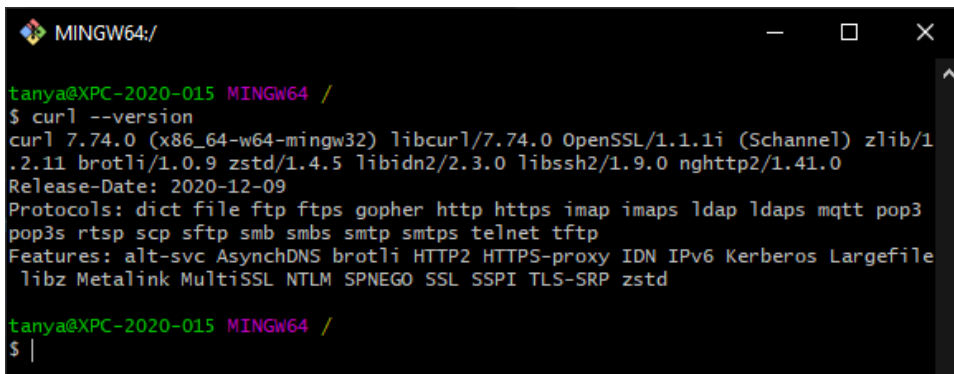

```

MINGW64:/
tanya@XPC-2020-015 MINGW64 /
$ curl --version
curl 7.74.0 (x86_64-w64-mingw32) libcurl/7.74.0 OpenSSL/1.1.1i (Schannel) zlib/1.2.11 brotli/1.0.9 zstd/1.4.5 libidn2/2.3.0 libssh2/1.9.0 nghttp2/1.41.0
Release-Date: 2020-12-09
Protocols: dict file ftp ftps gopher http https imap imaps ldap ldaps mqtt pop3 pop3s rtsp scp sftp smb smbs smtp smtps telnet tftp
Features: alt-svc AsynchDNS brotli HTTP2 HTTPS-proxy IDN IPv6 Kerberos Largefile libz Metalink MultiSSL NTLM SPNEGO SSL SSPI TLS-SRP zstd

tanya@XPC-2020-015 MINGW64 /
$ |

```


- **Important:** For testing APIs, the parameters to be entered into the command line will be:

```
curl --location --request POST '(insert URL here)' \
--header 'Content-Type:application/json' \
--data-raw '
(insert parameters here)
'
```

- When entered in the command line, the format should look like the picture below. After the “**--data-raw**” part, the user must create new lines for the “**params**” part and the rest of the data by clicking on Enter.

***Also, take note of the spaces and symbols entered**


(e.g., opening/closing braces, single/double quotation marks), as seen.

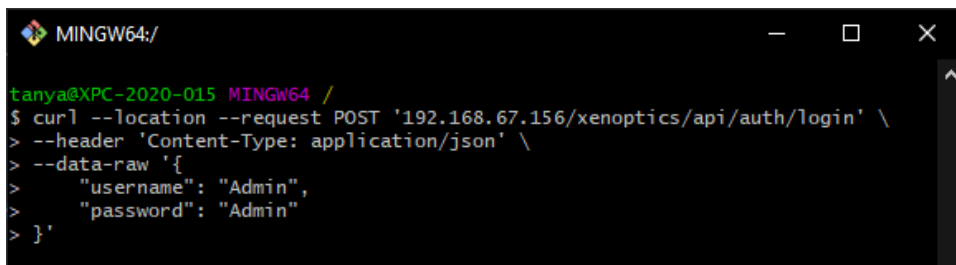

```
MINGW64:/
tanya@XPC-2020-015 MINGW64 /
$ curl --location --request POST '192.168.67.156/xenoptics/api/auth/login' \
> --header 'Content-Type: application/json' \
> --data-raw '{
>   "username": "Admin",
>   "password": "Admin"
> }'
```

```
curl --location --request POST '192.168.1.250/xenoptics/api/auth/login' \
--header 'Content-Type: application/json' \
--data-raw '{
    "username": "Admin",
    "password": "Admin"
}'
```

- If the API runs successfully, a response will appear. See figure below as an example.

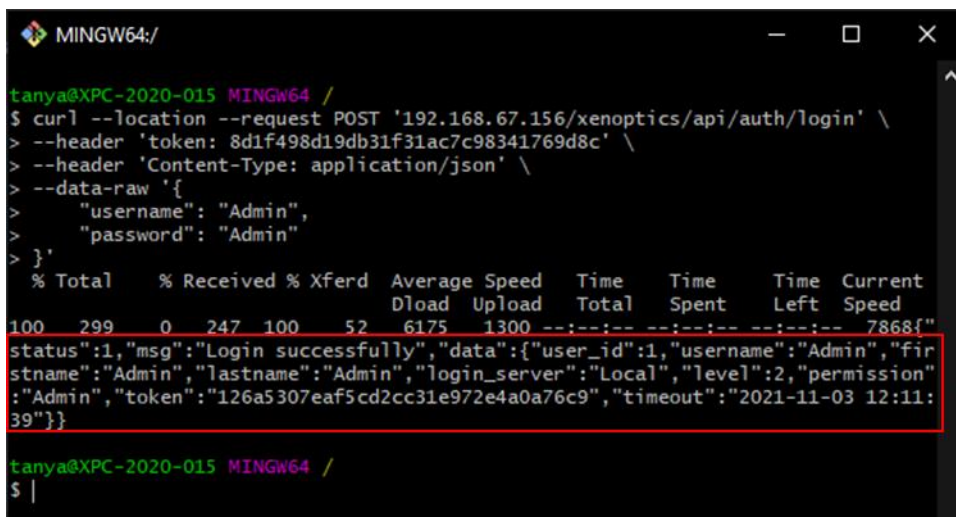

```
MINGW64:/
tanya@XPC-2020-015 MINGW64 /
$ curl --location --request POST '192.168.67.156/xenoptics/api/auth/login' \
> --header 'Content-Type: application/json' \
> --data-raw '{
>   "username": "Admin",
>   "password": "Admin"
> }'
  % Total    % Received % Xferd  Average Speed   Time    Time     Time  Current
                                 Dload  Upload   Total   Spent    Left   Speed
100 299    0 247 100  52  6175   1300  --:--:-- --:--:-- --:--:--  7868{
"status":1,"msg":"Login successfully","data":{"user_id":1,"username":"Admin","fir
stname":"Admin","lastname":"Admin","login_server":"Local","level":2,"permission
":"Admin","token":"126a5307eaf5cd2cc31e972e4a0a76c9","timeout":"2021-11-03 12:11:
39"}}
tanya@XPC-2020-015 MINGW64 /
$ |
```

1. User Authentication

Number	API Name	Details
1	Login	URL: /api/v2/authentication/login Method: POST Required Parameters: • username • password Optional Parameters: • mode Pre-requisite: • The user account must already exist in the database. Description: • Authenticates the user and logs in to the system.
2	Refresh token	URL: /api/v2/authentication/token/refresh Method: POST Required Parameters: • Authorization Bearer token • refresh_token Pre-requisite: • User must be logged in. Description: • Refreshes the authentication token for a logged-in user.
3	Logout	URL: /api/v2/authentication/logout Method: DELETE Required Parameters: • Authorization Bearer token Pre-requisite: • User must be logged in. Description: • Logs out of the system and invalidates the session token.

1.1 Login

➤ Required parameters.

Required Parameters	Description
username	Specifies the account username.
password	Specifies the password used to verify the user's identity.

➤ Optional parameters.

Required Parameters	Description
mode	Specifies the login mode. Used for enabling the read-only login option. Supported value: readonly : Enables Read-only login mode.

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the login request, used for tracking or auditing.
id	The returned identifier for the authenticated user or login session.
username	The username used for logging in.
firstname	The first name of the user account.
lastname	The last name of the user account.
server_name	Indicates the authentication source.
role_id	The role identifier that determines the user's permission level. Currently, the NMS supports role_id = 2 , which represents the Admin role.
role_name	The name of the role assigned to the user account.
permission	The permissions associated with the user's role. The supported permission types are: Admin: Provides full-access administrative authorization. Read-only: Provides read only access with no modification privileges.
timeout	Indicates the timestamp showing when the session will expire.
access_token	The authentication token used to authorize API service access.
refresh_token	The token used to obtain a new access token when the current access token expires.

Example: Login.

 Postman	Method: POST URL: https://nms2-sandbox.xenoptics.co/api/v2/authentication/login Body: <pre>{ "username": "Admin" , "password": "Admin" }</pre>
Command prompt 	<pre>curl.exe -X POST "https://nms2- sandbox.xenoptics.co/api/v2/authentication/login" -H "Content-Type: application/json" --data "{\"username\": \"Admin\", \"password\": \"Admin\"}" - -insecure</pre>
cURL 	<pre>curl --location 'https://nms2- sandbox.xenoptics.co/api/v2/authentication/login' \ --header 'Content-Type: application/json' \ --data '{ "username": "Admin" , "password": "Admin" }'</pre>
Response	<pre>{ "reference_no": "b5f4dee6-07c7-11f1-8451-5a00a01fe5bc", "data": { "user": { "id": 2, "username": "Admin", "firstname": "Admin", "lastname": "Admin", "server_name": "Local", "role_id": 2, "role_name": "admin", "permission": "admin", "timeout": "2026-02-12T09:05:00" }, "access_token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYWw1IljoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwLjoxNzcwODg3MTAwLCJzdWIiOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQOjE3NzA4ODExMDAsInRpbWV6b25lX2lkjoyMDIsInRpbWV6b25ljoivVRDliwiaXNfdGlZpovbmVfY29uZmlybSI6ZmEsc2UsIm9mZnNldF9udW1iZXliOiQi"</pre>

	<pre>rMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBp cmVkljpmYWxzZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9p bmVkX3NpbmNlloiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZX J2ZXJfdHlwZSI6ImxvY2FsliwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJl InJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmVhZGF9bmx5IjpmYWxzZSwidGVtcGVyYXR 1cmVfdW5pdF9uYW1lljoiQ2Vsc2l1cyAoXHUwMGIwQykiLCJ0ZW1wZXJhdHV yZV91bml0X3N5bWJvbCI6IkMifQ.U5lixUfuyjCZd8S2433QPun0RQj3mDT9Mx QlrwmSAxg", "refresh_token": "f0a26d3007e311f184515a00a01fe5bc" }</pre>
--	---

Example: Login with read-only permission.

Postman 	Method: POST URL: https://nms2-sandbox.xenoptics.co/api/v2/authentication/login Body: <pre>{ "username": "Admin", "password": "Admin", "mode": "readonly" }</pre>
Command prompt 	<pre>curl --location "https://nms2- sandbox.xenoptics.co/api/v2/authentication/login" ^ --header "Content-Type: application/json" ^ --data "{ \"username\": \"Admin\", \"password\": \"Admin\", \"mode\": \"readonly\" }"</pre>
cURL 	<pre>curl --location 'https://nms2- sandbox.xenoptics.co/api/v2/authentication/login' \ --header 'Content-Type: application/json' \ --data '{ "username": "Admin", "password": "Admin", "mode": "readonly" } '</pre>
Response	<pre>{ "reference_no": "b5f4dee6-07c7-11f1-8451-5a00a01fe5bc", "data": { "user": { "id": 2, "username": "Admin", "firstname": "Admin", "lastname": "Admin", "server_name": "Local", "role_id": 2, "role_name": "admin", "permission": "Readonly", "timeout": "2026-02-13T02:05:01" }, "access_token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkIjoyLCJmaXZdG5hbW UiOiJBZG1pbpbmVhc3R5YW1lIioiOQRtaW4iLCJ0eXN5dWFEnZSI6ImVuliwiZX "</pre>

	hwljoxNzcwOTQ4MzAxLCJzdWliOiJBZG1pbilslmlzcyI6lm5tc19zZXJ2ZXliLCJpYXQiOjE3NzA4ODgzMDEsInRpbWV6b25lX2lkljoyMDIsInRpbWV6b25lIjoieVVRDliwiaXNfdGltZXpvcmbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiI rMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwuLjAiLCJpc19wYXNzd29yZ9leHBp cmVkljpmYWxzZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9p bmVkX3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZX J2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilslJvbGVfaWQiOjlsInJvb GVfbmFtZSI6ImFkbWluliwiaXNfcmVhZF9vbmx5Ijp0cnVILCJ0ZW1wZXJhdHVy ZV91bml0X25hbWUiOiJDZWxzaxVzIChcdTAwYjBDKSIsInRlbXBldcmF0dXJlX3V uaXRfc3ltYm9sljoiQyJ9.4u7a- BpBD3ydnLBV85Cph9uSv2DG1nh0eNWkdLTdPAM", "refresh_token": "b52329d207f411f184515a00a01fe5bc" } }
--	---

1.2 Refresh token

➤ Required parameters.

Required Parameters	Description
refresh_token	The token used to obtain a new access token when the current access token expires.
Bearer token	An authentication security token used to authorize access to API services.

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the login request, used for tracking or auditing.
access_token	The authentication token used to authorize API service access.
refresh_token	The token used to obtain a new access token when the current one expires.

Example: Refresh token

Postman	Method: POST URL: https://nms2-sandbox.xenoptics.co/api/v2/authentication/token/refresh Header: • Key: Authorization • Value: Bearer {access_token} Body: <pre>{ "refresh_token": "refresh_token" }</pre>
Command prompt	<pre>curl --location "https://nms2- sandbox.xenoptics.co/api/v2/authentication/token/refresh" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lloiQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwLjoxNzcwOTU5NTg4LCJzdWIiOiJBZG1pbilslmlzczyl6lm5tc19zZXJ2ZXliLCJpcYXQiOjE3NzA4OTk1ODgsInRpbWV6b25lX2lkjoyMDIsbnRpbWV6b25ljoiVVRLDIiwiaXNfdGlTZXpvbmVFy29uZmlybS16ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCI6Im9mZnNldF9mbG9hdC16liswljaAiLCJpc19wYXNpdD9yZW5leHBpmcmVkklipmYWxzZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNIlljoijAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc190eXBlljojdXNlcislnJvbGVfaWQiOiJlcnJvbGVfbmFtZSI6ImFkbWluLiwiawXNfcmlvaGF9bmhm5ljpmpYWxzZSwidGVtcGVyYXR1cmVmdW5pdF9uYW1lloicQ2Vsc2l1cyAoXHUUwMGllwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCl6IkMifQ.IUXKD1vwIZlb3YCsglmWh3XS0NFbgR5mSeABDKurs8"" ^ --header "Content-Type: application/json" ^ --data "{ \"refresh_token\": \"9e4c0b104f6c11f1aecc46591ca6ae04\\\"}"</pre>
cURL	<pre>curl --location 'https://nms2- sandbox.xenoptics.co/api/v2/authentication/token/refresh' \ --header 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lloiQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwLjoxNzcwOTU5NTg4LCJzdWIiOiJBZG1pbilslmlzczyl6lm5tc19zZXJ2ZXliLCJpcYXQiOjE3NzA4OTk1ODgsInRpbWV6b25lX2lkjoyMDIsbnRpbWV6b25ljoiVVRLDIiwiaXNfdGlTZXpvbmVFy29uZmlybS16ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCI6Im9mZnNldF9mbG9hdC16liswljaAiLCJpc19wYXNpdD9yZW5leHBpmcmVkklipmYWxzZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNIlljoijAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc190eXBlljojdXNlcislnJvbGVfaWQiOiJlcnJvbGVfbmFtZSI6ImFkbWluLiwiawXNfcmlvaGF9bmhm5ljpmpYWxzZSwidGVtcGVyYXR1cmVmdW5pdF9uYW1lloicQ2Vsc2l1cyAoXHUUwMGllwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCl6IkMifQ.IUXKD1vwIZlb3YCsglmWh3XS0NFbgR5mSeABDKurs8''\ --header 'Content-Type: application/json' \ --data '{"refresh_token":"9e4c0b104f6c11f1aecc46591ca6ae04\\\"}'</pre>

Response

```
{
  "reference_no": "99544016-4f6a-11f1-aecc-46591ca6ae04",
  "data": {
    "access_token":
"eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkIjoyLCJmaXJzdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwIjoxNzc4NzQzMjI5LCJzZWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQiOiE3Nzg3NDcxNjksInRpbWV6b25lX2lkIjoxOTI5InRpbWV6b25lIjoIVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiRmDAwMCIsIm9mZnNldF9mbG9hdCI6IiwLjAiLCJpc19wYXNzd29yZf9leHBpcnVkljpmYWxzZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlljoIMjAyNi0wNS0xNCAwNzo1Nzo0OS44NzE4ODliLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilslmJvbGVfaWQiOiJlslmJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmVhZF9vbmx5IjpmYWxzZSwidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGlwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6ImFmQ.-37pb_GjQhnlx1MkypV0_Do0TvO0lv5_ID55sQP1N28",
    "refresh_token": "9e4c0b104f6c11f1aecc46591ca6ae04"
  }
}
```

1.3 Logout

➤ Required parameters.

Required Parameters	Description
Bearer token	An authentication security token used to authorize access to API services.

➤ Response parameters.

Response Parameters	Description
reference_no	A unique reference number generated for the logout request, used for tracking or auditing purposes.
details	A message indicating the result of the logout operation (e.g., “Successfully logged out”).

Example: Logout

Postman	Method: DELETE URL: https://nms2-sandbox.xenoptics.co/api/v2/authentication/logout Header: - Key: Authorization - Value: Bearer {access_token}
Command prompt	<pre>curl --location --request DELETE "https://nms2-sandbox.xenoptics.co/api/v2/authentication/logout" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjojQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwLjoxNzcwOTQzMDM3LCJzdWIiOiJBZG1pbilslmlzcyl6Im5tc19zZXJ2ZXliLCJpYXQiOjE3NzA4ODM0MzcsInRpbWV6b25lX2lkjoyMDIsInRpbWV6b25lIjojVVRDliwiaXNfdGltZXpvbmVfy29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiIlrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkljpmYWxzZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlljojMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilslJvbGVfaWQiOiJslJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmVhZF9vbm5ljpmYWxzZWidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjojQ2Vsc2l1cyAoXHUwMGlwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6IkMifQ.tl2tm-Dnn5-qK1M7ZVKflm9gk1jtRqKUfbj5aEr-gdg"</pre>
cURL	<pre>curl --location --request DELETE 'https://nms2-sandbox.xenoptics.co/api/v2/authentication/logout' \ --header 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjojQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwLjoxNzcwOTQzMDM3LCJzdWIiOiJBZG1pbilslmlzcyl6Im5tc19zZXJ2ZXliLCJpYXQiOjE3NzA4ODM0MzcsInRpbWV6b25lX2lkjoyMDIsInRpbWV6b25lIjojVVRDliwiaXNfdGltZXpvbmVfy29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiIlrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkljpmYWxzZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlljojMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilslJvbGVfaWQiOiJslJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmVhZF9vbm5ljpmYWxzZWidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjojQ2Vsc2l1cyAoXHUwMGlwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6IkMifQ.tl2tm-Dnn5-qK1M7ZVKflm9gk1jtRqKUfbj5aEr-gdg'</pre>
Response	<pre>{ "reference_no": "b5f4dee6-07c7-11f1-8451-5a00a01fe5bc", "details": "Successfully logged out" }</pre>

2. Connectivity

Number	API Name	Details
1	Create connection	URL: /api/v2/connectivity/connect Method: POST Required Parameters: - source_panel_name - source_port_no - target_panel_name - target_port_no - Authorization Bearer token Optional Parameters: - start_date Pre-requisite: - The user account must be logged in. - The selected ports must be available. Description: - Creates a connection by selecting the system(s) and two available ports.
2	Create disconnection	URL: /api/v2/connectivity/disconnect Method: POST Required Parameters: - panel_name - port_no - Authorization Bearer token Pre-requisite: - The user account must be logged in. - The selected ports must be in the Connected status. Description: - Initiates a disconnection operation by selecting the patch panel and the connected port number.
3	Create disconnection by using connection ID	URL: /api/v2/connectivity/connections/{connection_id}/disconnect Method: POST Required Parameters: - Authorization Bearer token - connection_id Pre-requisite: - The user account must be logged in. - The ports involved must be in the Connected status. Description: - Initiates the disconnection operation using a specific connection ID.

2.1 Create connection.

➤ Required parameters.

Required Parameters	Description
source_panel_name	Specifies the name of the patch panel configured in the NMS that will be used as the source panel. Type: string
source_port_no	Specifies the port number on the source patch panel that will be used to establish the connection. Type: array of integers
target_panel_name	Specifies the name of the patch panel configured in the NMS that will be used as the target panel. Type: string
target_port_no	Specifies the port number on the target patch panel that will be used to establish the connection. Type: array of integers
Bearer token	An authentication security token used to authorize access to API services.

➤ Optional parameters.

Required Parameters	Description
start_date	Specifies the scheduled connection date and time. Must be provided in a valid datetime format. Example: 2026-02-15T14:30:00

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the login request, used for tracking or auditing.
success	Indicates whether the connection was created successfully. (<i>true/false</i>)
message	A descriptive message returned by the API, informing the result of the operation.
connection_id	The unique identifier of the newly created connection.

Example: Create connection

Postman 	Method: POST URL: https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connect Header: - Key: Authorization - Value: Bearer {access_token} Body: <pre>{ "source_panel_name": "XSOS-576D-1", "source_port_no": [1], "target_panel_name": "XSOS-576D-2", "target_port_no": [145], "route": 0 }</pre>
Command prompt 	<pre>curl --location "https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connect" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2kljoyLCJmaXJzdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjojQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTU5NTg4LCJzdWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQjOiE3NzA4OTk1ODgsInRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjojVVRDliwiaXNfdGltZXpvcmbVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiI0rMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwuLjAiLCJpc19wYXNzd29yZf9leHBpcmbVkljpmYWxzZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVhX3NpbmNlIjojMjAyNS0xMC0yOSAwNDowMT0zOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwiwidXNlcl90eXBlljoidXNlciIsInJvbGVfaWQiOiJlInJvbGVfbmFtZSI6ImFkbWlulwliaXNfcmVhZf9vbm5lIjpmYWxzZSwidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjojQ2Vsc2l1cyAoXHUwMGIwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6IkMifQ.IUxkD1vviZlb3YCSgImWh3Xs0NFbgR5mSe aABDKurs8" ^ --header "Content-Type: application/json" ^ --data "{ \"source_panel_name\": \"XSOS-576D-1\", \"source_port_no\": [1], \"target_panel_name\": \"XSOS-576D-2\", \"target_port_no\": [145], \"route\": 0 }"</pre>
cURL 	<pre>curl --location 'https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connect' \ --header 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2kljoyLCJmaXJzdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjojQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTU5NTg4LCJzdWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQjOiE3NzA4OTk1ODgsInRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjojVVRDliwiaXNfdGltZXpvcmbVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiI0rMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwuLjAiLCJpc19wYXNzd29yZf9leHBpcmbVkljpmYWxzZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVhX3NpbmNlIjojMjAyNS0xMC0yOSAwNDowMT0zOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwiwidXNlcl90eXBlljoidXNlciIsInJvbGVfaWQiOiJlInJvbGVfbmFtZSI6ImFkbWlulwliaXNfcmVhZf9vbm5lIjpmYWxzZSwidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjojQ2Vsc2l1cyAoXHUwMGIwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6IkMifQ.IUxkD1vviZlb3YCSgImWh3Xs0NFbgR5mSe aABDKurs8' \ --header 'Content-Type: application/json' \</pre>

	<pre>--data '{ "source_panel_name": "XSOS-576D-1", "source_port_no": [1], "target_panel_name": "XSOS-576D-1", "target_port_no": [145], "route": 0 }'</pre>
Response	<pre>{ "reference_no": "783dcf76-08ea-11f1-97cc-6ef670fbde2e", "data": { "success": true, "message": "Connection added to queue successfully!", "connection_id": 49 } }</pre>

Example: Create connection with schedule time.

Postman 	Method: POST URL: https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connect Header: - Key: Authorization - Value: Bearer {access_token} Body: <pre>{ "source_panel_name": "XSOS-576D-1", "source_port_no": [3], "target_panel_name": "XSOS-576D-1", "target_port_no": [147], "route": 0, "start_date": "2026-02-28T05:00:00" }</pre>
Command prompt 	<pre>curl --location "https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connect" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2kljoyLCJmaXJzdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJ5YW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTU5NTg4LCJzdWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQiOiE3NzA4OTk1ODgsInRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvcmbVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiI0rMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwLjAiLCJpc19wYXNzd29yZf9leHBpcmbVkljpmYWxzZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVxX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMT0zOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwiidXNlcl90eXBlljoidXNlcilslInJvbGVfaWQiOiJslInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmVhZf9vbmxi5ljpYXZzSwidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGIwQykiLCJ0ZW1wZXJhdHVyZV91bmI0X3N5bWJvbCI6ImFkbWluliwK1UxkD1vviZlb3YCSgImWh3Xs0NFbgR5mSe aABDKurs8" ^ --header "Content-Type: application/json" ^ --data "{ \"source_panel_name\": \"XSOS-576D-1\", \"source_port_no\": [3], \"target_panel_name\": \"XSOS-576D-1\", \"target_port_no\": [147], \"route\": 0, \"start_date\": \"2026-02-28T05:00:00\" }"</pre>
cURL 	<pre>curl --location 'https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connect' \ --header 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2kljoyLCJmaXJzdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJ5YW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTU5NTg4LCJzdWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQiOiE3NzA4OTk1ODgsInRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvcmbVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiI0rMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwLjAiLCJpc19wYXNzd29yZf9leHBpcmbVkljpmYWxzZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVxX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMT0zOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwiidXNlcl90eXBlljoidXNlcilslInJvbGVfaWQiOiJslInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmVhZf9vbmxi5ljpYXZzSwidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGIwQykiLCJ0ZW1wZXJhdHVyZV91bmI0X3N5bWJvbCI6ImFkbWluliwK1UxkD1vviZlb3YCSgImWh3Xs0NFbgR5mSe aABDKurs8'</pre>

	<pre>yZV91bml0X3N5bWJvbCI6IkMifQ.IUxkD1vviZlb3YCSgImWh3Xs0NFbgR5mSe aABDKurs8'\ --header 'Content-Type: application/json' \ --data '{ "source_panel_name": "XSOS-576D-1", "source_port_no": [3], "target_panel_name": "XSOS-576D-1", "target_port_no": [147], "route": 0, "start_date": "2026-02-28T05:00:00" }'</pre>
Response	<pre>{ "reference_no": "b5f22638-07c7-11f1-b911-5a00a01fe5bc", "data": { "success": true, "message": "Connection added to queue successfully!", "connection_id": 105 } }</pre>

2.2 Create disconnection.

➤ Required parameters.

Required Parameters	Description
panel_name	Specifies the name of the patch panel that contains the port you want to disconnect. Type: string Note: When a port is selected from either the connected source or target patch panel, the system automatically identifies and selects its paired patch panel and port.
port_no	Specifies the port number on the selected patch panel that you want to disconnect. Type: integer Note: When you select a connected port from the chosen patch panel, the system will automatically select the corresponding paired patch panel and port.
Bearer token	An authentication security token used to authorize access to API services.

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the login request, used for tracking or auditing.
success	Indicates whether the disconnection was created successfully. (<i>true/false</i>)
message	A descriptive message returned by the API, informing the result of the operation.
connection_id	The unique identifier of the newly created disconnection.

Example: Create disconnection.

Postman	Method: POST URL: https://nms2-sandbox.xenoptics.co/api/v2/connectivity/disconnect Header: - Key: Authorization - Value: Bearer {access_token} Body:<pre>{ "panel_name": "XSOS-576D-1", "port_no": 1 }</pre>
Command prompt	<pre>curl --location "https://nms2-sandbox.xenoptics.co/api/v2/connectivity/disconnect" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2kljoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwlljoxNzcwOTU5NTg4LCJzdWIiOiJBZG1pbilslmlzcyl6Im5tc19zZXJ2ZXliLCJpYXQoOjE3NzA4OTk1ODgsInRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilsInJvbGVfaWQiOiJlsInJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmVhZmV6b25lcmV6b25lIjoivVRDIiwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIslm9mZnNldF9mbG9hdCI6IiswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZWswZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMTozOC</pre>

Response	<pre>{ "reference_no": "b5f22638-07c7-11f1-b911-5a00a01fe5bc", "data": { "success": true, "message": "Disconnection of Port 2 on panel 'XSOS-576D-1' added to queue successfully!", "connection_id": 36 } }</pre>
-----------------	---

2.3 Create disconnection by connection ID.

➤ Required parameters.

Required Parameters	Description
connection_id	Specifies the ID of the existing connection that you want to disconnect. This ID can be retrieved by using the View Current Connections API. Type: integer (<i>URL path</i>)
Bearer token	An authentication security token used to authorize access to API services.

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the login request, used for tracking or auditing.
success	Indicates whether the disconnection was created successfully. (<i>true/false</i>)
message	A descriptive message returned by the API, informing the result of the operation.
connection_id	The unique identifier of the newly created disconnection.

Example: Create disconnection by connection ID.

Postman 	Method: POST URL: https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connections/1/disconnect Header: - Key: Authorization - Value: Bearer {access_token}
Command prompt 	<pre>curl --location --request POST "https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connections/1/disconnect" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2kljoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTU5NTg4LCJzdWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQiOiJlE3NzA4OTk1ODgsInRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvcmbVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiI0rMDAwMCI6Im9mZnNldF9mbG9hdCI6IiwLjAiLCJpc19wYXNzd29yZf9leHBpcmVkljpmYWxzZSwiZW1haWwiOiJhZG1pbk4ZmV5cHRpY3MuY29tliwiam9pbmVhX3NpbmNlIjoimjAyNS0xMC0yOSAwNDowMT0zOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlciIsInJvbGVfaWQiOiJlInJvbGVfbmFtZSI6ImFkbWlulwliaXNfcmVhZf9vbm5lIjpmYWxzZSwidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGlwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6IkMifQ.IUxkD1vviZlb3YCSglmWh3Xs0NFbgR5mSeABDKurs8"</pre>
cURL 	<pre>curl --location --request POST 'https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connections/1/disconnect' \ --header 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2kljoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTU5NTg4LCJzdWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQiOiJlE3NzA4OTk1ODgsInRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvcmbVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiI0rMDAwMCI6Im9mZnNldF9mbG9hdCI6IiwLjAiLCJpc19wYXNzd29yZf9leHBpcmVkljpmYWxzZSwiZW1haWwiOiJhZG1pbk4ZmV5cHRpY3MuY29tliwiam9pbmVhX3NpbmNlIjoimjAyNS0xMC0yOSAwNDowMT0zOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlciIsInJvbGVfaWQiOiJlInJvbGVfbmFtZSI6ImFkbWlulwliaXNfcmVhZf9vbm5lIjpmYWxzZSwidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGlwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6IkMifQ.IUxkD1vviZlb3YCSglmWh3Xs0NFbgR5mSeABDKurs8'</pre>
Response	<pre>{ "reference_no": "8e57695a-08ec-11f1-aa77-26fe91894541", "data": { "success": true, "message": "Disconnection 1 added to queue successfully!", "connection_id": 1 } }</pre>

3. Tasks

Number	API Name	Details
1	View remaining tasks	URL: /api/v2/connectivity/queues Method: GET Required Parameters: • Authorization Bearer token Pre-requisite: • The user account must be logged in. Description: • Displays all remaining tasks in the queue list, including both the task currently being processed and those waiting to be executed.
2	View current connections	URL: /api/v2/connectivity/connections Method: GET Required Parameters: • Authorization Bearer token Pre-requisite: • The user account must be logged in. Description: • Retrieves a list of all current active connections.

3.1 View remaining tasks.

➤ Required parameters.

Required Parameters	Description
Bearer token	An authentication security token used to authorize access to API services.

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the login request, used for tracking or auditing.
total_count	The total number of remaining tasks in the queue.
no	The queue number assigned to the task in the remaining-tasks list.
connection_id	The ID of the connection associated with the queued task.
operation_name	The name of the operation (e.g., “Connect”, “Disconnect”).
source	A list containing details of the source patch panel and port used for the operation. Each item includes: • panel_name: name of the source patch panel • port_no: port number • port_description: description of the port
target	A list containing details of the target patch panel and port used for the operation. Each item includes: • panel_name: name of the target patch panel • port_no: port number • port_description: description of the port
status	The current status of the task (e.g., “Waiting”, “Operating”, “Failed”).
scheduled_at	The scheduled date and time for the operation.
created_by	The name of the user who created the queued task.
created_at	The date and time the task was created.
remark	Additional remarks or notes related to the task.

Example: View remaining tasks.

[illegible]

```
"operation_name": "Connect",
"source": [
  {
    "panel_name": "XSOS-576D-1",
    "port_no": 65,
    "port_description": "XSOS-576D-1: Port-65"
  }
],
"target": [
  {
    "panel_name": "XSOS-576D-1",
    "port_no": 165,
    "port_description": "XSOS-576D-1: Port-165"
  }
],
"status": "Waiting",
"scheduled_at": "2026-02-12T10:44:09",
"created_by": "Tanya",
"created_at": "2026-02-12T10:44:09",
"remark": ""
}
]
}
}
```

3.2 View current connections.

➤ Required parameters.

Required Parameters	Description
Bearer token	An authentication security token used to authorize access to API services.

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the login request, used for tracking or auditing.
total_count	The total number of active or current connections.
no	The list number of the connection.
connection_id	The unique ID of the current active connection.
operation_name	The type of operation associated with the connection.
source	A list containing details of the source patch panel and port. Each entry includes: • panel_name: the source patch panel name • port_no: the source port number • port_description: description of the source port
target	A list containing details of the target patch panel and port. Each entry includes: • panel_name: the target patch panel name • port_no: the target port number • port_description: description of the target port
scheduled_at	The date and time when the connection was scheduled.
created_at	The date and time when the connection request was created.
created_by	The user or system that created the connection.
remark	Additional comments or notes related to the connection.
started_at	The date and time when the connection operation started.
finished_at	The date and time when the connection operation finished.

Example: View current connections.

Postman 	Method: GET URL: https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connections Header: - Key: Authorization - Value: Bearer {access_token}
Command prompt 	<pre>curl --location "https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connections" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTUzMDA4LjZdWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpcYXQioEjE3NzA4OTMwMDgsInRpbWV6b25lX2lkjoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZW5iZW1haWwiOiJhZG1pbkBTZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNIjoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsIiwidXNlcj90eXBlljoidXNlcilslmVjbGVfaWQiOiJlbnVibGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZGF9bmV6b25lIjpmYWxzZW5pdF9udW1lIjoIQ2Vsc2l1cyAoXHUwMGluYXkiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6IkMifQ.BGYe-ToHo5yzuyaHmpHFXYGQFjlm4s9EBiXMUSo-IfU"</pre>
cURL 	<pre>curl --location 'https://nms2-sandbox.xenoptics.co/api/v2/connectivity/connections' \ --header 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTUzMDA4LjZdWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpcYXQioEjE3NzA4OTMwMDgsInRpbWV6b25lX2lkjoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpmYWxzZW5iZW1haWwiOiJhZG1pbkBTZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNIjoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsIiwidXNlcj90eXBlljoidXNlcilslmVjbGVfaWQiOiJlbnVibGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZGF9bmV6b25lIjpmYWxzZW5pdF9udW1lIjoIQ2Vsc2l1cyAoXHUwMGluYXkiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6IkMifQ.BGYe-ToHo5yzuyaHmpHFXYGQFjlm4s9EBiXMUSo-IfU'</pre>
Response	<pre>{ "reference_no": "b5f22638-07c7-11f1-b911-5a00a01fe5bc", "data": { "total_count": 102, "items": [{ "no": 1, "connection_id": 1, "operation_name": "Connect", "source": [</pre>

	<pre>"panel_name": "XSOS-576D-1", "port_no": 60, "port_description": "XSOS-576D-1: Port-60" }], "target": [{ "panel_name": "XSOS-576D-1", "port_no": 255, "port_description": "XSOS-576D-1: Port-255" }], "scheduled_at": "2026-02-12T10:05:12", "created_at": "2026-02-12T10:05:12", "created_by": "EMS", "remark": "EMS Connection", "started_at": "2026-02-12T10:05:12", "finished_at": "2026-02-12T10:05:12" },</pre>
--	--

4. Port information

Number	API Name	Details
1	View port information	URL: /api/v2/ports Method: GET Required Parameters: • Authorization Bearer token Optional Parameters: • offset • limit • search • ordering • smu_type • status Pre-requisite: • The user account must be logged in. Description: • Displays port information.
2	View port summary	URL: /api/v2/ports/summary Method: GET Required Parameters: • Authorization Bearer token Pre-requisite: • The user account must be logged in. Description: • Display a summary of each port status.

4.1 View port information

**NOTE**

By default, the API returns 288 ports to optimize response performance. To retrieve all ports available in the system, optional parameters may be applied to adjust the data filtering criteria.

➤ Required parameters.

Required Parameters	Description
Bearer token	An authentication security token used to authorize access to API services.

➤ Optional parameters.

Required Parameters	Description
offset	Number of items to skip before returning results (0-based index). Type: integer Default: 0 Minimum: 0
limit	Maximum number of items to return per request. Type: integer Default: 288 Maximum: 10,000
search	Search filter for matching port description . Type: string or null
ordering	Sort direction for the selected sort field. Type: string or null Available values: asc, desc Default: asc
smu_type	Filter ports by SMU type. Type: string or null Available values: east, west
status	Filter ports by port status. Type: array of strings or null Available values: available, connected, disabled

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the login request, used for tracking or auditing.
total_count	The total number of ports in the system.
id	The unique identifier of the port in the system.
port_no	The port number on the patch panel.
description	The full description of the port as configured in the system (e.g., <i>XSOS-576D-2: Port-288</i>).
panel_name	The name of the patch panel that contains the port.
status	The current status of the port which are: • Available • Connected • Disabled • Reserved.
connected_port	The paired port number this port is connected to. May be null if the port is not connected.
reserved_as_interconnection	Indicates whether the port is reserved for interconnection which the value are: • true = The port is being used as interconnection. • false = The port is not being used a interconnection.
allocated_to_customer	Customer allocation details if assigned. May be null if not allocated.
fiber_type	The fiber type supported by the port (Duplex, Simplex).
smu_type	The port type (East, West).
serial_no	The serial number of the port.
connected_count	The number of times this port has been used in connections.

Example: View all port information.

[illegible]

	<pre>"allocated_to_customer": null, "fiber_type": "Duplex", "smu_type": "East", "serial_no": null, "connected_count": 30 },</pre>
--	---

Example: View port information with filter option.

 Postman	Method: GET URL: https://nms2-sandbox.xenoptics.co/api/v2/ports Header: - Key: Authorization - Value: Bearer {access_token} Params (Optional): <table border="1"> <thead> <tr> <th>Key</th><th>Example Value</th></tr> </thead> <tbody> <tr> <td>limit</td><td>10</td></tr> <tr> <td>offset</td><td>10</td></tr> <tr> <td>search</td><td>Port-1</td></tr> <tr> <td>ordering</td><td>desc</td></tr> <tr> <td>smu_type</td><td>west</td></tr> <tr> <td>status</td><td>available</td></tr> </tbody> </table>	Key	Example Value	limit	10	offset	10	search	Port-1	ordering	desc	smu_type	west	status	available
Key	Example Value														
limit	10														
offset	10														
search	Port-1														
ordering	desc														
smu_type	west														
status	available														
Command prompt 	<pre>curl --location "https://nms2-sandbox.xenoptics.co/api/v2/ports?limit=10&offset=10&search=Port-1&ordering=desc&smu_type=west&status=available" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lljoiQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwIjojNzcwOTU5NTg4LjZldWIiOiJBZG1pbilslmlzcyYlM5tc19zZXJ2ZXliLCJpYXQiOjE3NzA4OTk1ODgsInRpbWV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV6b25lIjoiVVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6liswLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWZSwiZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoiMjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilSnJvbGVfaWQiOiJlSnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZmV6b25lX2lkjoyMDIsInRpbWV</pre>														

	yZV91bml0X3N5bWJvbCI6IkMifQ.IUxkD1vviZlb3YCSgImWh3Xs0NFbgR5mSe aABDKurs8'
Response	<pre>{ "reference_no": "b5f22638-07c7-11f1-b911-5a00a01fe5bc", "data": { "total_count": 110, "items": [{ "id": 477, "port_no": 189, "description": "XSOS-576D-2: Port-189", "panel_name": "XSOS-576D-2", "status": "Available", "connected_port": null, "reserved_as_interconnection": false, "allocated_to_customer": null, "fiber_type": "Duplex", "smu_type": "West", "serial_no": "XEN20220110/01-1-S0008", "connected_count": 0 }] } }</pre>

4.2 View port summary

➤ Required parameters.

Required Parameters	Description
Bearer token	An authentication security token used to authorize access to API services.

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the login request, used for tracking or auditing.
total_ports	The total number of ports in the system.
available_ports	The number of ports that are currently available and not in use.
connected_port	The number of ports that are currently connected.
interconnection_port	The number of ports involved in interconnections.
disabled_port	The number of ports that are currently disabled.

Example: View port summary

Postman 	Method: GET URL: https://nms2-sandbox.xenoptics.co/api/v2/ports/summary Header: - Key: Authorization - Value: Bearer {access_token}
Command prompt 	<pre>curl --location "https://nms2-sandbox.xenoptics.co/api/v2/ports/summary" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2kljoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJ5YW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTUzMDA4LCJzdWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQiOiJlE3NzA4OTMwMDgsInRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvcmbVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiIlrMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwLjAiLCJpc19wYXNzd29yZf9leHBpcmVkljpmYWxzZSwiZW1haWwiOiJhZG1pbk4ZmV5cHRpY3MuY29tliwiam9pbmVhX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMT0zOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilslJvbGVfaWQiOiJlslJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlVhZf9vbm5lIjpmYWxzZSwidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGllwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6ImFmQyBGRyYyZm4s9EBlXmUso-IfU"</pre>
cURL 	<pre>curl --location 'https://nms2-sandbox.xenoptics.co/api/v2/ports/summary' \ --header 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2kljoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJ5YW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTUzMDA4LCJzdWliOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQiOiJlE3NzA4OTMwMDgsInRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvcmbVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXliOiIlrMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwLjAiLCJpc19wYXNzd29yZf9leHBpcmVkljpmYWxzZSwiZW1haWwiOiJhZG1pbk4ZmV5cHRpY3MuY29tliwiam9pbmVhX3NpbmNlIjoIMjAyNS0xMC0yOSAwNDowMT0zOC4zODkwNzQiLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlcl90eXBlljoidXNlcilslJvbGVfaWQiOiJlslJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlVhZf9vbm5lIjpmYWxzZSwidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGllwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6ImFmQyBGRyYyZm4s9EBlXmUso-IfU'</pre>
Response	<pre>{ "reference_no": "b5f22638-07c7-11f1-b911-5a00a01fe5bc", "data": { "total_ports": 576, "available_ports": 372, "connected_port": 204, "interconnection_port": 0, "disabled_port": 0 } }</pre>

5. System Information

Number	API Name	Details
1	View system information	URL: /api/v2/system/status Method: GET Required Parameters: • Authorization Bearer token Pre-requisite: • The user account must be logged in. Description: • Displays system information.
2	View system inventory	URL: /api/v2/inventory Method: GET Required Parameters: • Authorization Bearer token Pre-requisite: • The user account must be logged in. Description: • Display a list of unit registered in the NMS.

5.1 View system information

➤ Required parameters.

Required Parameters	Description
Bearer token	An authentication security token used to authorize access to API services.

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the login request, used for tracking or auditing.
status	The current operating status of the system.
total_queue	The total number of tasks currently in the remaining list.
total_connection	The total number of active or completed connection operations recorded by the system.
total_notification	The total number of unread or pending system notifications.

Example: View system information.

Postman	Method: GET URL: https://nms2-sandbox.xenoptics.co/api/v2/system/status Header: - Key: Authorization - Value: Bearer {access_token}
Command prompt	<pre>curl --location "https://nms2-sandbox.xenoptics.co/api/v2/system/status" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwLjoxNzcwOTUzMDA4LCJzdWIiOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQiOjE3NzA4OTMwMDgSnRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvbmVfY29uZmlybSl6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZW1haWwiOiJhZG1pbk4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoimjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilslJvbGVfaWQiOiJslJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZGF9bm5ljpmYWxzZWidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGlwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6IkMifQ.BGYe-ToHo5yzuyaHmpHFXYGQFjlm4s9EBiXMUSo-lfu"</pre>
cURL	<pre>curl --location 'https://nms2-sandbox.xenoptics.co/api/v2/system/status' \ --header 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilslmxhc3RuYW1lIjoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwLjoxNzcwOTUzMDA4LCJzdWIiOiJBZG1pbilslmlzcyI6Im5tc19zZXJ2ZXliLCJpYXQiOjE3NzA4OTMwMDgSnRpbWV6b25lX2kljoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvbmVfY29uZmlybSl6ZmFsc2UsIm9mZnNldF9udW1iZXliOilrMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwLjAiLCJpc19wYXNzd29yZF9leHBpcmVkIjpYWxzZWsiZW1haWwiOiJhZG1pbk4ZW5vcHRpY3MuY29tliwiam9pbmVkJ3NpbmNlljoimjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FsliwidXNlc90eXBlljoidXNlcilslJvbGVfaWQiOiJslJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZGF9bm5ljpmYWxzZWidGVtcGVyYXR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGlwQykiLCJ0ZW1wZXJhdHVyZV91bml0X3N5bWJvbCI6IkMifQ.BGYe-ToHo5yzuyaHmpHFXYGQFjlm4s9EBiXMUSo-lfu'</pre>
Response	<pre>{ "reference_no": "b5f22638-07c7-11f1-b911-5a00a01fe5bc", "data": { "status": "Paused", "total_queue": 1, "total_connection": 102, "total_notification": 0 } }</pre>

5.2 View inventory

➤ Required parameters.

Required Parameters	Description
Bearer token	An authentication security token used to authorize access to API services.

➤ Response parameters.

Response Parameters	Description
reference_no	A unique identifier generated for the request, used for tracking or auditing purposes.
total_count	The total number of units registered in the NMS system.
no	The list number of the unit entry in the inventory list.
id	The unique identifier of the unit registered in the NMS.
name	The name assigned to the unit in the NMS.
ip_address	The IP address or hostname used to communicate with the unit.
model_name	The model name of the unit which are: • XSOS-576DLC • XSOS-288SLC • XSOS-288DLC • CSOS-72SLC • CSOS-144DLC
model_fiber_type	The fiber type supported by the unit which are: • Duplex • Simplex
ems_name	The name assigned to the unit in the EMS (Element Management System).
serial_no	The unique serial number of the hardware unit.
software_version	The current software version installed on the unit.
firmware_version	The firmware version running on the unit.
timezone	The timezone configured on the unit (e.g., UTC (+0000)).
uptime	The duration for which the unit has been running since the last reboot.
status	The operational status of the unit which are: • Ready • Operating • Pause • Initializing • Locked • Locking • Unlocking

Response Parameters	Description
	• Recovery • Power saver • Stand by
progress	The current progress of any ongoing task, if applicable (may be null).
alarm_msg	Any active alarm message from the unit, if applicable (may be null).

Example: View system inventory.

Postman	Method: GET URL: https://nms2-sandbox.xenoptics.co/api/v2/inventory Header: - Key: Authorization - Value: Bearer {access_token}
Command prompt	<pre>curl --location "https://nms2-sandbox.xenoptics.co/api/v2/inventory" ^ --header "Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilSImxhc3RuYW1lIjoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTUzMDA0LjZkdWliOiJBZG1pbilSImZcyY2F9udW19zZXJ2ZXIiLCJpcyYXQiOjE3NzA4OTMwMDgsInRpbWV6b25lX2lkjoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXIiOiIlrMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwiaXBkYXRpbWV6b25lIjoivVRcmVkljpmYWxzZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlljoimjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlc90eXBlljoidXNlcislnJvbGVfaWQiOiJlbnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZGF9bmV6b25lIjoivVR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGluYyZV91bml0X3N5bWJvbCI6IkMifQ.BGYe-ToHo5yzuyaHmpHFXYGQFjlm4s9EBiXMUSo-IfU"</pre>
cURL	<pre>curl --location 'https://nms2-sandbox.xenoptics.co/api/v2/inventory' \ --header 'Authorization: Bearer eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VyX2lkjoyLCJmaXZdG5hbWUiOiJBZG1pbilSImxhc3RuYW1lIjoIQWRtaW4iLCJsYW5ndWFnZSI6ImVuliwiZXhwIjoxNzcwOTUzMDA0LjZkdWliOiJBZG1pbilSImZcyY2F9udW19zZXJ2ZXIiLCJpcyYXQiOjE3NzA4OTMwMDgsInRpbWV6b25lX2lkjoyMDIsInRpbWV6b25lIjoivVRDliwiaXNfdGltZXpvbmVfY29uZmlybSI6ZmFsc2UsIm9mZnNldF9udW1iZXIiOiIlrMDAwMCIsIm9mZnNldF9mbG9hdCI6IiwiaXBkYXRpbWV6b25lIjoivVRcmVkljpmYWxzZW1haWwiOiJhZG1pbkB4ZW5vcHRpY3MuY29tliwiam9pbmVkX3NpbmNlljoimjAyNS0xMC0yOSAwNDowMTozOC4zODkwNzQlLCJzZXJ2ZXJfdHlwZSI6ImxvY2FslwidXNlc90eXBlljoidXNlcislnJvbGVfaWQiOiJlbnJvbGVfbmFtZSI6ImFkbWluliwiaXNfcmlhZGF9bmV6b25lIjoivVR1cmVfdW5pdF9uYW1lIjoIQ2Vsc2l1cyAoXHUwMGluYyZV91bml0X3N5bWJvbCI6IkMifQ.BGYe-ToHo5yzuyaHmpHFXYGQFjlm4s9EBiXMUSo-IfU'</pre>
Response	<pre>{ "reference_no": "b5f22638-07c7-11f1-b911-5a00a01fe5bc", "data": { "total_count": 2, "items": [{ "no": 1, "id": 1, "name": "XSOS-576D-1", "ip_address": "576d-demo-1.xenoptics.co", "model_name": "XSOS-576DLC", "model_fiber_type": "Duplex", "ems_name": "XSOSHST".</pre>

	<pre>"serial_no": "S202120501006", "software_version": "2.0.0.2", "firmware_version": "1.0.0", "timezone": "UTC (+0000)", "uptime": "1 hours 54 mins", "status": "Ready", "progress": null, "alarm_msg": null },</pre>
--	--