

# quinta practica arquitectura en la nube



Creamos una carpeta para el wordpress

elanticuchito@DESKTOP-QF8RQM:~\$ mkdir -p ~/practica5-wordpress

cd ~/practica5-wordpress

elanticuchito@DESKTOP-QF8RQM:~/practica5-wordpress\$ mkdir -p ~/practica5-wordpress

cd ~/practica5-wordpress

elanticuchito@DESKTOP-QF8RQM:~/practica5-wordpress\$ pwd

/home/elanticuchito/practica5-wordpress

elanticuchito@DESKTOP-QF8RQM:~/practica5-wordpress\$ ssh-keygen -t ed25519 -f ~/.ssh/wordpress-key -C "wordpress-aws"

Generating public/private ed25519 key pair.

Enter passphrase (empty for no passphrase):

Enter same passphrase again:

Your identification has been saved in /home/elanticuchito/.ssh/wordpress-key

Your public key has been saved in /home/elanticuchito/.ssh/wordpress-key.pub

The key fingerprint is:

SHA256:8GJ61iOI3GZdf5TLWisAcWk718CRDp220VScC79DKLw wordpress-aws

The key's randomart image is:

+--[ED25519 256]--+

|

| .+ .o .

| . = 0 o o

| .+ = = o .

| .oo + E.+

| o.S+ .oo .

| . o = +.oo..o

| o \* = o..= .

| o o . .+. .

| . . . .

+-----[SHA256]-----+

elanticuchito@DESKTOP-QF8RQM:~/practica5-wordpress\$ ls -la ~/.ssh/wordpress-key\*

-rw----- 1 elanticuchito elanticuchito 399 Jan 30 02:55 /home/elanticuchito/.ssh/wordpress-key

-rw-r--r-- 1 elanticuchito elanticuchito 95 Jan 30 02:55 /home/elanticuchito/.ssh/wordpress-key.pub

elanticuchito@DESKTOP-QF8RQM:~/practica5-wordpress\$

Nombre de IP: ip-172-31-3-93.eu-north-1.compute.internal

Tipo de instancia  
t3.micro

Direcciones IP elásticas  
-

Dirección IP asignada automáticamente  
16.170.35.43 [IP pública]

ID de VPC  
vpc-017283af36e643747

Hallazgo de AWS Compute Optimiz  
Suscribirse a AWS Compute Optimiz

Y lanzamos otra instancia con una clave llamada(wordpress) igual que la anterior pero con el nombre

| Ordenar Ver ... |                                             |                       |                      |        |
|-----------------|---------------------------------------------|-----------------------|----------------------|--------|
|                 | Nombre                                      | Fecha de modificación | Tipo                 | Tamaño |
| Personal        | hoy                                         |                       |                      |        |
|                 | wordpress-key-aws.pem                       | 30/01/2026 2:59       | Archivo PEM          | 2 KB   |
|                 | ayer                                        |                       |                      |        |
|                 | labuser.pem                                 | 29/01/2026 18:35      | Archivo PEM          | 2 KB   |
| io              | Sexta práctica de Arquitecta en la Nube...  | 29/01/2026 18:09      | Microsoft Edge PD... | 245 KB |
| gas             | Quinta práctica de Arquitectura en la Nu... | 29/01/2026 18:09      | Microsoft Edge PD... | 188 KB |

Resumen de instancia de i-09cf6449483f5ab51

Se ha actualizado hace less than a minute

ID de la instancia

i-09cf6449483f5ab51

Dirección IPv6

-

Tipo de nombre de anfitrión

Nombre de IP: ip-172-31-38-241.eu-north-1.compute.internal

Responder al nombre DNS de recurso privado

IPv4 (A)

Dirección IP asignada automáticamente

13.61.104.116 [IP pública]

Rol de IAM

-

IMDSv2

Required

Operador

-

Dirección IPv4 pública

13.61.104.116 | dirección abierta

Estado de la instancia

En ejecución

Nombre DNS de IP privada (solo IPv4)

ip-172-31-38-241.eu-north-1.compute.internal

Tipo de instancia

t3.micro

ID de VPC

vpc-017283af36e643747

ID de subred

subnet-0fc294e9d33f7c0fe

ARN de instancia

arn:aws:ec2:eu-north-1:412655954942:instance/i-09cf6449483f5ab51

Direcciones IPv4 privadas

172.31.38.241

DNS público

ec2-13-61-104-116.eu-north-1.compute.amazonaws.com | dirección abierta

Direcciones IP elásticas

-

Hallazgo de AWS Compute Optimizer

Suscribirse a AWS Compute Optimizer para recibir recomendaciones. | Más información

Nombre del grupo de Auto Scaling

-

Administradas

falso

Detalles

Estado y alarmas

Monitoreo

Seguridad

Redes

Almacenamiento

Etiquetas

▼ Detalles de la instancia Información

ID de AMI

ami-073130f74f5fb161

Nombre de AMI

ubuntu/images/hvm-ssd-gp3/ubuntu-noble-24.04-amd64-server-20251212

Detener la protección

desactivado

Migración por reinicio de instancias

Predeterminada (activado)

Comportamiento de detención de hibernación

desactivado

Motivo de transición de estado

-

Monitoreo

desactivado

Imagen permitida

-

Hora de lanzamiento

Fri Jan 30 2026 03:01:28 GMT+0100 (hora estándar de Europa central) (2 minutos)

Recuperación automática de instancias

Predeterminada

Índice de lanzamiento de AMI

0

Especificación de crédito

unlimited

Detalles de la plataforma

Linux/UNIX

Protección de terminación

desactivado

Ubicación de AMI

amazon/ubuntu/images/hvm-ssd-gp3/ubuntu-noble-24.04-amd64-server-20251212

Ciclo de vida

normal

Par de claves asignado en el lanzamiento

wordpress-key-aws

ID de kernel

-

Conectamos la maquina a la clave

```

ubuntu@ip-172-31-38-241: ~
/mnt/c/Users/elanticuchito/Downloads/labuser.pem /mnt/c/Users/elanticuchito/Downloads/wordpress-key-aws.pem
elanticuchito@DESKTOP-QF8RQMQ:~/practica5-wordpress$ cp /mnt/c/Users/$USER/Downloads/wordpress-key-aws.pem ~/.ssh/
cp: cannot create regular file '/home/elanticuchito/.ssh/wordpress-key-aws.pem': Permission denied
elanticuchito@DESKTOP-QF8RQMQ:~/practica5-wordpress$ chmod 400 ~/.ssh/wordpress-key-aws.pem
elanticuchito@DESKTOP-QF8RQMQ:~/practica5-wordpress$ ssh -i ~/.ssh/wordpress-key-aws.pem ubuntu@13.61.104.116
^C
elanticuchito@DESKTOP-QF8RQMQ:~/practica5-wordpress$ ssh -i ~/.ssh/wordpress-key-aws.pem ubuntu@13.61.104.116
^C
elanticuchito@DESKTOP-QF8RQMQ:~/practica5-wordpress$ ssh -i ~/.ssh/wordpress-key-aws.pem ubuntu@172.31.38.241
^C
elanticuchito@DESKTOP-QF8RQMQ:~/practica5-wordpress$ ssh -i ~/.ssh/wordpress-key-aws.pem ubuntu@13.61.104.116
Welcome to Ubuntu 24.04.3 LTS (GNU/Linux 6.14.0-1018-aws x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:        https://ubuntu.com/pro

System information as of Fri Jan 30 03:24:02 UTC 2026

System load:  0.0           Temperature:   -273.1 C
Usage of /:   26.4% of 6.71GB Processes:    109
Memory usage: 25%          Users logged in: 0
Swap usage:   0%           IPv4 address for ens5: 172.31.38.241

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.

```


Operación de uso

ID de disco RAM

Instalamos apache2 y vefrificamos su estatus

```
ubuntu@ip-172-31-38-241: ~  
systemctl restart getty@tty1.service  
systemctl restart networkd-dispatcher.service  
systemctl restart serial-getty@ttyS0.service  
systemctl restart systemd-logind.service  
systemctl restart unattended-upgrades.service  
  
No containers need to be restarted.  
  
User sessions running outdated binaries:  
ubuntu @ session #14: sshd[1310]  
ubuntu @ user manager service: systemd[1315]  
  
No VM guests are running outdated hypervisor (qemu) binaries on this host.  
ubuntu@ip-172-31-38-241:~$ sudo systemctl status apache2  
● apache2.service - The Apache HTTP Server  
   Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset: enabled)  
   Active: active (running) since Fri 2026-01-30 03:27:10 UTC; 17s ago  
     Docs: https://httpd.apache.org/docs/2.4/  
   Main PID: 8360 (apache2)  
     Tasks: 55 (limit: 1008)  
    Memory: 5.3M (peak: 5.8M)  
       CPU: 36ms  
    CGroup: /system.slice/apache2.service  
            └─8360 /usr/sbin/apache2 -k start  
              └─8363 /usr/sbin/apache2 -k start  
                └─8364 /usr/sbin/apache2 -k start  
  
Jan 30 03:27:10 ip-172-31-38-241 systemd[1]: Starting apache2.service - The Apache HTTP Server...  
Jan 30 03:27:10 ip-172-31-38-241 systemd[1]: Started apache2.service - The Apache HTTP Server.  
ubuntu@ip-172-31-38-241:~$
```

Y comprobamos que apache funciona en chrome con la ip publica

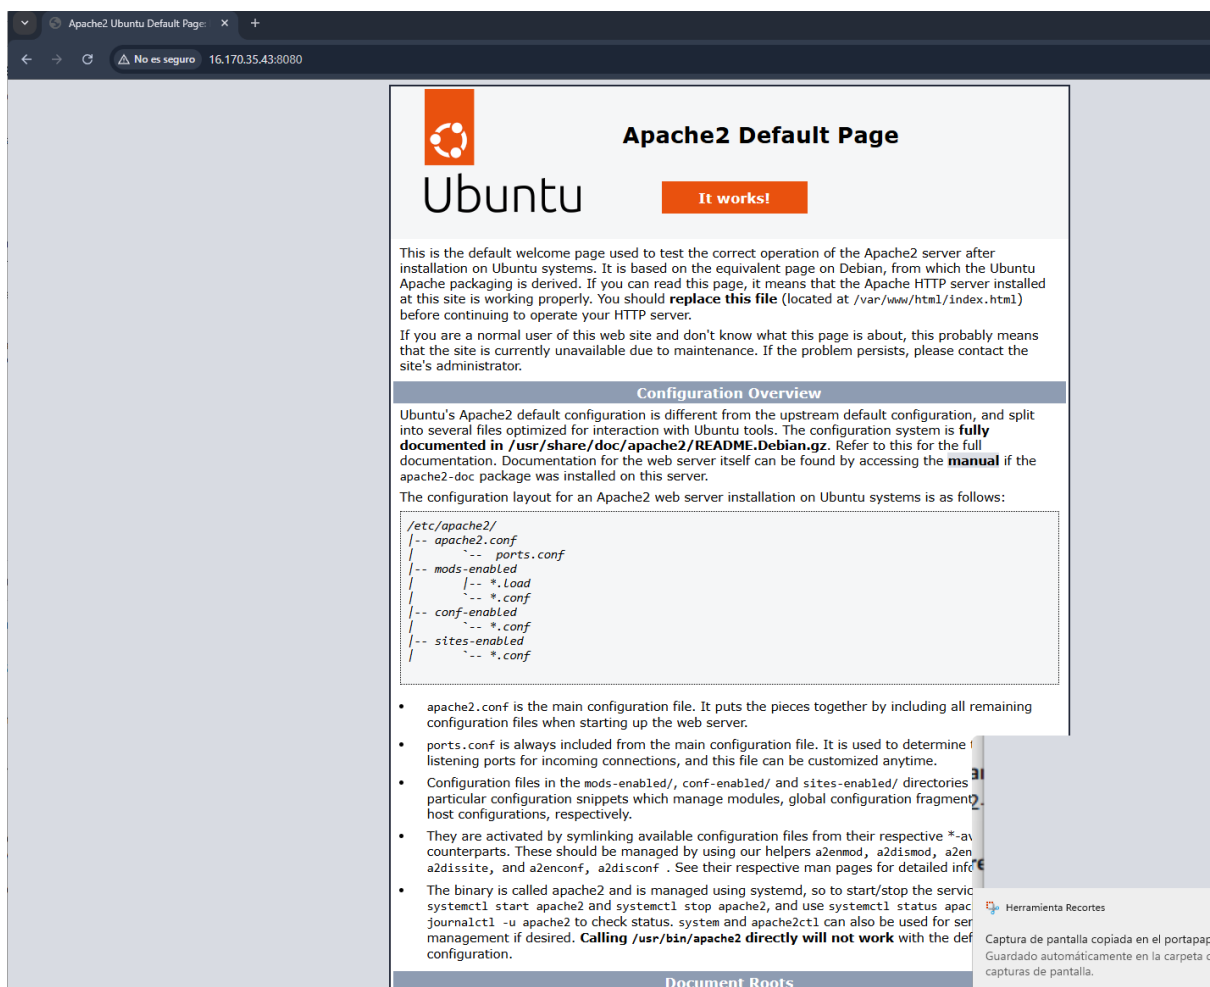

Descargamos wordpress e instalamos la base de datos y el zim de la clave

```
mysql> CREATE DATABASE wordpress;
E USER 'wpuser'@'localhost' IDENTIFIED BY 'password123';
GRANT ALL PRIVILEGES ON wordpress.* TO 'wpuser'@'localhost';
FLUSH PRIVILEGES;
EXIT;
Query OK, 1 row affected (0.03 sec)

mysql> CREATE USER 'wpuser'@'localhost' IDENTIFIED BY 'password123';
Query OK, 0 rows affected (0.02 sec)

mysql> GRANT ALL PRIVILEGES ON wordpress.* TO 'wpuser'@'localhost';
Query OK, 0 rows affected (0.02 sec)

mysql> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.00 sec)

mysql> EXIT;
Bye
ubuntu@ip-172-31-38-241:~$ cd /var/www/html
ubuntu@ip-172-31-38-241:/var/www/html$ sudo wget https://wordpress.org/latest.zip
--2026-01-30 03:31:09-- https://wordpress.org/latest.zip
Resolving wordpress.org (wordpress.org)... 198.143.164.252, 2607:f978:5:8002::c68f:a4fc
Connecting to wordpress.org (wordpress.org)|198.143.164.252|:443... connected.
HTTP request sent, awaiting response... 200 OK
Length: 28678124 (27M) [application/zip]
Saving to: 'latest.zip'

latest.zip          100%[=====] 27.35M  17.3MB/s  in 1.6s
```



# Apache2 Default Page



This is the default welcome page used to test the correct operation of the Apache2 server after installation on Ubuntu systems. It is based on the equivalent page on Debian, from which the Ubuntu Apache packaging is derived. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should **replace this file** (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.

### Configuration Overview

Ubuntu's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Ubuntu tools. The configuration system is **fully documented in `/usr/share/doc/apache2/README.Debian.gz`**. Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the **manual** if the `apache2-doc` package was installed on this server.

The configuration layout for an Apache2 web server installation on Ubuntu systems is as follows:

```
/etc/apache2/
|-- apache2.conf
|   |-- ports.conf
|-- mods-enabled
|   |-- *.load
|   |-- *.conf
|-- conf-enabled
|   |-- *.conf
|-- sites-enabled
|   |-- *.conf
```

- `apache2.conf` is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.
- `ports.conf` is always included from the main configuration file. It is used to determine the listening ports for incoming connections, and this file can be customized anytime.
- Configuration files in the `mods-enabled/`, `conf-enabled/` and `sites-enabled/` directories contain particular configuration snippets which manage modules, global configuration fragments, or virtual host configurations, respectively.
- They are activated by symlinking available configuration files from their respective `*-available/` counterparts. These should be managed by using our helpers `a2enmod`, `a2dismod`, `a2ensite`, `a2dissite`, and `a2enconf`, `a2disconf`. See their respective man pages for detailed information.
- The binary is called `apache2` and is managed using `systemd`, so to start/stop the service use `systemctl start apache2` and `systemctl stop apache2`, and use `systemctl status apache2` and `journalctl -u apache2` to check status. `system` and `apache2ctl` can also be used for service management if desired. **Calling `/usr/bin/apache2` directly will not work** with the default configuration.

### Document Roots

By default, Ubuntu does not allow access through the web browser to *any* file outside of those located in `/var/www`, **public\_html** directories (when enabled) and `/usr/share` (for web applications). If your site is using a web document root located elsewhere (such as in `/srv`) you may need to whitelist your document root directory in `/etc/apache2/apache2.conf`.

The default Ubuntu document root is `/var/www/html`. You can make your own virtual hosts under `/var/www`.

### Reporting Problems

Please use the `ubuntu-bug` tool to report bugs in the Apache2 package with Ubuntu. However, check **existing bug reports** before reporting a new bug.

Please report bugs specific to modules (such as PHP and others) to their respective packages, not to the

EC2

Tip

Norm

Respx

IPv4

Direct

1

Role d

-

IMDS

Requi

Oper

-

Data

▼ Dr

Role d

-

Grup

1

▼ Re

Q

Norm

-

-

-

▼ Re

Q


Norm

-

-

CloudShell

Y vemos que de la pagina de apache si actualizamos nos manda a wordpress

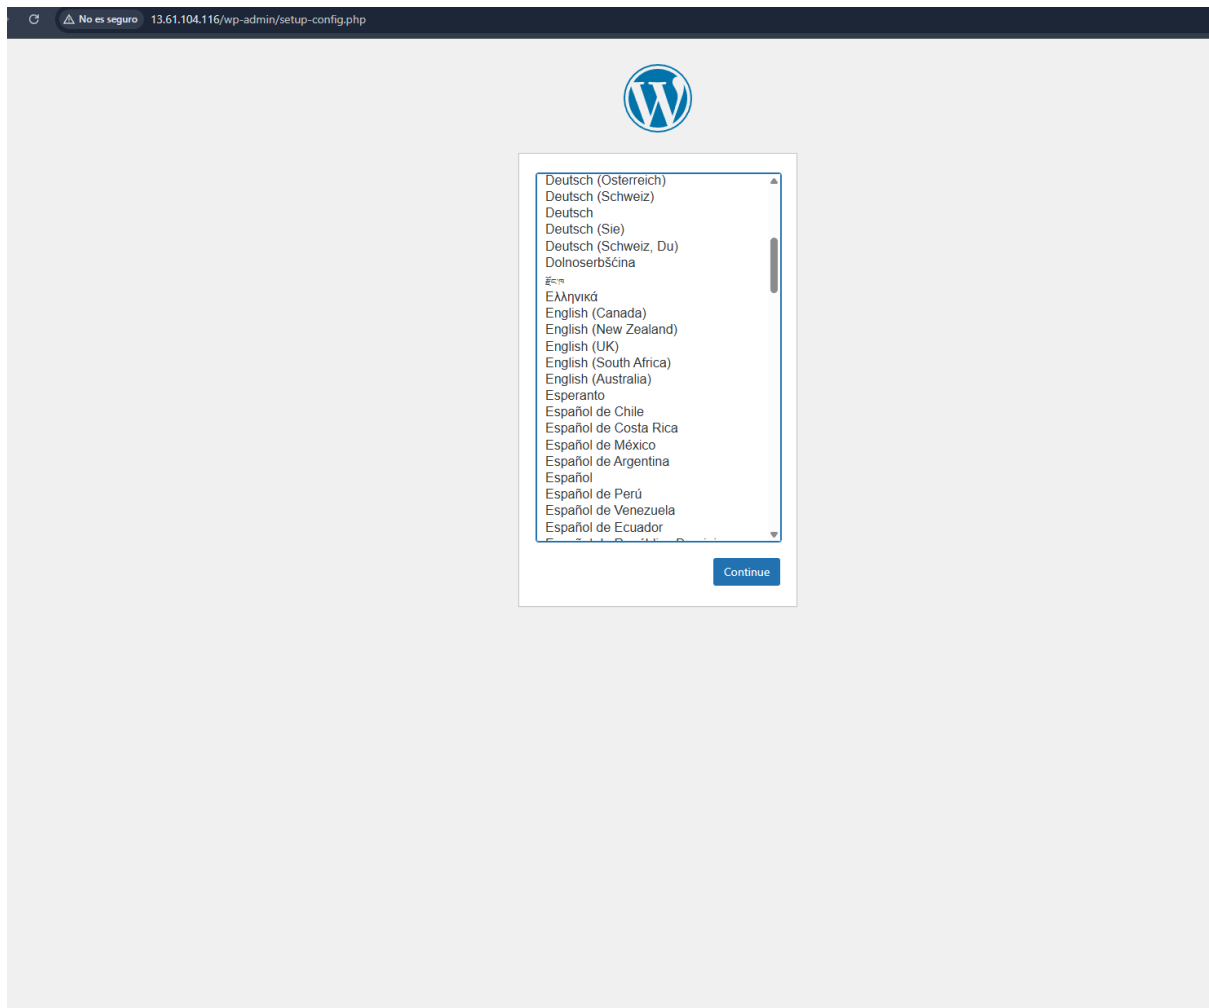

Seleccionamos el idioma español

A continuación tendrás que introducir los detalles de tu conexión con la base de datos. Si no estás seguro de ellos, contacta con tu proveedor de alojamiento.

**Nombre de la base de datos**

El nombre de la base de datos que quieres usar con WordPress.

**Nombre de usuario**

El nombre de usuario de tu base de datos.

**Contraseña**

[Ocultar](#)

La contraseña de tu base de datos.

**Servidor de la base de datos**

Si localhost no funciona, deberías poder obtener esta información de tu proveedor de alojamiento web.

**Prefijo de tabla**

Si quieres ejecutar varias instalaciones de WordPress en una sola base de datos cambia esto.

[Enviar](#)

Ahora ponemos estos datos



```
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> ALTER USER 'wpuser'@'localhost' IDENTIFIED WITH mysql_native_password BY 'Password123!';
Query OK, 0 rows affected (0.01 sec)

mysql> GRANT ALL PRIVILEGES ON wordpress.* TO 'wpuser'@'localhost';
Query OK, 0 rows affected (0.00 sec)

mysql> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0.01 sec)

mysql>
mysql> EXIT;
Bye
ubuntu@ip-172-31-38-241:/tmp$ mysql -u wpuser -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 17
Server version: 8.0.44-0ubuntu0.24.04.2 (Ubuntu)


Copyright (c) 2000, 2025, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql>
```

Comprobamos que el usuario esta en la base de datos

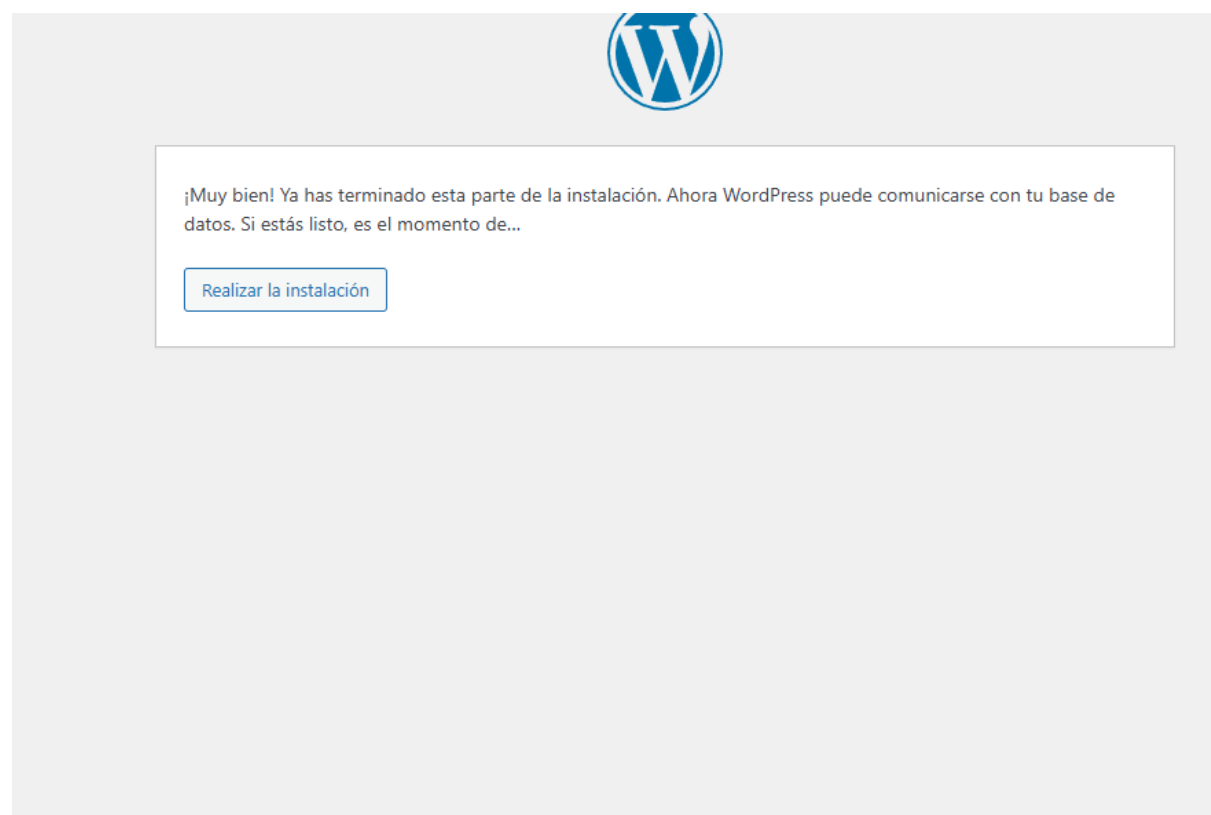

Todo funciona correctamente y realizamos la instalacion



## ¡Lo lograste!


WordPress ya está instalado. ¡Gracias, y que lo disfrutes!

**Nombre de usuario** admin


**Contraseña** *La contraseña que has elegido.*

[Acceder](#)

Accedemos con la clave y contraseña

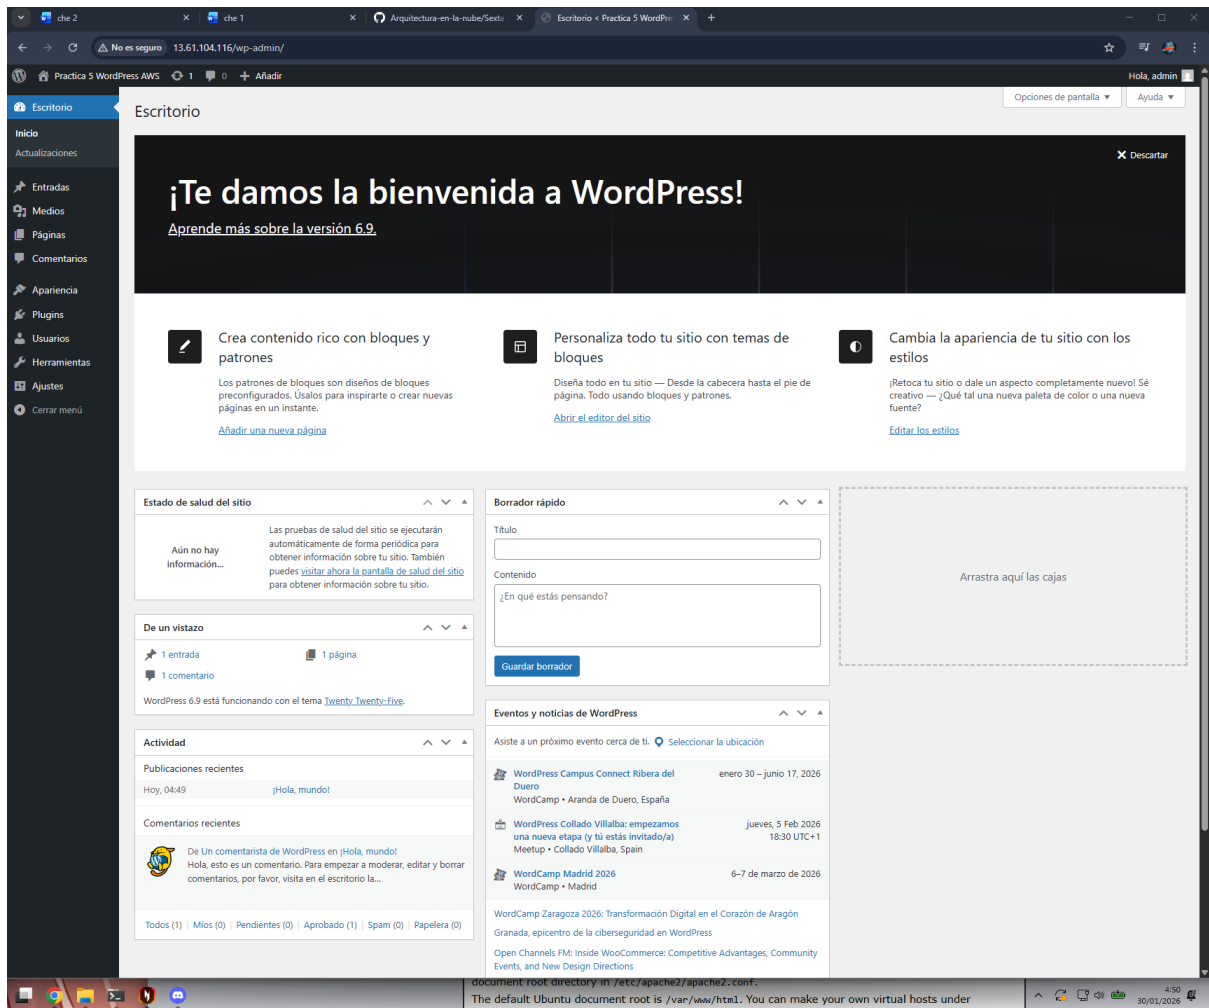

Y nos conectamos a través de la ip a la pagina



Practica 5 WordPress AWS

Página de ejemplo

## Blog

¡Hola, mundo!

Te damos la bienvenida a WordPress. Esta es tu primera entrada. Editala o bórrala, ¡luego empieza a escribir!

30 de enero de 2026

Practica 5 WordPress AWS

[Blog](#) [Events](#)  
[About](#) [Shop](#)  
[FAQs](#) [Patterns](#)  
[Authors](#) [Themes](#)

Twenty Twenty-Five

Designed with [WordPress](#)