

Apache, Nginx and Caddy



Adrián Yáñez Rivera

Parte 1:

Primero instalamos los servicios basicos

```
manolo@manolo-virtual-machine: ~  
manolo@manolo-virtual-machine:~$ sudo apt update && sudo apt upgrade -y  
sudo apt install -y net-tools curl  
[sudo] password for manolo:  
Hit:1 http://security.ubuntu.com/ubuntu jammy-security InRelease  
Hit:2 http://es.archive.ubuntu.com/ubuntu jammy InRelease  
Hit:3 https://ppa.launchpadcontent.net/oisf/suricata-stable/ubuntu jammy InRelease  
Hit:4 http://es.archive.ubuntu.com/ubuntu jammy-updates InRelease  
Hit:6 http://es.archive.ubuntu.com/ubuntu jammy-backports InRelease  
Hit:5 https://d20hasrqv82i0q.cloudfront.net/packages/deb stable InRelease  
Reading package lists... Done  
Building dependency tree... Done  
Reading state information... Done  
1 package can be upgraded. Run 'apt list --upgradable' to see it.  
N: Skipping acquire of configured file 'main/binary-i386/Packages' as repository  
  'https://download.falco.org/packages/deb stable InRelease' doesn't support arch  
  itecture 'i386'  
Reading package lists... Done  
Building dependency tree... Done  
Reading state information... Done  
Calculating upgrade... Done
```

```
Processing triggers for man-db (2.10.2-1) ...  
manolo@manolo-virtual-machine:~$ sudo apt update && sudo apt upgrade -y  
Hit:1 http://es.archive.ubuntu.com/ubuntu jammy InRelease  
Hit:2 http://es.archive.ubuntu.com/ubuntu jammy-updates InRelease  
Hit:3 http://es.archive.ubuntu.com/ubuntu jammy-backports InRelease  
Hit:4 http://security.ubuntu.com/ubuntu jammy-security InRelease  
Hit:5 https://d20hasrqv82i0q.cloudfront.net/packages/deb stable InRelease  
Hit:6 https://ppa.launchpadcontent.net/oisf/suricata-stable/ubuntu jammy InRelease  
Reading package lists... Done  
Building dependency tree... Done  
Reading state information... Done  
1 package can be upgraded. Run 'apt list --upgradable' to see it.  
N: Skipping acquire of configured file 'main/binary-i386/Packages' as repository  
  'https://download.falco.org/packages/deb stable InRelease' doesn't support arch  
  itecture 'i386'  
Reading package lists... Done  
Building dependency tree... Done  
Reading state information... Done  
Calculating upgrade... Done  
The following packages have been kept back:  
  snapd  
0 upgraded, 0 newly installed, 0 to remove and 1 not upgraded.  
manolo@manolo-virtual-machine:~$ S
```

Ahora instala apache 2

```
0 upgraded, 0 newly installed, 0 to remove and 1 not upgraded.
manolo@manolo-virtual-machine:~$ sudo apt install apache2 -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  apache2-bin apache2-data apache2-utils libapr1 libaprutil1
  libaprutil1-dbd-sqlite3 libaprutil1-ldap
Suggested packages:
  apache2-doc apache2-suexec-pristine | apache2-suexec-custom
The following NEW packages will be installed:
  apache2 apache2-bin apache2-data apache2-utils libapr1 libaprutil1
  libaprutil1-dbd-sqlite3 libaprutil1-ldap
0 upgraded, 8 newly installed, 0 to remove and 1 not upgraded.
Need to get 1.923 kB of archives.
After this operation, 7.728 kB of additional disk space will be used.
Get:1 http://es.archive.ubuntu.com/ubuntu jammy-updates/main amd64 libapr1 amd64
  1.7.0-8ubuntu0.22.04.2 [108 kB]
Get:2 http://es.archive.ubuntu.com/ubuntu jammy-updates/main amd64 libaprutil1 a
  md64 1.6.1-5ubuntu4.22.04.2 [92,8 kB]
Get:3 http://es.archive.ubuntu.com/ubuntu jammy-updates/main amd64 libaprutil1-d
  bd-sqlite3 amd64 1.6.1-5ubuntu4.22.04.2 [11,3 kB]
Get:4 http://es.archive.ubuntu.com/ubuntu jammy-updates/main amd64 libaprutil1-l
  dap amd64 1.6.1-5ubuntu4.22.04.2 [9.170 B]
```

Abre el archivo con el comando: `sudo nano /etc/apache2/ports.conf` y cambia la linea listen 80 a 8080 guarda y cierralo

```
# If you just change the port or add more ports here, you will likely also
# have to change the VirtualHost statement in
# /etc/apache2/sites-enabled/000-default.conf

Listen 8080


<IfModule ssl_module>
    Listen 443
</IfModule>

<IfModule mod_gnutls.c>
    Listen 443
</IfModule>

# vim: syntax=apache ts=4 sw=4 sts=4 sr noet
```

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^_ Go To Line

Ahora cambia el puerto de la virtualbox al puerto 8080 guardalo y cierralo

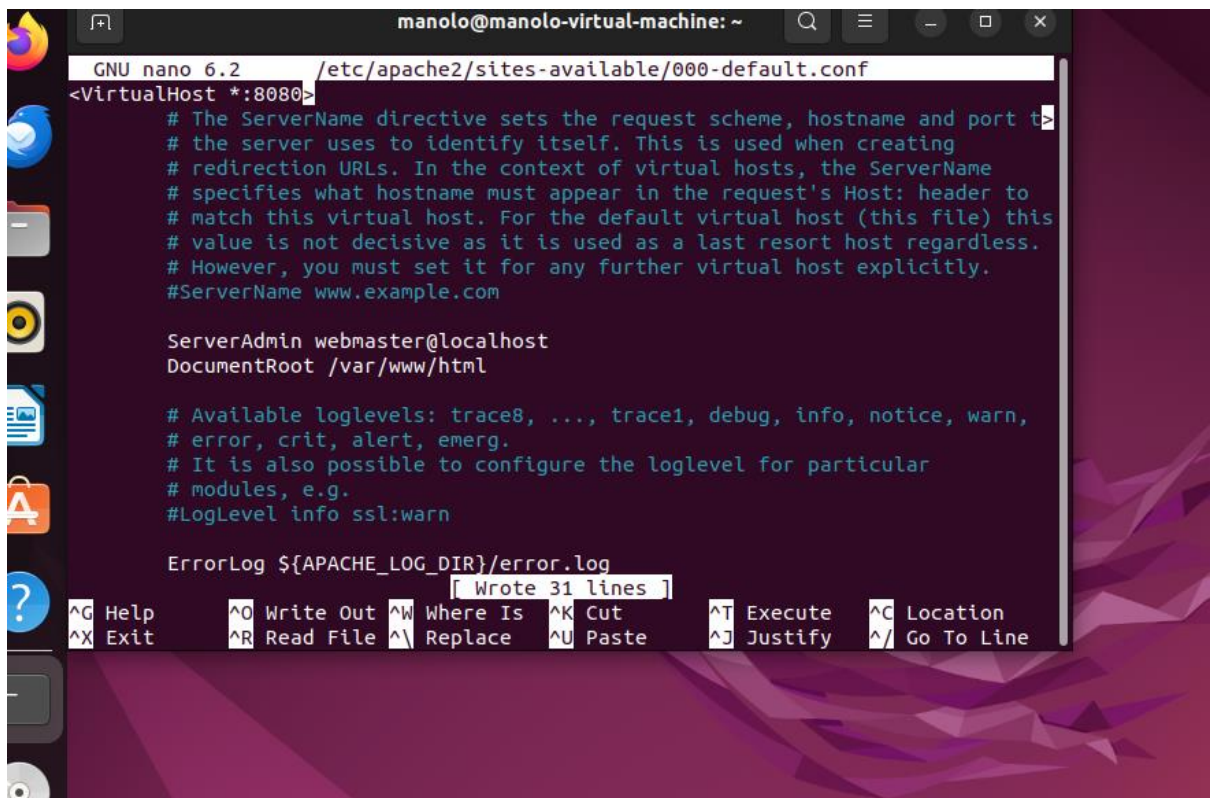

```
manolo@manolo-virtual-machine: ~
GNU nano 6.2 /etc/apache2/sites-available/000-default.conf
<VirtualHost *:8080>
# The ServerName directive sets the request scheme, hostname and port that
# the server uses to identify itself. This is used when creating
# redirection URLs. In the context of virtual hosts, the ServerName
# specifies what hostname must appear in the request's Host: header to
# match this virtual host. For the default virtual host (this file) this
# value is not decisive as it is used as a last resort host regardless.
# However, you must set it for any further virtual host explicitly.
#ServerName www.example.com

ServerAdmin webmaster@localhost
DocumentRoot /var/www/html

# Available loglevels: trace8, ..., trace1, debug, info, notice, warn,
# error, crit, alert, emerg.
# It is also possible to configure the loglevel for particular
# modules, e.g.
#LogLevel info ssl:warn

ErrorLog ${APACHE_LOG_DIR}/error.log

[ Wrote 31 lines ]
^G Help      ^O Write Out ^W Where Is  ^K Cut      ^T Execute  ^C Location
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify  ^_ Go To Line
```

Ahora instala el php para apache

```
manolo@manolo-virtual-machine:~$ sudo nano /etc/apache2/sites-available/000-default.conf
manolo@manolo-virtual-machine:~$ sudo apt install php libapache2-mod-php -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  libapache2-mod-php8.1 php-common php8.1 php8.1-cli php8.1-common
  php8.1-opcache php8.1-readline
Suggested packages:
```

Y reinicia apache

Y comprueba que esta activo y que el puerto esta bien puesto

```
Processing triggers for libapache2-mod-php8.1 (8.1.2-1ubuntu2.22) ...
manolo@manolo-virtual-machine:~$ sudo systemctl restart apache2
manolo@manolo-virtual-machine:~$ sudo systemctl status apache2
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/lib/systemd/system/apache2.service; enabled; vendor preset: enabled)
   Active: active (running) since Thu 2025-11-13 13:10:19 CET; 4s ago
     Docs: https://httpd.apache.org/docs/2.4/
   Process: 10810 ExecStart=/usr/sbin/apachectl start (code=exited, status=0/SUCCESS)
  Main PID: 10814 (apache2)
    Tasks: 6 (limit: 9258)
   Memory: 10.2M
      CPU: 196ms
   CGroup: /system.slice/apache2.service
           └─10814 /usr/sbin/apache2 -k start
             └─10815 /usr/sbin/apache2 -k start
               └─10816 /usr/sbin/apache2 -k start
                 └─10817 /usr/sbin/apache2 -k start
                   └─10818 /usr/sbin/apache2 -k start
                     └─10819 /usr/sbin/apache2 -k start

nov 13 13:10:19 manolo-virtual-machine systemd[1]: Starting The Apache HTTP Server:
nov 13 13:10:19 manolo-virtual-machine apachectl[10813]: AH00558: apache2: Could not reliably determine the server's fully qualified domain name, using 127.0.0.1. Set the 'ServerName' directive globally to suppress this message
nov 13 13:10:19 manolo-virtual-machine systemd[1]: Started The Apache HTTP Server:
lines 1-20/20 (END)
```

Y con el comando sudo netstat -tulpn | grep apache2: mira en que puerto escucha


```
manolo@manolo-virtual-machine:~$ sudo netstat -tulpn | grep apache2
tcp6      0      0 :::8080          :::*              LISTEN
10814/apache2
```

Y crea un fichero PHP que muestra información de PH

```
manolo@manolo-virtual-machine:~$ curl http://localhost:8080/info.php
<?php phpinfo(); ?>
<!DOCTYPE html PUBLIC "-//W3C//DTD XHTML 1.0 Transitional//EN" "DTD/xhtml1-trans
itional.dtd">
<html xmlns="http://www.w3.org/1999/xhtml"><head>
<style type="text/css">
body {background-color: #fff; color: #222; font-family: sans-serif;}
pre {margin: 0; font-family: monospace;}
a:link {color: #009; text-decoration: none; background-color: #fff;}
a:hover {text-decoration: underline;}
table {border-collapse: collapse; border: 0; width: 934px; box-shadow: 1px 2px 3
px #ccc;}
.center {text-align: center;}
.center table {margin: 1em auto; text-align: left;}
.center th {text-align: center !important;}
td, th {border: 1px solid #666; font-size: 75%; vertical-align: baseline; paddin
g: 4px 5px;}
th {position: sticky; top: 0; background: inherit;}
```

Prueba apache en firefox

PHP 8.1.2-1ubuntu2.22 - php: x	
http://localhost:8080/info.php	
PHP Version 8.1.2-1ubuntu2.22 	
System	Linux manolo-virtual-machine 6.8.0-87-generic #88-22.04.1-Ubuntu SMP PREEMPT_DYNAMIC Tue Oct 14 14:03:14 UTC 2 x86_64
Build Date	Jul 15 2025 12:11:22
Build System	Linux
Server API	Apache 2.0 Handler
Virtual Directory Support	disabled
Configuration File (php.ini) Path	/etc/php/8.1/apache2
Loaded Configuration File	/etc/php/8.1/apache2/php.ini
Scan this dir for additional .ini files	/etc/php/8.1/apache2/conf.d
Additional .ini files parsed	/etc/php/8.1/apache2/conf.d/10-opcache.ini, /etc/php/8.1/apache2/conf.d/10-pdo.ini, /etc/php/8.1/apache2/conf.d/20-calendar.ini, /etc/php/8.1/apache2/conf.d/20-ctype.ini, /etc/php/8.1/apache2/conf.d/20-exif.ini, /etc/php/8.1/apache2/conf.d/20-fi.ini, /etc/php/8.1/apache2/conf.d/20-fileinfo.ini, /etc/php/8.1/apache2/conf.d/20-ftp.ini, /etc/php/8.1/apache2/conf.d/20-gettext.ini, /etc/php/8.1/apache2/conf.d/20-iconv.ini, /etc/php/8.1/apache2/conf.d/20-phar.ini, /etc/php/8.1/apache2/conf.d/20-posix.ini, /etc/php/8.1/apache2/conf.d/20-readline.ini, /etc/php/8.1/apache2/conf.d/20-shmop.ini, /etc/php/8.1/apache2/conf.d/20-sockets.ini, /etc/php/8.1/apache2/conf.d/20-sysmsg.ini, /etc/php/8.1/apache2/conf.d/20-sysvsem.ini, /etc/php/8.1/apache2/conf.d/20-sysvshm.ini, /etc/php/8.1/apache2/conf.d/20-tokenizer.ini
PHP API	20210902
PHP Extension	20210902
Zend Extension	420210902
Zend Extension Build	API420210902.NTS
PHP Extension Build	API20210902.NTS
Debug Build	no
Thread Safety	disabled
Zend Signal Handling	enabled
Zend Memory Manager	enabled
Zend Multibyte Support	disabled
IPv6 Support	enabled
DTrace Support	available, disabled
Registered PHP Streams	https, ftps, compress.zlib, php, file, glob, data, http, ftp, phar
Registered Stream Socket Transports	tcp, udp, unix, udg, ssl, tls, tlsv1.0, tlsv1.1, tlsv1.2, tlsv1.3

Ahora instala cettbot y creamos un certificado autofirmado

```

</table>
</div></body></html>manolo@manolo-virtual-machine:~$
manolo@manolo-virtual-machine:~$ sudo apt install certbot python3-certbot-apache
-y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  augeas-lenses libaugeas0 python3-acme python3-augeas python3-certbot

```

Rellenamos os datos

```
+++++
-----
You are about to be asked to enter information that will be incorporated
into your certificate request.
What you are about to enter is what is called a Distinguished Name or a DN.
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [AU]:ES
State or Province Name (full name) [Some-State]:madrid
Locality Name (eg, city) []:madrid
Organization Name (eg, company) [Internet Widgits Pty Ltd]:
Organizational Unit Name (eg, section) []:
Common Name (e.g. server FQDN or YOUR name) []:localhost
Email Address []:manolo@gmail.com
manolo@manolo-virtual-machine:~$
```

Home

Y activamos el modulo ssl en apache


```
manolo@manolo-virtual-machine: ~
There are quite a few fields but you can leave some blank
For some fields there will be a default value,
If you enter '.', the field will be left blank.
-----
Country Name (2 letter code) [AU]:ES
State or Province Name (full name) [Some-State]:madrid
Locality Name (eg, city) []:madrid
Organization Name (eg, company) [Internet Widgits Pty Ltd]:
Organizational Unit Name (eg, section) []:
Common Name (e.g. server FQDN or YOUR name) []:localhost
Email Address []:manolo@gmail.com
manolo@manolo-virtual-machine:~$ sudo a2enmod ssl
Considering dependency setenvif for ssl:
Module setenvif already enabled
Considering dependency mime for ssl:
Module mime already enabled
Considering dependency socache_shmcb for ssl:
Enabling module socache_shmcb.
Enabling module ssl.
See /usr/share/doc/apache2/README.Debian.gz on how to configure SSL and create s
elf-signed certificates.
To activate the new configuration, you need to run:
    systemctl restart apache2
manolo@manolo-virtual-machine:~$
```

Añadimos el puerto 8443

```

# If you just change the port or add more ports here, you will likely also
# have to change the VirtualHost statement in
# /etc/apache2/sites-enabled/000-default.conf

Listen 8080
Listen 8443

<IfModule ssl_module>
    Listen 443
</IfModule>

<IfModule mod_gnutls.c>
    Listen 443
</IfModule>

# vim: syntax=apache ts=4 sw=4 sts=4 sr noet

```

Read 16 lines

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
 ^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^_ Go To Lin

Home

Y en virtualbox hacemos lo mismo cambiamos el puerto a 8443

```

manolo@manolo-virtual-machine: ~
GNU nano 6.2 /etc/apache2/sites-available/default-ssl.conf *
<IfModule mod_ssl.c>
    <VirtualHost _default_:8443>
        ServerAdmin webmaster@localhost

        DocumentRoot /var/www/html

        # Available loglevels: trace8, ..., trace1, debug, info, notice
        # error, crit, alert, emerg.
        # It is also possible to configure the loglevel for particular
        # modules, e.g.
        #LogLevel info ssl:warn

        ErrorLog ${APACHE_LOG_DIR}/error.log
        CustomLog ${APACHE_LOG_DIR}/access.log combined

        # For most configuration files from conf-available/, which are
        # enabled or disabled at a global level, it is possible to
        # include a line for only one particular virtual host. For exam
        # following line enables the CGI configuration for this host on
        # after it has been globally disabled with "a2disconf".

```

^G Help ^O Write Out ^W Where Is ^K Cut ^T Execute ^C Location
 ^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^_ Go To Line

Home

Habilitamos el sitio ssl

```
manolo@manolo-virtual-machine:~$ sudo a2ensite default-ssl.conf
Enabling site default-ssl.
To activate the new configuration, you need to run:
    systemctl reload apache2
manolo@manolo-virtual-machine:~$
```

Hom


Comprobamos si hay algun error y como no sale nada esta bien

```
systemctl reload apache2
manolo@manolo-virtual-machine:~$ sudo systemctl restart apache2
manolo@manolo-virtual-machine:~$
```

Comprobamos el https con el buscador

```
To activate the new configuration, you need to run:
    systemctl reload apache2
manolo@manolo-virtual-machine:~$ sudo systemctl restart apache2
manolo@manolo-virtual-machine:~$ curl -i -k https://localhost:8443
HTTP/1.1 200 OK
Date: Thu, 13 Nov 2025 12:23:09 GMT
Server: Apache/2.4.52 (Ubuntu)
Last-Modified: Thu, 13 Nov 2025 12:06:34 GMT
ETag: "29af-64378b65ca4e0"
Accept-Ranges: bytes
Content-Length: 10671
Vary: Accept-Encoding
```

Y la pagina se muestra correctamente

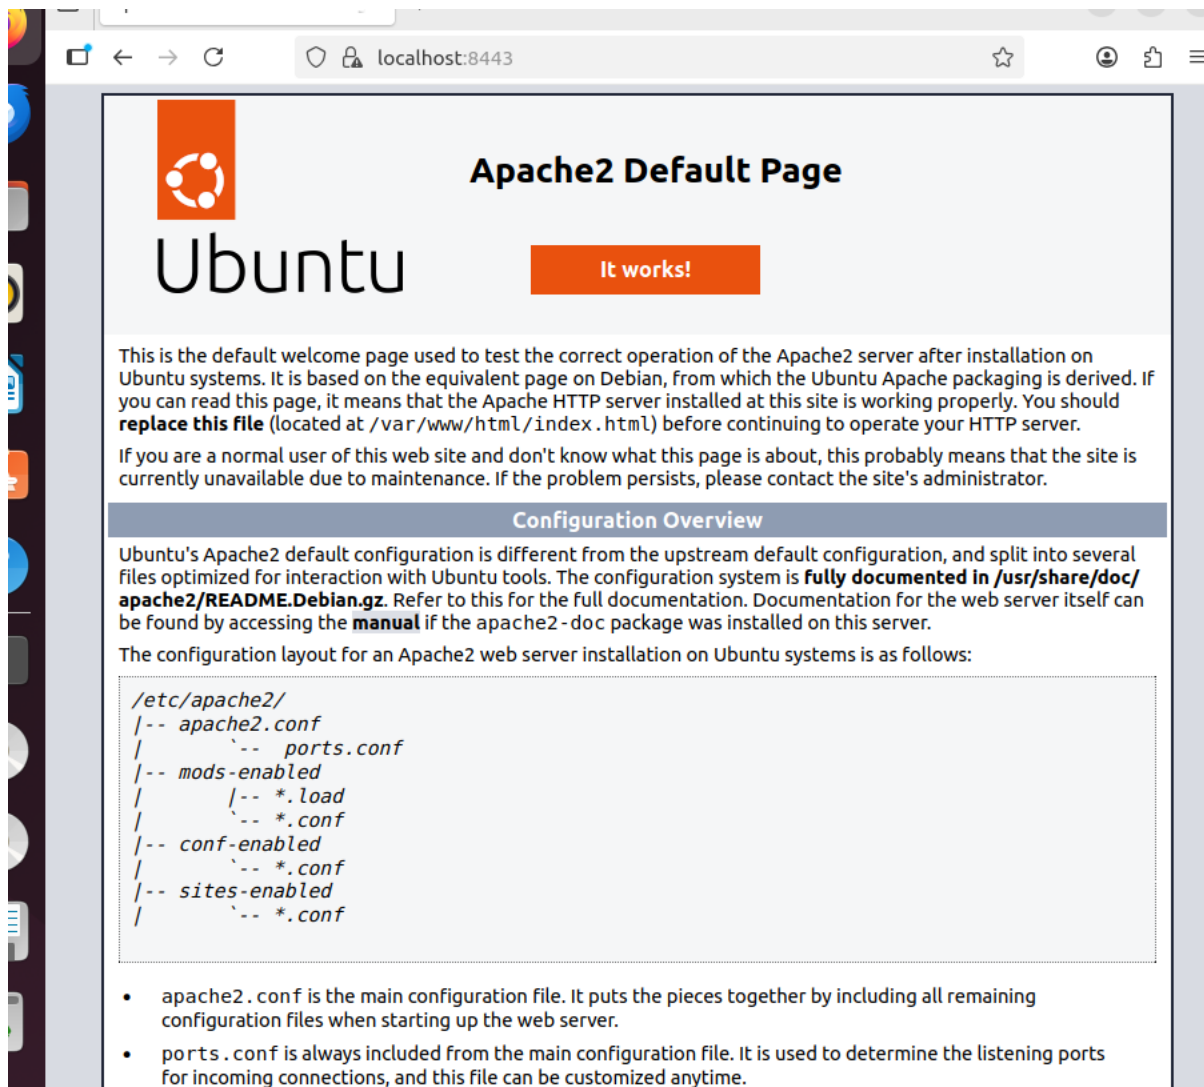


Parte 2:

Instalamos nginx

```
</div>
</div>
<div class="validator">
</div>
</body>
</html>
manolo@manolo-virtual-machine:~$ sudo apt install nginx -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  libnginx-mod-http-geoip2 libnginx-mod-http-image-filter
  libnginx-mod-http-xslt-filter libnginx-mod-mail libnginx-mod-stream
  libnginx-mod-stream-geoip2 nginx-common nginx-core

```

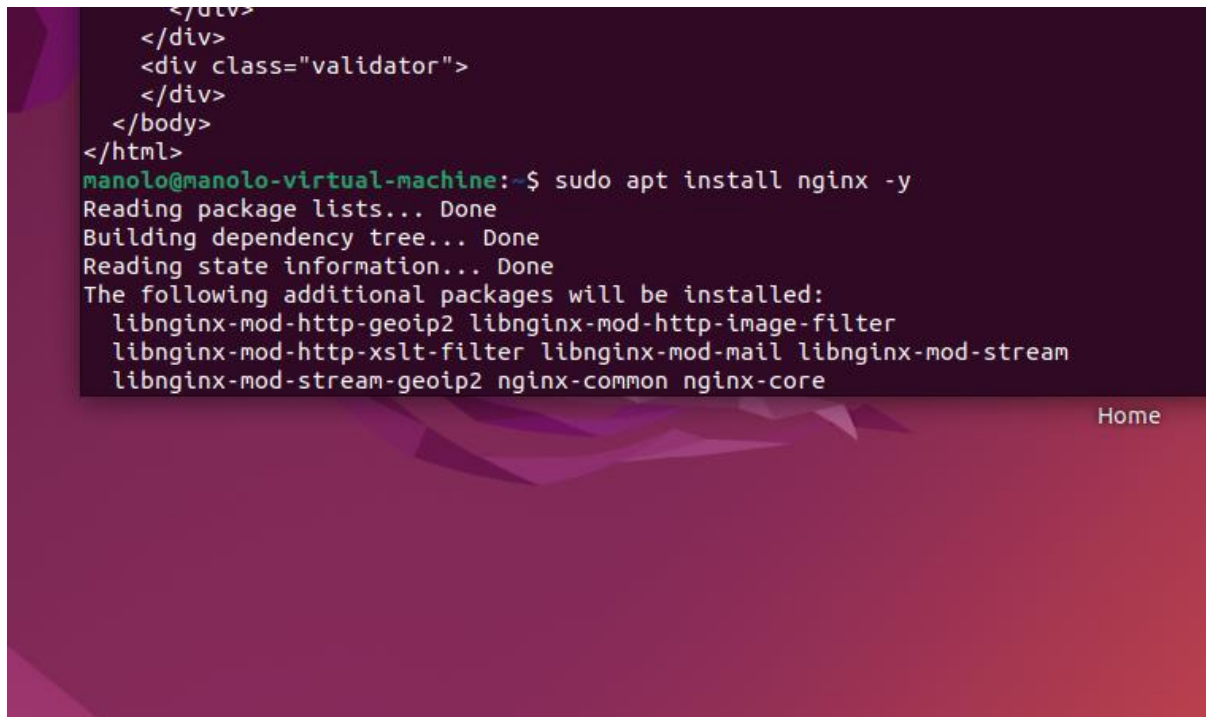

Y lo configuramos en el puerto 8081


```

manolo@manolo-virtual-machine:~$ sudo systemctl restart nginx
manolo@manolo-virtual-machine:~$ sudo systemctl status nginx
● nginx.service - A high performance web server and a reverse proxy server
   Loaded: loaded (/lib/systemd/system/nginx.service; enabled; vendor preset:
   Active: active (running) since Thu 2025-11-13 13:25:53 CET; 14s ago
     Docs: man:nginx(8)
    Process: 13314 ExecStartPre=/usr/sbin/nginx -t -q -g daemon on; master_proce
    Process: 13315 ExecStart=/usr/sbin/nginx -g daemon on; master_process on; (
 Main PID: 13316 (nginx)
    Tasks: 5 (limit: 9258)
   Memory: 4.8M
      CPU: 96ms
   CGroup: /system.slice/nginx.service
           └─13316 "nginx: master process /usr/sbin/nginx -g daemon on; maste
              └─13317 "nginx: worker process" "" "" "" "" "" "" "" "" "" "" ""
              └─13318 "nginx: worker process" "" "" "" "" "" "" "" "" "" "" ""
              └─13319 "nginx: worker process" "" "" "" "" "" "" "" "" "" "" ""
              └─13320 "nginx: worker process" "" "" "" "" "" "" "" "" "" "" ""

nov 13 13:25:53 manolo-virtual-machine systemd[1]: Starting A high performance
nov 13 13:25:53 manolo-virtual-machine systemd[1]: Started A high performance w
lines 1-19/19 (END)

```

Home

Y compruebo el puerto tambien


```

nov 13 13:25:53 manolo-virtual-machine systemd[1]: Started A high performance w
manolo@manolo-virtual-machine:~$ sudo netstat -tulpn | grep nginx
tcp        0      0 0.0.0.0:8081          0.0.0.0:*            LISTEN
13316/nginx: master
tcp6       0      0 :::8081              :::*                  LISTEN
13316/nginx: master
manolo@manolo-virtual-machine:~$

```

Home

Y comprobamos en el navegador y funciona

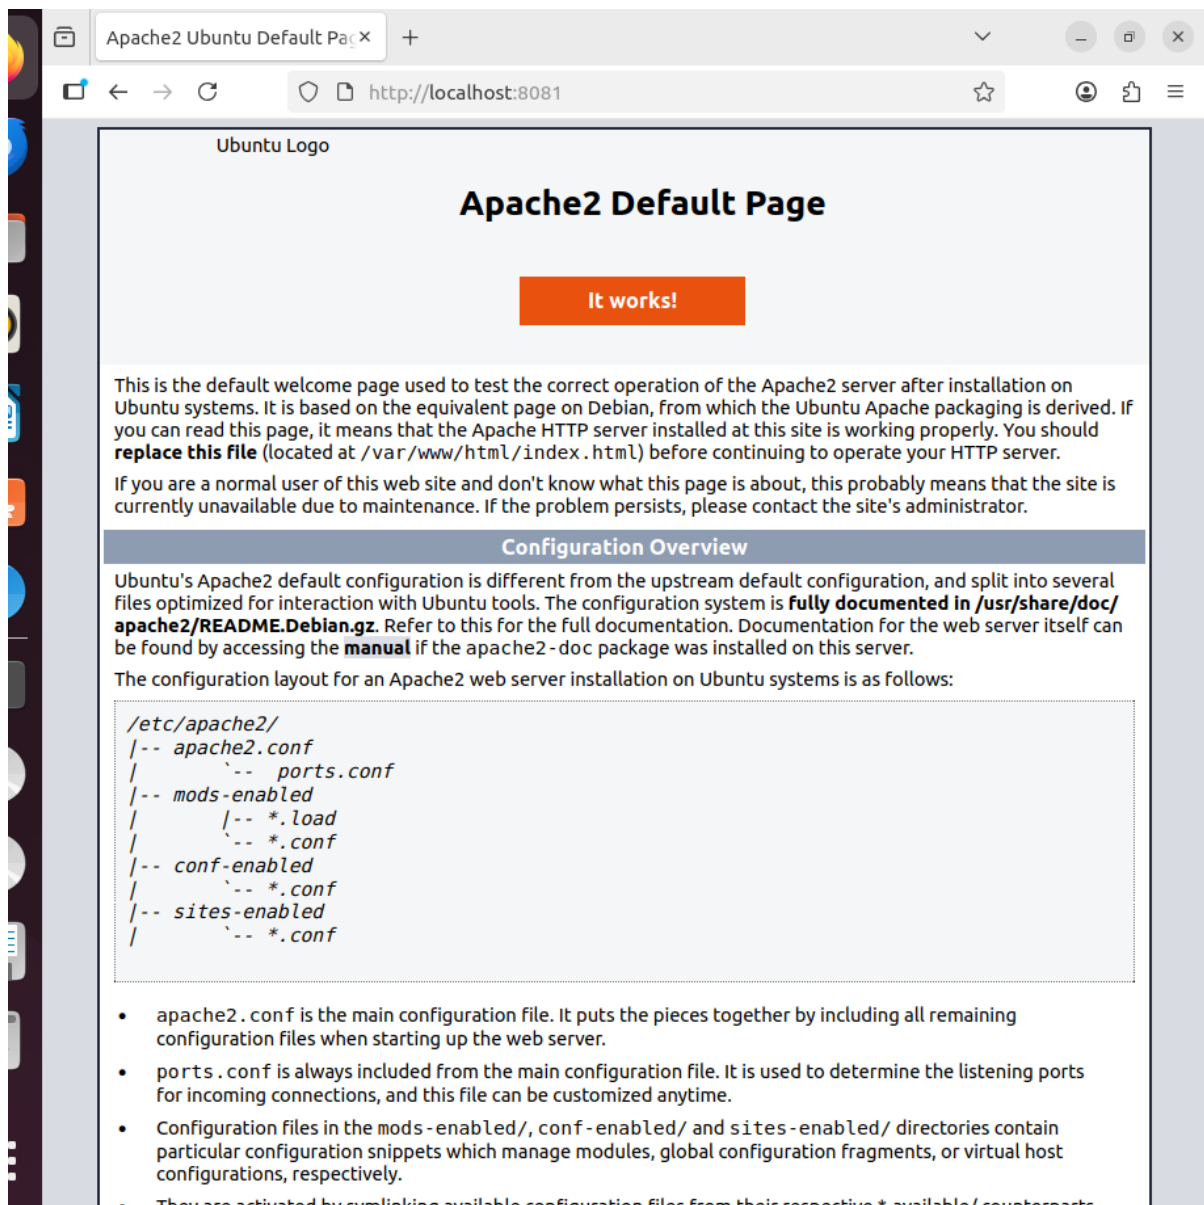

Ahora instalamos caddy

```

tcp6      0      0 :::8081          :::*             LISTEN
manolo@manolo-virtual-machine:~$ sudo apt install -y debian-keyring debian-archive-keyring apt-transport-https curl
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
curl is already the newest version (7.81.0-1ubuntu1.21).
The following NEW packages will be installed:
  apt-transport-https debian-archive-keyring debian-keyring
0 upgraded, 3 newly installed, 0 to remove and 1 not upgraded.
Need to get 29,8 MB of archives.
After this operation, 32,4 MB of additional disk space will be used.
Get:1 http://es.archive.ubuntu.com/ubuntu jammy-updates/universe amd64 apt-transport-https all 2.4.14 [1.510 B]
Get:2 http://es.archive.ubuntu.com/ubuntu jammy/universe amd64 debian-archive-keyring all 2021.1.1ubuntu2 [90,6 kB]
Get:3 http://es.archive.ubuntu.com/ubuntu jammy/universe amd64 debian-keyring all 2021.1.1ubuntu2 [90,6 kB]
debconf: unable to initialize frontend: Dialog
debconf: falling back to frontend: Readline
debconf: unable to initialize frontend: Readline
debconf: falling back to frontend: Teletype
debconf: unable to initialize frontend: Teletype
debconf: falling back to frontend: Noninteractive

```

che2.conf is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.

Creamos repositorios caddy


```

Setting up debian-keyring (2021.12.24) ...
manolo@manolo-virtual-machine:~$ curl -1sLf 'https://dl.cloudsmith.io/public/caddy/stable/gpg.key' \
| sudo gpg --dearmor -o /usr/share/keyrings/caddy-stable-archive-keyring.gpg

curl -1sLf 'https://dl.cloudsmith.io/public/caddy/stable/debian.deb.txt' \
| sudo tee /etc/apt/sources.list.d/caddy-stable.list
# Source: Caddy
# Site: https://github.com/caddyserver/caddy
# Repository: Caddy / stable
# Description: Fast, multi-platform web server with automatic HTTPS

deb [signed-by=/usr/share/keyrings/caddy-stable-archive-keyring.gpg] https://dl.cloudsmith.io/public/caddy/stable/deb/debian any-version main

deb-src [signed-by=/usr/share/keyrings/caddy-stable-archive-keyring.gpg] https://dl.cloudsmith.io/public/caddy/stable/deb/debian any-version main
manolo@manolo-virtual-machine:~$

# Conf-enabled
# -- *.conf
# Sites-enabled
# -- *.conf

```

2. conf is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.

0.conf is always included from the main configuration file. It is used to determine the listening ports and incoming connections, and this file can be customized anytime.

Configuration files in the mods-enabled/, conf-enabled/ and sites-enabled/ directories contain similar configuration snippets which manage modules, global configuration fragments, or virtual host configurations, respectively.

are activated by symlinking available configuration files from their respective *-available/ counterparts.

Instalamos caddy

```

/dl.cloudsmith.io/public/caddy/stable/deb/debian any-version main
manolo@manolo-virtual-machine:~$ sudo apt update && sudo apt install caddy -y
Hit:1 http://security.ubuntu.com/ubuntu jammy-security InRelease
Hit:2 http://es.archive.ubuntu.com/ubuntu jammy InRelease
Hit:3 http://es.archive.ubuntu.com/ubuntu jammy-updates InRelease
Hit:5 http://es.archive.ubuntu.com/ubuntu jammy-backports InRelease
Hit:6 https://ppa.launchpadcontent.net/oisf/suricata-stable/ubuntu jammy InRelease
Get:7 https://dl.cloudsmith.io/public/caddy/stable/deb/debian any-version InRelease [14,8 kB]
Hit:4 https://d20hasrqv82i0q.cloudfront.net/packages/deb stable InRelease
Get:8 https://dl.cloudsmith.io/public/caddy/stable/deb/debian any-version/main amd64 Packages [4.329 B]
Fetched 19,1 kB in 4s (5.141 B/s)
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
1 package can be upgraded. Run 'apt list --upgradable' to see it.
N: Skipping acquire of configured file 'main/binary-i386/Packages' as repository 'https://download.falco.org/packages/deb stable InRelease' doesn't support architecture 'i386'
Reading package lists... Done

```

Y creamos carpetas para los archivos caddy

```

manolo@manolo-virtual-machine:~$ sudo mkdir -p /var/www/caddy
manolo@manolo-virtual-machine:~$ ls -ld /var/www/caddy
drwxr-xr-x 2 root root 4096 nov 13 13:28 /var/www/caddy
manolo@manolo-virtual-machine:~$

```

`02.conf` is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.

`01.conf` is always included from the main configuration file. It is used to determine the listening ports, incoming connections, and this file can be customized anytime.

Creamos el archivo `readme.md` de prueba

```

manolo@manolo-virtual-machine:~$ echo "# Bienvenido a Caddy" | sudo tee /var/www/caddy/README.md
echo "" | sudo tee -a /var/www/caddy/README.md
echo "Este servidor está funcionando correctamente." | sudo tee -a /var/www/caddy/README.md
echo "" | sudo tee -a /var/www/caddy/README.md
echo "## Características" | sudo tee -a /var/www/caddy/README.md
echo "- Servidor moderno" | sudo tee -a /var/www/caddy/README.md
echo "- HTTPS automático" | sudo tee -a /var/www/caddy/README.md
echo "- Fácil configuración" | sudo tee -a /var/www/caddy/README.md
# Bienvenido a Caddy
Este servidor está funcionando correctamente.
## Características
- Servidor moderno
- HTTPS automático
- Fácil configuración
manolo@manolo-virtual-machine:~$

```

2.conf is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.

conf is always included from the main configuration file. It is used to determine the listening ports and incoming connections, and this file can be customized anytime.

Descargamos imagen de prueba y

```

manolo@manolo-virtual-machine:~$ curl -o /tmp/test-image.jpg "https://www.python.org/static/apple-touch-icon-144x144-precomposed.png"
sudo mv /tmp/test-image.jpg /var/www/caddy/test.jpg

```

% Total	% Received	% Xferd	Average Speed	Time Dload	Time Upload	Time Total	Time Spent	Time Left	Current Speed
100	7382	100	7382	0	0	46984	0	---	47320

he2.conf is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.

s.conf is always included from the main configuration file. It is used to determine the listening ports and incoming connections, and this file can be customized anytime.

configuramos caddyfile para el puerto 8082

```
n read th # To use your own domain name (with automatic HTTPS), first make
:e this fi # sure your domain's A/AAAA DNS records are properly pointed t
are a non # Or serve a PHP site through php-fpm:
itly unava # php_fastcgi localhost:
:8082 {
    root * /var/www/caddy
    file_server browse

    @markdown path *.md
    header @markdown Content-Type text/plain
}

:/apach
apache# Refer to the Caddy docs for more information:
    # https://caddyserver.com/docs/caddyfile
mods-e
/- ^G Help      ^O Write Out  ^W Where Is   ^K Cut        ^T Execute    ^C Location
  ^X Exit      ^R Read File ^\ Replace    ^U Paste      ^J Justify    ^_ Go To Line
conf-enabled
  -- *.conf
sites-enabled
  -- *.conf
```

Y comprobamos el caddy con el comando `sudo systemctl status caddy`

```
manolo@manolo-virtual-machine:~$ sudo systemctl restart caddy
manolo@manolo-virtual-machine:~$ sudo systemctl status caddy
● caddy.service - Caddy
   Loaded: loaded (/lib/systemd/system/caddy.service; enabled; vendor preset: enabled)
   Active: active (running) since Thu 2025-11-13 13:30:44 CET; 4s ago
     Docs: https://caddyserver.com/docs/
   Main PID: 14348 (caddy)
    Tasks: 9 (limit: 9258)
   Memory: 11.2M
      CPU: 300ms
   CGroup: /system.slice/caddy.service
           └─14348 /usr/bin/caddy run --environ --config /etc/caddy/Caddyfile

nov 13 13:30:44 manolo-virtual-machine caddy[14348]: {"level":"info","ts":1763044800.0000001,"msg":"Starting Caddy"}
nov 13 13:30:44 manolo-virtual-machine caddy[14348]: {"level":"warn","ts":1763044800.0000001,"msg":"Caddy is running as root. It is recommended to run Caddy as an unprivileged user, see https://caddyserver.com/docs/running-in-docker"}
nov 13 13:30:44 manolo-virtual-machine caddy[14348]: {"level":"warn","ts":1763044800.0000001,"msg":"Caddy is running as root. It is recommended to run Caddy as an unprivileged user, see https://caddyserver.com/docs/running-in-docker"}
nov 13 13:30:44 manolo-virtual-machine caddy[14348]: {"level":"info","ts":1763044800.0000001,"msg":"Starting Caddy"}
nov 13 13:30:44 manolo-virtual-machine caddy[14348]: {"level":"info","ts":1763044800.0000001,"msg":"Starting Caddy"}
nov 13 13:30:44 manolo-virtual-machine caddy[14348]: {"level":"info","ts":1763044800.0000001,"msg":"Starting Caddy"}
nov 13 13:30:44 manolo-virtual-machine caddy[14348]: {"level":"info","ts":1763044800.0000001,"msg":"Starting Caddy"}
nov 13 13:30:44 manolo-virtual-machine caddy[14348]: {"level":"info","ts":1763044800.0000001,"msg":"Starting Caddy"}
nov 13 13:30:44 manolo-virtual-machine caddy[14348]: {"level":"info","ts":1763044800.0000001,"msg":"Starting Caddy"}
nov 13 13:30:44 manolo-virtual-machine systemd[1]: Started Caddy.
lines 1-21/21 (END)
```

he2.conf is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.

Y los puertos


```
manolo@manolo-virtual-machine:~$ sudo netstat -tulpn | grep caddy
tcp        0      0 127.0.0.1:2019        0.0.0.0:*           LISTEN
14348/caddy
tcp6       0      0 :::8082               :::*                 LISTEN
14348/caddy
manolo@manolo-virtual-machine:~$
```


he2.conf is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.


s.conf is always included from the main configuration file. It is used to determine the listening ports, incoming connections, and this file can be customized anytime.

Y lo comprobamos en el buscador

Vemos q esta correcto y comprobamos la imagen y el texto escrito

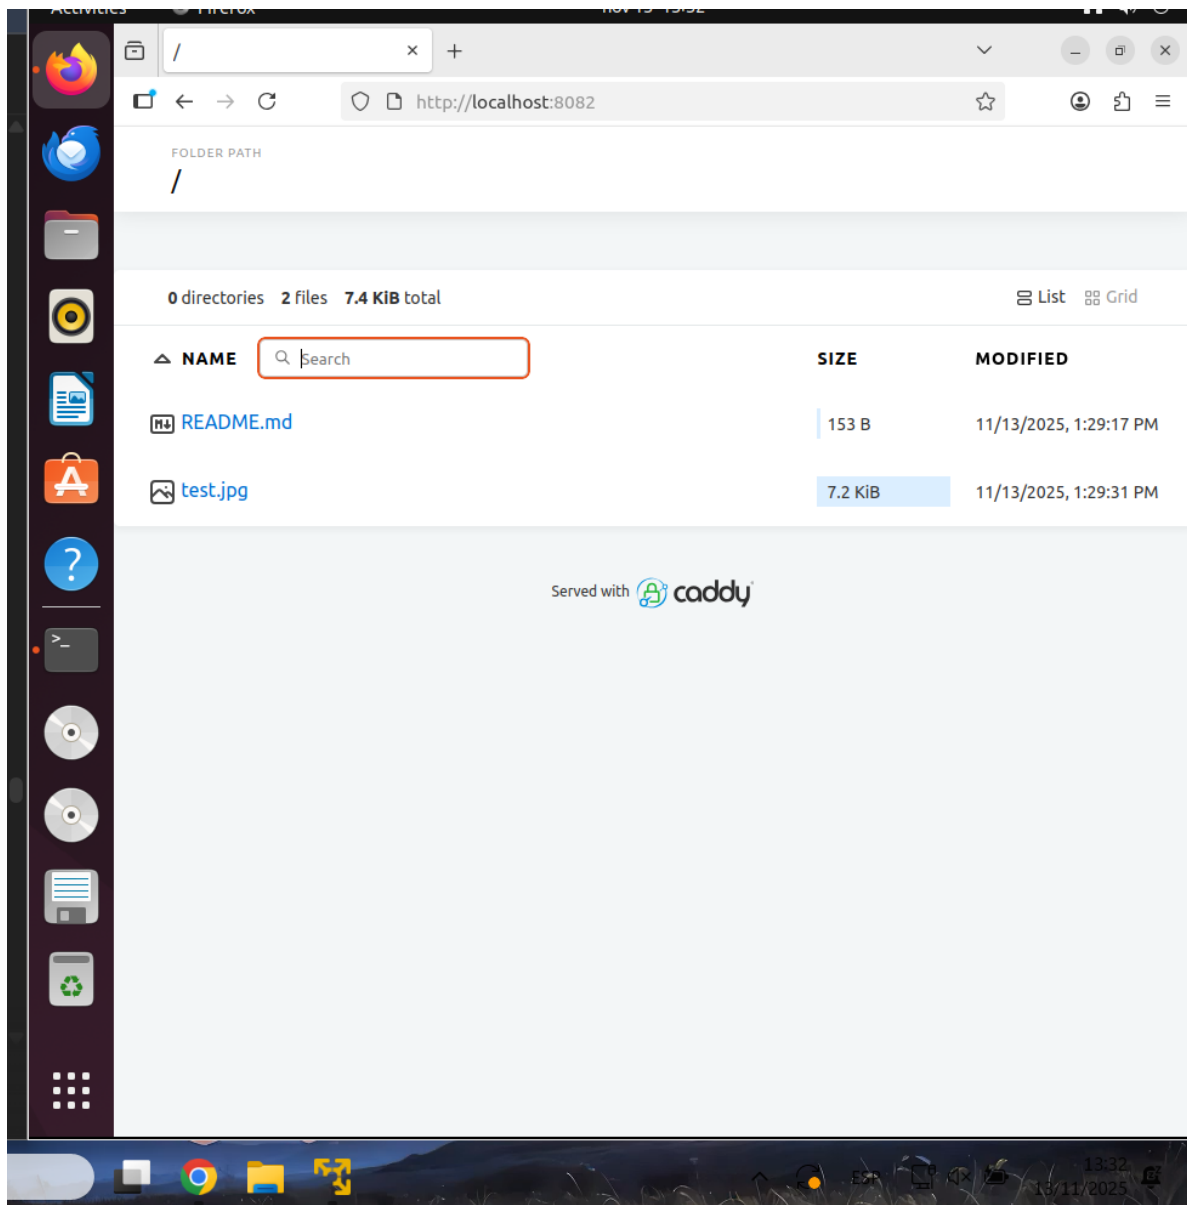

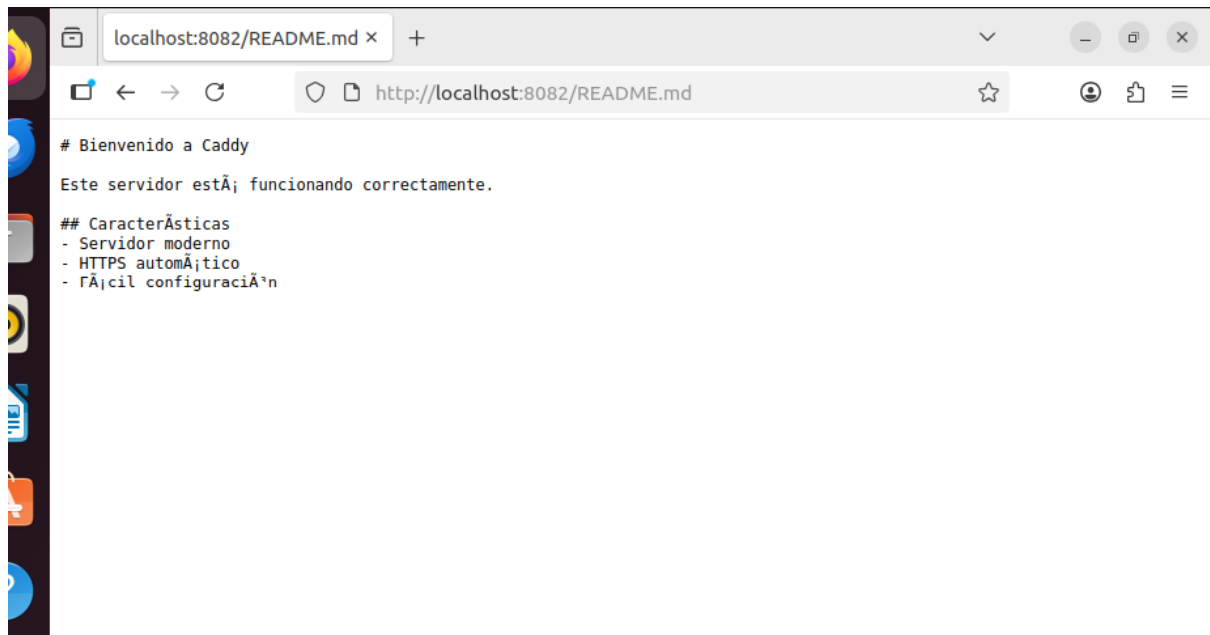

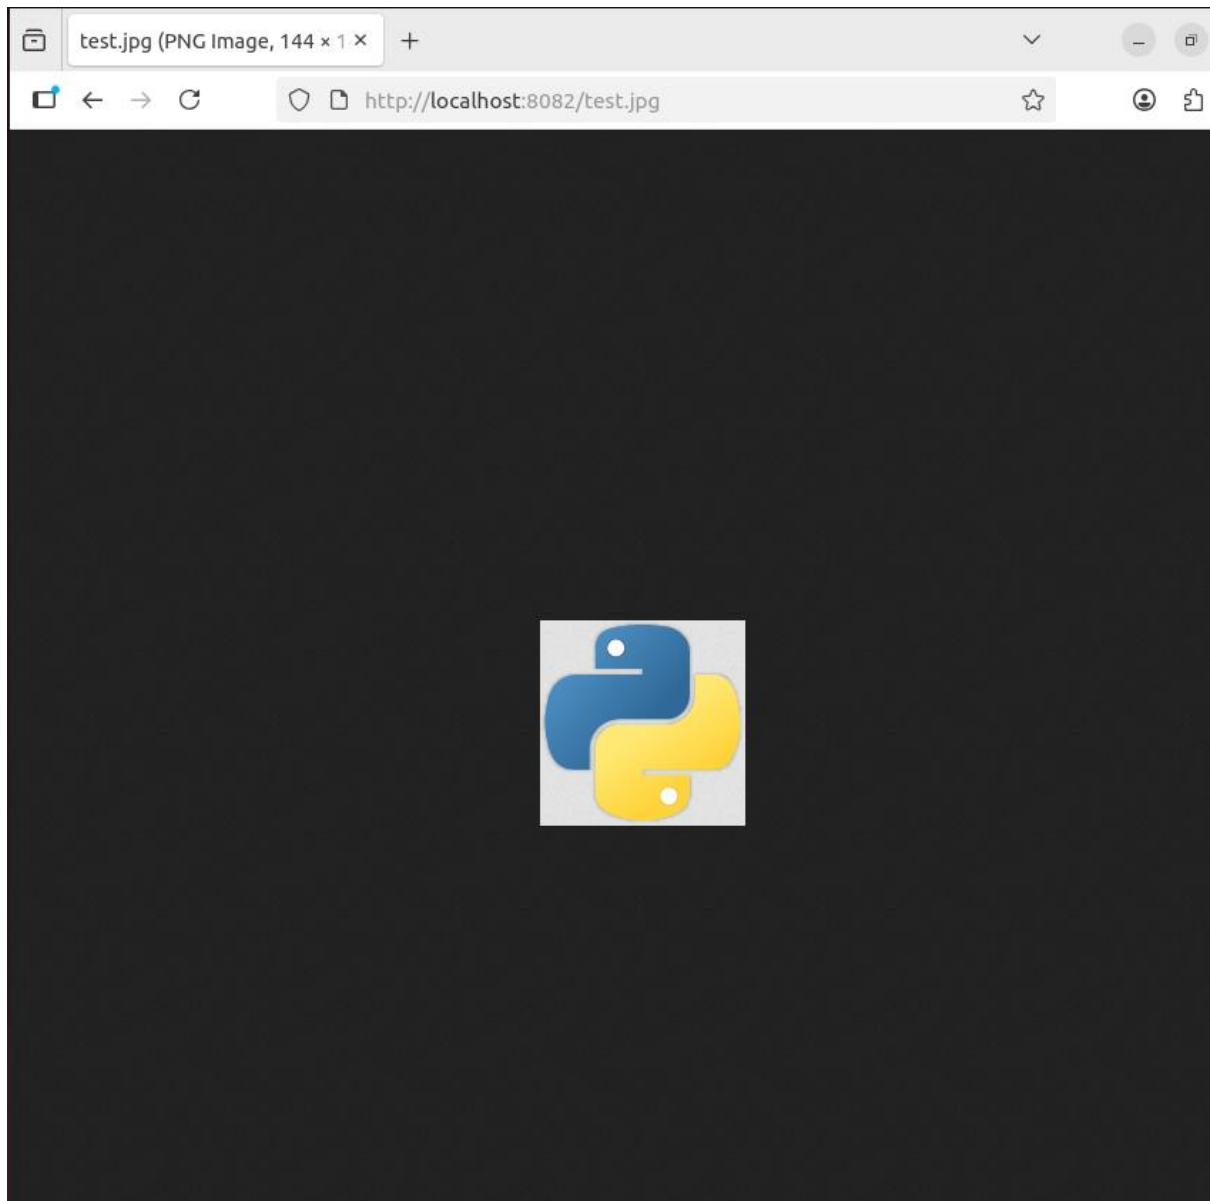

Y comprobamos todos los servicios que esten activos a la vez junto con sus puertos

```
manolo@manolo-virtual-machine:~$ sudo systemctl status apache2
sudo systemctl status nginx
sudo systemctl status caddy
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/lib/systemd/system/apache2.service; enabled; vendor prese>
   Active: active (running) since Thu 2025-11-13 13:21:59 CET; 11min ago
     Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 12723 (apache2)
    Tasks: 7 (limit: 9258)
   Memory: 13.7M
      CPU: 367ms
   CGroup: /system.slice/apache2.service
           └─12723 /usr/sbin/apache2 -k start
             └─12724 /usr/sbin/apache2 -k start
               └─12725 /usr/sbin/apache2 -k start
                 └─12726 /usr/sbin/apache2 -k start
                   └─12727 /usr/sbin/apache2 -k start
                     └─12728 /usr/sbin/apache2 -k start
                       └─12854 /usr/sbin/apache2 -k start

nov 13 13:21:59 manolo-virtual-machine systemd[1]: Starting The Apache HTTP Ser>
nov 13 13:21:59 manolo-virtual-machine apachectl[12722]: AH00558: apache2: Cou>
nov 13 13:21:59 manolo-virtual-machine systemd[1]: Started The Apache HTTP Serv>
lines 1-20/20 (END)
```

Home

```

sudo systemctl status nginx
sudo systemctl status caddy
● apache2.service - The Apache HTTP Server
   Loaded: loaded (/lib/systemd/system/apache2.service; enabled; vendor prese
   Active: active (running) since Thu 2025-11-13 13:21:59 CET; 11min ago
     Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 12723 (apache2)
     Tasks: 7 (limit: 9258)
    Memory: 13.7M
       CPU: 367ms
    CGroup: /system.slice/apache2.service
            └─12723 /usr/sbin/apache2 -k start
              └─12724 /usr/sbin/apache2 -k start
                └─12725 /usr/sbin/apache2 -k start
                  └─12726 /usr/sbin/apache2 -k start
                    └─12727 /usr/sbin/apache2 -k start
                      └─12728 /usr/sbin/apache2 -k start
                        └─12854 /usr/sbin/apache2 -k start

nov 13 13:21:59 manolo-virtual-machine systemd[1]: Starting The Apache HTTP Ser
nov 13 13:21:59 manolo-virtual-machine apache2[12722]: AH00558: apache2: Cou
nov 13 13:21:59 manolo-virtual-machine systemd[1]: Started The Apache HTTP Serv

● nginx.service - A high performance web server and a reverse proxy server
   Loaded: loaded (/lib/systemd/system/nginx.service; enabled; vendor preset:
   Active: active (running) since Thu 2025-11-13 13:25:53 CET; 7min ago
     Docs: man:nginx(8)
   Main PID: 13316 (nginx)
     Tasks: 5 (limit: 9258)
    Memory: 4.9M
       CPU: 99ms
    CGroup: /system.slice/nginx.service
            └─13316 "nginx: master process /usr/sbin/nginx -g daemon on; maste
              └─13317 "nginx: worker process" "" "" "" "" "" "" "" "" "" "" "" ""
                └─13318 "nginx: worker process" "" "" "" "" "" "" "" "" "" "" ""
                  └─13319 "nginx: worker process" "" "" "" "" "" "" "" "" "" "" ""
                    └─13320 "nginx: worker process" "" "" "" "" "" "" "" "" "" "" ""

nov 13 13:25:53 manolo-virtual-machine systemd[1]: Starting A high performance
nov 13 13:25:53 manolo-virtual-machine systemd[1]: Started A high performance w
lines 1-17/17 (END)
● caddy.service - Caddy
   Loaded: loaded (/lib/systemd/system/caddy.service; enabled; vendor preset:
   Active: active (running) since Thu 2025-11-13 13:30:44 CET; 3min 4s ago
     Docs: https://caddyserver.com/docs/
   Main PID: 14348 (caddy)
     Tasks: 9 (limit: 9258)
    Memory: 11.5M

```



```

manolo@manolo-virtual-machine:~$ sudo netstat -tulpn | grep apache2
sudo netstat -tulpn | grep nginx
sudo netstat -tulpn | grep caddy
tcp6      0      0 :::8443          :::*             LISTEN
12723/apache2
tcp6      0      0 :::443          :::*             LISTEN
12723/apache2
tcp6      0      0 :::8080          :::*             LISTEN
12723/apache2
tcp      0      0 0.0.0.0:8081      0.0.0.0:*         LISTEN
13316/nginx: master
tcp6      0      0 :::8081          :::*             LISTEN
13316/nginx: master
tcp      0      0 0.0.0.0:2019      0.0.0.0:*         LISTEN
14348/caddy
tcp6      0      0 :::8082          :::*             LISTEN
14348/caddy
manolo@manolo-virtual-machine:~$

```

```

14348/caddy
manolo@manolo-virtual-machine:~$ sudo netstat -tulpn | grep -E '8080|8081|8082|8443'
tcp      0      0 0.0.0.0:8081      0.0.0.0:*         LISTEN
13316/nginx: master
tcp6      0      0 :::8443          :::*             LISTEN
12723/apache2
tcp6      0      0 :::8082          :::*             LISTEN
14348/caddy
tcp6      0      0 :::8080          :::*             LISTEN
12723/apache2
tcp6      0      0 :::8081          :::*             LISTEN
13316/nginx: master
manolo@manolo-virtual-machine:~$

```

