

Development of an open-source calibration framework for superconducting qubits

Master degree in Physics

Candidate:

Elisa Stabilini
28326A

July 4th 2025

Università degli Studi di Milano - Department of Physics

Supervisor:

Prof. Dr. Stefano Carrazza

Co-supervisors:

Dr. Alessandro Candido

Dr. Andrea Pasquale


Dott. Edoardo Pedicillo



Table of contents

1. Superconducting qubits
2. Average Clifford gate fidelity optimization
3. Library additions
4. Conclusions & Outlooks

Qibo framework

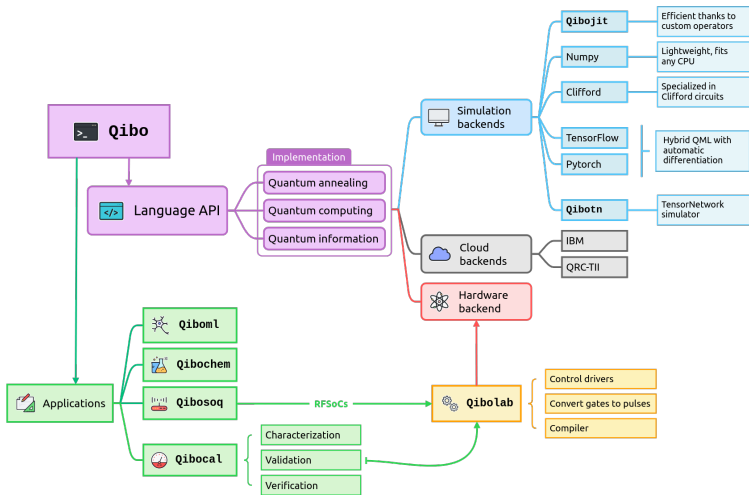

Superconducting qubits

Artificial atoms

Qubit: two level system

Superconducting qubits: use Josephson
Junctions to build anharmonic oscillators

State readout

Qubit - resonator hamiltonian:

$$\hat{H} = \hbar\omega_r\hat{a}\hat{a}^\dagger - \frac{\hbar\omega_{01}}{2}\hat{\sigma}_z + \hbar g(\hat{\sigma}^+\hat{a} + \hat{\sigma}^-\hat{a}^\dagger)$$

Dispersive regime $g \ll \omega_q - \omega_r$

$$\hat{H}_{disp} = \hbar(\omega_r - \chi\hat{\sigma}_z)\hat{a}^\dagger\hat{a} - \frac{\hbar}{2}(\omega_{01} + \chi)\hat{\sigma}_z$$

dispersive shift:

$$\chi = \frac{g^2}{\Delta}, \Delta = \omega_q - \omega_r$$

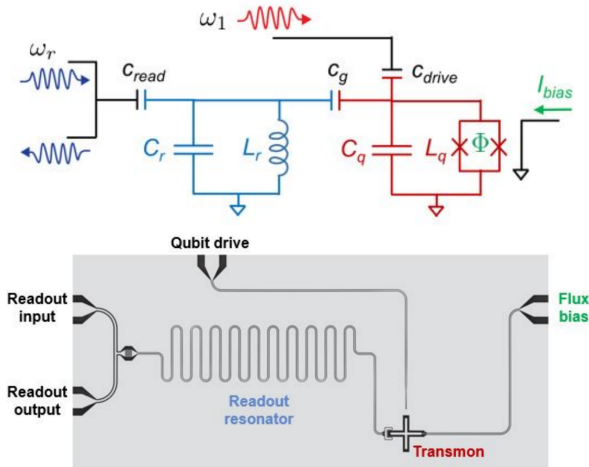


Figure 1: DOI: 10.1109/MAP.2022.3176593

Average Clifford gate fidelity optimization

Randomized Benchmarking

Randomized benchmarking estimates average gate fidelity by applying random sequences of Clifford gates followed by an inverting gate.


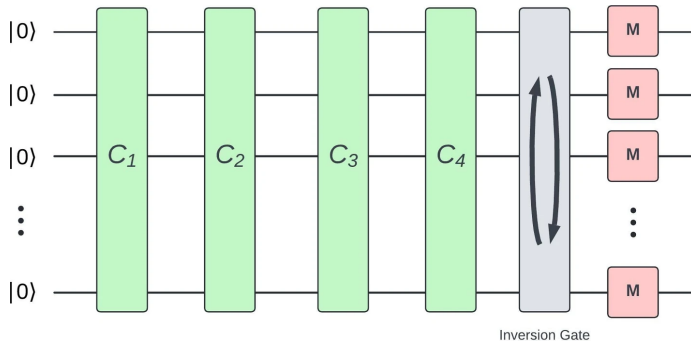


Figure 2: DOI: 10.1007/s10773-024-05811-8

Randomized Benchmarking

Randomized benchmarking estimates average gate fidelity by applying random sequences of Clifford gates followed by an inverting gate.

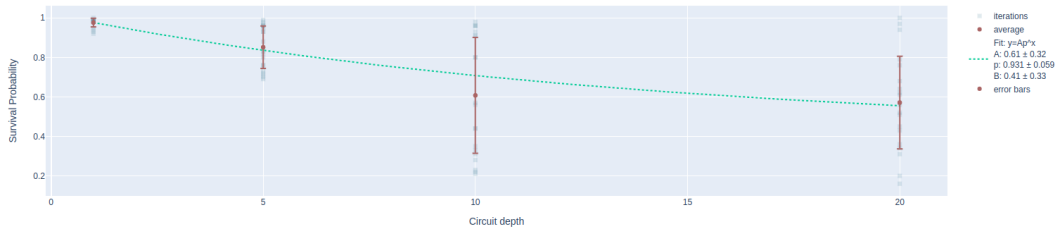


Library additions

Flux pulse reconstruction

Transmon flux dependence:

$$f_q(\Phi_q) \approx \left(\sqrt{8E_J E_C} \left| \cos \left(\pi \frac{\Phi_q}{\Phi_0} \right) \right| \right)$$

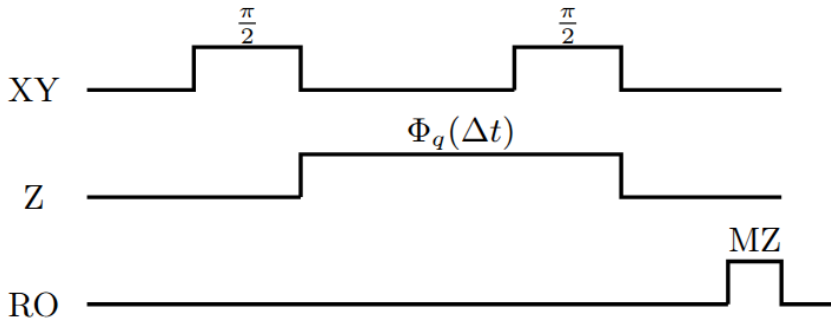

Conclusions & Outlooks

Questions?

References

What is for?

Simulation of quantum system:

"Nature isn't classical, dammit, and if you want to make a simulation of nature, you'd better make it quantum mechanical, and by golly it's a wonderful problem, because it doesn't look so easy"























Optimization and modeling (finance, traffic, weather...)

Quantum Algorithms

Quantum Machine Learning



Qubit platforms

	atoms	electron superconducting loops & controlled spin					photons	
								
	trapped ions	cold atoms	quantum annealing	superconducting	silicon	NV centers	topological	photons
vendors								
labs (*)								

©c) Oliver Glatz, October 2021

(cc) Olivier Ezratty, October 2021

Standard Randomized Benchmarking protocol

RB protocol

1. Initialize the system in the ground state
2. For each sequence length m , draw a sequence of Clifford group elements
3. Calculate the inverse gate
4. Measure sequence and inverse gate
5. Repeat the process for multiple sequences of the same length while varying the length

RB features

robust to SPAM errors

faster than state tomography

hardware-agnostic