
Multiple choice questions: Lecture 6




0

When a model requests a search in a ReAct-style system, where does the resulting observation come from?

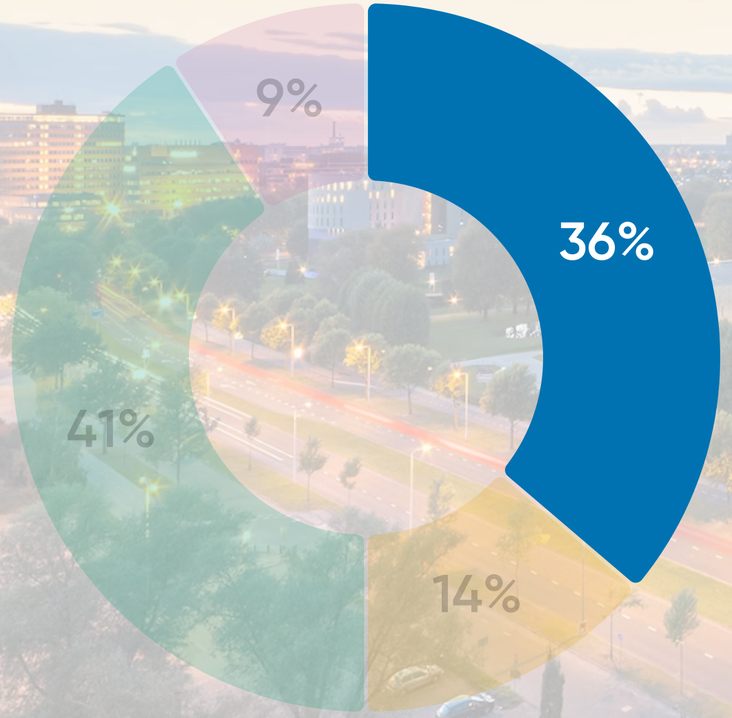


- 36% The search tool executed by the surrounding program. ✓
- 14% The model's prediction of what the search should return. ×
- 41% The description of the search tool supplied in the prompt. ×
- 9% The reasoning text that introduced the search request. ×

Which description best captures the ReAct approach?

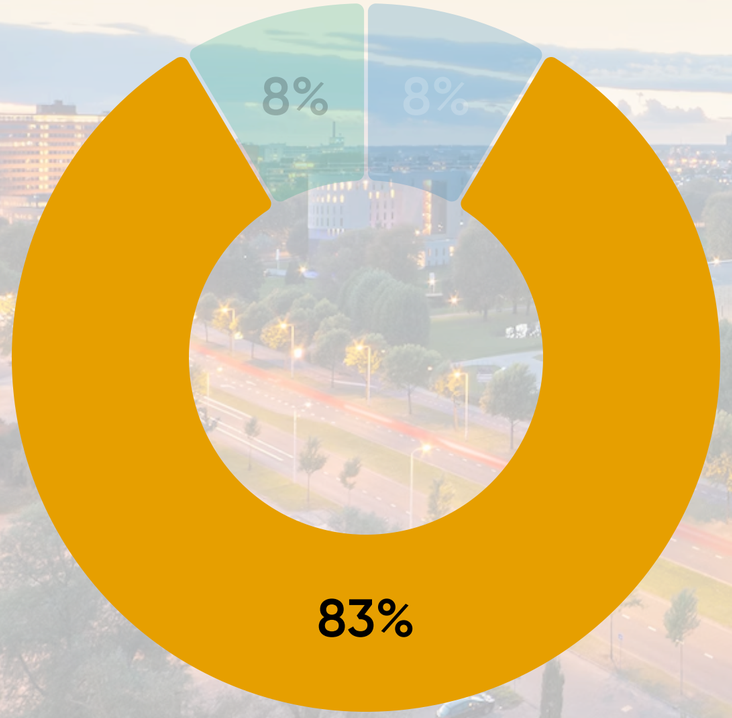


- 8% Complete a reasoning plan before executing its actions without further model decisions. ×
- 83% Interleave reasoning and actions, using observations to inform subsequent steps. ✓
- 8% Generate a final answer before constructing a reasoning trace to explain it. ×
- 0% Assign reasoning and action selection to two separately trained language models. ×

In ReAct's few-shot prompting setup, how do demonstrations influence the model?

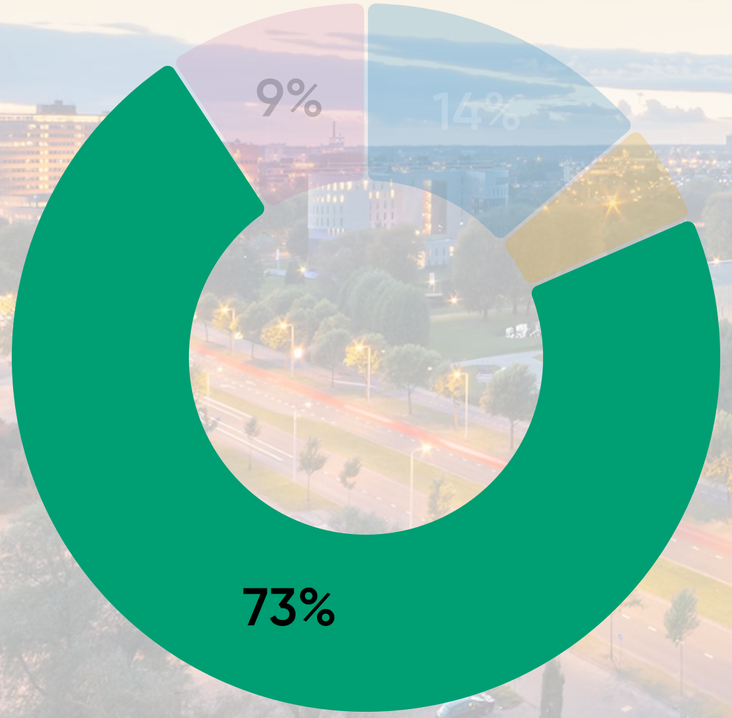


- 14% They supply labelled examples for updating every model parameter. ×
- 5% They train a separate controller that chooses actions for the model. ×
- 73% They provide example trajectories in the input context while model weights remain fixed. ✓
- 9% They replace the external environment with stored answers to the test questions. ×

Why can external search help address the factual hallucinations discussed in ReAct?

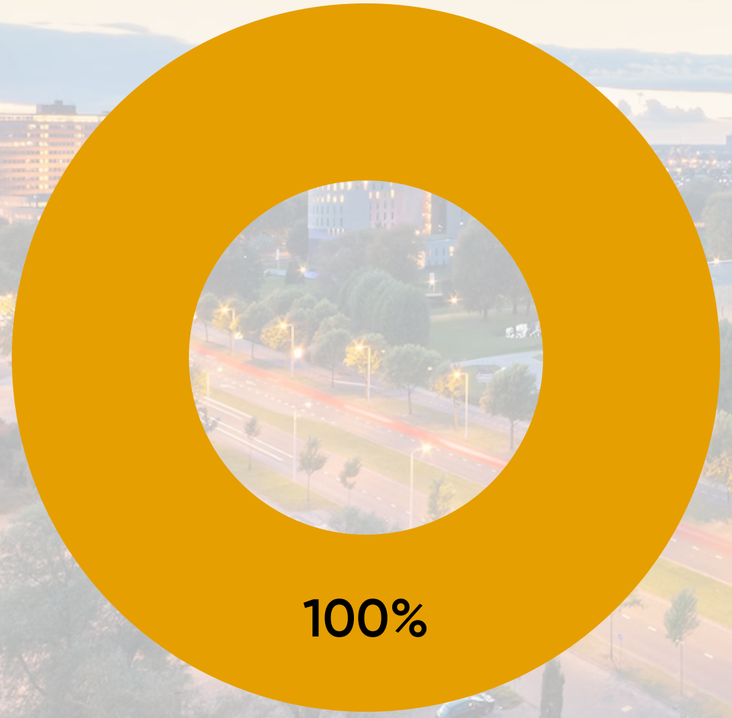


- 0% It increases the amount of reasoning generated before any evidence is retrieved. ×
- 100 % It supplies evidence that the model can use in subsequent reasoning. ✓
- 0% It transfers responsibility for composing the final answer to the search engine. ×
- 0% It replaces the model's stored knowledge by updating its weights after each search. ×

What is the main distinction between workflows and agents (according to the engineering article)?

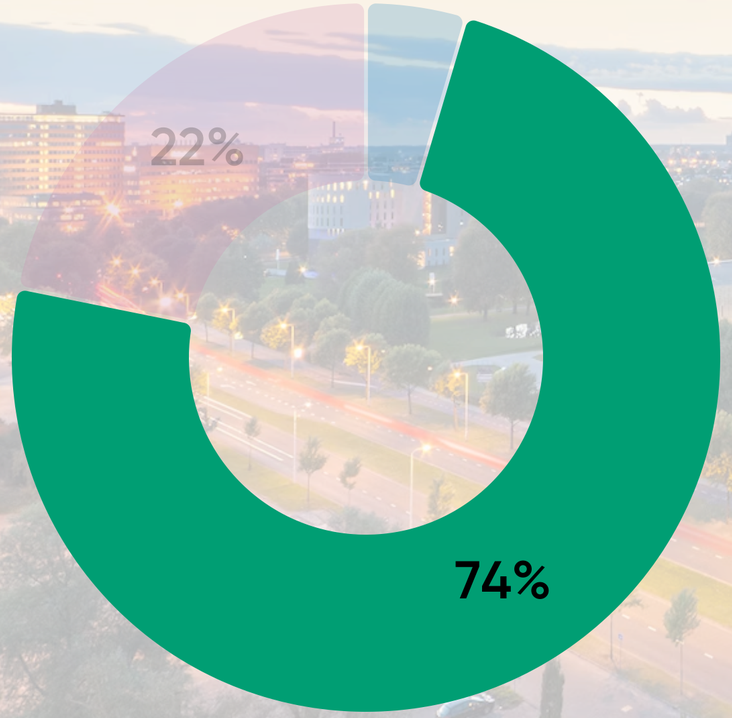

- 4% Workflows use one model, whereas agents require several cooperating models. ×
- 0% Workflows process text, whereas agents must also process images or other modalities. ×
- 74% Workflows use predefined code paths, whereas agents let the LLM direct the process and tool use. ✓
- 22% Workflows keep model weights fixed, whereas agents update them after each action. ×

A system uses one LLM call to extract findings, a second to draft a summary , and a third to translate the summary. Which *pattern* is this?

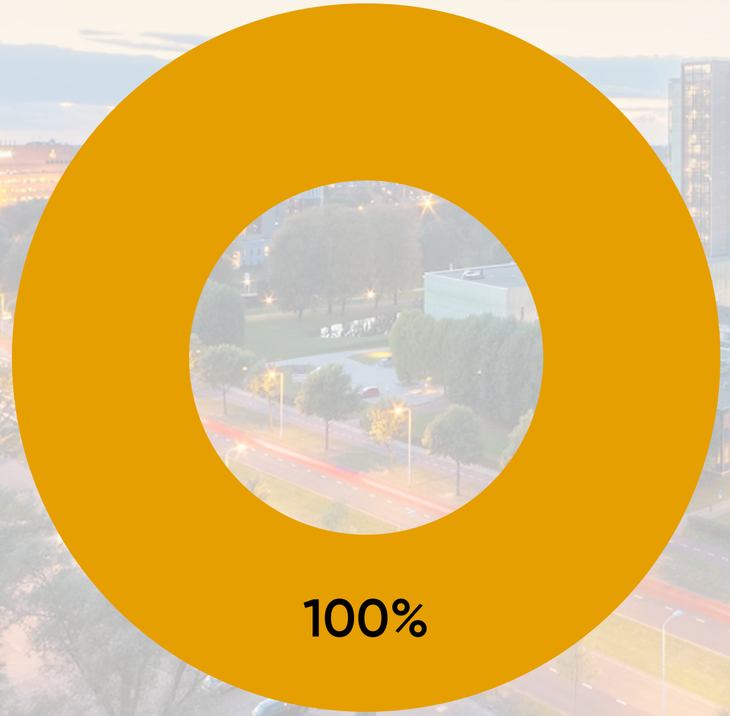

- 0% Routing ×
- 100% Prompt chaining. ✓
- 0% Parallelization. ×
- 0% Evaluator-optimizer. ×


A system classifies an incoming request and sends it to one of several predefined specialist handlers. Which pattern does this illustrate?



- 0% Prompt chaining. ×
- 0% Evaluator–optimizer. ×
- 100% Parallelization. ×
- 0% Routing. ✓

1/1

Which capability is least directly tested by a static medical multiple-choice benchmark?

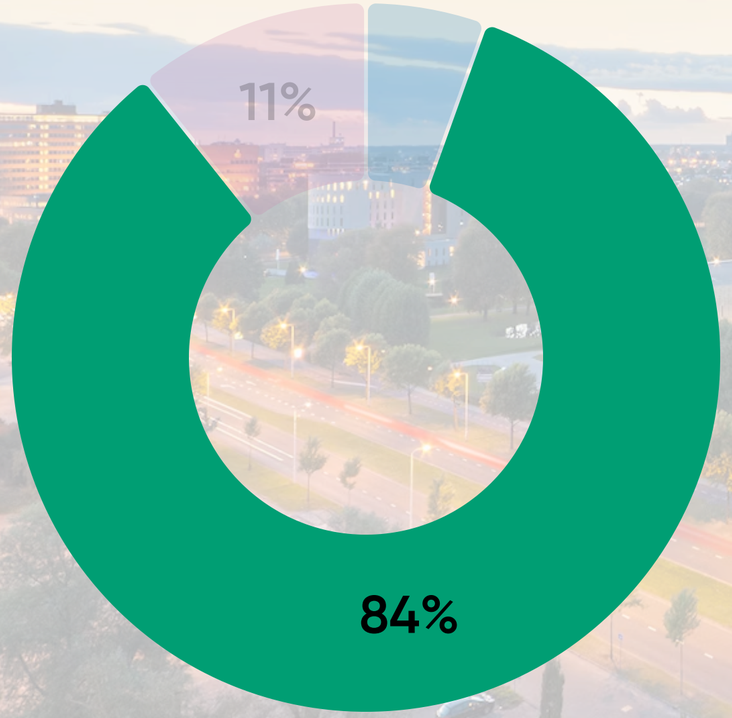

- 5% Selecting a diagnosis from a supplied list of alternatives. ×
- 0% Recalling a medical fact needed to answer a question. ×
- 84% Deciding what information to request as a consultation develops. ✓
- 11% Recognizing an association between symptoms and a disease. ×


What is the role of agent-based modeling in the proposed clinical evaluations?

- To simulate the actions and interactions of participants in a clinical environment. ✓
- To replace a clinical encounter with a single fixed question and answer. ×
- To train the language model's next-token predictor on clinical textbooks. ×
- To rank language models by their number of parameters and inference speed. ×



0

An agent performs well in a clinical simulation. Which further step best addresses whether that result transfers to actual care?

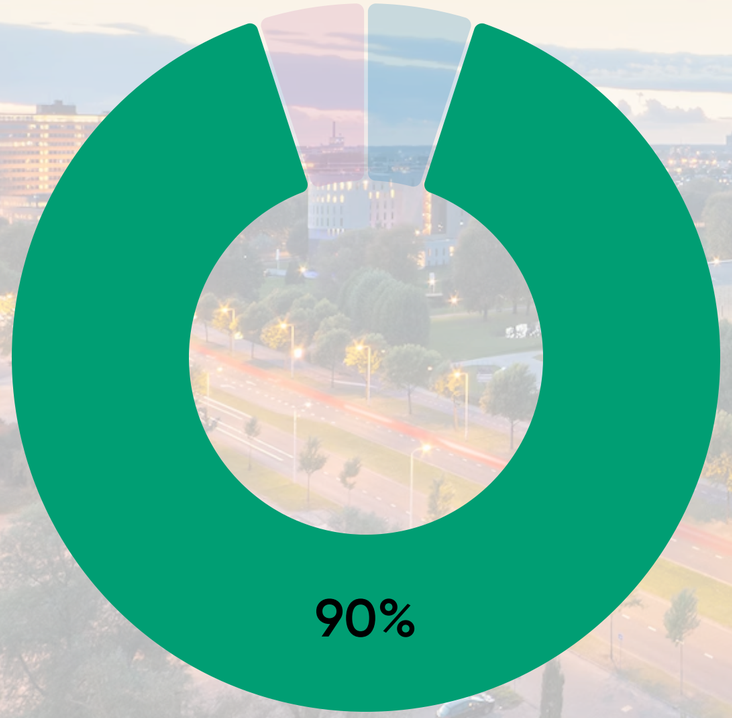

- 5% Increasing the number of runs in the same unchanged simulation. ×
- 0% Expanding the set of static medical knowledge questions. ×
- 90% Testing real-world impact in clinical studies and monitoring performance after deployment. ✓
- 5% Increasing the similarity between generated explanations and reference explanations. ×