


Fig. 4 | Dual-layer state transitions: a worked example

Given: $G : x^2 = ay$, $A = (1, 1/4)$, $A \in G$. Query: $q = \text{Distance}(A, \text{Focus}(G))$.

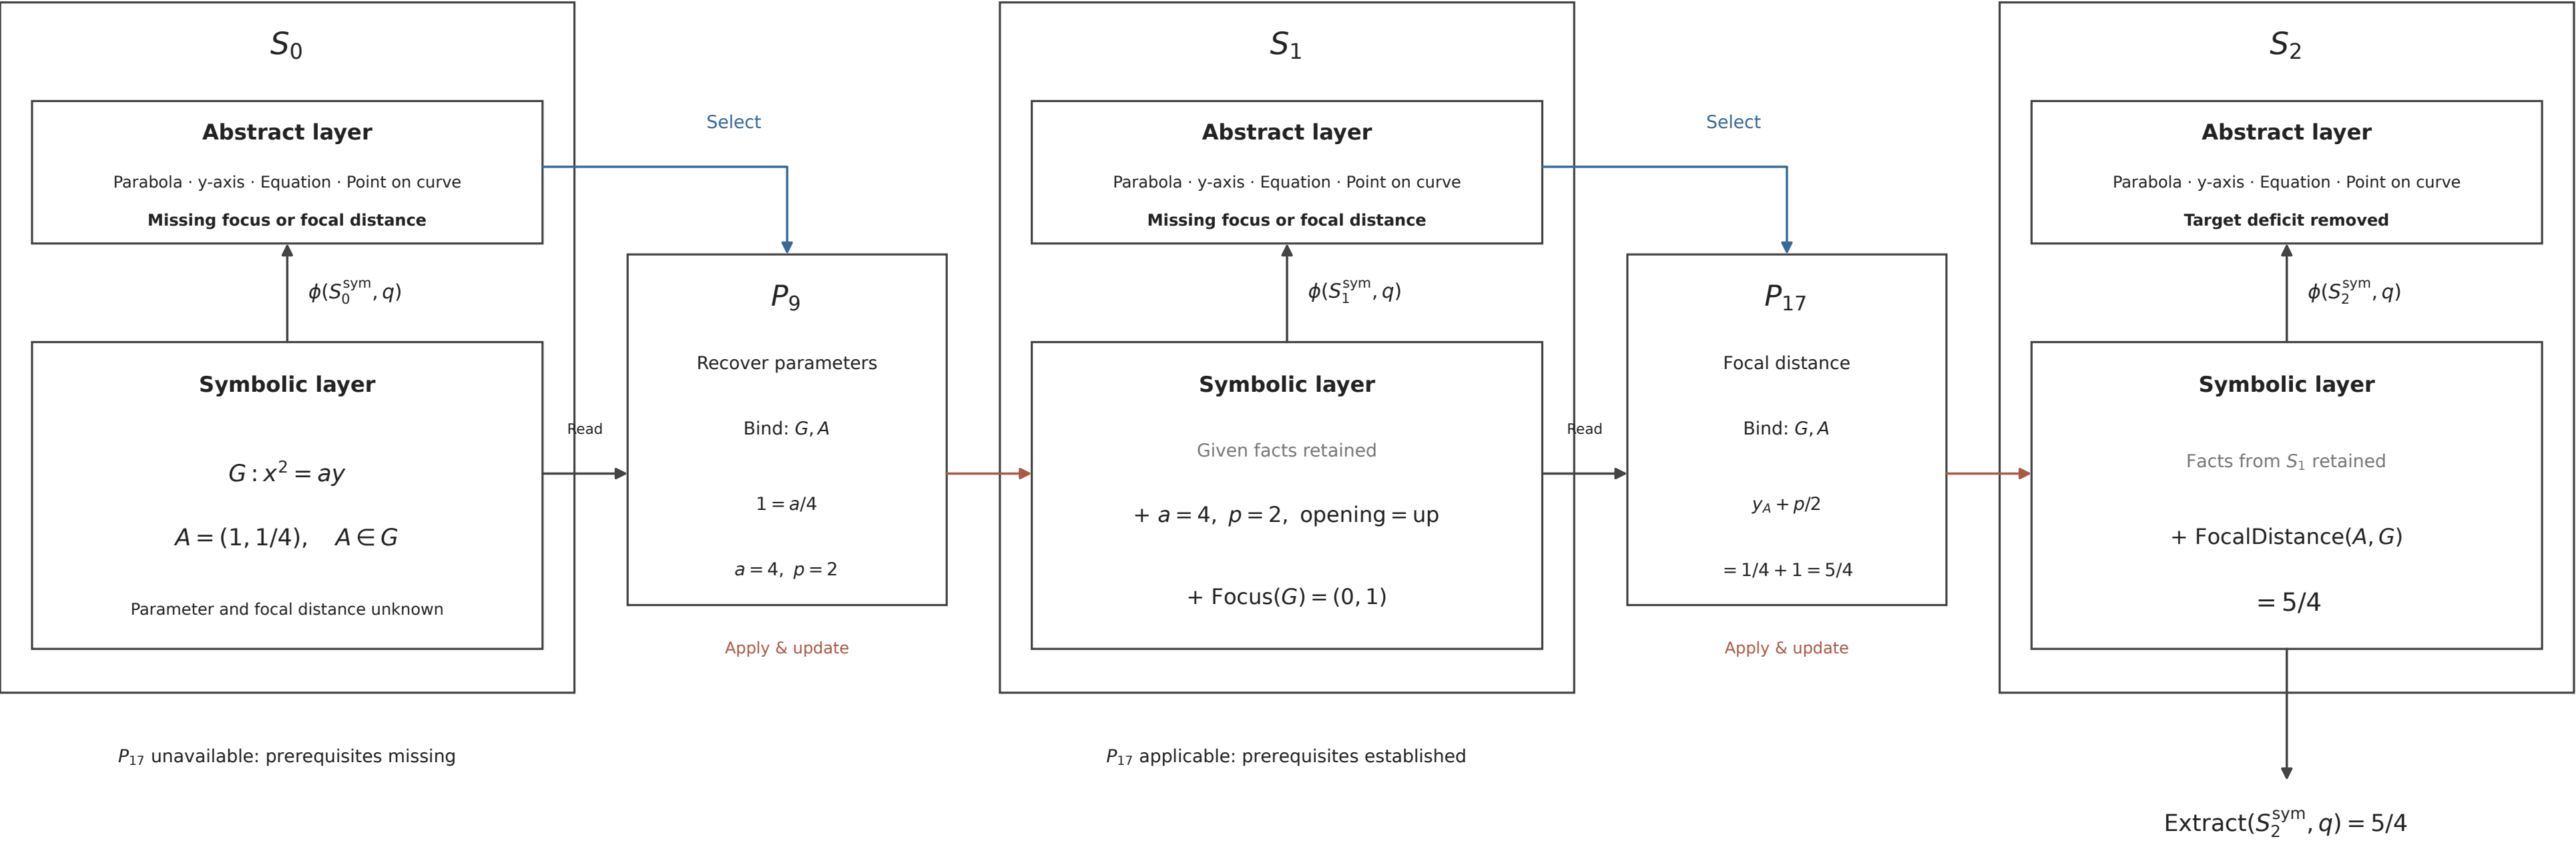

Method illustration based on fixed replay; no selector ranking is asserted. + New facts. The displayed descriptor sets of S_0 and S_1 are identical.