


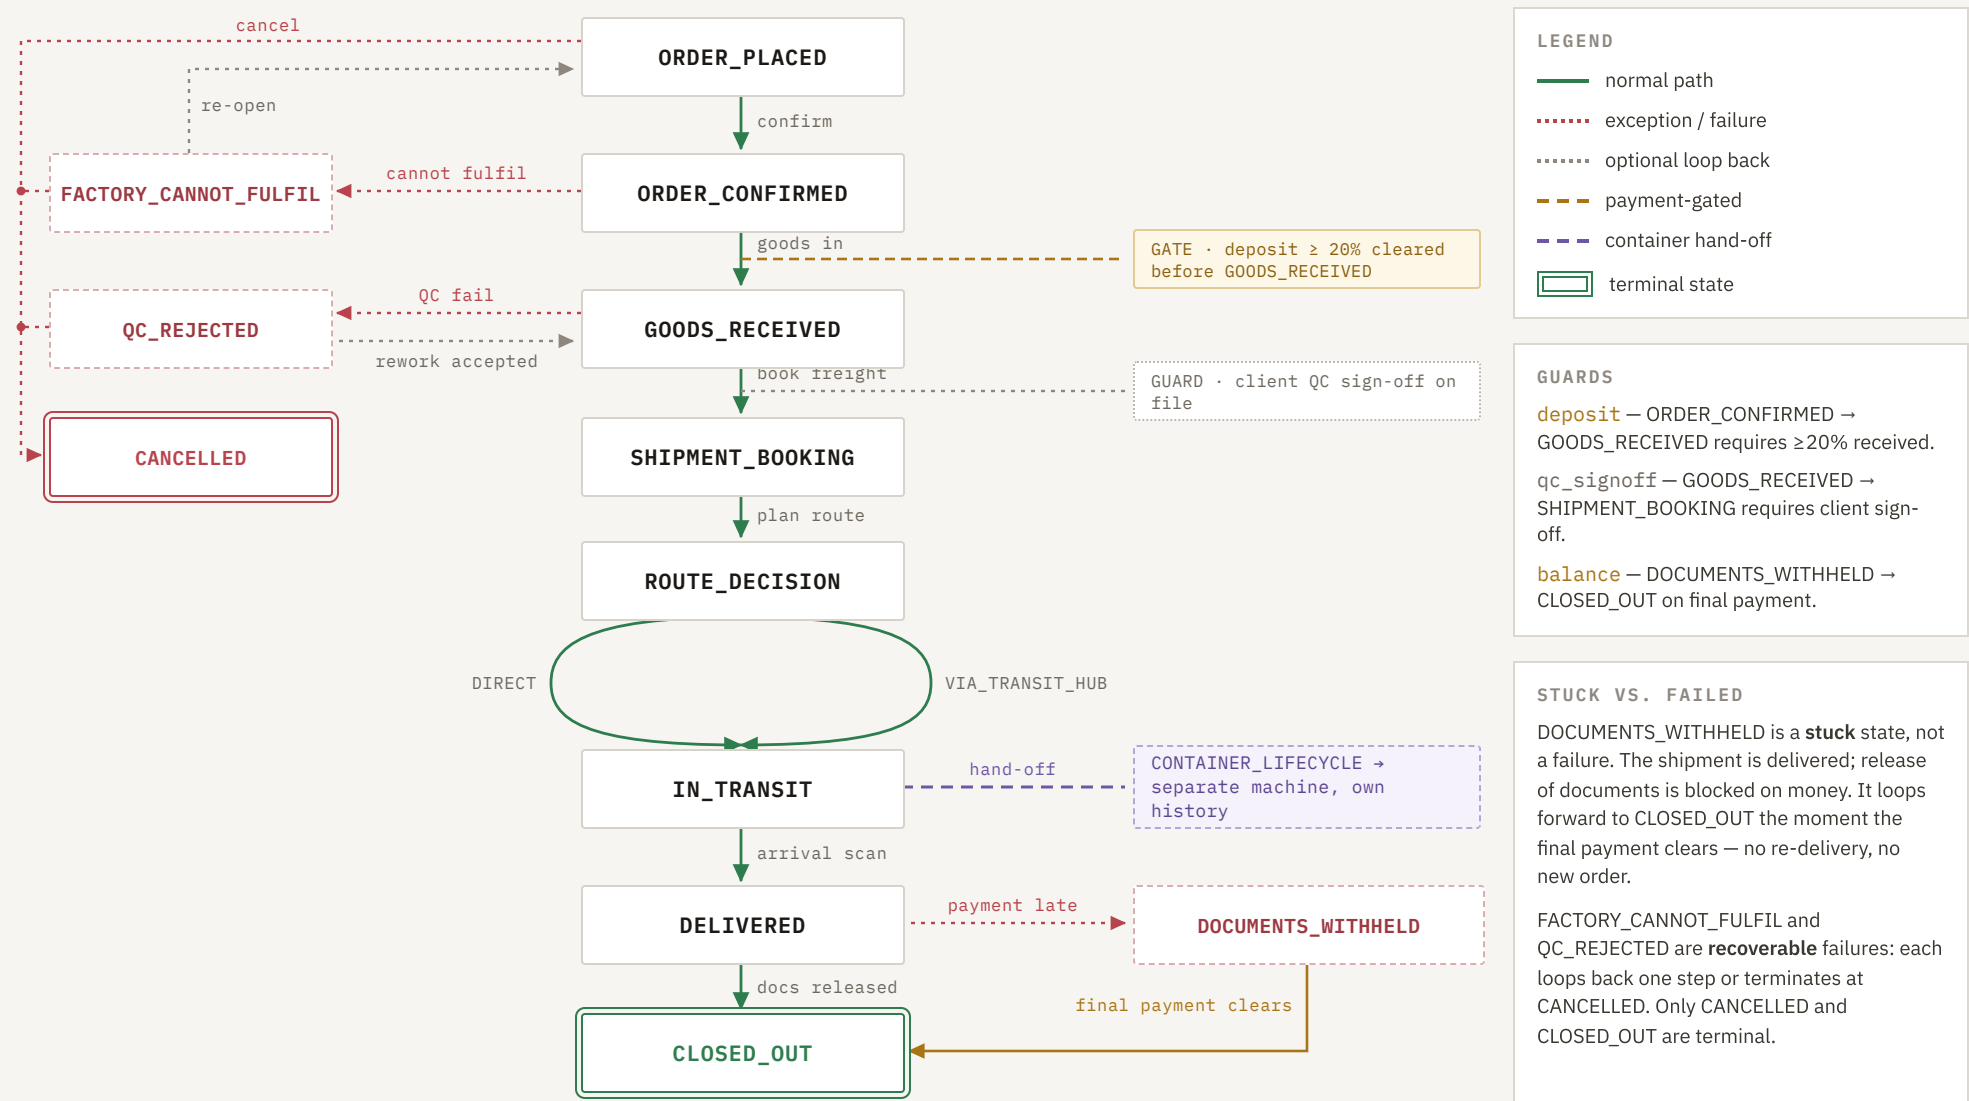

TRANSITION CONTRACT

Every transition is executed server-side. Clients request a target status; they never write one. Each accepted transition writes one STATUS_HISTORY row and enqueues one notification job (see Notification Pipeline). Transitions are idempotent per (order_id, to_status, request_id).

STATUS_HISTORY

from_status enum, null on create
to_status enum, not null
changed_by actor id or system
reason text, required on exceptions
created_at timestampz, append-only

INVALID TRANSITION · HTTP 422

```
{ "error": "invalid_transition",  
  "from": "IN_TRANSIT",  
  "to": "CLOSED_OUT",  
  "allowed": ["DELIVERED"] }
```

A failed guard returns 422 with "error": "guard_failed" and the guard name. No history row is written.