

Context-Optimized Multi-Agent Orchestration with Budgeted Context Routing

A scoped-context architecture for reducing token duplication, hallucination exposure, and synthesis overhead

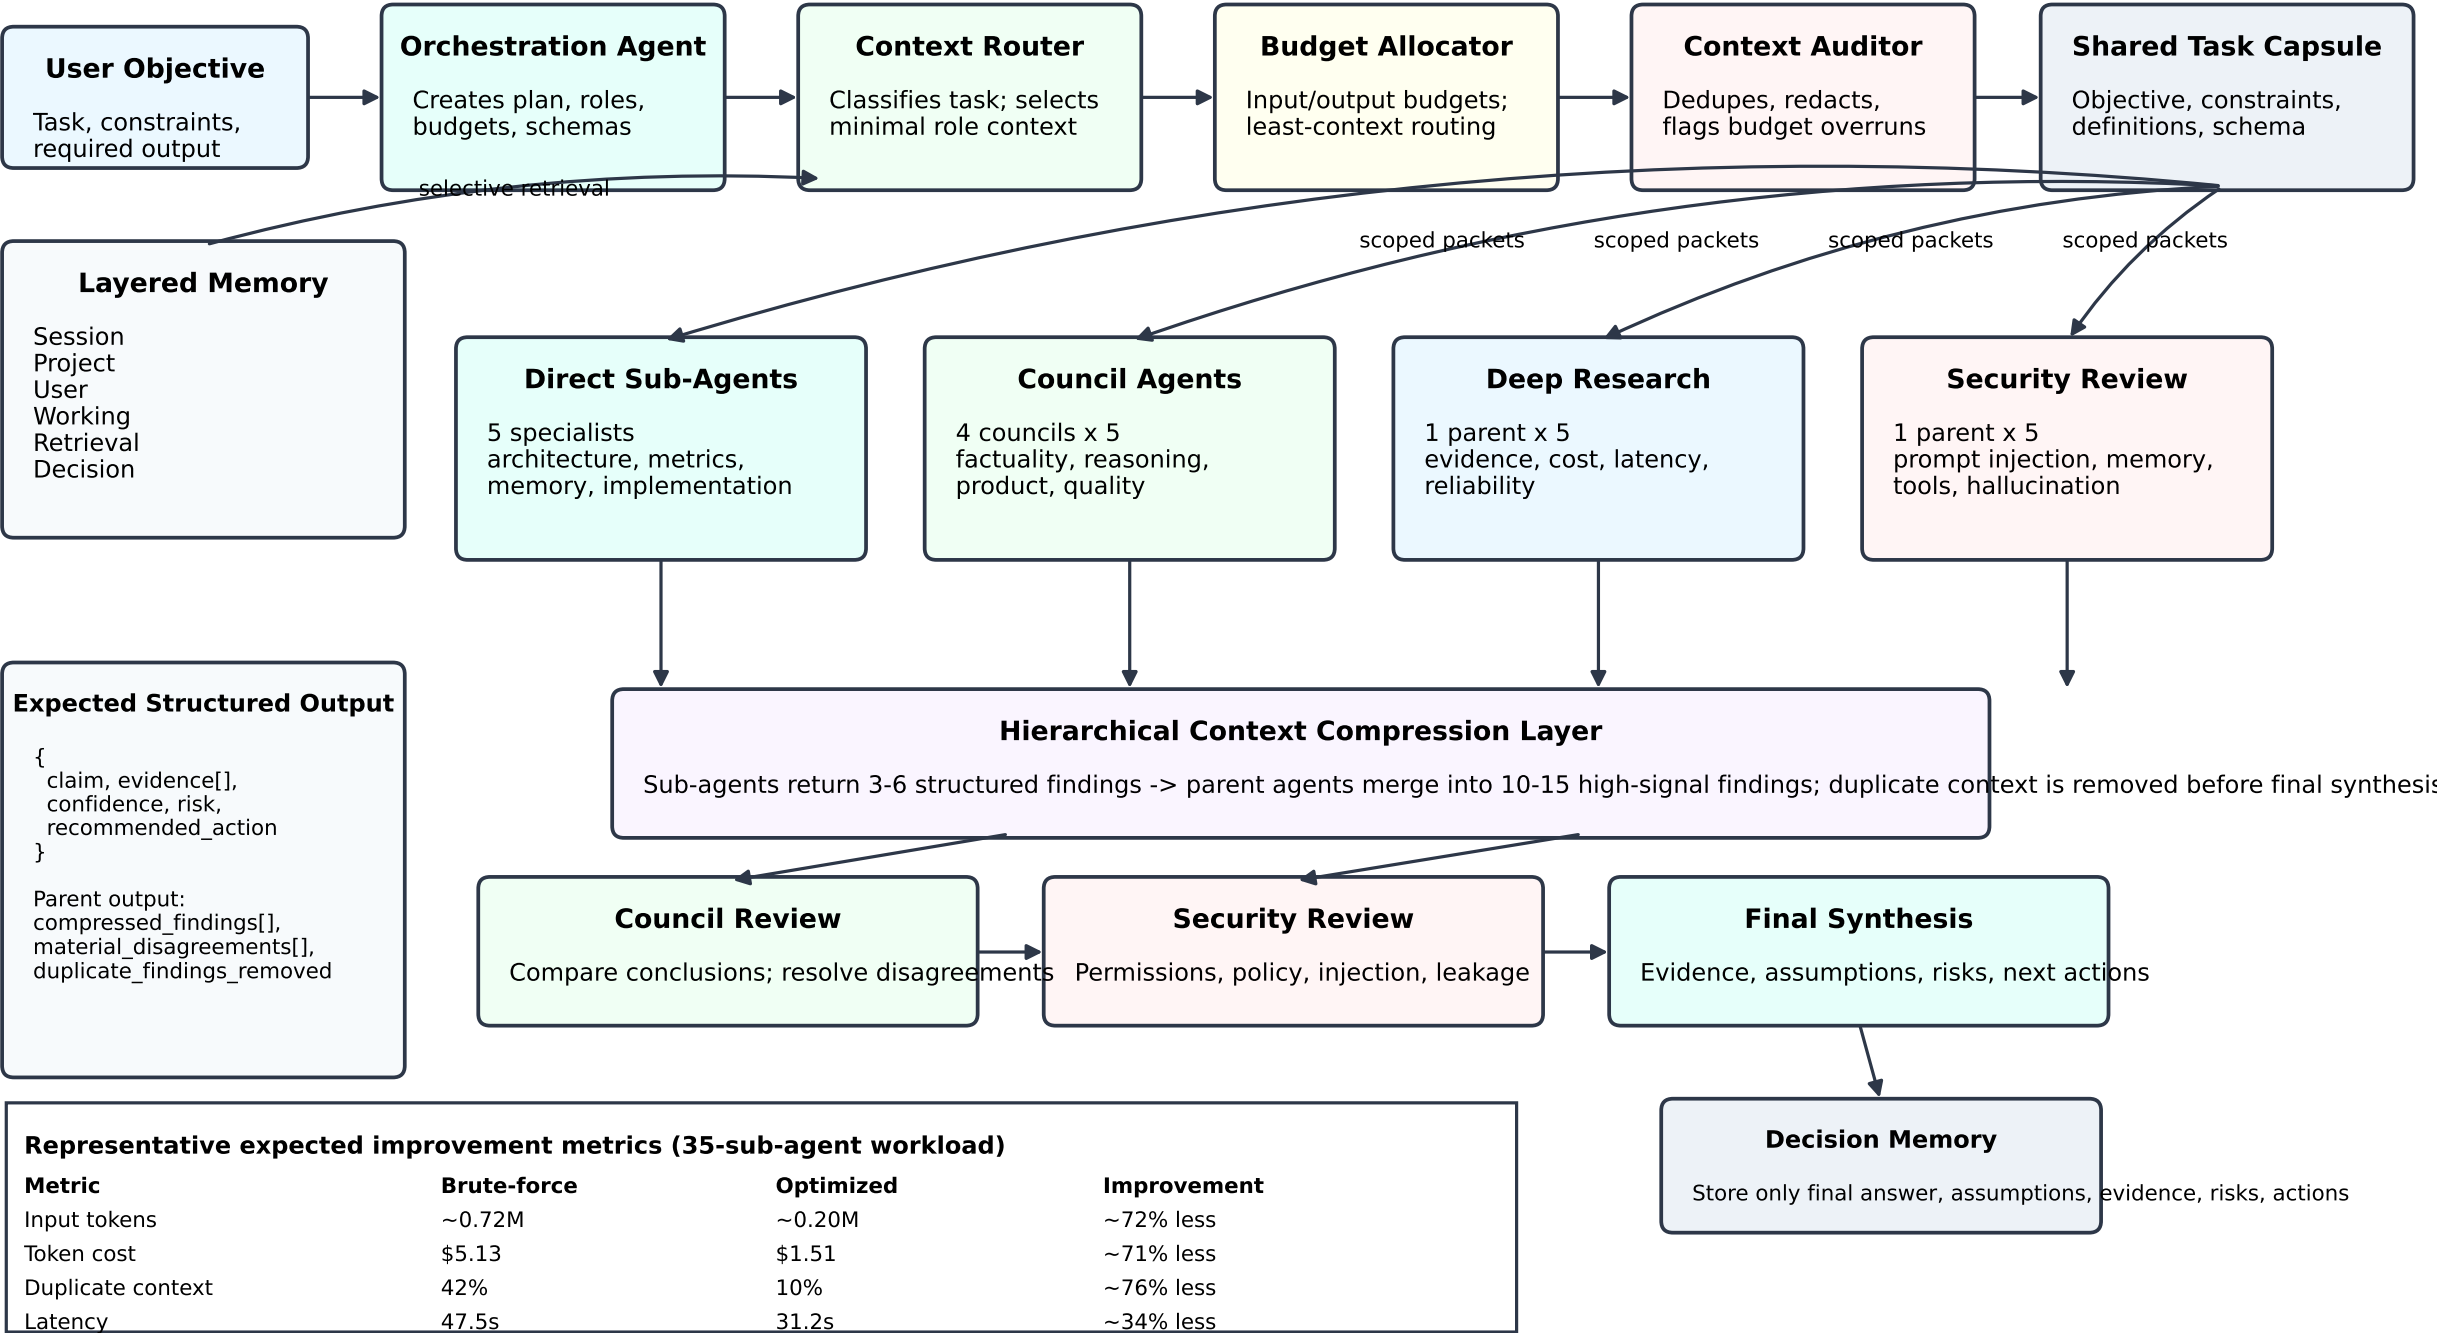


Figure 1. Scoped context routing uses shared task capsules, private role packets, strict budgets, progressive retrieval, and hierarchical compression before final synthesis.