

NOTE

Join the Astra Framework Discord server!

There is now a dedicated **Discord server** for Astra Framework and its extensions. Join to **receive notifications** about new extension releases and important updates, to **ask for new features**, **report bugs**, **share ideas**, and **showcase your Astra creations** with other developers.

 Join the Discord Server: <https://discord.gg/nJVRMkGrZg>

Introduction

Astra Framework is a lightweight, modular framework that takes a different approach compared to other solutions. While many existing frameworks offer comprehensive, pre-built systems, they often come with steep learning curves and rigid structures that can limit your creative freedom. Astra Framework instead focuses on providing a clean, flexible foundation that you can shape to your exact needs.

Key advantages:

- **Modular Architecture:** Pay just for what you need. Astra Framework serves as the foundation, with additional packages building upon it to extend functionality in a modular way.
- **True Flexibility:** Unlike more rigid frameworks, Astra Framework defines only essential concepts, letting you model any game system without being constrained by pre-made assumptions. The limitations are minimal.
- **Gentle Learning Curve:** Start creating immediately with intuitive, inspector-driven workflows, avoiding the complexity of larger frameworks.
- **100% Inspector-Driven:** Make changes and balance your game without touching code. Game designers can tweak values through ScriptableObjects in real-time, even during play mode, without needing recompilation. This also enables rapid testing and debugging by allowing instant value adjustments.
- **Minimal Lock-in:** The framework's lightweight nature means you're never locked into specific game design patterns.

Whether you're creating a traditional RPG, a roguelike/roguelite, an MMO, or even a game with unique mechanics, Astra Framework adapts to your needs without forcing you into predetermined patterns. It provides essential building blocks for managing attributes, statistics, levels, and classes, along with powerful systems for controlling stat growth through customizable formulas, handling game events, and implementing scaling calculations. This lets you focus on the creative aspects of game development while having precise control over how your game elements evolve and interact.

Vocabulary of Astra Framework

The package is developed around the concept of *entity*, so let's clarify what we mean by this term in the context of Astra Framework. In its most minimal version, an entity is a `GameObject` that has a set of statistics. Optionally, an entity can have attributes, can level up, and can have a class. Let's clarify what we mean by each mentioned term.

Statistics (Stat)

A statistic is a value that quantifies an aspect of the entity. The meaning of this aspect is solely due to the concept it refers to.

Examples

In an RPG, a statistic can be `physical damage`. The concept of physical damage refers the player to the amount of damage inflicted by physical attacks, whether with weapons or without. Other statistics can be `ability power`, `defense`, `speed`, `armor penetration`, `range`, etc.

Attributes

An attribute is a value that can influence the value of one or more statistics. The weight of its influence on the statistics can be variable.

Examples

In an RPG, attributes can be: `strength`, `dexterity`, `intelligence`, `constitution`, etc. Considering the previous example of statistics, `strength` could influence `physical damage`, `dexterity` would increase `speed`, `intelligence` would increase `ability power`, and `constitution` would increase `defense`.

Experience and Level

The entity can gain experience and level up. This functionality is used by the class to express how attributes and statistics grow with levels, for that particular class.

Class

The class is associated with a set of statistics and optionally a set of attributes. The class describes how statistics and attributes vary with levels.

Examples

In RPGs most common classes are: `warrior`, `rogue`, `mage`, `paladin`, and so on. These classes have different attribute values. For example, a warrior will have more `strength` and `constitution` than a mage. The `rogue` might have the highest `dexterity`, etc.

How is Astra Framework organized and how does it work?



Entity

A **GameObject** becomes an entity once the **EntityCore** and **EntityStats MonoBehaviours** (Mono) are added to it. **EntityCore** comes with a built-in **EntityLevel** (plain C# `class`) that manages the experience and the level of the entity.

Stat

A **Stat** is a class that derives from **ScriptableObject** (SO) and represents a statistic in the game. Each statistic has a name (the name given to the SO instance of the created **Stat**), and we can choose whether to provide it with a maximum and/or minimum value. Additionally, we can define how that statistic grows or is reduced, depending on certain **Attributes**.

StatSet

A **StatSet** is a class derived from **ScriptableObject** that defines a collection of **Stats**. Stat sets can be composed by combining other sub-stat sets, enabling hierarchical organization and easy reuse of statistics among different entities or classes.

EntityStats

EntityStats allows us to configure:

- the base statistics
- the flat modifiers
- the *StatToStat* modifiers
- the percentage modifiers We will see what these modifiers are in the section [Understanding Stat Modifier Types](#).

The base statistics can be *fixed*, or instead derive from a class if the entity has one assigned. If we use the fixed ones, we must also provide a **StatSet**, while if we use those of a class, the class's **StatSet** will be used. If the entity levels up and we want its statistics to grow with levels, we are forced to use a class, as the *fixed* statistics are immutable.

Class

Class derives from SO and represents a game class. Each class has a name, a **GrowthFormula** that defines how the base Max HP grows with levels, a **StatSet**, optionally an **AttributeSet**, and associates each **Stat** of the provided StatSet with a **GrowthFormula** that describes how the statistic varies with levels. Similarly, if an **AttributeSet** is provided, it will be possible to associate a **GrowthFormula** for each **Attribute** present in the set, to describe how the attributes vary with levels.

EntityClass

EntityClass derives from Mono and allows us to assign a **Class** to our entity.

Attribute

An **Attribute** is a class that derives from SO and represents an attribute in the game. Each attribute has a name and, like statistics, can have a maximum and minimum value.

AttributeSet

An **AttributeSet** is a class that derives from SO and defines a set of **Attributes**.

EntityAttributes

Optionally, we can add the Mono **EntityAttributes** to our entity if we want to give it attributes.

EntityAttributes allows us to specify how many attribute points to provide at each new level. These points can be spent on various attributes to increase their value. For **EntityAttributes** we can configure:

- the base attributes
- the flat modifiers
- the percentage modifiers Similarly to **EntityStats**, we can decide whether the base attributes are *fixed* or if they instead derive from the class associated with **EntityClass**.

Growth Formula

To express how **Stats**, **Attributes**, Max HP, and the experience required to level up vary at each level, we can use instances of **GrowthFormula**. This is a class that derives from SO and allows us to define a mathematical function, or a system of functions, that describe how a value changes as levels increase. We will see in more detail how to define a **GrowthFormula** in the [Growth Formulas](#) section.

Scaling Formulas

Scaling formulas provide a flexible way to define how values such as damage, healing, or other effects are calculated based on one or more attributes or stats. They allow you to combine base values (which can be constant or level-dependent) with contributions from various stats and attributes, each weighted by customizable scaling components.

Scaling components

Specify how much a particular stat or attribute influences the final value of the scaling formula, enabling complex and dynamic calculations for abilities, equipment, or other game mechanics. This modular approach lets you easily adjust and extend scaling logic to fit your game's needs.

Game Events

Game events are ScriptableObjects that allow you to implement the Observer pattern in your game. They provide a way to decouple systems by broadcasting notifications when something happens (such as a

player jumping, leveling up, or taking damage). Listeners can subscribe to these events and react accordingly, all through inspector-driven workflows. Game events can carry context parameters, making them flexible for a wide range of use cases.



Game Event Generators

Game Event Generators are `ScriptableObjects` that let you define custom game events with up to four context parameters. They automate the creation of event and listener classes, making it easy to extend your event system for complex gameplay scenarios. You can specify parameter types and documentation, and generate code and assets directly from the inspector.



Game Actions

Game Actions are `ScriptableObjects` that encapsulate reusable pieces of logic that can be executed in response to game events or other triggers. They promote modularity and code reuse by allowing you to define specific actions (like teleport player to base, enable a GO, resurrect an entity, etc.) that can be easily invoked from various parts of your game without duplicating code. They are asynchronous and can be also used as responses to Game Events.



Game Tags

GameTags are lightweight identifiers that let you classify Astra assets and components for gameplay logic and editor organization. They appear as colored pills in tag-aware inspectors, making it easy to scan related assets at a glance and to build tag-based queries or conditions. For the full authoring workflow, see [Game Tags](#).

Conditions

Conditions are reusable predicates evaluated against runtime context such as the current holder, performer, or event payload. They are authored directly in the Inspector through polymorphic condition fields and can be used to gate game actions and other reactive behaviors without writing bespoke code for every rule. For the complete model and editor workflow, see [Conditions](#).

How is Astra Framework implemented?

The package is developed around a Scriptable Objects architecture inspired by the [GDC talk of Ryan Hipple](#). In a nutshell, the main benefits provided by this architecture are:

- **encapsulation**: separation of game logic from data. Game logic code shouldn't mix with data. All data is nicely wrapped withing SO instances
- **game designers friendly**: game designers can make changes and balancements from the inspector without touching the code
- **greater reusability**: most features are `ScriptableObjects` that can be reused by many components

- **greater testability:** being data separated from code, is easier to isolate and fix bugs. Moreover, SO events can be raised with ease at the press of a button from the inspector interface, easing and speeding up debugging even further.

Flexibility of Astra Framework

The package is so flexible that it allows it to be used in almost any game. As it allows creating attributes like **strength**, **dexterity**, **agility**, etc., and statistics such as **physical attack**, **magic power**, **physical defense**, etc., in RPG, Roguelike, MMO games, etc., nothing prevents it from being used, for example, to implement a firearm. The attributes could be **weight**, **size**, **ergonomics**, etc., and the statistics **recoil**, **handling**, **stability**, **intimidation**, etc. Attributes can influence statistics. A heavier weapon could reduce **handling** but increase **stability**. A larger weapon could reduce **handling** but increase **intimidation**. A more ergonomic weapon could reduce **recoil** and increase **handling**. And so on... The weapon's levels, if present, influence the attributes and statistics, progressively improving them. Classes could represent weapon types (assault rifles, snipers, shotguns, etc.), and each class could have its own set of dedicated attributes and statistics. For example, shotguns could have, in addition to the aforementioned ones, the **barrel length** attribute that influences the **pellet spread** statistic.

Package Configuration

The base Astra Framework is designed for **zero setup out of the box** for runtime configuration: importing the **Utils** sample is all you need to get a fully working setup. The sample provides a pre-built **AstraFrameworkConfigSO** asset placed in a **Resources** subfolder (named **Astra Framework Config**), with the three required global events already wired up to the event instances also found in the sample. The editor bootstrapper auto-detects this asset and assigns it to the Global Settings the moment Unity loads, so no manual steps are required.

Authoring defaults are a separate **editor-only** convenience layer. They are fully optional, they do not affect runtime behavior, and leaving them empty preserves the same manual authoring workflow.

The configuration asset holds **Global Events** — the **GameEvent** ScriptableObjects that broadcast entity, level, stat, and attribute information to the entire game — plus an optional shared stat binding for experience gain modifiers. Three of these events are required for the framework to function correctly; the remaining event fields and the stat binding are optional.

Zero Setup via Samples

The quickest way to configure the framework is to import the **Utils** sample from the Package Manager:

1. Open **Window** → **Package Manager**
2. Select **Astra Framework** in your project packages
3. Expand **Samples** and click **Import** next to **Utils**

After import, your project will contain:

- **Assets/Samples/Astra Framework/<version>/Utils/Resources/Astra Framework Config.asset** — the ready-to-use configuration with all required events already assigned
- **Assets/Samples/Astra Framework/<version>/Utils/EventInstances/** — the individual event **ScriptableObject** assets referenced by the configuration

The editor bootstrapper detects the config automatically and assigns it to the Global Settings. No Project Settings step is needed.

⊗ IMPORTANT

The sample events are generic, shared instances intended for getting started quickly. If your game already has its own event architecture — or if you need to subscribe to entity spawned, level-up, or level-down events from your own systems — you should create a **custom configuration** and assign your own events to it (see [Creating Configuration Assets](#) and [Project Settings](#)).

Runtime Configuration Overview

The framework uses a **two-tier runtime configuration architecture**:

1. **Global Settings** (`AstraFrameworkGlobalSettingsSO`) — A lightweight pointer stored in `Resources` that references your active configuration
2. **Framework Configuration** (`AstraFrameworkConfigSO`) — The actual configuration containing all global event references and shared stat bindings

This separation allows you to:

- Switch between different configuration profiles easily (e.g., for testing)
- Keep configuration data separate from the loading mechanism
- Support convention-based fallbacks for quick prototyping

For editor-time asset and component pre-filling, see [Authoring Defaults](#).

Global Settings

Automatic Setup

The package automatically creates the Global Settings asset on first import or when the editor loads. You don't need to do anything manually.

What happens automatically:

1. The `AstraFrameworkGlobalSettings.asset` is created in `Assets/Resources/`
2. If a default configuration exists (e.g., from imported samples), it is automatically assigned
3. The system is immediately ready to use

NOTE

Default location: `Assets/Resources/AstraFrameworkGlobalSettings.asset`

Project Settings

You can manage the package configuration through Unity's Project Settings window:

1. Open **Edit** → **Project Settings**
2. Navigate to **Astra Framework**
3. Assign your desired **Active Config Profile**

Status Indicators:

-  **"Using Explicit Configuration"** — A configuration is explicitly assigned
-  **"No explicit profile assigned. System is using the Fallback..."** — No explicit configuration; using convention-based fallback
-  **"No Configuration found!"** — No configuration available; global events will not be dispatched

Quick Actions:

- **Create New Config Asset** — Opens a save dialog to create a new configuration

Manual Configuration (alternative to Project Settings)

You can also manage the configuration by directly editing the `AstraFrameworkGlobalSettingsSO` asset in the `Assets/Resources` folder. This lets you assign a specific `AstraFrameworkConfigSO` without using the Project Settings window.

Convention Over Configuration

The package follows a **convention-over-configuration** philosophy to reduce setup friction.

Fallback Resolution

If no explicit configuration is assigned in Project Settings, the system automatically searches for a configuration named:

`Astra Framework Config`

located in any `Resources` folder in your project.

Search Order

The configuration provider uses a **three-step loading strategy**:

1. Explicit Configuration (Project Settings)

- Loads `AstraFrameworkGlobalSettingsSO` from `Resources/AstraFrameworkGlobalSettings`
- If it has an `ActiveConfig` assigned, use it

2. Convention-Based Fallback

- Searches for `Astra Framework Config` in any `Resources` folder
- Logs a message indicating fallback usage

3. Error State

- If neither is found, logs an error with instructions
- Global events will not be dispatched until a configuration is provided

TIP

For production projects, always use **explicit configuration** via Project Settings for clarity and control.

Authoring Defaults

Authoring defaults are **project-scoped, editor-only defaults** configured in [Edit > Project Settings > Astra Framework > Authoring Defaults](#). They pre-fill selected references when you add framework components or create framework assets. They are never read by gameplay code, and every assignment in this page is optional.

The manual **Authoring Defaults** section shown in supported inspectors is controlled separately through the user preference at [Edit > Preferences... > Astra Framework > Authoring Defaults](#). This preference affects only whether the extra **Apply** and **Replace** actions are rendered in inspectors. It does **not** change the project-wide defaults configured in Project Settings, and it does **not** disable automatic default assignment when new supported objects are created.

NOTE

Authoring defaults do **not** change the framework's zero-setup philosophy. The framework works without them, and they exist only to make repeated authoring safer, clearer, and more customizable.

Why authoring defaults replaced script default references

Earlier authoring flows could rely on script-level default references that pointed to assets imported from the package samples. That was convenient, but it could also create silent project drift after a package update: newly created objects could start referencing assets from the newly imported sample version, while older objects still referenced assets from an older sample version.

Authoring defaults move that responsibility into explicit project settings. This makes the choice visible, project-owned, and easy to standardize across a team. If no default is configured, the corresponding field simply stays empty and can still be assigned manually.

What can be configured

Each authoring-default group has its own enable toggle, so you can automate only the parts of the workflow that are useful for your project:

- **Level Defaults** — applied when `EntityCore` is added; can assign **Default Max Level** and **Default Experience Formula**
- **Growth Formula Defaults** — applied when `GrowthFormulaSO` assets are created; can assign **Default Max Level**
- **Class Defaults** — applied when `ClassSO` assets are created; can assign **Default Stat Set**, **Default Attribute Set**, and an optional **Default Max HP Formula**
- **Entity Stats Defaults** — applied when `EntityStats` is added; can assign **Default Fixed Base Stats Set** when the component uses fixed base stats
- **Entity Attributes Defaults** — applied when `EntityAttributes` is added; can assign **Default Fixed Base Attribute Set** when the component uses fixed base attributes

For class authoring, the same settings page also exposes the optional automatic growth-formula creation helpers used when new `ClassSO` assets are created.

NOTE

A field left empty stays manual. You can configure only a shared `Max Level`, only a fixed-base set, only class defaults, or nothing at all.

Inspector actions

Supported inspectors can expose a manual **Authoring Defaults** section with two actions:

- **Apply Authoring Defaults** — fills only empty or unassigned fields using the current project defaults
- **Replace With Authoring Defaults** — asks for confirmation and then also overwrites fields that are already configured

This section is available for `EntityCore`, `GrowthFormulaSO`, `ClassSO`, `EntityStats`, and `EntityAttributes`.

If you want to show it, open `Edit > Preferences > Astra Framework > Authoring Defaults` and enable **Show Authoring Defaults inspector actions**.

If you leave this preference disabled, the inspectors simply hide these manual buttons. The automatic authoring-default workflow configured in Project Settings still applies normally when supported components or assets are created.

This is useful when a project decides to standardize on a shared set of authoring assets after some objects have already been created.

Recommended usage

If your project always expects the same **Max Level**, experience formula, class sets, or fixed-base sets, assign those project-owned assets in **Authoring Defaults** so newly created objects follow one explicit standard. If you prefer per-object setup, leave the defaults empty and continue authoring manually.

When possible, prefer project-owned assets over assets living inside imported sample folders. The goal of authoring defaults is to keep these references explicit and under project control.

Configuration Loading Strategy

The configuration is loaded lazily on first access and cached for performance:

```
// Automatically loads configuration on first access
var config = AstraFrameworkConfigProvider.Instance;

// Pre-load during initialization to avoid runtime overhead
AstraFrameworkConfigProvider.WarmUp();

// Force reload (useful for testing or after domain reload)
AstraFrameworkConfigProvider.Reset();
```

When is the configuration loaded?

- Automatically before the first scene loads (via **RuntimeInitializeOnLoadMethod**)
 - Lazily when first accessed via **AstraFrameworkConfigProvider.Instance**
 - Explicitly when calling **WarmUp()**
-

Creating Configuration Assets

Via Project Settings

1. Open **Edit** → **Project Settings** → **Astra Framework**
2. Unassign any existing configuration, if any
3. Click **Create New Config Asset**
4. Choose a save location
5. The new configuration is automatically assigned

Via Asset Menu

1. Right-click in the **Project Window**
 2. Select **Create** → **Astra Framework** → **Config**
 3. Name your configuration
 4. Assign it in Project Settings or in the Global Settings asset
-

Configuration Reference

NOTE

In the `AstraFrameworkConfigSO` asset, you can hover over each field to see a tooltip with a brief description.

The `AstraFrameworkConfigSO` asset contains the global event references and shared stat bindings used by the core entity components.

The red asterisks (*) indicate fields that are required for the system to function properly. Make sure to assign them before entering Play Mode to avoid missing event dispatches.

Global Events

Global Events are `GameEvent` ScriptableObjects that broadcast framework-level information to the **entire game**. They are assigned once in the configuration asset and shared by all entities, ensuring a single authoritative source for framework-level communication.

Each global event is broadcast through the `FrameworkEventChannel1` system. This means that alongside the global event configured here, individual entity components can also hold per-entity extra events that are raised together with the global one when the channel fires. All entity components that expose event channels implement `IEventRegistrar`, which provides `Subscribe<TEvent>` and `Unsubscribe<TEvent>` for per-entity extra event registration.

WARNING

Three events are **required** — if they are missing, the corresponding entity lifecycle events are never dispatched, which breaks systems that depend on entity spawn, level-up, or level-down notifications. Assign them before entering Play Mode.

IMPORTANT

If your game already has systems built around your own entity spawned, level-up, or level-down events, **do not reuse the sample events**. Create your own `AstraFrameworkConfigSO`, assign your events to it, and register it in **Project Settings** → **Astra Framework**. That way your existing subscriptions continue to work seamlessly.

Global Entity Spawned Event *

Type: `EntityCoreGameEvent`

Required: Yes

Raised by: `EntityCore`

Description: Raised once, at the end of the entity's `Start()` lifecycle, after the level, stats, and attribute components have all initialized. Carries a direct reference to the `EntityCore` that just spawned.

Subscribe to this event to track entity registration in global systems (e.g., registering an entity with an AI manager or a health-bar tracker).

Per-entity extra events API:

```
entityCore.Subscribe<EntityCoreGameEvent>(myEntitySpecificEvent);  
entityCore.Unsubscribe<EntityCoreGameEvent>(myEntitySpecificEvent);
```

Global Entity Level Up Event *

Type: `EntityLevelUpGameEvent`

Required: Yes

Raised by: `EntityLevel`

Description: Raised when any entity's level increases. Carries an `EntityLevelChangedContext` payload. Raised once per transition, even when several levels are crossed at once (`AbsAmount` holds the number of levels gained).

Payload — `EntityLevelChangedContext`:

Property	Type	Description
<code>Target</code>	<code>EntityCore</code>	The entity whose level changed
<code>PreviousValue</code>	<code>int</code>	The level before the increase
<code>NewValue</code>	<code>int</code>	The level after the increase
<code>AbsAmount</code>	<code>int</code>	The absolute number of levels gained

Per-entity extra events API:

```
entityCore.Level.Subscribe<EntityLevelUpGameEvent>(myLevelUpEvent);  
entityCore.Level.Unsubscribe<EntityLevelUpGameEvent>(myLevelUpEvent);
```

Global Entity Level Down Event *

Type: `EntityLevelDownGameEvent`

Required: Yes

Raised by: `EntityLevel`

Description: Raised when any entity's level decreases. Carries an `EntityLevelChangedContext` payload with the same fields as the level-up event. Raised once per transition, even when several levels are crossed at once (`AbsAmount` holds the number of levels lost).

Per-entity extra events API:

```
entityCore.Level.Subscribe<EntityLevelDownGameEvent>(myLevelDownEvent);  
entityCore.Level.Unsubscribe<EntityLevelDownGameEvent>(myLevelDownEvent);
```

Experience Gain Modifier Stat

Type: `StatS0`

Required: No

Read by: `EntityCore` / `EntityLevel`

Description: Optional shared `StatS0` binding used when `EntityLevel` applies experience gain modifiers. Assign the stat asset once in the active configuration, and each entity will read its own value for that stat from `EntityStats` when calling `AddExp(...)`.

If this field is empty, or if a given entity does not expose that stat in `EntityStats`, the entity gains experience without an additional modifier.

TIP

This replaces the older per-entity setup. You now choose the stat asset once in `AstraFrameworkConfigS0` instead of assigning the same stat on every entity.

Global Stat Changed Event

Type: `StatChangedGameEvent`

Required: No

Raised by: `EntityStats`

Description: Raised whenever any stat's computed value changes on any entity — whether due to a flat modifier, a percentage modifier, a stat-to-stat dependency, or an attribute-driven scaling update. Carries a `StatChangeInfo` payload.

Payload — `StatChangeInfo`:

Property	Type	Description
EntityStats	EntityStats	The component that owns the changed stat
Stat	Stat	The stat asset that changed
Target / Entity	EntityCore	The owning entity
PreviousValue	long	The stat's computed value before the change
NewValue	long	The stat's computed value after the change
AbsAmount	long	The absolute magnitude of the change

Example use cases:

- Updating a HUD bar when a character's Attack stat changes
- Triggering ability unlock logic when a threshold stat is reached
- Logging stat changes for analytics

Per-entity extra events API:

```
entityStats.Subscribe<StatChangedGameEvent>(myStatChangedEvent);
entityStats.Unsubscribe<StatChangedGameEvent>(myStatChangedEvent);
```

Global Attribute Changed Event

Type: `AttributeChangedGameEvent`

Required: No

Raised by: `EntityAttributes`

Description: Raised whenever any attribute value changes on any entity. Carries an `AttributeChangeInfo` payload.

Payload — `AttributeChangeInfo`:

Property	Type	Description
EntityAttributes	EntityAttributes	The component that owns the changed attribute
Attribute	Attribute	The attribute asset that changed
Target / Entity	EntityCore	The owning entity

Property	Type	Description
PreviousValue	long	The attribute's value before the change
NewValue	long	The attribute's value after the change
AbsAmount	long	The absolute magnitude of the change

Per-entity extra events API:

```
entityAttributes.Subscribe<AttributeChangedGameEvent>(myAttributeChangedEvent);
entityAttributes.Unsubscribe<AttributeChangedGameEvent>(myAttributeChangedEvent);
```

NOTE

Changing an attribute may also trigger the **Global Stat Changed Event** for any stats whose scaling formula depends on that attribute. Both events are dispatched independently.

Troubleshooting

"No configuration found" error

Cause: No configuration is assigned and no fallback exists.

Solution:

1. Check **Project Settings** → **Astra Framework**
2. Assign a configuration or create a new one
3. Alternatively, create a config named **Astra Framework Config** in a **Resources** folder

"Using Fallback" log message

Cause: No explicit configuration assigned in Project Settings.

Solution:

1. Open **Project Settings** → **Astra Framework**
2. Assign the fallback configuration explicitly
3. This message is informational only and won't break functionality

Configuration not updating in Play Mode

Cause: Configuration is cached on first access.

Solution:

```
// Force reload  
AstraFrameworkConfigProvider.Reset();
```

Missing Resources folder

Cause: The `Assets/Resources/` folder doesn't exist.

Solution: The package creates it automatically. If it's missing, create it manually:

1. Right-click `Assets`
2. Create → Folder → Name it `Resources`
3. Restart Unity to trigger the editor bootstrapper

Fundamentals

Creating instances of the objects

All the scriptable objects provided by the framework can be created through the Unity Editor by either right-clicking in the hierarchy and selecting **Create > Astra Framework** or navigating to the **Assets** menu at the top of the window and choosing **Create > Astra Framework**.

Mandatory, re-play, and read-only fields

Fields marked with a red asterisk (*) are mandatory and must be filled out to ensure proper functionality of the framework.

Fields marked with an orange **R** are re-play fields. Any changes made to these fields during playtime will require a restart to ensure the changes take effect.

Fields marked with a teal **RO** are read-only fields. The framework manages these fields internally, and they cannot and should not be modified directly by the user.

Some utilities

Almost every class provided by this package uses events or variables in the form of **ScriptableObject**. Therefore, let's quickly introduce these concepts so that we are clear about what we are talking about when we encounter them in the following paragraphs.

Game events as **ScriptableObjects**

The Scriptable Objects based architecture allows us to implement the Observer pattern through scriptable objects. In the simplest case, with events without context, we can define various game events as **GameEvent** instances: a class that derives from **ScriptableObject**. For example, we can create an instance called **PlayerJumped** that represents the event "The player has jumped". This event will notify all listening systems when it occurs. Systems subscribe to this event using the **MonoBehaviour GameEventListener**. We can assign a **GameEvent** to this component, and it will handle the subscription and invoke a callback when the event is triggered. The callback is a [UnityEvent](#), so we can select a callback to invoke in response to our event directly from the inspector.

For more details, see the [Game Events section](#).

Int and Long Vars

Another common use of **ScriptableObject** in the SO based architecture is to define variables. The main advantage of these variables in the form of SO is that they can be easily shared between various objects that may decide to share the same value. A common example is the player's game score. There could be a game manager that adds or removes points from this variable, while the UI HUD uses it to display its

value on the screen. This way, we can keep the game manager and UI completely decoupled, passing shared values (like variables) through the inspector.

From the code, we can access the values held by these variables using the `Value` getter and setter:

```
// intVar is an instance of IntVar
int value = intVar.Value; // Get the value

// Thanks to implicit conversion, we can also use it as an int directly
int intValue = intVar; // Implicit conversion to int

intVar.Value = 10; // Set the value
```

Int and Long Refs

`IntRef` and `LongRef` allow choosing whether to use a native value (`int` or `long`) or an `IntVar`/`LongVar`. As mentioned in the previous paragraph, `IntVar` and `LongVar` have the advantage of being shareable between different components/game objects, while native values are more immediate to use and require less setup (no need to instantiate an `IntVar`/`LongVar` and assign it in the inspector).

Thanks to a custom property drawer, it will be possible, from the inspector, to check a checkbox named `Use constant` to use a native value instead of a `Ref`, and vice versa.

`IntRef` and `LongRef` are widely used in the package's `MonoBehaviour`.

From the code, we can access the values held by these references using the `Value` getter and setter. It is worth mentioning that when we use the setter, we need to provide a native `int` or `long` value. If `Use constant` is unchecked, this value will be assigned to the `Value` property of the referenced `IntVar` or `LongVar` instance; if `Use constant` is checked, the assignment only updates the local constant value and does not affect any referenced variable.

```
// intRef is an instance of IntRef
int value = intRef.Value; // Get the value
// Thanks to implicit conversion, we can also use it as an int directly
int intValue = intRef; // Implicit conversion to int
intRef.Value = 10; // Set the value

// Assigns the value of intVar to intRef.Value using implicit conversion.
// Note: This does not change the IntVar reference held by intRef, only its value.
intRef.Value = intVar;
```

Game events

The package also supports game events with up to 4 context parameters. They are generics, but in Unity, it is not possible to instantiate classes that derive from `ScriptableObject` if they are generics with unspecified type parameters. To use them, we must explicitly declare classes that derive from the generic `GameEvent` and fix the type parameters with concrete types. To simplify the definition of new event types, with specific types as context parameters, the package provides `GameEventGenerator`. These generators, which derive from `SO`, allow generating the concrete classes of `GameEvent`. We will see these generators in more detail in the [Game Event Generators](#) section. Some game events are already defined and made available by the package (see the [Samples](#) page).

Growth Formulas

Relative path: `Growth Formula`

As already mentioned in [Introduction](#), `GrowthFormula` allows defining how a certain value varies as levels increase. A `GrowthFormula` can be instantiated through the hierarchy context menu by going to `Astra Framework` -> `Growth Formula`. The package provides a custom property drawer for `GrowthFormula`.

Max level for the values

In the inspector of a `GrowthFormula`, we can pass an `IntVar` to define up to which level to grow the values.

Use constant at level one

If the checkbox named `Use constant value at level 1` is checked, the respective constant value will be used.

Growth expressions

The various values of the `GrowthFormula` are defined by a function where values, the y-axis, are expressed as a function of the levels, the x-axis. Such a function is defined as a composite function. Each segment of the function is represented by a string that specifies a mathematical expression for a range of levels. The string can be defined by using the [Unity ExpressionEvaluator](#) syntax. On top of it, the following terms can be used:

- `LVL`: the level at each iteration
- `PRV`: the previous value of the `GrowthFormula` (value evaluated at the previous level)
- `SPRV`: the second previous value of the `GrowthFormula` (value evaluated 2 levels ago)
- `PRV[N]`: (👉 v1.3.0+) the N-th previous value of the `GrowthFormula` (value evaluated N levels ago). N must be a valid number with respect to the level range being used. For example, N cannot be 5 if we are evaluating level an expression in the level range 3 --> 10, as `PRV[5]` at level 3, 4, and 5 will be undefined.
- `AT[N]`: (👉 v1.3.0+) the value of the `GrowthFormula` at level N. N cannot be a value equal or greater than the current level being evaluated.

- **SUM**: the sum of the values of the **GrowthFormula** from level 1 up to the previous level

Example of a **GrowthFormula**

Let's see an example of how to define a **GrowthFormula** for defining the Physical Attack of a warrior class. First of all, let's create a new **GrowthFormula** instance and name it **Warrior Physical Attack GF**. In the

inspector, it should look like this:



Open


• Max Level

Use Constant At Lvl 1 ☒

Constant At Lvl 1

Add growth expression

Growth Values for each level - graph

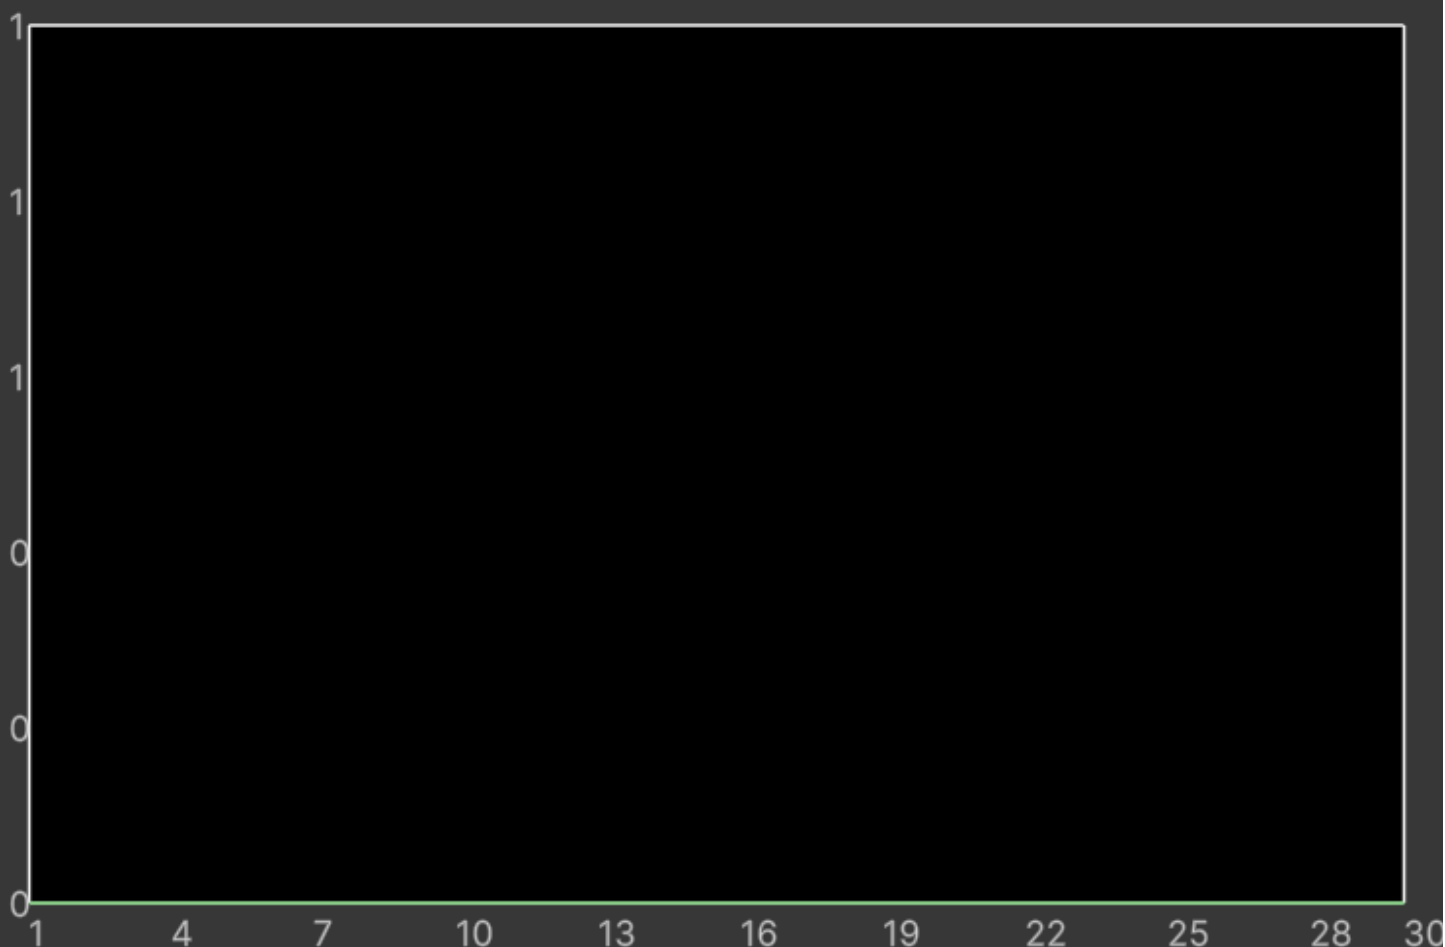

Hold the mouse for a moment on top of the graph to see the value at a certain level

Growth Values per Level

Level	Value	Level	Value
Lvl 1 – 30 Constant		16	0
1	0	17	0
2	0	18	0

3	0	19	0
4	0	20	0
5	0	21	0
6	0	22	0
7	0	23	0
8	0	24	0
9	0	25	0
10	0	26	0
11	0	27	0
12	0	28	0
13	0	29	0
14	0	30	0
15	0		

The **Max Level**, a mandatory field, is set with an **IntVar** assigned by default. We can edit that variable to change the maximum level that will be computed for our growth formula.


⚠ **WARNING**

When modifying the value of a variable referenced in growth formulas, such as Max Level, the growth formulas are not directly updated unless you select them in the inspector. To update all growth formulas simultaneously after changing the maximum level, a command is available in the menu: **Tools > Astra Framework > Validate All Growth Formulas**.

Validation occurs automatically during script compilation, upon entering play mode, and when instantiating a prefab. This is achieved through the **OnValidate** callback, which ensures that formulas are updated accordingly.

The **Use constant value at level 1** checkbox lets us decide whether to use a constant value at level 1 or not. If checked, the **Constant Value** field will be enabled, and we can set a value for it. In this case, we set it to 10.

The **Add new growth expression** button lets us add a growth expression for a certain range of levels of our choice. If we press it, we will see the following:

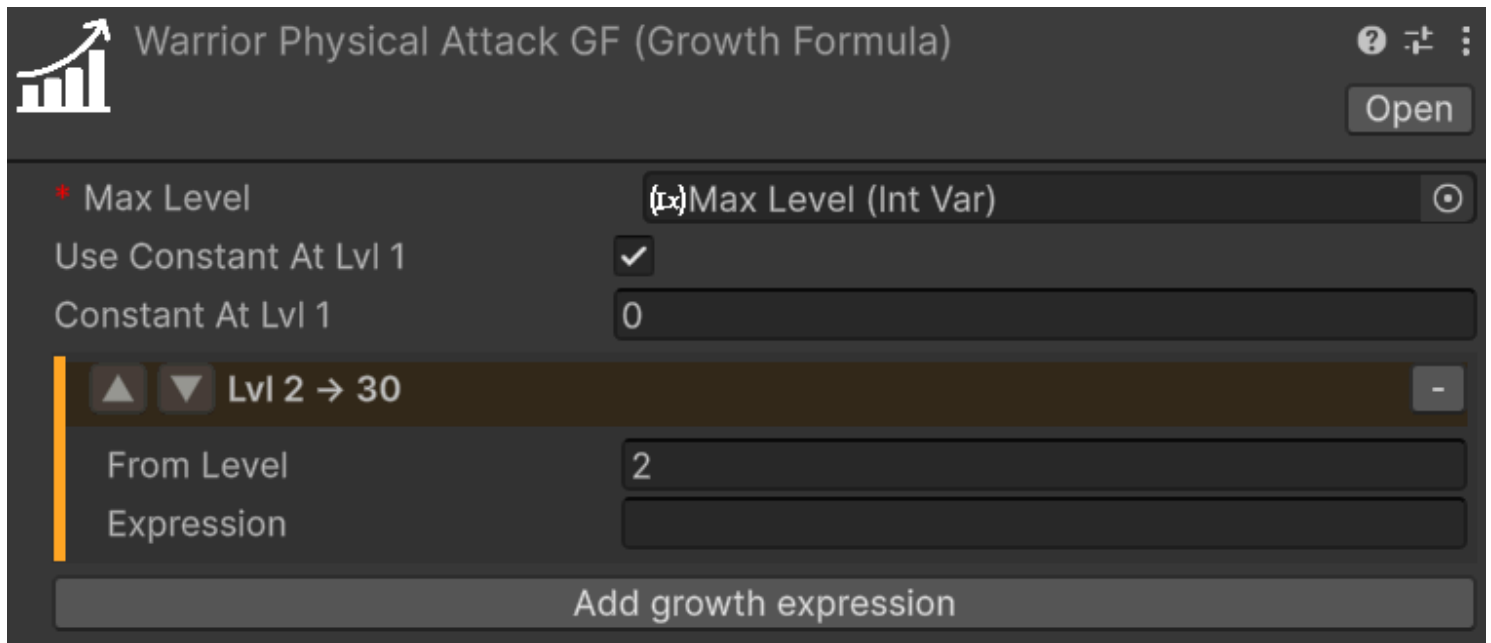

The image shows a software interface titled "Warrior Physical Attack GF (Growth Formula)". It features a bar chart icon with an upward arrow in the top left. In the top right, there are icons for help, zoom, and a menu, along with an "Open" button. The main area contains several input fields: "Max Level" with a dropdown menu showing "(x)Max Level (Int Var)", "Use Constant At Lvl 1" with a checked checkbox, and "Constant At Lvl 1" with a text input field containing "0". Below these is a section header "Lvl 2 → 30" with up and down arrow icons and a minus icon. Under this header are two fields: "From Level" with a text input containing "2", and "Expression" with an empty text input field. At the bottom of the interface is a wide button labeled "Add growth expression".

The new section includes two fields: **From Level** and **Growth Expression**.

- **From Level:** Specifies the starting level at which the corresponding **Growth Expression** becomes effective. It is pre-filled with the next level after the last defined growth expression, but it can be edited to any level. If no other growth expression is defined, it will be pre-filled with level 2 if **Use constant value at level 1** is checked, or level 1 if it is not checked.
- **Growth Expression:** Defines how the value evolves starting from the specified level.

If the **Growth Expression** overlaps with the **Constant At Lvl 1** option, a warning will appear. To resolve this, set the **From Level** field to 2 or higher, and the warning will disappear.

We want to model the Physical Attack of a warrior as follows:

- Level 1: 10
- From level 2 to level 5: +2 per level
- At level 11: flat +30 (like a bonus due to other game mechanics, such as an awakening)
- From level 12 and onward: grows by 7% each level

To achieve this, set the **Constant At Lvl 1** field to 10. For the first growth expression, use **PRV + 2** as the formula. **PRV**, as we saw before, represents the value of the growth formula at the previous level (in this case, 10 at level 1).

This formula ensures that the value grows by 2 times the level at each subsequent level.

Next we want to press the **Add new growth expression** button to add the next growth expression for the levels. For the second growth expression, set **From Level** to 11 and use the formula **PRV + 30**. This ensures that at level 11, a flat bonus of 30 is added to the previous value.

Finally, for the third growth expression, set **From Level** to **12** and use the formula **PRV * 1.07**. This ensures that from level 12 onward, the value increases by 7% each level.

After adding these growth expressions, the **GrowthFormula** for the **Warrior Physical Attack GF** should look like this:



Open

* Max Level

Use Constant At Lvl 1 ☒

Constant At Lvl 1

▲ ▼ Lvl 2 → 10

From Level

Expression

▲ ▼ Lvl 11 → 11

From Level

Expression


▲ ▼ Lvl 12 → 30


From Level

Expression

Add growth expression

Growth Values for each level - graph

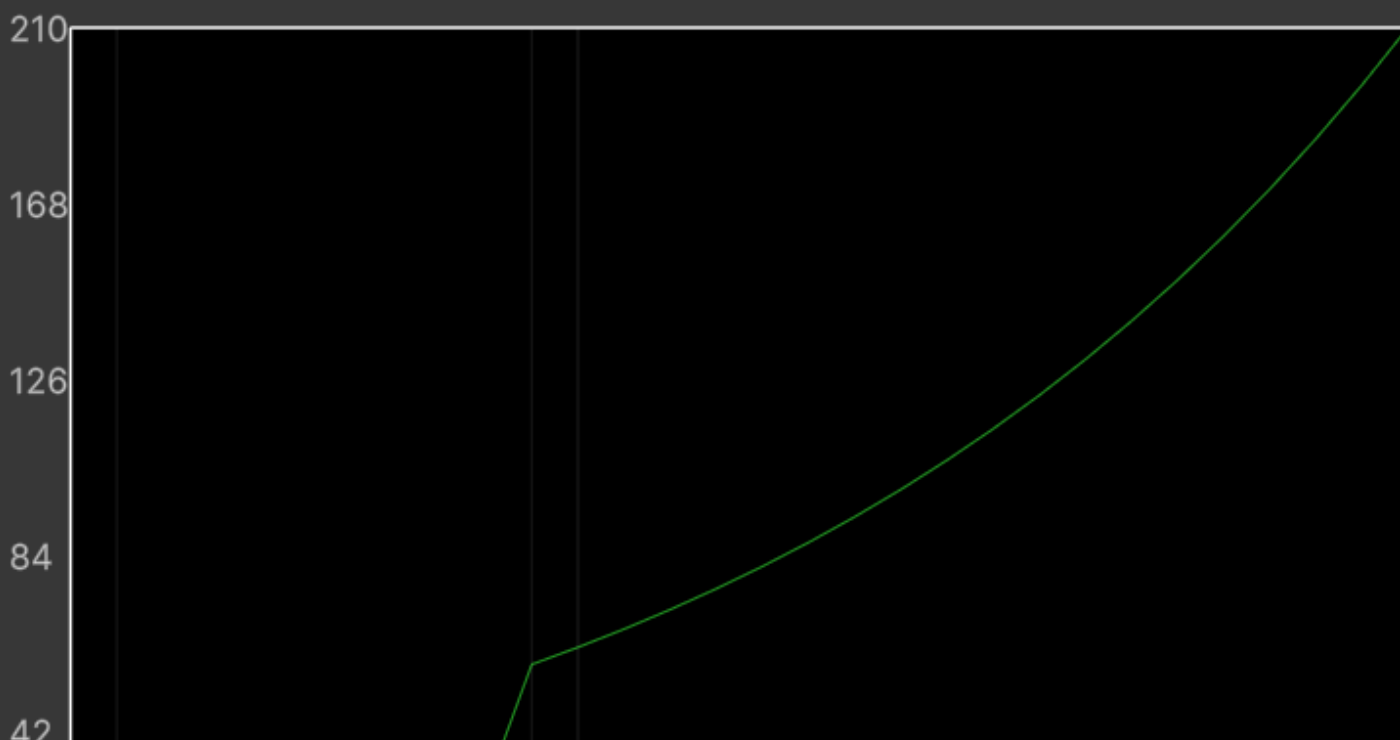


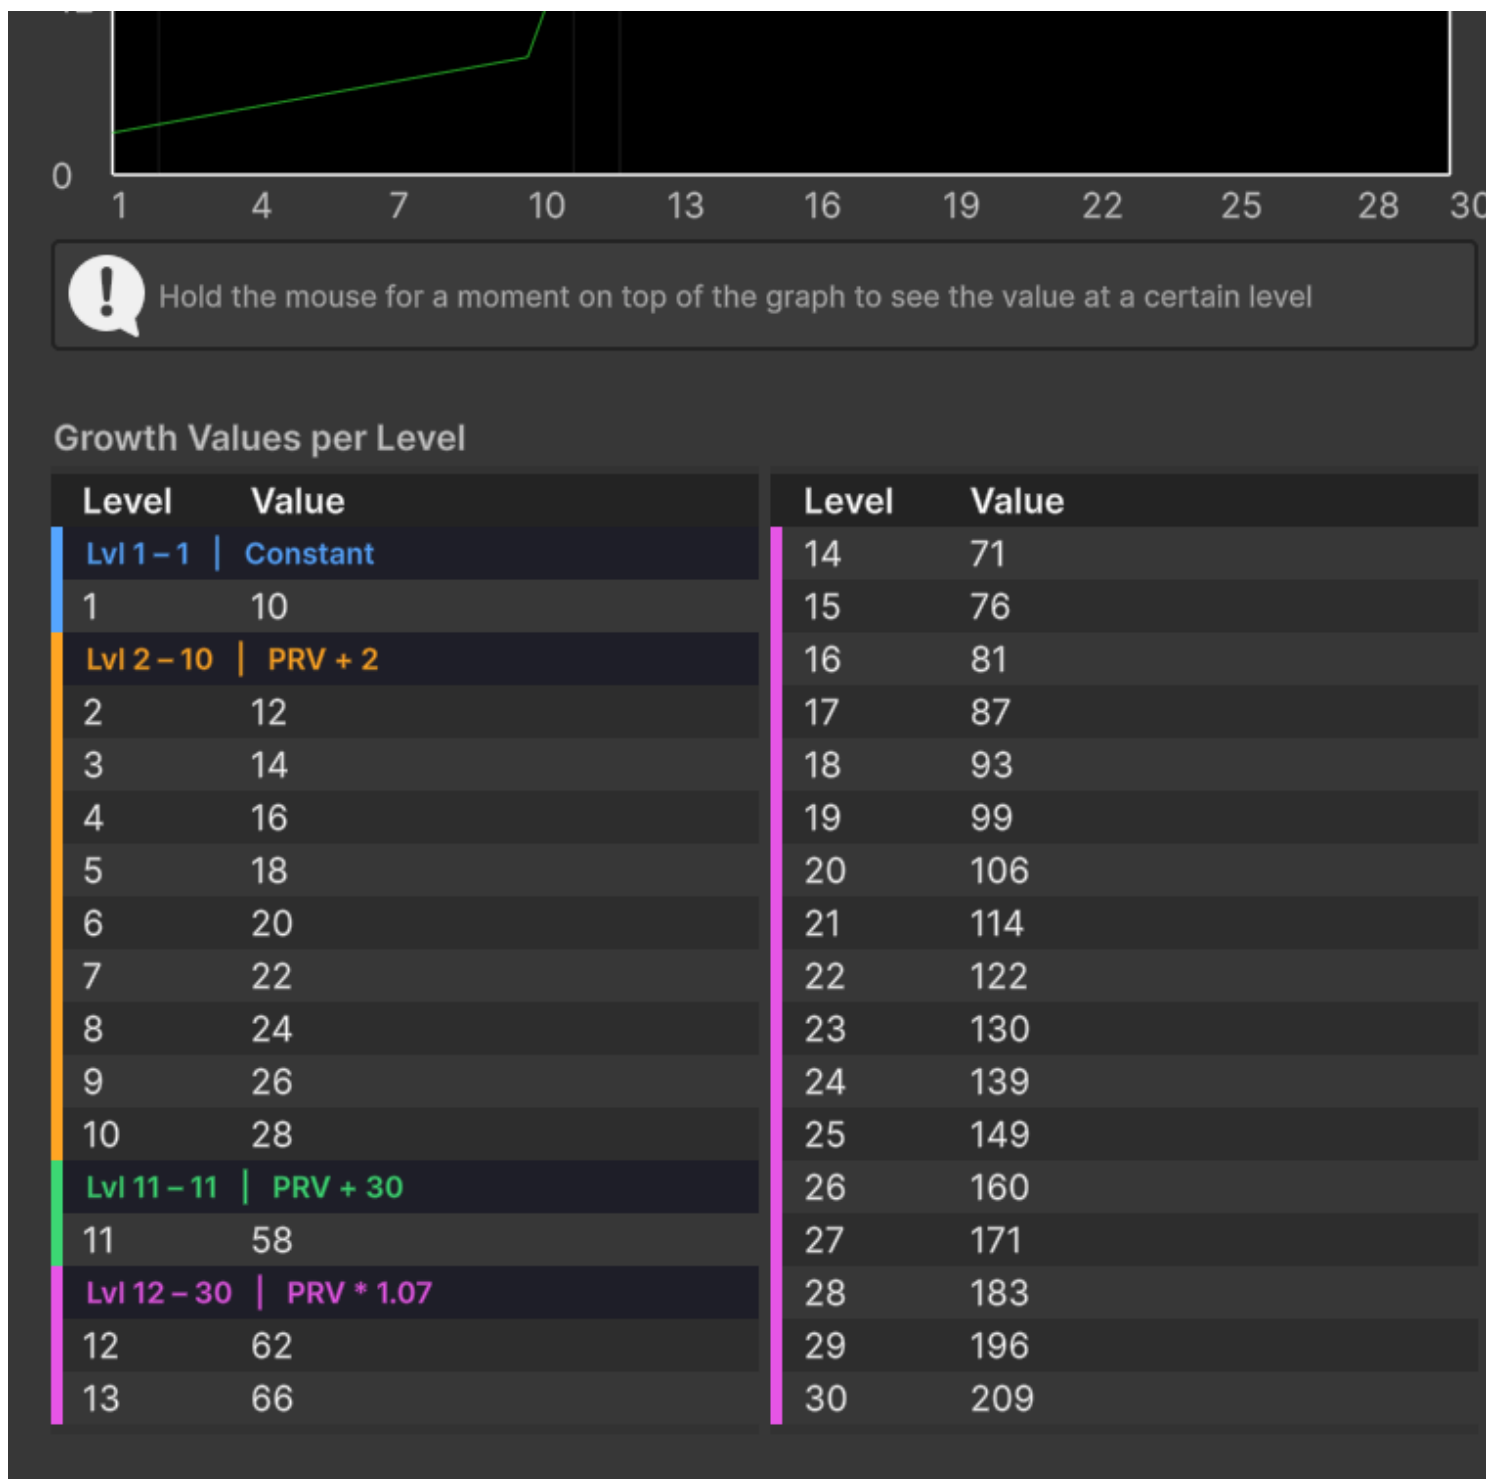

With this setup, the `GrowthFormula` will correctly calculate the Physical Attack values for the warrior class based on the specified rules.

Interactive Chart

If you hold your mouse for a moment onto the chart, a label will show up, showing the exact value of the growth formula at the pointed level:

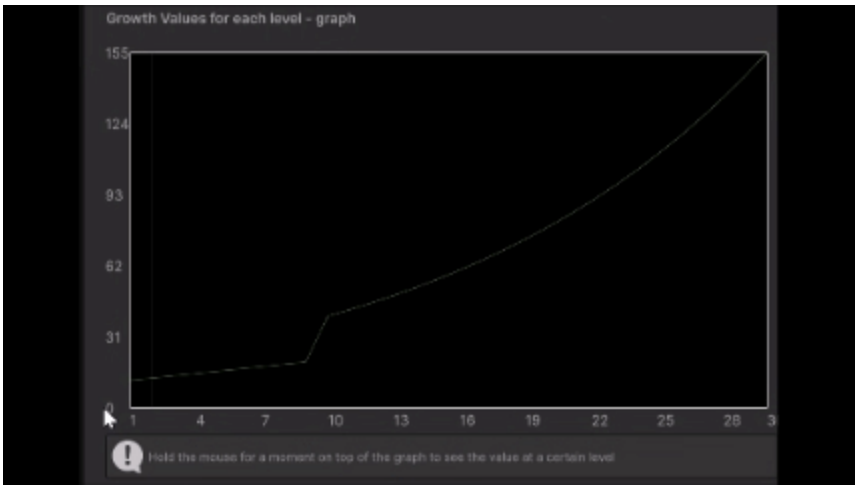


Retrieving growth values from code

To retrieve the values of a `GrowthFormula` from code, you can use the `GetGrowthValue(int level)` method. For example, to get the Physical Attack value at level 5, you can do:

```
// warriorPhysicalAttackGF is a reference to the Warrior Physical Attack Growth Formula
int physicalAttackLevel5 = warriorPhysicalAttackGF.GetGrowthValue(5);
```

Making a `GameObject` an entity

To make a `GameObject` an entity, we need to add the `MonoBehaviour EntityCore` to it. Select your object from the hierarchy and click, in the inspector, on "Add component". Then search for and select `EntityCore`.

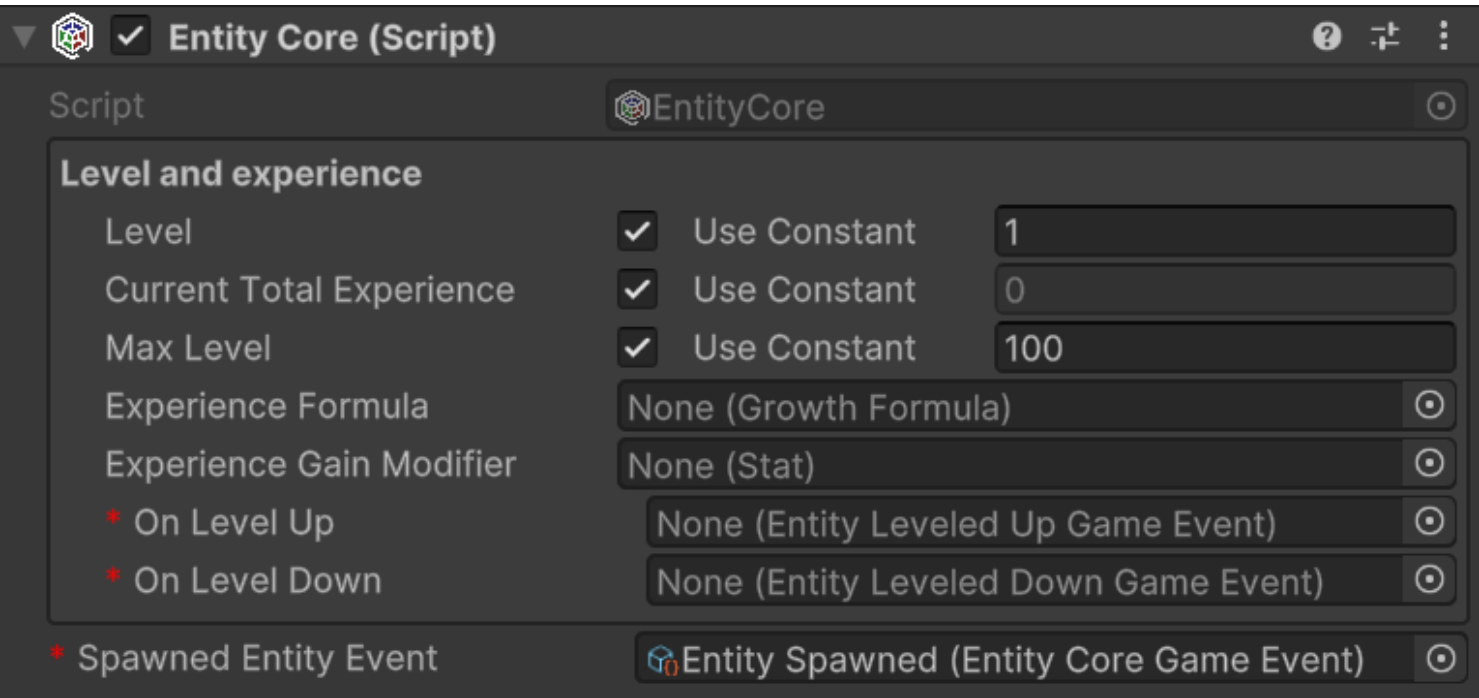

From the inspector, we can configure several values. Let's analyze them one by one.

(💎 v2.0.0+) **EntityCore** also supports multi-object editing for shared inspector values across multiple selected entities.

Level1: defines the entity's level. By changing its value, we can assign a different level to the entity directly from the inspector. This can be useful for testing purposes. You'll notice the **Use Constant** checkbox. If checked, you can pass an **IntVar** instead of using a constant.

Current Total Experience: Represents the total experience possessed by the entity.

⚠ **WARNING**

If you've passed a **LongRef** for the current total experience, the value contained in this variable should not be modified manually. If **Use constant** is checked instead, the value is readonly.

Max Level: The maximum level the entity can reach

Experience Formula: **GrowthFormula** that describes how the total experience required to reach the next level grows at each level.

(💎 v2.0.0+) **Experience Gain Modifier Stat** is no longer configured per entity in the **EntityLevel** inspector. If your project uses experience gain modifiers, open the active **AstraFrameworkConfigSO** from **Edit -> Project Settings -> Astra Framework** and assign the shared **StatSO** to **Experience Gain Modifier Stat**. Each entity will then use its own value for that stat from **EntityStats** when **AddExp(...)** applies modifiers.

Built-in framework events such as **Spawned**, **Level Up**, **Level Down**, **Stat Changed**, and **Attribute Changed**, together with the shared experience gain modifier stat binding, are resolved through the active Astra Framework configuration. Use **Edit -> Project Settings -> Astra Framework** to choose which configuration asset is active, then open that configuration asset and assign the shared fields inside it. If no active Project Settings configuration is assigned, the runtime falls back to a **Resources/Astra Framework Config** asset.

EntityLevel code APIs

It is honorable to mention some code APIs that can be used to interact with the **EntityLevel** component.

EntityLevel exposes the **OnEntityLevelUp** and **OnEntityLevelDown** events, both of type **Action<EntityLevelChangedContext>**, that can be used to subscribe to level-change events from code. The **EntityLevelChangedContext** payload carries the entity, the previous and new level, and **AbsAmount** (see [Global Entity Level Up Event](#) for the full field list). Adding a handler wires it to the active configuration's global level event, so it fires for every entity.

If we want to grant experience to the entity, we can use the `AddExp(long amount)` method. This method will automatically raise the `OnEntityLevelUp` event if the entity levels up. Alternatively, it is available also the `SetTotalCurrentExp(long totalCurrentExperience)` method, which allows setting the total current experience of the entity. This method will also raise the `OnEntityLevelUp` event if the entity levels up, and the `OnEntityLevelDown` event if the entity levels down.

(💡 v1.2.0+) Similarly, the `RemoveExp(long amount)` method allows deducting experience from the entity. This method will raise the `OnEntityLevelDown` event if the entity levels down. If you want to *respec* an entity, the `ResetToLevelOne()` method resets the entity's level and experience to level 1. This method will raise the `OnEntityLevelDown` event if the entity levels down. Clearly, all spent attribute points will be reset as well.

NOTE

(💡 v2.2.0+) A change that spans several levels at once raises a single `OnEntityLevelUp` or `OnEntityLevelDown` event covering the whole transition, not one event per level. The number of levels crossed is carried in the event payload as `AbsAmount`; iterate over it when you need a per-level reaction (one reward or fanfare each).

Finally, there are the `CurrentLevelTotalExperience()` and the `NextLevelTotalExperience()` methods. These methods return the total experience required to reach the current level and the next level, respectively. They are useful, for example, for checking how much experience is needed to level up.

Entity Ownership

💡 v2.2.0+

WARNING

Entity ownership is currently experimental and may change at any time.

Be careful when adopting it for production-critical features. Future package updates may require refactoring how ownership is authored or resolved, or adjusting integration code that depends on the current `Owner/Root/IsOwnedBy` behavior.

Because of this, the **Ownership** section is hidden from the `EntityCore` inspector by default — see [Showing the Ownership section in the inspector](#) below to opt in.

Astra's entity model is intentionally flat: each entity is a single `EntityCore`, and satellite components find each other through `GetComponent`. Most games never need more than that, but composition still comes

up naturally. Let's say you're building a spaceship as an entity (**EntityCore** + **EntityStats** for armor and speed), with a **Primary Weapon** child **GameObject** that is *also* a full entity, carrying its own **EntityStats** for bullet damage and fire rate.

In that setup, the weapon is the one firing, so anything that identifies "who performed this action" (such as **Performer** in [Conditions](#), or the performer resolved by systems like Astra Health's *lifesteal*) naturally resolves to the weapon, not the ship. Without a way to relate the two entities, a *lifesteal* effect configured on the ship would never trigger, because the entity dealing the damage is the weapon, not the ship carrying it.

Owner is an explicit, opt-in edge on **EntityCore** that expresses exactly this relationship, so systems built on top of the framework can look past the weapon and credit the ship instead.


Showing the Ownership section in the inspector

Because the feature is experimental, the **Ownership (Experimental)** section is hidden from the **EntityCore** inspector by default. To reveal it, open **Edit > Preferences > Astra Framework > Ownership** and enable **Show Ownership section (Experimental)**.

NOTE

This preference only controls whether the section is rendered in the **EntityCore** inspector. **Owner**, **Root**, **IsOwnedBy**, and **EntityOwnership.Resolve** keep working from code regardless of this setting — it does not gate the ownership-aware **ConditionTarget** values or **IsOwnedByCondition** either, which stay available in condition pickers.

Configuring ownership

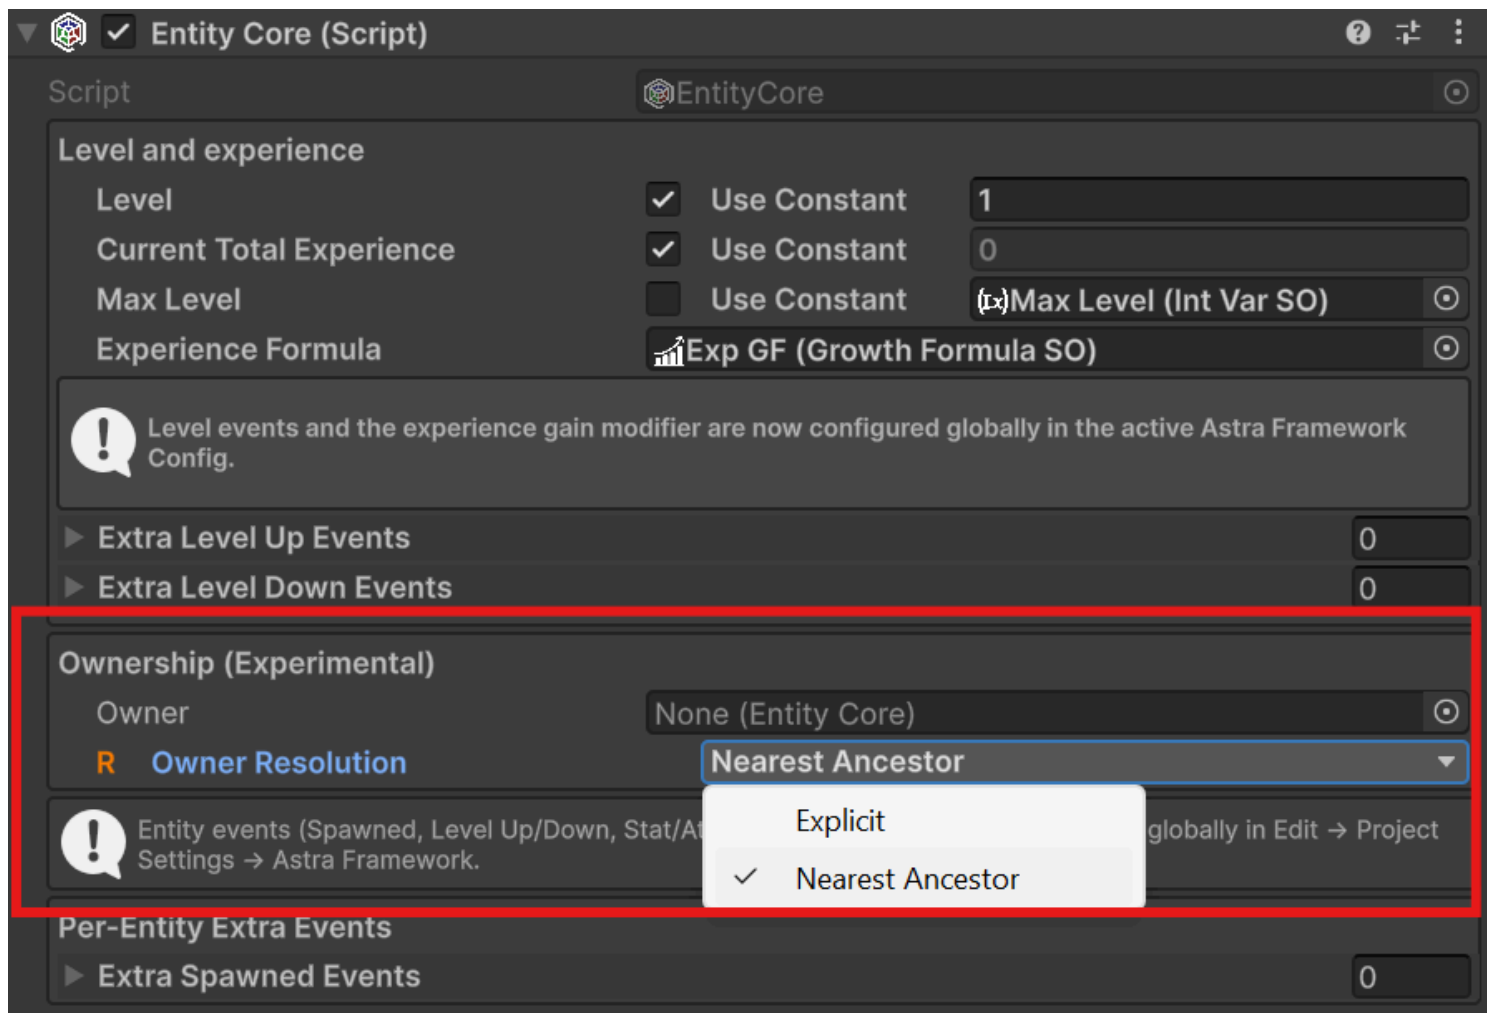

With the preference enabled, the **EntityCore** inspector exposes an **Ownership (Experimental)** section with two fields:

- **Owner:** the **EntityCore** this entity is owned by. Left empty, the entity has no owner, and every ownership-aware API behaves exactly as it did before v2.2.0.
- **Owner Resolution:** how **Owner** should be assigned. **Explicit** (the default) leaves **Owner** exactly as set in the inspector or from code. **NearestAncestor** resolves **Owner** automatically in **Awake**, from the closest **EntityCore** found by walking up the transform hierarchy, but only if **Owner** is not already set.

For the spaceship example, setting the weapon's **Owner Resolution** to **NearestAncestor** is enough: as long as the **Primary Weapon GameObject** is nested under the ship, the weapon picks up the ship as its owner automatically, without any explicit inspector wiring.

NOTE

Owner is also settable at runtime, which matters for pooled objects such as deployable turrets that need to be assigned an owner on spawn rather than at authoring time.

Reading ownership from code

```
public EntityCore Owner { get; set; }
public EntityCore Root { get; }
public bool IsOwnedBy(EntityCore other);
public event Action<EntityCore, EntityCore> OnOwnerChanged; // (previous, current)
```

- **Root** walks the ownership chain upward and returns the top-most entity, or the entity itself if it has no owner. In the spaceship example, **weapon.Root** returns the ship.
- **IsOwnedBy** walks the same chain to check whether an entity is (transitively) owned by another.
- **OnOwnerChanged** fires whenever **Owner** changes, passing both the previous and the current owner.

NOTE

The **Owner** setter refuses assignments that would create a cycle (owning yourself, directly or through the chain), logging an error and leaving **Owner** unchanged instead. **Root** and **IsOwnedBy** also stop after 16 levels as an additional safeguard, so a corrupted chain cannot cause an infinite walk.

IMPORTANT

EntityCore does not automatically clear **Owner** when the owner entity is invalidated or destroyed. In Astra Health, invalidation also happens on death, not only on destruction. So, auto-clearing would silently break ownership across a resurrection. If you pool and respawn owned entities, reassign **Owner** explicitly on spawn, the same way you already reinitialize other pooled state.


See [Resolving ownership in custom systems](#) for how to consume this edge from your own gameplay code, and [How ConditionTarget resolves entities](#) for the ownership-aware condition targets.

Exp Source

The **ExpSource MonoBehaviour** component marks a **GameObject** as a source of experience points. When such an entity dies, collection systems (such as those provided by Astra Health) can harvest its experience and award it to eligible recipients.

To add an **ExpSource** to an entity, select the entity's **GameObject** in the hierarchy and use "Add Component" from the inspector. Search for and select **ExpSource**.

In the inspector, you can configure the amount of experience this entity provides:

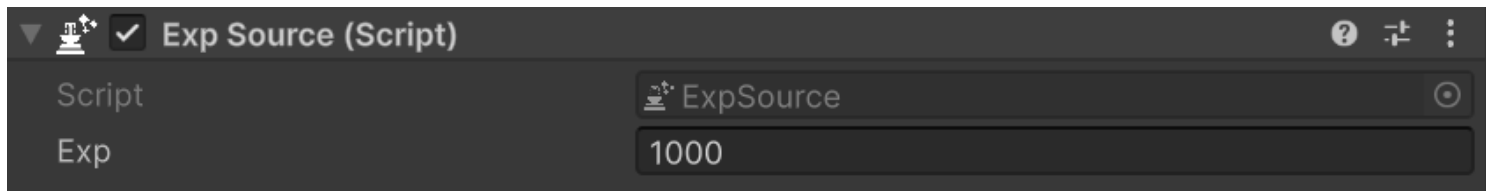

Exp: The base amount of experience points this entity grants when collected. This value can be modified by collection strategies of Astra Health.

The Harvested Flag

Each `ExpSource` exposes a `Harvested` property. When `Harvested` is `true`, the source is considered already collected and collection strategies will skip it, preventing experience from being granted more than once per entity.

By default, `Harvested` is `false`. Collection strategies that check this flag — such as `DirectKillExpStrategySO` in Astra Health — set it to `true` once the experience has been awarded, ensuring each source can only be harvested a single time.

NOTE

Not all collection strategies enforce the `Harvested` flag, and neither all collections strategies respect it. Refer to the documentation of the specific strategy you are using to understand its behavior.

Resetting the Harvested Flag

You may encounter scenarios where an entity should become harvestable again — for example, when a defeated enemy is respawned or resurrected. For these cases, the framework provides the `ToggleHarvestedExpSourceEntityGameAction`.

Relative path: `Astra Framework/Game Actions/Context: Entity/Toggle Harvested Exp Source`

This action reads a `Harvested` boolean field configured in the inspector and applies it to the `IExpSource` found on the entity's `GameObject` (`context.Entity`). Set `Harvested` to `false` to make the source collectable again, or to `true` to mark it as already harvested and prevent further collection.

Because the context type is `IHasEntity`, this action can be wired directly to any `GameEventListener` whose payload exposes an entity — for example, an `EntityResurrectedGameEventListener` — without any additional bridging.

NOTE

A **Component**-based variant (**ToggleHarvestedExpSourceComponentGameAction**, relative path **Context: Component/Toggle Harvested Exp Source**) is also available for cases where only a raw **Component** context is in scope.

Custom Exp Sources

If you need finer control over how experience is provided — for example, if the amount should scale with the entity's level, or the source should conditionally refuse collection — you can implement the **IExpSource** interface directly on a **MonoBehaviour**:

```
public interface IExpSource {  
    bool Harvested { get; set; }  
    long Exp { get; }  
}
```

Any **MonoBehaviour** implementing **IExpSource** is fully compatible with collection strategies that target this interface, including those provided by Astra Health.

Creating Astra Framework assets

All the instances of the various assets that derive from **ScriptableObject**s can be created in the following ways:

- Context menu: **Right click on the hierarchy > Create > Astra Framework**
- Top bar: **Assets > Create > Astra Framework**
- Hotkeys: By pressing the respective keyboard shortcut while a folder or an element of the hierarchy is currently selected

NOTE

For Mac users the **Ctrl** key corresponds to the **Cmd** key.


Create attributes

Keyboard shortcut: **Ctrl + Alt + A**

Relative path: **Attribute**

Once created a new attribute you can name it as you wish and you'll be able tweak some settings in the inspector. For example lets create a **Strength** attribute. Create an **Attributes** folder in your hierarchy, then press **A** and name the newly created attribute **Strength**.

In the inspector it should look like:

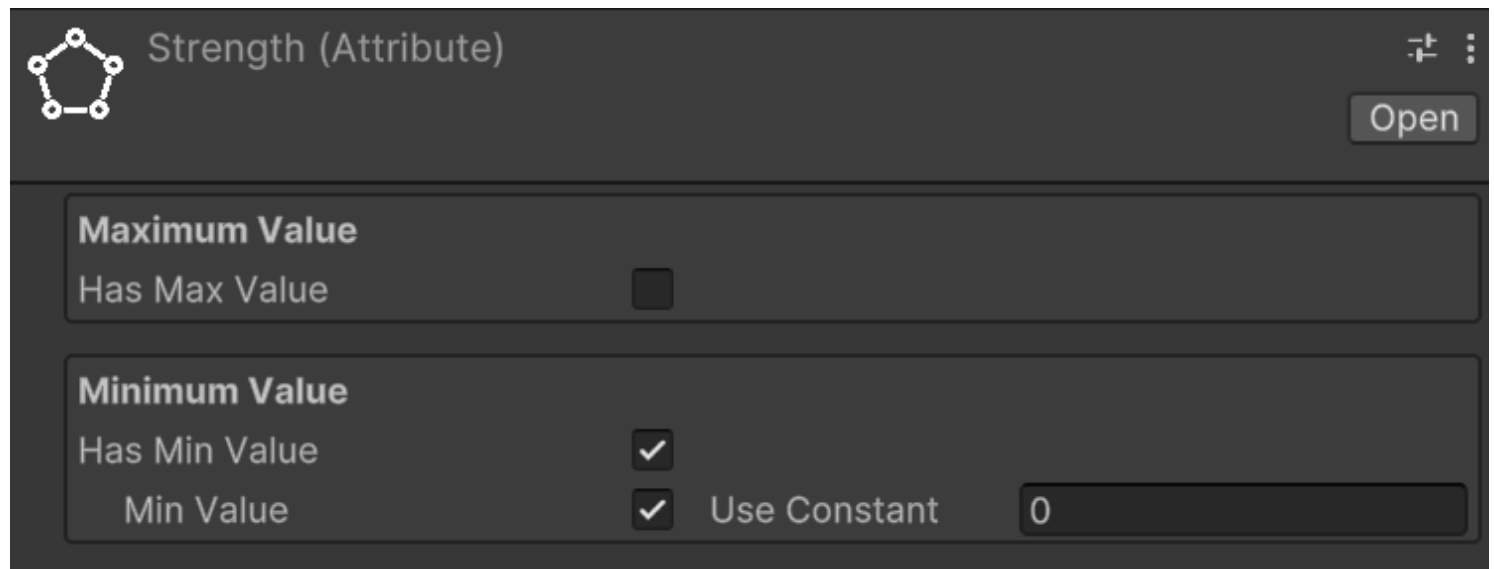

By checking **Has Max Value**, we will set a maximum value for the attribute. By default, there is no maximum value.


By checking **Has Min Value**, we will set a minimum value for the attribute. By default, the minimum value is zero.

Repeat the process for also the **Constitution**, **Intelligence**, and **Dexterity** attributes.


Create an attribute set

Relative path: **Attribute Set**

Now that we have some attributes let's create an **AttributeSet** named, for example, **Hero Attribute Set**. In the inspector it should look like this:

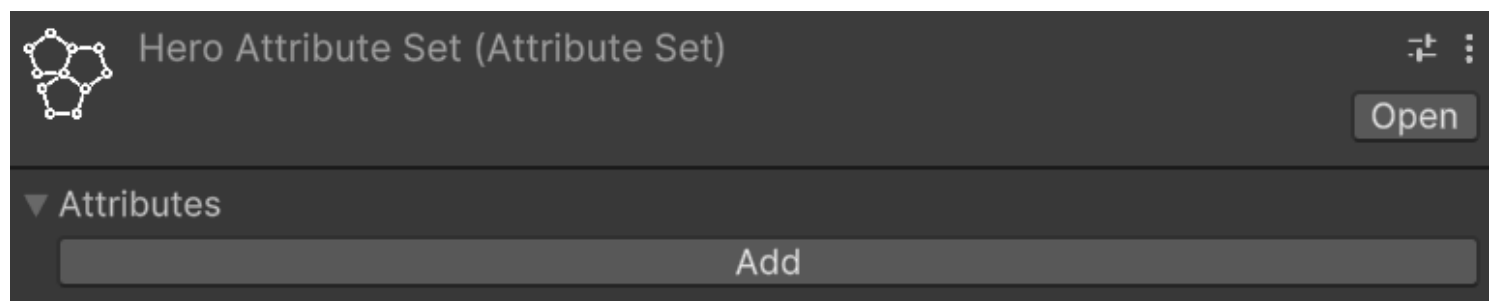

An attribute set without attributes isn't very useful, so let's add the previously created ones, one at a time. To do this, click on the **Add** button. Notice that an entry with **None (Attribute)** appears:

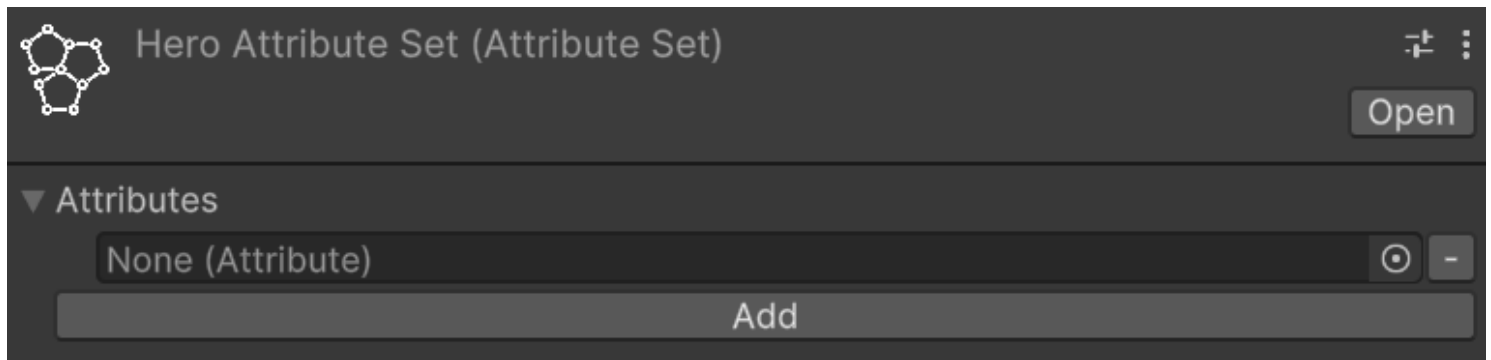

To assign an attribute to the entry, we can either drag & drop from the hierarchy or click on the small circle button on the right of the newly appeared entry. This mechanism is the same used for public variables or, more generally, for fields annotated with `SerializeField`, so it will be familiar to you. Let's add `Strength` using whichever method you prefer. Repeat the process of adding an attribute to the set for `Constitution`, `Intelligence`, and `Dexterity` as well.

If you want to remove an attribute from the set, you can click on the small - button on the right of the attribute you want to remove.

Add `EntityAttributes` to an entity

The next step is to assign the attribute set we created to an entity. To do this, let's add the `EntityAttributes` component to our game object. The inspector will look like this:

☒ Entity Attributes (Script)

Use Base Attributes From Class ☐

* Attributes Set None (Attribute Set SO)

Use Fixed Attribute Values Asset ☐

Fixed Base Attributes

No common fixed base attributes are available across the selected EntityAttributes components.

Attribute Points Per Level ☒ Use Constant 0

Attribute Points Tracker

AttributeSet is not assigned on every selected EntityAttributes component. Assign an AttributeSet or enable 'Use Base Attributes From Class' with a valid EntityClass.

Permanent Bonuses

AttributeSet is not assigned on every selected EntityAttributes component. Assign an AttributeSet or enable 'Use Base Attributes From Class' with a valid EntityClass.

Level-Down Behavior

Point Removal Strategy Default Select

This strategy is applied only at runtime when using the API methods (RemoveExp, ResetToLevelOne). Manually changing the level field in the inspector will not trigger point removal.

Attribute changed events are now configured globally in Edit → Project Settings → Astra Framework.

Per-Entity Extra Events

▶ Extra Attribute Changed Events 0

Use Cache For Attributes ☐

An entity has base points for attributes, which can be either fixed or derived from a class, a configurable amount of attribute points that can be arbitrarily assigned, permanent per-attribute bonuses, and flat and percentage modifiers for the attributes. Attribute points are granted at each level-up, and can also be granted independently of leveling through bonus points (see [Bonus attribute points](#)). Except for permanent attribute bonuses and the flat and percentage modifiers, which can only be assigned via code, all other values can be configured from the inspector.

(🔑 v2.0.0+) **EntityAttributes** supports multi-object editing; shared fields can be edited in bulk, and attribute-specific rows are shown only for attributes common to the current selection.

Attr Points Per Level defines how many arbitrarily spendable attribute points are provided at each level-up. They are assigned starting from level 2 on.

Attribute Points Tracker allows monitoring and assigning spendable points. **Available** shows how many unspent points are still available against the total budget, broken down into **Level** (granted by leveling up) and **Bonus** (granted independently of leveling — see [Bonus attribute points](#)).

If you change the level of the entity you'll see the **Level** portion (and therefore **Available**) change accordingly. And as you spend points on an attribute, **Available** will decrease.

(💡 v2.2.0+) The **Bonus Points** field, right below the summary, lets you edit the bonus pool directly from the inspector. Lowering it below what is currently spent forces a refund of invested points, so a confirmation dialog is shown first.

Moreover, there is a checkbox labeled **Use Class Base Attributes**. For now, let's leave it unchecked since we haven't added a class yet. However, in this case, we need to manually assign an attribute set.

Therefore, let's set the **Attribute Set** field found under **Fixed Base Attributes** with the **Hero Attribute Set**. By doing this, we now have access to additional fields in the inspector:

Entity Attributes (Script)

☐ Use Base Attributes From Class

* Attributes Set

Hero Attribute Set (Attribute Set SO)

☐ Use Fixed Attribute Values Asset

Fixed Base Attributes

Strength0

Intelligence0

Constitution0

Dexterity0

Attribute Points Per Level

☒ Use Constant

1

Attribute Points Tracker

Available: 0 / 0 (Level: 0 · Bonus: 0)

Bonus Points0

Strength0

Intelligence0

Constitution0

Dexterity0

Permanent Bonuses

Strength0

Intelligence0

Constitution0

Dexterity0

Clear All

Level-Down Behavior

Point Removal Strategy

RoundRobinStrategy

Select

This strategy is applied only at runtime when using the API methods (RemoveExp, ResetToLevelOne). Manually changing the level field in the inspector will not trigger point removal.

Attribute changed events are now configured globally in Edit → Project Settings → Astra Framework.

Per-Entity Extra Events

▶ Extra Attribute Changed Events0


☐ Use Cache For Attributes

We can assign values to the attributes of **Fixed Base Attributes** as we see fit.


Fixed base attribute sources

Version 2.1.0+

Besides the inline values shown above, fixed base attributes can also be sourced from a dedicated, reusable asset. Enable **Use Fixed Attribute Values Asset** to switch:

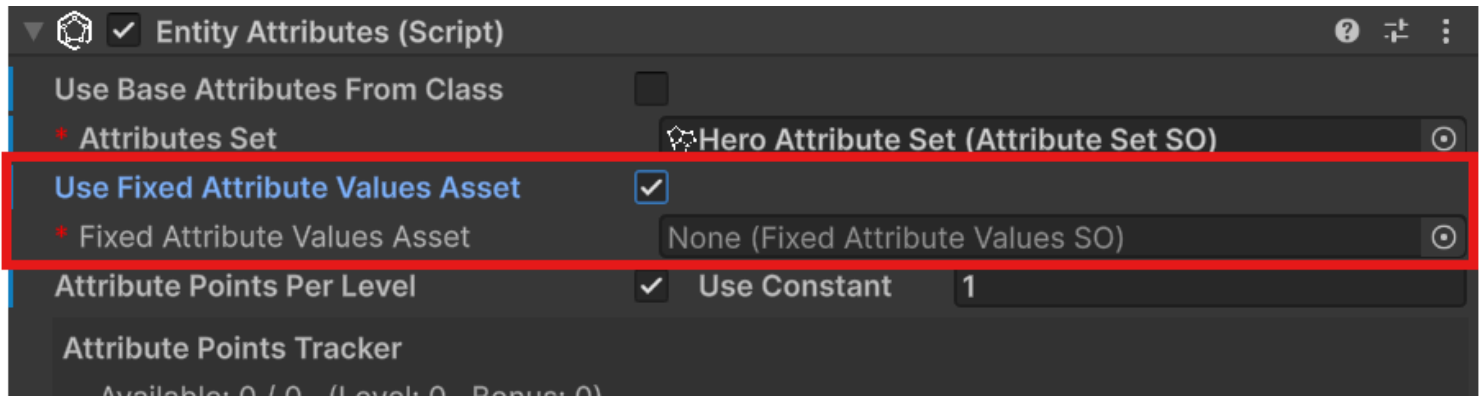

With the toggle enabled, assign a **Fixed Attribute Values** asset to the **Fixed Attribute Values Asset** field *. Create one from **Assets > Create > Astra Framework > Fixed Attribute Values**, then assign it the same **AttributeSetSO** used by the entity and fill in its values directly from its own inspector:

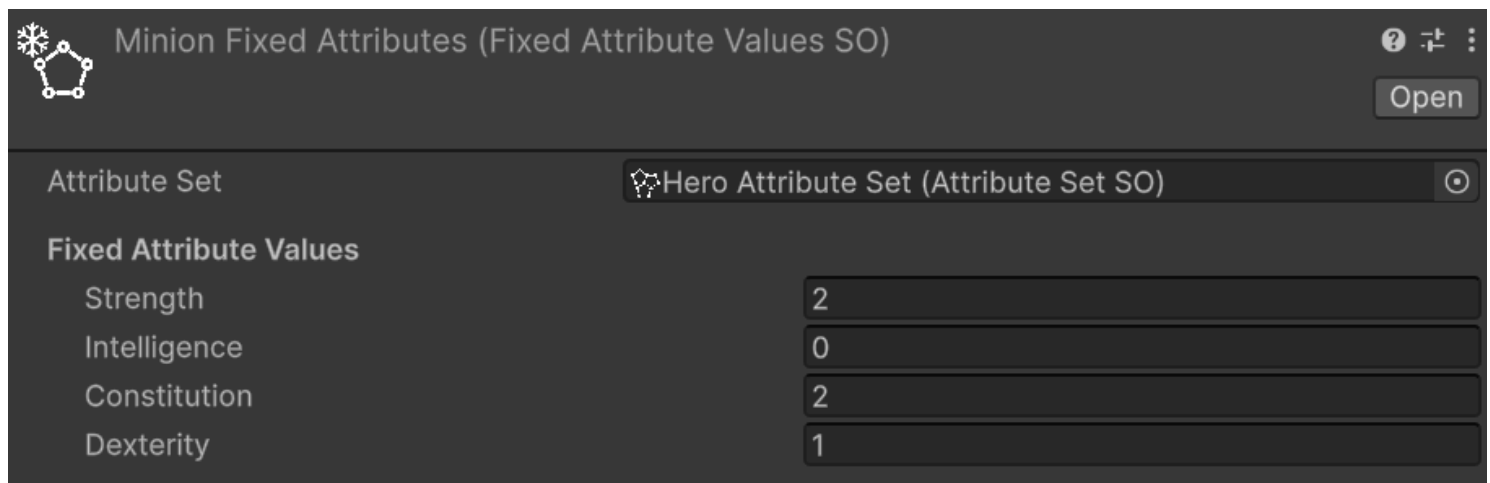

This is useful when several entities should share the exact same fixed base attributes (for example, every enemy of a given kind) without duplicating the values on each prefab.

Reassigning the asset's **Attribute Set** reconciles its values automatically: values for attributes present in both sets are preserved, new attributes default to 0.

NOTE

Use Fixed Attribute Values Asset only applies while **Use Class Base Attributes** is disabled. The inline values are preserved even while the asset is in use, so switching the toggle back off restores them.

For swapping fixed base sources or the attribute set itself from code, see [Pluggable fixed base value sources](#) in Advanced topics.

Understanding Attribute Modifier Types

The framework provides three distinct types of attribute modifiers that work together with spent attribute points to determine final attribute values. Understanding how each type works is essential for creating predictable character progression and balanced gameplay mechanics.

NOTE

General considerations for attribute modifiers

- When adding modifiers through code, the `OnAttributeChanged` event will automatically be raised if the final value changes
- If cache is being used: when adding modifiers through code, the attribute cache will automatically be invalidated to ensure the correct value is returned on the next access

Spent Attribute Points

Before diving into modifiers, it's important to understand that spent attribute points form the foundation of the attribute calculation system. These points are allocated by players during character progression and are applied immediately after the base value.

Characteristics:

- Player-controlled allocation of points earned through leveling
- Applied directly after base values in the calculation order
- Permanent increases (until points are redistributed)
- Each point provides a 1:1 increase to the attribute

Code example:

```
// Spend 3 points on Strength
entityAttributes.SpendOn(strengthAttribute, 3);

// Check available points before spending
int availablePoints = entityAttributes.AvailableAvailableAttributePoints;
if (availablePoints >= 2) {
    entityAttributes.SpendOn(constitutionAttribute, 2);
}
```

Flat Modifiers

Flat modifiers add or subtract a fixed amount to an attribute's value. They are applied after base values and spent points but before percentage modifiers.

Use cases:

- Equipment bonuses (e.g., +3 Strength from gauntlets)
- Temporary buffs (e.g., +5 Constitution from a fortitude potion)
- Race or class bonuses (e.g., Dwarves get +2 Constitution)
- Status effects that provide fixed bonuses or penalties
- Environmental effects (e.g., library affecting Intelligence)

Code example:

```
// Add a flat +4 bonus to Strength
entityAttributes.AddFlatModifier(strengthAttribute, 4);

// Add a flat -2 penalty to Dexterity (negative values work too)
entityAttributes.AddFlatModifier(dexterityAttribute, -2);
```

Calculation example:

- Base Strength: 12
- Spent points: +3
- Flat modifier: +4
- Result after flat modifiers: $12 + 3 + 4 = 19$

Permanent Bonuses

 *Version 2.2.0+*

Permanent bonuses add a fixed amount to an attribute, similar to flat modifiers, but they aren't drawn from any point pool and are meant to be granted once and stay for good, rather than being toggled on and off like a temporary flat modifier. They are applied alongside spent points, before percentage modifiers.

Use cases:

- A consumable item that permanently raises an attribute (e.g. a tome granting +2 Intelligence for good)
- A one-time quest reward that permanently boosts an attribute
- A permanent curse or affliction lowering an attribute

Code example:

```
// Reading a tome permanently grants +2 Intelligence
entityAttributes.AddPermanentBonus(intelligenceAttribute, 2);
```

See [Permanent attribute bonuses](#) for the full API, including removal and inspector support.

Percentage Modifiers

Percentage modifiers apply a multiplicative increase or decrease to the current attribute value. They are the most powerful type of modifier and are applied last in the calculation chain, after all other values have been calculated.

Use cases:

- Powerful equipment bonuses (e.g., +20% to all attributes)
- Character traits or talents (e.g., "Natural Athlete: +15% Strength and Dexterity")
- Temporary powerful buffs or curses
- Class features
- Magical enchantments or artifacts

Code example:

```
// Add a 20% increase to Strength
entityAttributes.AddPercentageModifier(strengthAttribute, 20);

// Add a 10% decrease to Intelligence (negative percentage)
entityAttributes.AddPercentageModifier(intelligenceAttribute, -10)
```

Calculation example:

- Previous value: 19 (from previous steps)
- Percentage modifier: +20% = $19 \times 0.20 = 3.8$
- Final result: $19 + 3.8 = 22.8$ (rounded to 23 for integer attributes)

Important notes:

- Multiple percentage modifiers are additive before being applied (e.g., +20% and +10% = +30% total)
- The percentage is calculated based on the value after base, spent points, permanent bonuses, and flat modifiers
- Percentage modifiers can be negative to create penalties

Complete Calculation Example

Let's see a complete example showing the full attribute calculation process:

Initial setup:

- Base Intelligence: 14

- Points spent on Intelligence: 4
- Permanent bonus: +2 (from a previously read tome)
- Equipment flat bonus: +2 (from a circlet)
- Trait percentage bonus: +25% (from "Scholar" trait)

Step-by-step calculation:

1. Start with base: 14
2. Add spent points: $14 + 4 = 18$
3. Add permanent bonus: $18 + 2 = 20$
4. Apply flat modifiers: $20 + 2 = 22$
5. Apply percentage modifiers: $22 + (22 \times 0.25) = 22 + 5.5 = 27.5$ (rounded to 28 for integer attributes)

Final Intelligence value: 28

Comparison with Stat Modifiers

Unlike stats, attributes have a simpler modifier system:

Attributes have:

- Base values
- Spent attribute points (player-controlled, from leveling and from [bonus grants](#))
- Permanent per-attribute bonuses
- Flat modifiers
- Percentage modifiers

Stats additionally have:

- Stat-to-stat modifiers (attributes don't have attribute-to-attribute modifiers)
- More complex scaling relationships
- Stats can scale upon attributes

This simplicity makes attributes more predictable and easier for players to understand, while stats can have more complex interactions. Keeping them simple helps maintain clarity in gameplay

Retrieving Attribute Values from code

Concrete components such as `EntityAttributes` expose convenience methods like `Get` and `GetBase`, but for reusable or defensive code the preferred read-only contract is `IAttributeReader`.

```
IAttributeReader attributeReader = entity;
```

```
if (attributeReader.TryGet(strengthAttribute, out long currentStrength) &&
```

```

    attributeReader.TryGetBase(strengthAttribute, out long baseStrength))
{
    Debug.Log($"STR = {currentStrength} (base {baseStrength})");
}

```

`EntityCore` implements `IAttributeReader`, so many gameplay systems can read values through the entity itself without depending directly on `EntityAttributes`. See [Advanced topics](#) for the broader reader and rounding APIs.

Spending attribute points

If the entity's `Attr Points Per Level` is greater than zero and the level is greater than 1, we can spend attribute points on the attributes. To do this, we can use the `SpendOn` method:

```

// strengthAttribute is a reference to the Strength Attribute
entityAttributes.SpendOn(strengthAttribute, 2);

```

This will spend 2 points on the `Strength` attribute, increasing its value by 2. If there are not enough available points, a `Debug.LogError` will be raised.

NOTE

`Debug.LogError` messages are shown only in development builds. If you run a production build, you won't see them. This is useful to avoid cluttering the console with error messages that are not relevant in production.

Bonus attribute points

 *Version 2.2.0+*

Besides the points granted by leveling up, an entity can also receive bonus attribute points: extra spendable points granted independently of leveling, for example by finding an item or completing a quest. Unlike level points, bonus points survive level-down and re-spec.

```

// Grant 3 bonus attribute points, e.g. after completing a quest
entityAttributes.GrantBonusAttributePoints(3);

// Revoke previously granted bonus points, e.g. if the quest reward is undone
entityAttributes.RevokeBonusAttributePoints(3);

```

```
// Set the bonus pool to an absolute value, e.g. when restoring save data
entityAttributes.SetBonusAttributePoints(5);
```

`BonusAttributePoints` and `LevelAttributePoints` expose the two pools individually, while `AvailableAttributePoints` and `TotalAttributePoints` keep reporting the combined budget:

```
int bonus = entityAttributes.BonusAttributePoints;
int fromLevels = entityAttributes.LevelAttributePoints;
int available = entityAttributes.AvailableAttributePoints; // unspent, from either pool
```

NOTE

Points spent on an attribute aren't tagged with the pool (level or bonus) they were drawn from. This means:

- `RefundAllSpentPoints`, `RefundFrom`, and `RefundPointsForAttribute` refund invested points regardless of whether they came from level or bonus points.
- Lowering the bonus pool below what is currently spent (via `RevokeBonusAttributePoints` or `SetBonusAttributePoints`) forces a refund of invested points, following the same point removal strategy used for level-down.

Permanent attribute bonuses

 Version 2.2.0+

A permanent attribute bonus is a fixed amount added to a single attribute that isn't drawn from any point pool. Unlike attribute points, it doesn't need to be granted before it can be spent, it's simply applied — a typical use case is a consumable item or a quest reward that permanently raises an attribute, such as an Archmage's tome that grants +2 `Intelligence` for the rest of the game.

```
// Reading the Archmage's tome permanently grants +2 Intelligence
entityAttributes.AddPermanentBonus(intelligenceAttribute, 2);

// Amounts can be negative too, e.g. a permanent curse
entityAttributes.AddPermanentBonus(strengthAttribute, -1);

// Reads
long intBonus = entityAttributes.GetPermanentBonus(intelligenceAttribute);
IReadOnlyDictionary<AttributeSO, long> allBonuses =
entityAttributes.GetAllPermanentBonuses();
```

`RemovePermanentBonus` subtracts from the existing bonus, while `SetPermanentBonus` (and the bulk `SetPermanentBonuses`, useful when restoring save data) assigns an absolute value instead:

```
// Remove 1 point of the earlier Intelligence bonus (e.g. the tome's effect partially fades)
entityAttributes.RemovePermanentBonus(intelligenceAttribute, 1);

// Restore permanent bonuses from save data in a single bulk update
entityAttributes.SetPermanentBonuses(savedPermanentBonuses);
```

To clear permanent bonuses entirely, use `ClearPermanentBonus` for a single attribute or `ClearAllPermanentBonuses` for every attribute:

```
entityAttributes.ClearPermanentBonus(intelligenceAttribute);
entityAttributes.ClearAllPermanentBonuses();
```

(🔑 v2.2.0+) The inspector exposes the same values through a `Permanent Bonuses` box below the `Attribute Points Tracker`, with one editable field per attribute and a `Clear All` button.

⊗ CAUTION


Permanent bonuses are never touched by level-down, re-spec, or `RefundAllSpentPoints` — only the explicit `ClearPermanentBonus/ClearAllPermanentBonuses` APIs remove them. Since they were never drawn from a point budget, clearing them never increases `AvailableAttributePoints` or `BonusAttributePoints` either. To let a player re-spend points they already invested, use `RefundAllSpentPoints` instead.

Create stats

Keyboard shortcut: `Ctrl + Alt + S`

Relative path: `Stat`

As with attributes, you can create stats as you wish and assign them the names you prefer. Let's create the `Physical Attack` stat together. Create a new `Stats` folder, select it and press `S`. Name it `Physical Attack`. In the inspector, it should look like this:

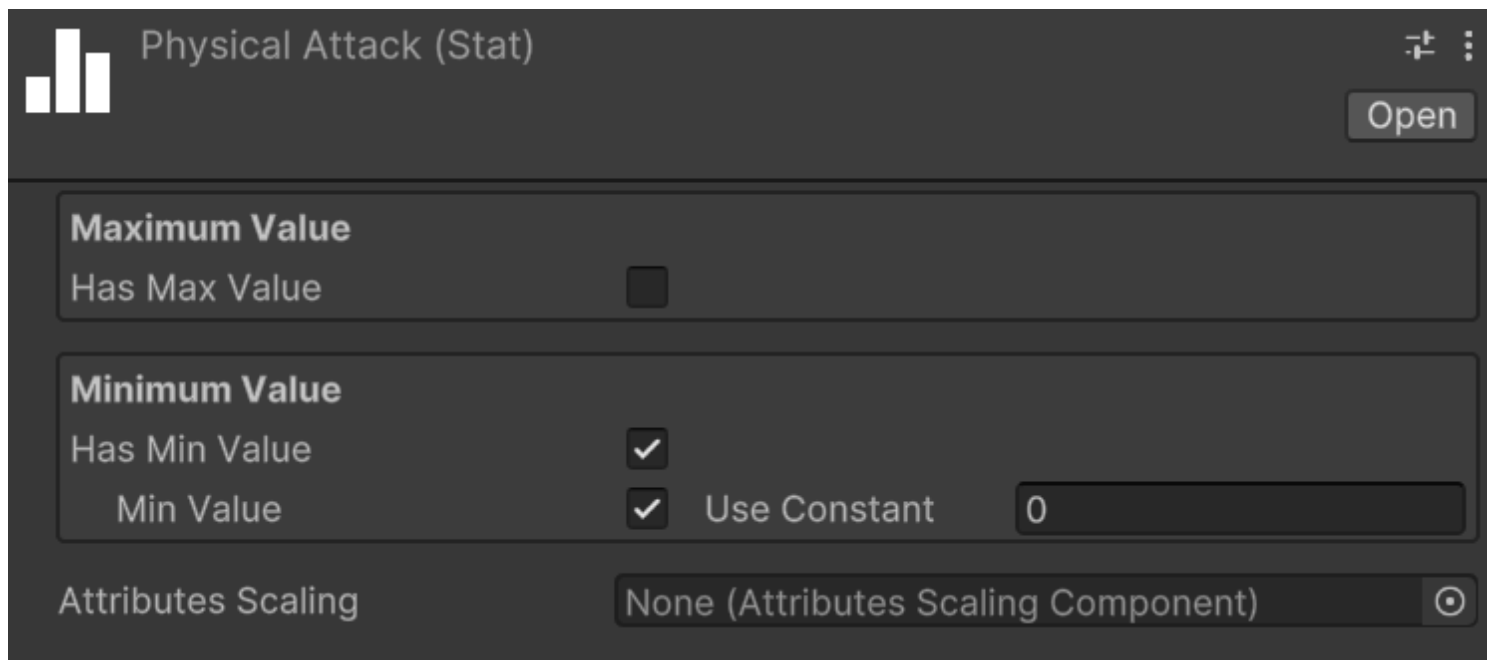

Physical Attack (Stat)

Open

Maximum Value

Has Max Value ☐

Minimum Value

Has Min Value ☒

Min Value ☒ Use Constant

Attributes Scaling None (Attributes Scaling Component) 

As with attributes, you can assign both a maximum and a minimum value to a stat.

Repeat the process for the **Magical Power**, **Defense**, and **Critical Chance** stats.

Unlike attributes, however, stats include **Attributes Scaling**.

Create an Attribute Scaling Component for Stats

*Relative path: **Scaling** -> **Attribute Scaling Component***

Let's create a new **Attribute Scaling Component** to use with the strength stat we created earlier. Create a new folder named, for example, **Attribute Scalings for Stats**, and inside it, create an attribute scaling component called **Physical Attack Strength Scaling**.

( v2.0.0+) **Attribute Scaling Component** supports multi-object editing; shared set assignment and common attribute rows can be edited in bulk.

Assign the previously created **Hero Attribute Set** to the **Set** field. You will see the attributes of the set appear. Here, you can assign scaling values using **double**. For example, set the scaling of **Strength** to **1.0**. This component defines a 100% scaling on the value of **Strength**.

Physical Attack ASC (Attributes Scaling Component)

Open

Script

AttributesScalingComponent

* Attribute Set

Hero Attribute Set (Attribute Set)

Scaling Attribute Values

Strength	1
Intelligence	0
Constitution	0
Dexterity	0

 Use double values. For example: 0.8 means 80%, 1.6 means 160%.

Now, assign this scaling component to the **Physical Attack** stat to ensure it scales with the **Strength** attribute.

Create a stat set

Relative path: **Stat Set**


Now that we have some stats, let's create a **StatSet** named, for example, **Hero Stat Set**.

A stat set without stats isn't very useful, so let's add the previously created ones, one at a time. To do this, click on the **Add** button. Notice that an entry with **None (Stat)** appears. To assign a stat to the entry, we can either drag & drop from the hierarchy or click on the small circle button on the right of the newly appeared entry. This mechanism is the same used for public variables or, more generally, for fields annotated with **SerializeField**, so it will be familiar to you.

Let's add **Physical Attack** using whichever method you prefer.

Repeat the process of adding a stat to the set for **Magical Power**, **Defense**, and **Critical Chance** as well.

The stat set should look like:

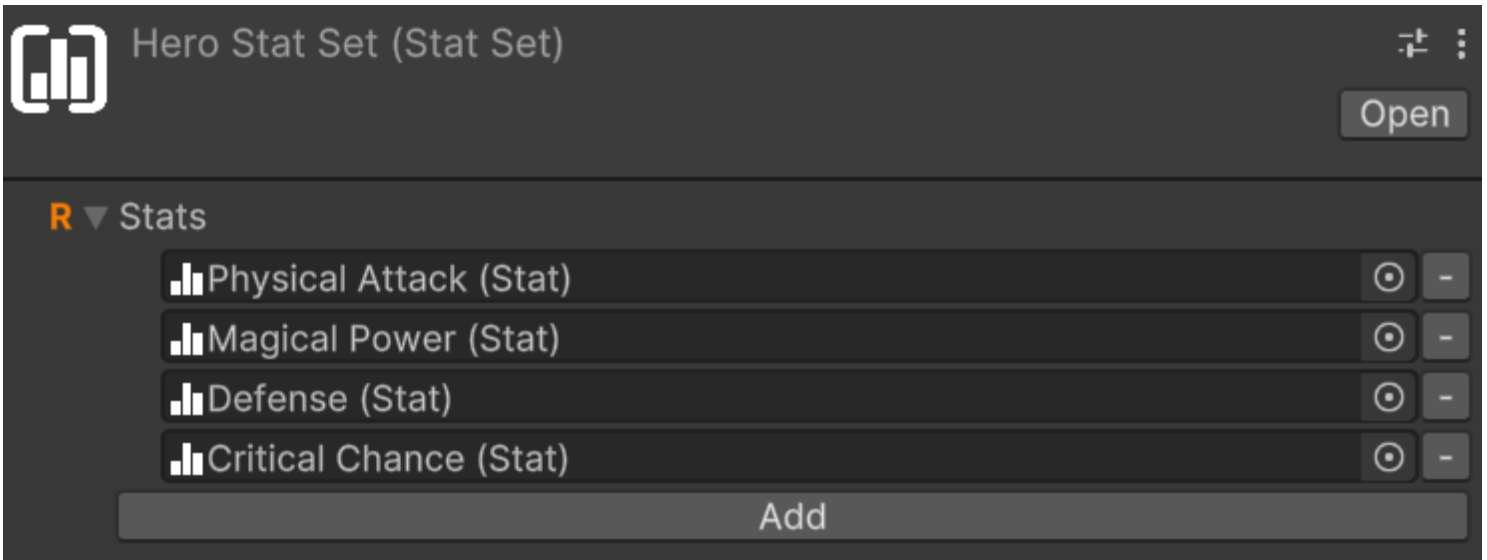

If you want to remove a stat from the set, you can click on the small - button on the right of the stat you want to remove.

Modular stat sets

Stat sets can include other stat sets, allowing for modular and reusable configurations. This is particularly useful if we have various kind of entities that share some stats but not all of them. For example, let's consider three entities: a deer, a ballista turret, and our hero character. The deer can take damage, move around, and cannot attack. The turret instead can take damage, deal damage, but cannot move. The hero can do all three things.

A first approach could be to create three distinct stat sets for each entity, but this would lead to a lot of redundancy since many stats would be repeated across the three sets. What if we decide to add a new stat that all three entities should have? We would have to remember to add it to all three sets, which is error-prone and inefficient. Alternatively, we could use a single all-embracing stat set that includes all the stats needed by all entities. However, this would lead to unnecessary complexity for entities that don't need all those stats, making it harder to manage and understand.

A better approach is to create modular stat sets that can be combined as needed. We can create three stat sets:

- **Damageable Stat Set**: includes stats like **Armor**, **Magical Defense**, **Dmg Reduction**, and so on
- **Damage Dealer Stat Set**: includes stats like **Physical Attack**, **Magical Power**, **Critical Chance**, and so on
- **Movable Stat Set**: includes stats like **Movement Speed**, **Jump Height**, etc.

Then, we can create three additional stat sets for our entities:


- **Prey Stat Set** for the deer, which includes only the **Damageable Stat Set** and the **Movable Stat Set**

- **Turret Stat Set** for the ballista turret, which includes only the **Damageable Stat Set** and the **Damage Dealer Stat Set**
- **Hero Stat Set** for our hero character, which includes all three stat sets: **Damageable Stat Set**, **Damage Dealer Stat Set**, and **Movable Stat Set**

This modular approach allows us to reuse stat configurations across different entities, reducing redundancy and making it easier to manage and update stats.

Add **EntityStats** to an Entity

The next step is to assign the stat set we created to an entity. To do this, let's add the **EntityStats** component to our game object. The inspector will look like this:

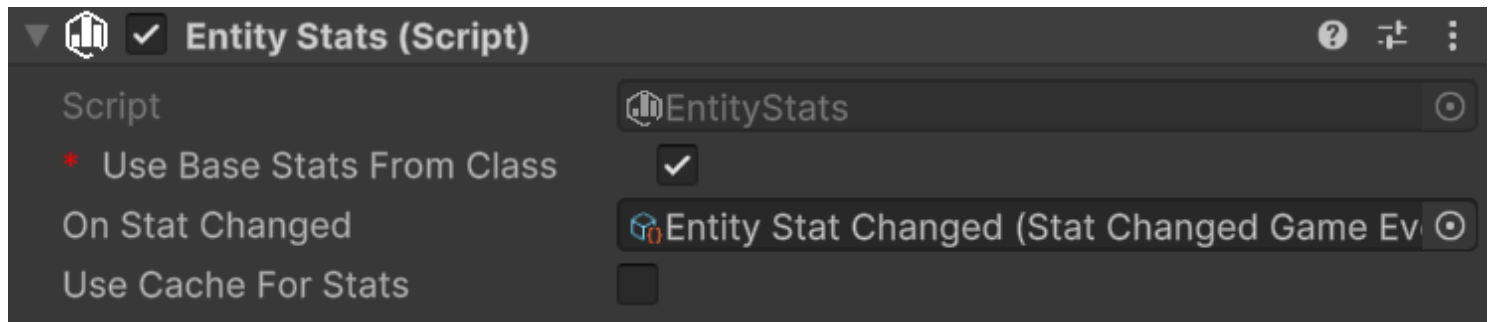


An entity has base stats that can be either fixed or derived from a class. Additionally, stats can be modified through flat modifiers, stat-to-stat modifiers, and percentage modifiers.

(🔖 v2.0.0+) **EntityStats** supports multi-object editing; shared fields can be edited in bulk, and fixed-base rows are shown only for stats common to the current selection.

Use Class Base Stats checkbox determines whether the base stats should come from the entity's class (if one is available) or from fixed values defined in the inspector. For now, let's leave it unchecked since we haven't added a class yet.

With **Use Class Base Stats** unchecked, we need to manually assign a stat set. Set the **Stat Set** field under **Fixed Base Stats** with our **Hero Stat Set**. This will reveal additional fields in the inspector where we can set the base values for each stat:

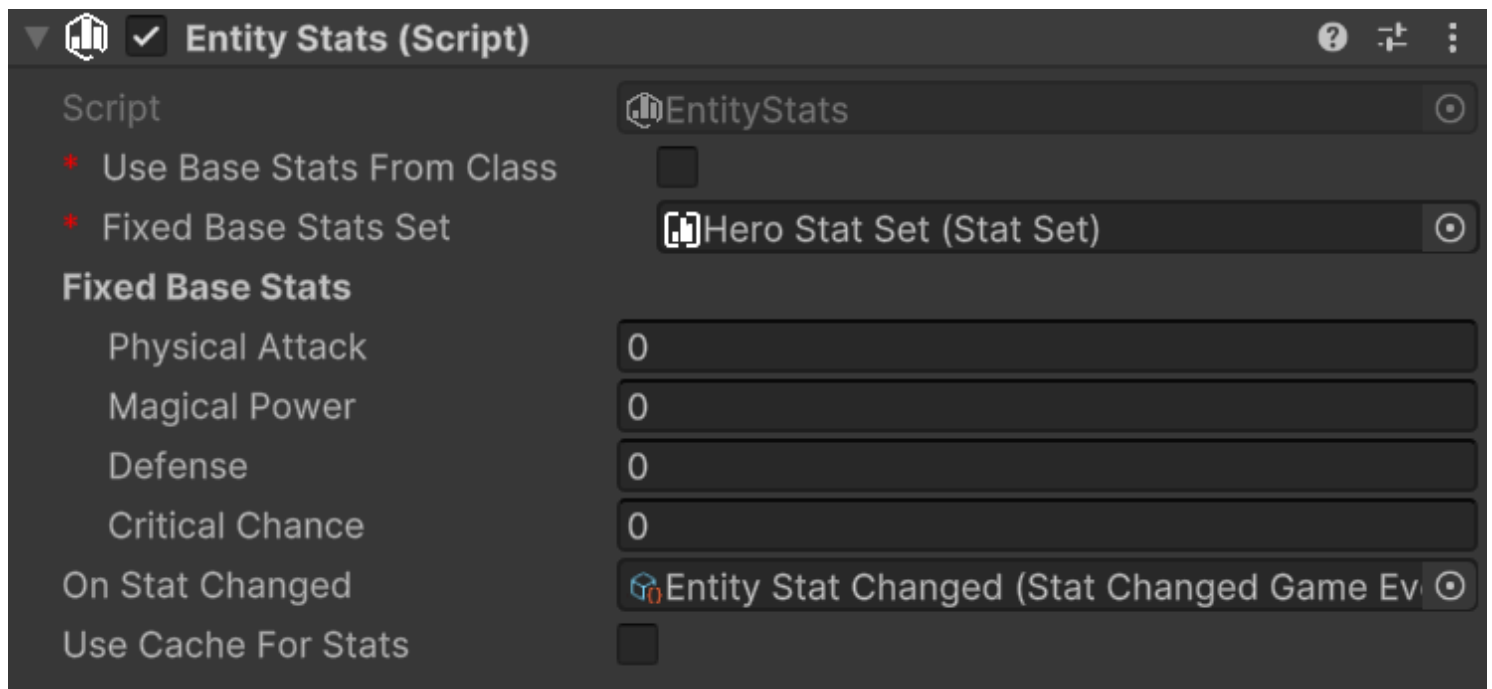


On Stat Changed event gets raised whenever any stat value changes due to modifiers. You can use this to update UI elements or trigger other game logic.

Use Cache enables caching of final stat values. This is useful for performance when you have many entities or complex stat calculations.

Fixed base stat sources


Version 2.1.0+

Besides the inline values shown above, fixed base stats can also be sourced from a dedicated, reusable asset. Enable **Use Fixed Stat Values Asset** to switch:

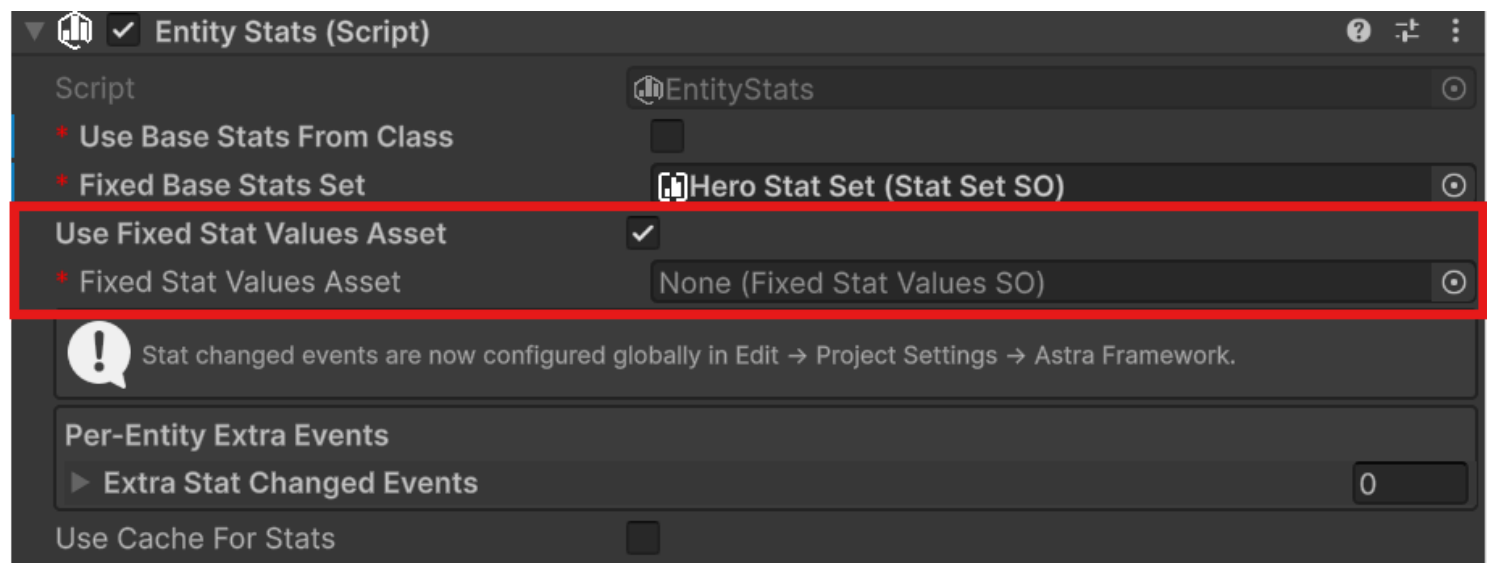

With the toggle enabled, assign a **Fixed Stat Values** asset to the **Fixed Stat Values Asset** field *. Create one from **Assets > Create > Astra Framework > Fixed Stat Values**, then assign it the same **StatSetSO**

used by the entity and fill in its values directly from its own inspector:

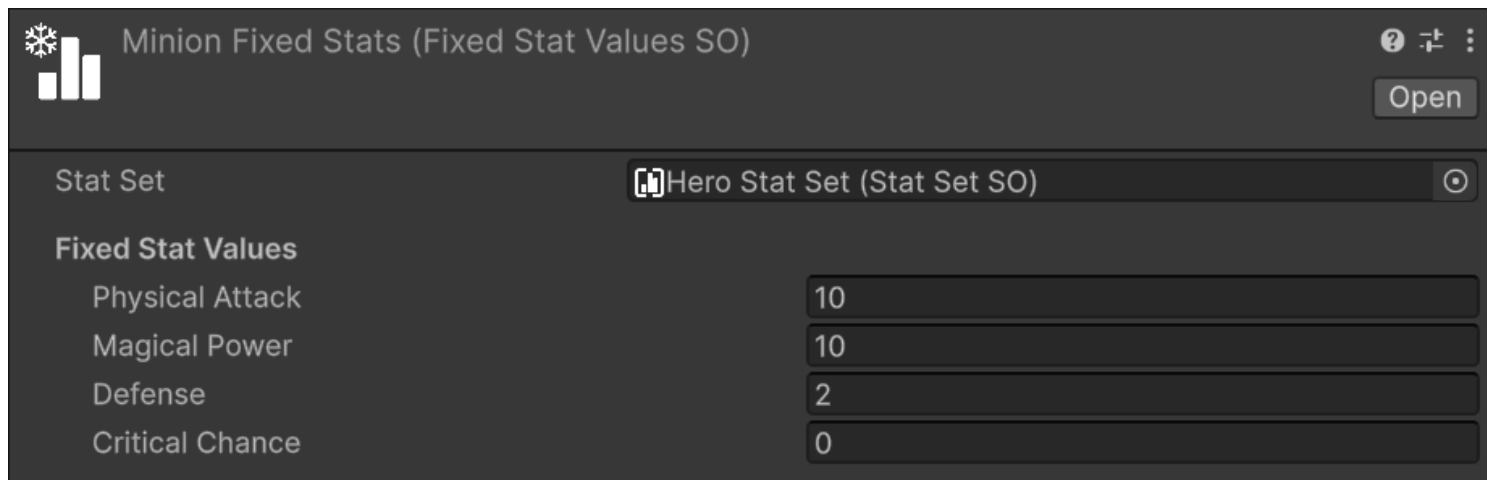

This is useful when several entities should share the exact same fixed base stats (for example, every enemy of a given kind) without duplicating the values on each prefab.

Reassigning the asset's **Stat Set** reconciles its values automatically: values for stats present in both sets are preserved, new stats default to 0.

NOTE

Use **Fixed Stat Values Asset** only applies while **Use Class Base Stats** is disabled. The inline values are preserved even while the asset is in use, so switching the toggle back off restores them.

For swapping fixed base sources or the stat set itself from code, see [Pluggable fixed base value sources](#) in Advanced topics.

Understanding Stat Modifier Types

The framework provides three distinct types of stat modifiers, each serving different purposes and applied in a specific order during final value calculation. Understanding how each type works is crucial for creating balanced and predictable stat systems.

NOTE

General considerations for stat modifiers

- If cache is being used: when adding modifiers through code, the attribute cache will automatically be invalidated to ensure the correct value is returned on the next access
- When adding modifiers through code, the **OnStatChanged** event will automatically be raised if the final value changes.

Flat Modifiers

Flat modifiers add or subtract a fixed amount to a stat's value. They are the simplest type of modifier and are applied directly after the base value.

Use cases:

- Equipment bonuses (e.g., +5 Physical Attack from a sword)
- Temporary buffs (e.g., +10 Defense from a shield spell)
- Status effects that provide fixed bonuses or penalties

Code example:

```
// Add a flat +15 bonus to Physical Attack
entityStats.AddFlatModifier(physicalAttackStat, 15);

// Add a flat -5 penalty to Defense (negative values work too)
entityStats.AddFlatModifier(defenseStat, -5);
```

Calculation example:

- Base Physical Attack: 50
- Flat modifier: +15
- Result after flat modifiers: $50 + 15 = 65$

Stat-to-Stat Modifiers

Stat-to-stat modifiers allow one stat to contribute a percentage of its value to another stat. This creates interesting dependencies between different stats and allows for more complex character builds.

These modifiers are applied right after the flat modifiers.

Use cases:

- Cross-stat synergies (e.g., 25% of Armor is added to Physical Attack).

WARNING

When using stat-to-stat modifiers, **only the base value and flat modifiers of the source stat are used** in the calculation. Stat-to-stat modifiers and percentage modifiers applied to the source stat are ignored. This ensures predictable and non-circular calculations.

Code example:

```
// 25% of armor is added to physical attack
entityStats.AddStatToStatModifier(physicalAttackStat, armorAttribute, 25);

// Negative modifier: -10% of armor is subtracted from physical attack
entityStats.AddStatToStatModifier(physicalAttackStat, armorAttribute, -10);
```

Calculation example:

- Base Physical Attack: 50
- Flat modifier: +15 (from previous step)
- Current value: 65
- Armor value: 40
- Stat-to-stat modifier: 50% of Armor = $40 \times 0.5 = 20$
- Result after stat-to-stat modifiers: $65 + 20 = 85$

Important notes:

- The source stat's base value + its flat modifiers is used for calculation
- Multiple stat-to-stat modifiers from different sources are additive, and order of calculation is commutative
- You can have the same source stat contribute to multiple target stats
- Circular dependencies can be defined, as the base values + flat modifiers are used for calculations

Percentage Modifiers

Percentage modifiers apply a multiplicative increase or decrease to the current stat value. They are applied last in the calculation chain. Because of this, they can have a significant impact on the final value.

Use cases:

- Powerful equipment bonuses (e.g., +25% damage increase)
- Character traits or talents (e.g., "Warrior's Might: +20% Physical Attack")
- Temporary powerful buffs or debuffs

Code example:

```
// Add a 25% increase to Physical Attack
entityStats.AddPercentageModifier(physicalAttack, 25);

// Add a 15% decrease to movement speed (negative percentage)
entityStats.AddPercentageModifier(movementSpeed, -15);
```

Calculation example:

- Previous value: 85 (from previous steps)
- Percentage modifier: $+25\% = 85 \times 0.25 = 21.25$
- Final result: $85 + 21.25 = 106.25$ (rounded to 106 for integer stats)

Important notes:

- Multiple percentage modifiers are additive before being applied (e.g., $+25\%$ and $+15\% = +40\%$ total)
- The percentage is calculated based on the value after flat and stat-to-stat modifiers
- Percentage modifiers can be negative to create penalties

Complete Calculation Example

Let's see a complete example with all three modifier types:

Initial setup:

- Base Physical Attack: 100
- Armor value: 60 (base + flat modifiers)

Applied modifiers:

1. Flat modifier: $+20$ (from weapon)
2. Stat-to-stat modifier: 75% of Armor $= 60 \times 0.75 = 45$
3. Percentage modifier: $+30\%$ (from various sources)

Step-by-step calculation:

1. Start with base: 100
2. Apply flat modifiers: $100 + 20 = 120$
3. Apply stat-to-stat modifiers: $120 + 45 = 165$
4. Apply percentage modifiers: $165 + (165 \times 0.30) = 165 + 49.5 = 214.5 \rightarrow 214$

Final Physical Attack value: 214

NOTE

The framework does not provide a built-in tool for removing applied modifiers. It is up to you to define your own abstraction for buffs, debuffs, or other temporary effects that add and remove modifiers as needed. In the future, the Astra Modifiers extension for this framework will be released, which will include such abstractions thought to integrate seamlessly with the existing systems. Check the status of the extension for more details at <https://electricdrill.github.io/> 

Retrieving Stat Values from code

Concrete components such as `EntityStats` expose convenience methods like `Get` and `GetBase`, but for reusable or defensive code the preferred read-only contract is `IStatReader`.

```
IStatReader statReader = entity;


if (statReader.TryGet(phyAtkStat, out long physicalAttack) &&
    statReader.TryGetBase(phyAtkStat, out long basePhysicalAttack))
{
    Debug.Log($"Physical Attack = {physicalAttack} (base {basePhysicalAttack})");
}
```

`EntityCore` implements `IStatReader`, so systems that already work with the entity can query stats without reaching into a specific `EntityStats` component. See [Advanced topics](#) for more on readers, `TryGetBase`, and related APIs.

Create a class

Relative path: `Class`

Let's create an instance of `Class` called `Warrior`. It should appear like this:

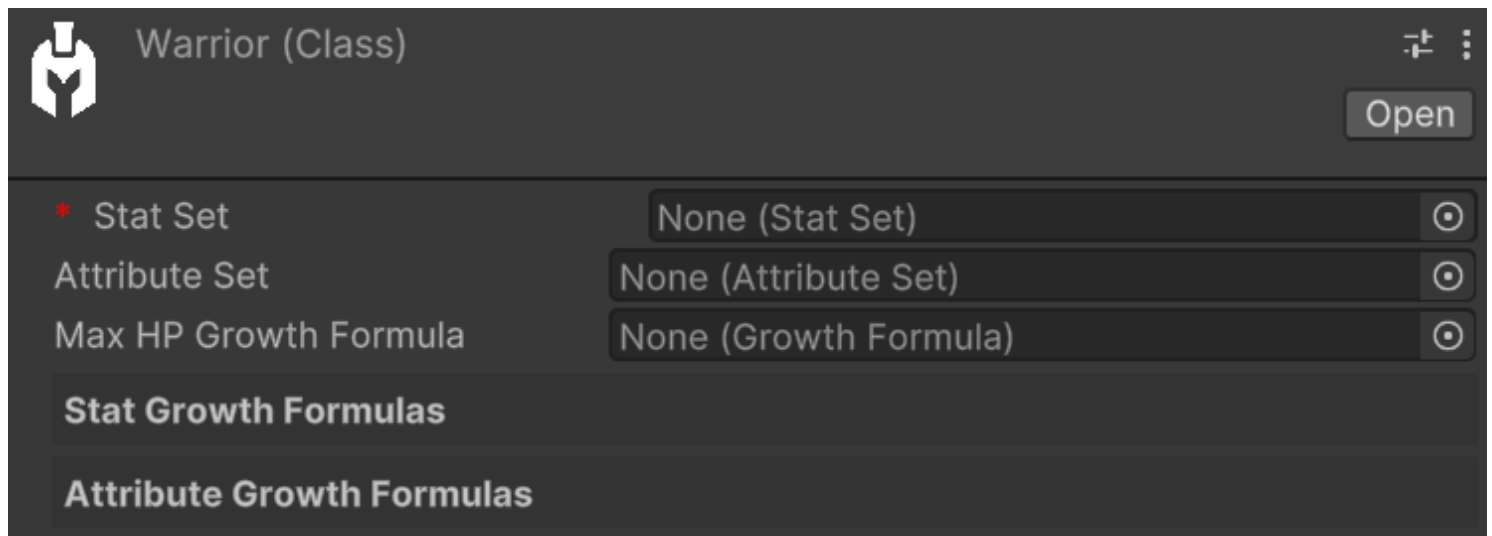

Field	Value	Icon
* Stat Set	None (Stat Set)	⊙
Attribute Set	None (Attribute Set)	⊙
Max HP Growth Formula	None (Growth Formula)	⊙

Stat Growth Formulas

Attribute Growth Formulas

The only mandatory field is `Stat Set`. If we don't make use of attributes and Max HP, we can leave the `Attribute Set` and `Max HP Growth Formula` fields empty.

In our case, let's assign our `Hero Stat Set` to `Stat Set` and `Hero Attribute Set` to `Attribute Set`. This way, the `Warrior` will have access to all stats and attributes from the assigned `Stat Set` and `Attribute Set`. As we fill these two fields, we'll see that the `Stat Growth Formulas` and `Attribute Growth Formulas` sections will automatically populate with the stats and attributes from the assigned `Stat Set` and `Attribute Set`.

(🔑 v2.0.0+) You can also select multiple **Class** assets and edit them together. Shared **Stat Set**, **Attribute Set**, and **Max HP Growth Formula** values can be assigned in bulk, while the growth-formula sections only show the stats and attributes that are common to every selected class. If a shared entry currently references different formulas across the selection, Unity shows the field as a mixed value until you assign a common formula.

NOTE

Auto-Create Missing Growth Formulas is available only when editing a single **Class** asset.

When multi-editing, assign a common **Stat Set** and/or **Attribute Set** first if you want to batch-edit growth formula references across several classes.

Let's proceed to create all the growth formulas for the warrior's stats and attributes. Follow the steps outlined in the [Growth Formulas](#) section to create the growth formulas for the warrior's stats and attributes.

Once all growth formulas are assigned, the **Warrior** should look like this:

Warrior (Class)

Open

Stat Set

Attribute Set

Max HP Growth Formula

Hero Stat Set (Stat Set)

Hero Attribute Set (Attribute Set)

None (Growth Formula)

Stat Growth Formulas

Physical Attack

Magical Power

Defense

Critical Chance

Warr Physical Attack GF (Growth Formula)

Warr Magical Power GF (Growth Formula)

Warr Defense GF (Growth Formula)

Warr Critical Change GF (Growth Formula)

Attribute Growth Formulas

Strength

Intelligence

Constitution

Dexterity

Warr STR GF (Growth Formula)

Warr INT GF (Growth Formula)

Warr CON GF (Growth Formula)

Warr DEX GF (Growth Formula)

Max HP Growth Formula allows specifying how the Max HP value grows as levels change. In our example, we'll leave it empty. The presence of this field for hit points might be surprising since this module of the framework isn't focused on health management. Indeed, damage and health are managed by the *Astra Health* module, which will be released in the coming months. However, this field is positioned here since the scaling of base max hp still depends on the class.


Keeping the hierarchy clean

By now you should have a lot of assets in your hierarchy. To keep it clean, you can create a folder named **Classes** and move the **Warrior** class inside it. You can do the same for the **Attributes** and **Stats** growth formulas inside the **Warrior** folder. This way, you can keep the hierarchy organized and easily find the assets.

Similarly, the **Hero Stat Set** and **Hero Attribute Set** could be placed in a **Hero** folder, that is common to all the classes. This way, you can have a single set of stats and attributes for all the classes that will be created in the future.

This is how your hierarchy could look like:


- ▼  Classes
 - ▼  Mage
 - ▼  Attributes Growth Formulas
 -  Mage CON GF
 -  Mage DEX GF
 -  Mage INT GF
 -  Mage STR GF
 - ▼  Stats Growth Formulas
 -  Mage Critical Change GF
 -  Mage Defense GF
 -  Mage Magical Power GF
 -  Mage Physical Attack GF
 -  Mage Level
 -  Mage Max HP GF
 -  Mage
 - ▼  Rogue
 - ▶  Attributes Growth Formulas
 - ▶  Stats Growth Formulas
 -  Rogue Level
 -  Rogue Max HP GF
 -  Rogue
 - ▼  Warrior
 - ▶  Attributes Growth Formulas
 - ▶  Stats Growth Formulas
 -  Warr Max HP GF
 -  Warrior Level
 -  Warrior
- ▶  Events
- ▼  Hero
 - ▼  Attribute Scalings For Stats
 -  Critical Change ASC
 -  Defense ASC
 -  Magical Power ASC
 -  Physical Attack ASC
 - ▼  Attributes
 -  Constitution
 -  Dexterity
 -  Intelligence
 -  Strength
 - ▼  Stats
 -  Critical Chance

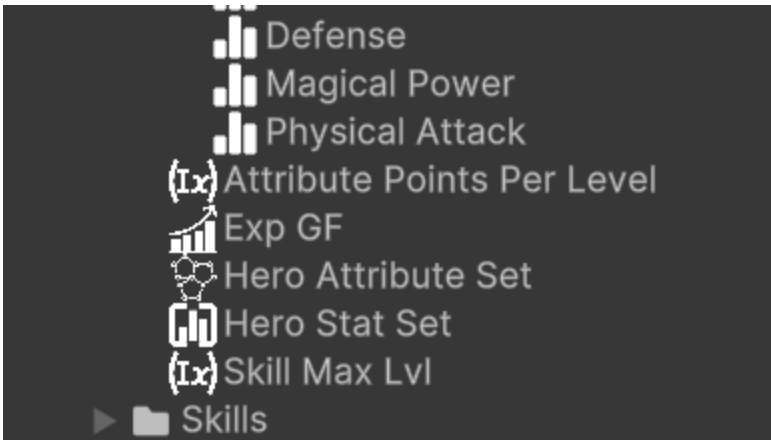

Obviously this is just a possible organization of the assets. Feel free to organize it as you prefer.

Add `EntityClass` to an entity

To assign a class to an entity, we need to add the `EntityClass` component to it. The inspector will look like this:

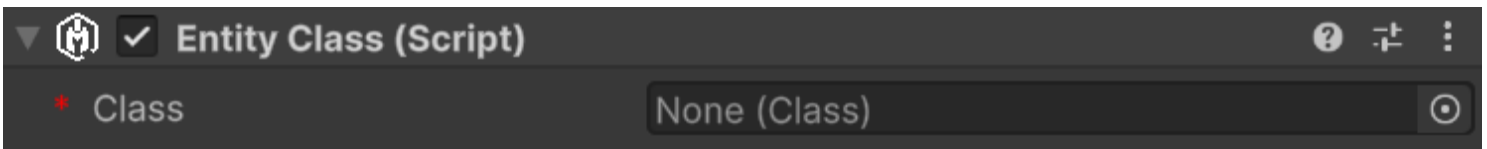

All we have to do now is just assign the `Warrior` class we created earlier to the `Class` field.

(💡 v2.0.0+) `EntityClass` also supports multi-object editing, so you can assign the same `Class` asset to multiple selected entities at once.

Switching to class-based attributes and stats

We can now check the `Use Class Base Attributes` and `Use Class Base Stats` checkboxes. By doing this, the entity will use the base attributes and stats defined by the class. The `Fixed Base Attributes` and `Fixed Base Stats` fields will be disabled, and the values will be automatically retrieved from the class growth formulas.

Retrieving class-based values from code

With a class we can access:

- attributes values: `GetAttributeAt(Attribute attribute, int level)`
- stats values: `GetStatAt(Stat stat, int level)`
- Max HP values: `GetMaxHpAt(int level)` For example:

```
// hero is a reference to the EntityCore component of the hero
EntityClass warriorClass = hero.GetComponent<EntityClass>();
// hero.Level is of EntityLevel type, but it is implicitly be converted to an int
int level = hero.Level;
```

```
int strengthAtLevel5 = warriorClass.GetAttributeAt(strengthAttribute, level);
int physicalAttackAtLevel5 = warriorClass.GetStatAt(phyAtkStat, level);
int maxHpAtLevel5 = warriorClass.GetMaxHpAt(level);
```


Create Scaling Formulas

Keyboard shortcut: **Alt + Shift + S**

Relative path: **Scaling -> Scaling Formula**

We already saw how to create an **Attribute Scaling Component** for stats. On top of such usage, scaling components, and more in general scaling formulas, can be used for much more situations. For example, they can be used to define the damage of an ability, to define the bonus granted by a piece of equipment, or to define the damage of a weapon. In general, they can be used to define any kind of scaling that can be expressed as a function of one or more variables.

For example, let's create a **Scaling Formula** called **Mighty Blow SF**. It should look like this in the inspector:

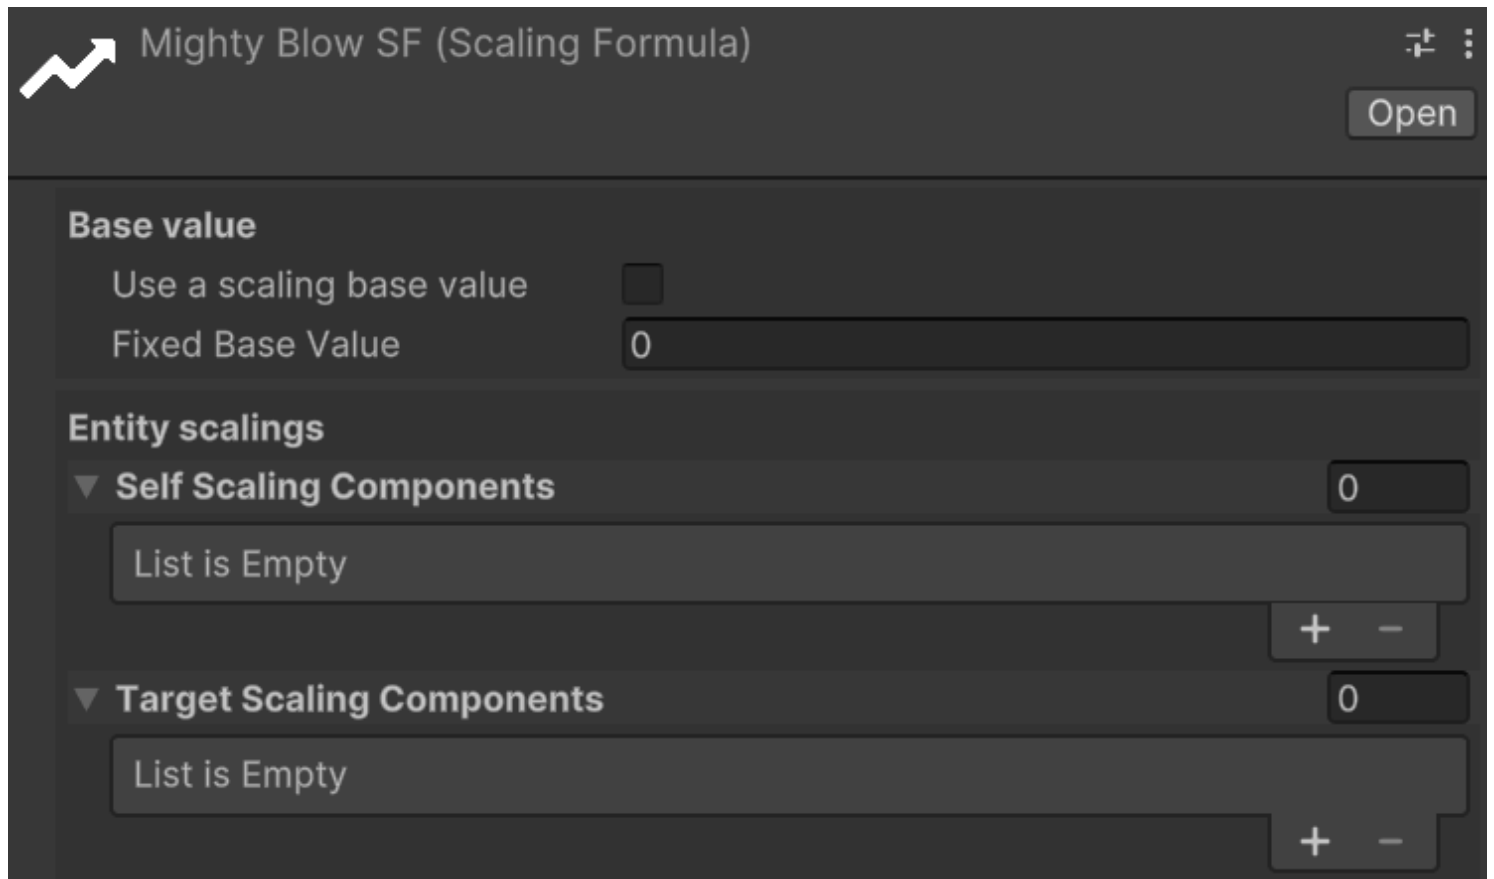

The image shows the Unity Inspector for a component named "Mighty Blow SF (Scaling Formula)". The component has a yellow lightning bolt icon in the top left and an "Open" button in the top right. The inspector is divided into several sections:

- Base value**: Contains a checkbox "Use a scaling base value" which is unchecked, and a "Fixed Base Value" input field with the value "0".
- Entity scalings**: Contains two expandable sections:
 - Self Scaling Components**: Shows a value of "0" and a list box containing "List is Empty".
 - Target Scaling Components**: Shows a value of "0" and a list box containing "List is Empty".

Each list box has a "+ -" button to the right for adding or removing items.

(💡 v2.0.0+) **Scaling Formula**, **Attribute Scaling Component**, and **Stat Scaling Component** support multi-object editing for shared values across the current selection.

Base Value determines the starting point for the scaling formula. It can either be a fixed constant value or a value that scales with levels (e.g., the level of the Mighty Blow skill). If the latter is chosen, a **Growth**

Formula must be provided to define how the base value changes as levels increase.

This scaling formula will be used to define the damage of a skill called **Mighty Blow**. The scaling formula will be defined as follows:

- Base damage: 10 at lvl 1, 25 at level 2, 60 at lvl 3
- Damage scaling: $1.5 * \text{Physical Attack} + 0.5 * \text{Constitution}$

Since we want a base value that varies as level grows, let's check the **Use a scaling base value** checkbox and create a **Growth Formula** named **Mighty Blow Base Dmg GF**. The **Mighty Blow Base Damage GF** should look like this:



Mighty Blow Base Dmg GF (Growth Formula)



Open

* Max Level (Skill Max Lvl (Int Var))

Use Constant At Lvl 1 ☒

Constant At Lvl 1 10

▲ ▼ Lvl 2 → 2

From Level 2

Expression 25


▲ ▼ Lvl 3 → 3

From Level 3

Expression 60

Add growth expression

Growth Values for each level - graph

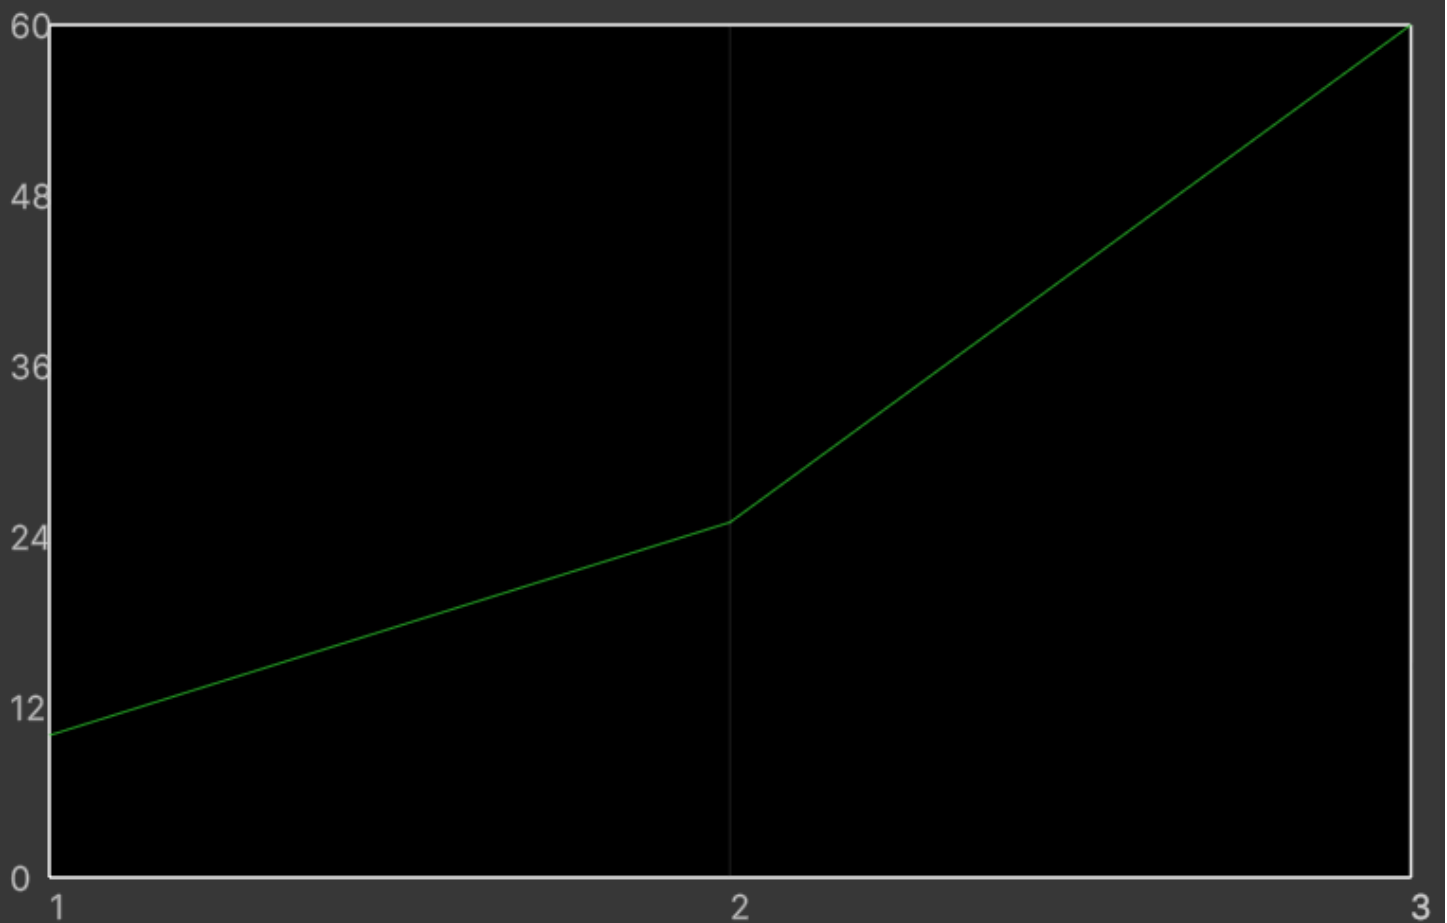

Hold the mouse for a moment on top of the graph to see the value at a certain level

Hold the mouse for a moment on top of the graph to see the value at a certain level

Growth Values per Level

Level	Value	Level	Value	Level	Value
Lvl 1 – 1 Constant		Lvl 2 – 2 25		Lvl 3 – 3 60	
1	10	2	25	3	60

Notice that a new Skill Max Lvl has been created and assigned to **Max Level**. This is necessary as the skill max level is not related to the max level of our hero.

We can now assign this growth formula to the **Base Value** field of the **Mighty Blow SF** scaling formula.

Under **Entity Scalings** we have **Self Scaling Components** and **Target Scaling Components**. The former are used to define the scaling of the entity itself, while the latter are used to define the scaling of the target of the ability. In our case, we will only use **Self Scaling Components**, so we can leave **Target Scaling Components** empty.

We can now proceed to create the scaling components for the **Physical Attack** stat and the **Constitution** attribute.

Let's create a new **Stat Scaling Component** called **Mighty Blow Physical Attack Scaling**. Assign the **Hero Stat Set** to it and set the scaling of the **Physical Attack** stat to **1.5**. The scaling component should look like this:


Mighty Blow Physical Attack Scaling (Stats Scaling Component)
Open

Script StatsScalingComponent

* Stat Set Hero Stat Set (Stat Set)


Scaling Stat Values

Physical Attack	1.5
Magical Power	0
Defense	0
Critical Chance	0


 Use double values. For example: 0.8 means 80%, 1.6 means 160%.

Next, we will create a similar **Attribute Scaling Component** for the **Constitution** attribute called **Mighty Blow Constitution Scaling**. Assign the **Hero Attribute Set** to it and set the scaling of the **Constitution**

to 0.5. The scaling component should look like this:

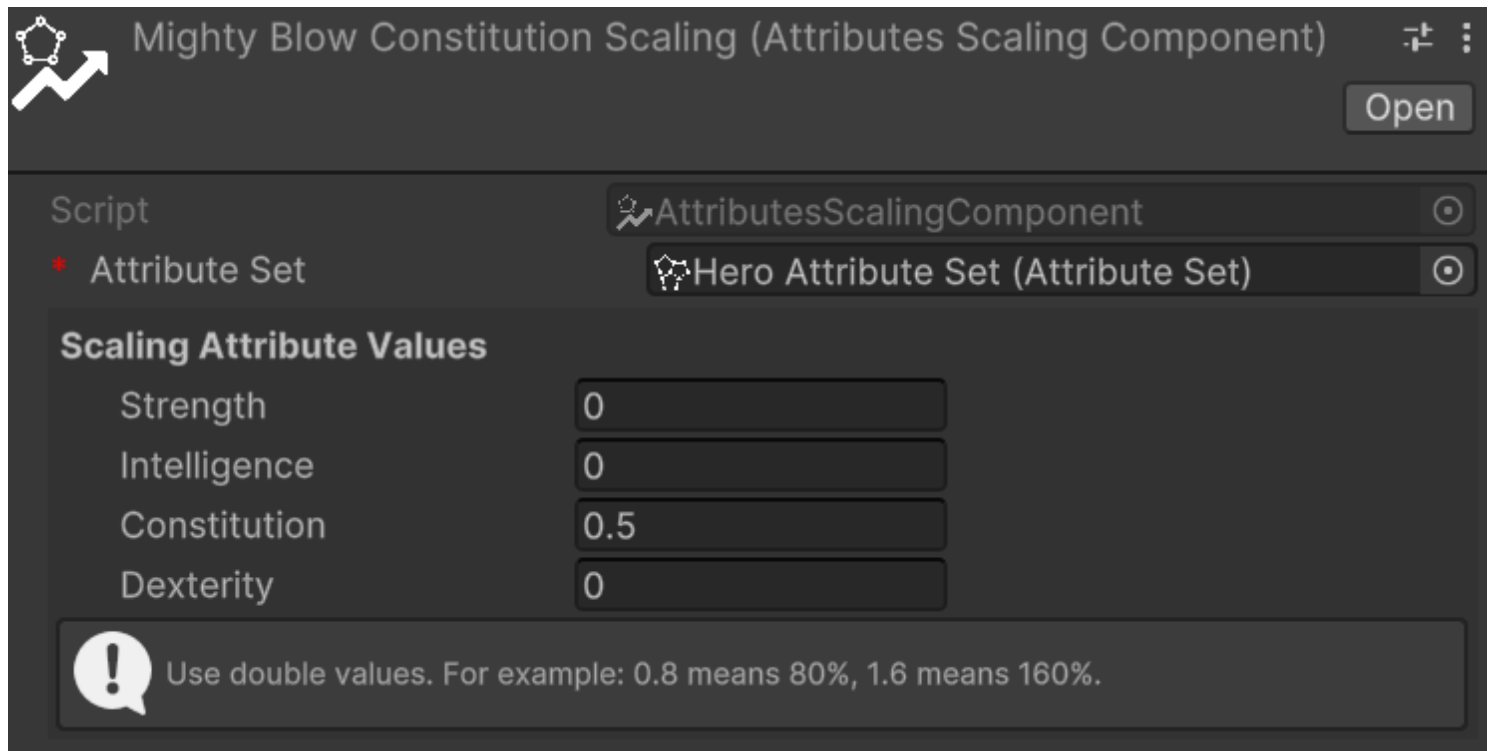

Mighty Blow Constitution Scaling (Attributes Scaling Component) Open

Script: AttributesScalingComponent


Attribute Set: Hero Attribute Set (Attribute Set)

Scaling Attribute Values

Strength	0
Intelligence	0
Constitution	0.5
Dexterity	0

Use double values. For example: 0.8 means 80%, 1.6 means 160%.

Finally, let's press on the + of **Self Scaling Components** and assign the two scaling components we just created. The **Mighty Blow SF** should look like this:

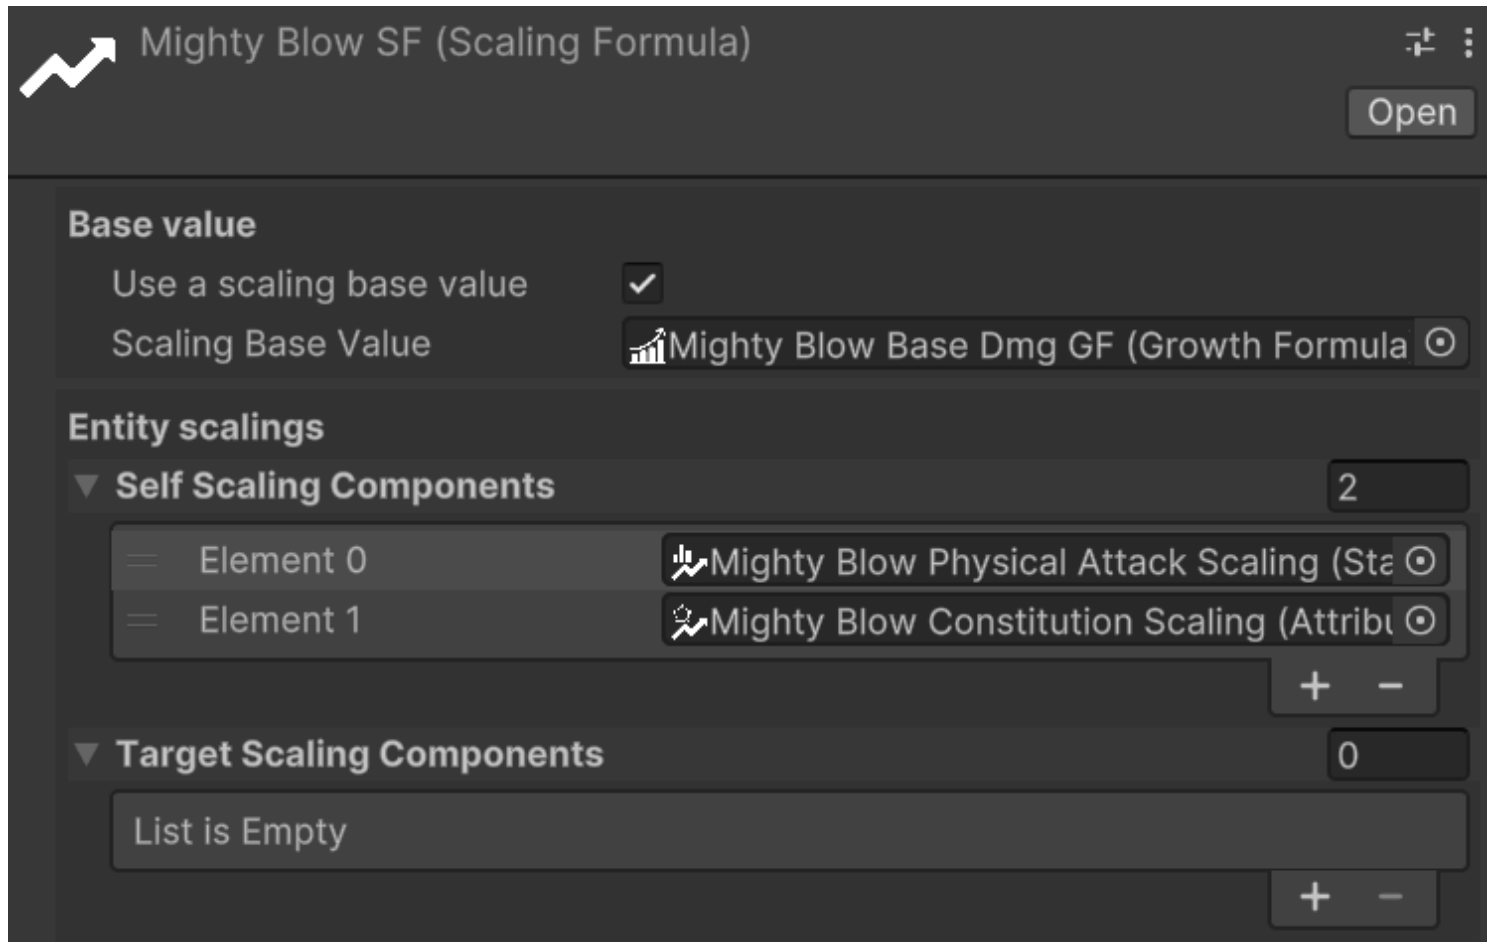

Mighty Blow SF (Scaling Formula) Open

Base value

Use a scaling base value ☒

Scaling Base Value: Mighty Blow Base Dmg GF (Growth Formula)

Entity scalings

▼ **Self Scaling Components** 2

Element 0	Mighty Blow Physical Attack Scaling (Sta)
Element 1	Mighty Blow Constitution Scaling (Attrib)

+ -

▼ **Target Scaling Components** 0

List is Empty

+ -

Using scaling formulas in code

Because `ScalingFormula` is a shared `ScriptableObject` asset, multiple entities can reference the same instance. To support per-entity runtime modifications without affecting other entities, use `ScalingFormulaInstance` — a lightweight wrapper you create once per entity at initialisation:

```
var instance = new ScalingFormulaInstance(mightyBlowSF);
```

`ScalingFormulaInstance` exposes two lists: `TmpSelfScalingComponents` and `TmpTargetScalingComponents`. These let you add scaling components at runtime without touching the original asset. For example, the character could get a temporary buff that makes the `Mighty Blow` skill scale also with the `Intelligence` attribute. In this case, we can add an `AttributeScalingComponent` for `Intelligence` to the instance's `TmpSelfScalingComponents`:

```
instance.TmpSelfScalingComponents.Add(intelligenceScalingComponent);
```

If the buff wears off, remove the component:

```
instance.TmpSelfScalingComponents.Remove(intelligenceScalingComponent);
```

There is also `ResetTmpScalings()` to clear all temporary components at once, useful for example when the player completes a room and all temporary buffs should be cleared:

```
instance.ResetTmpScalings();
```

Both `ScalingFormula` and `ScalingFormulaInstance` implement the `IScalingFormula` interface, so you can use either interchangeably wherever only value calculation is needed.

The four `CalculateValue` methods are available on both:

- `long CalculateValue(EntityCore self)`: Calculates the value of the scaling formula by summing the value returned by each self scaling component (calculated on the entity itself values), there must not be any target scaling components.
- `long CalculateValue(EntityCore self, int level)`: If the scaling formula has a base value that varies with levels, this method calculates the value of the scaling formula for the entity itself, and adds the base value at a specific level. Again, there must not be any target scaling components.
- `long CalculateValue(EntityCore self, EntityCore target)`: Calculates the value of the scaling formula by summing the value returned by each self scaling component (calculated on the entity itself values) and each target scaling component (calculated on the target entity values).

- `long CalculateValue(EntityCore self, EntityCore target, int level)`: Calculates the value of the scaling formula by summing the value returned by each self scaling component (calculated on the entity itself values) and each target scaling component (calculated on the target entity values), and adds the base value at a specific level.

Game Events

Relative path: Events -> Game Event *Relative path for custom game events: Events -> Generated -> *CustomEventName**


At the beginning of this page we briefly mentioned the concept of game events as scriptable objects, and we have introduced the generic `GameEvent`. Such event is great for notifying actions that happen in the game, but it has limited flexibility as it is not carrying along any context information. For example, if we want to notify that a character has leveled up, we might want to pass along the entity that leveled up and the new level reached. In other cases it could be useful to pass along with the event a reference to the entity that triggered the event, so we would like to be able to pass a reference of type `EntityCore` as context parameter. And so on.

The framework comes along with some pre-defined game events:

- `IntGameEvent`: an event that carries along an `int` as context parameter
- `EntityCoreGameEvent`: an event that carries along an `EntityCore` as context parameter
- `EntityLeveledUpGameEvent`: an event that carries along an `EntityCore` and an `int` as context parameters, where the `EntityCore` is the entity that leveled up and the `int` is the new level reached
- `StatChangedGameEvent`: an event that carries along a `StatChangeInfo` context parameter, which contains:
 - A reference to the `EntityStats` component of the entity that has changed
 - The `Stat` that has changed
 - The previous value of the stat
 - The new value of the stat
- `AttributeChangedGameEvent`: an event that carries along an `AttributeChangeInfo` context parameter, which contains:
 - A reference to the `EntityAttributes` component of the entity that has changed
 - The `Attribute` that has changed
 - The previous value of the attribute
 - The new value of the attribute

Along with the game events, the framework provides the `*GameEventListener` counterparts, which are components that can be attached to a game object to listen for the events and execute a method when the event is raised. For example, `IntGameEventListener` listens for a specific `IntGameEvent` and executes a method that takes an `int` as parameter when the event is raised.

Let's suppose we need a game event for notifying, each time the player dies, how many times the player has died so far. In the inspector, create a new `IntGameEvent` called `PlayerDied`. It should look like this:

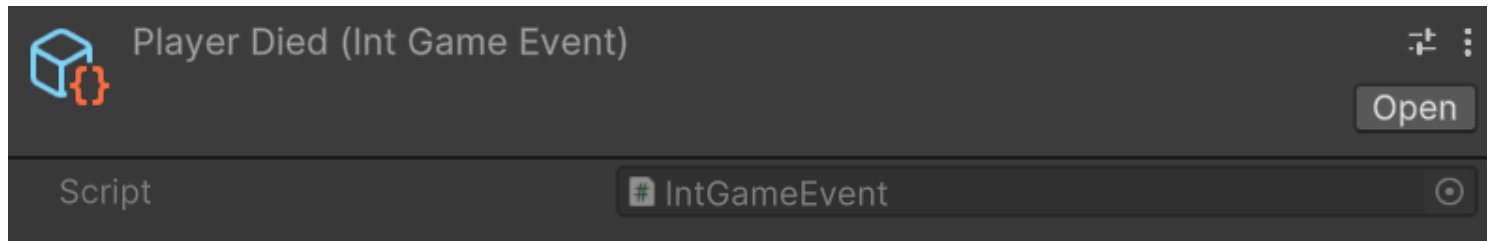

There are no fields to fill in the inspector. The integer to be passed as context parameter will be passed in the code that is responsible for raising the event.


The method to raise the event is `Raise(int value)`, which will raise the event and pass along the integer as context parameter. Therefore in a dedicated script you can call it like this:

```
public void OnPlayerDeath() {
    playerDeathCount++;
    // Assuming playerDiedEvent is a reference to the PlayerDied event
    playerDiedEvent.Raise(playerDeathCount);
}
```

Now let's create a listener for this event. Let's say that we want to show a message in the console when the event is raised. To do this, create a new game object in the hierarchy and add a script that defines a public method for logging an event, that takes an `int` as input parameter. It should be like:

```
public void LogPlayerDeath(int deathCount) {
    Debug.Log($"Player has died {deathCount} times.");
}
```

Now add the `IntGameEventListener` component to the listener game object and, in the inspector, assign the `PlayerDied` event to the `Event` field. Now drag the `Logger` script created before into the `Response`'s object selector. You should be able now to select the `LogPlayerDeath` method from the dropdown menu. The result should look like this:

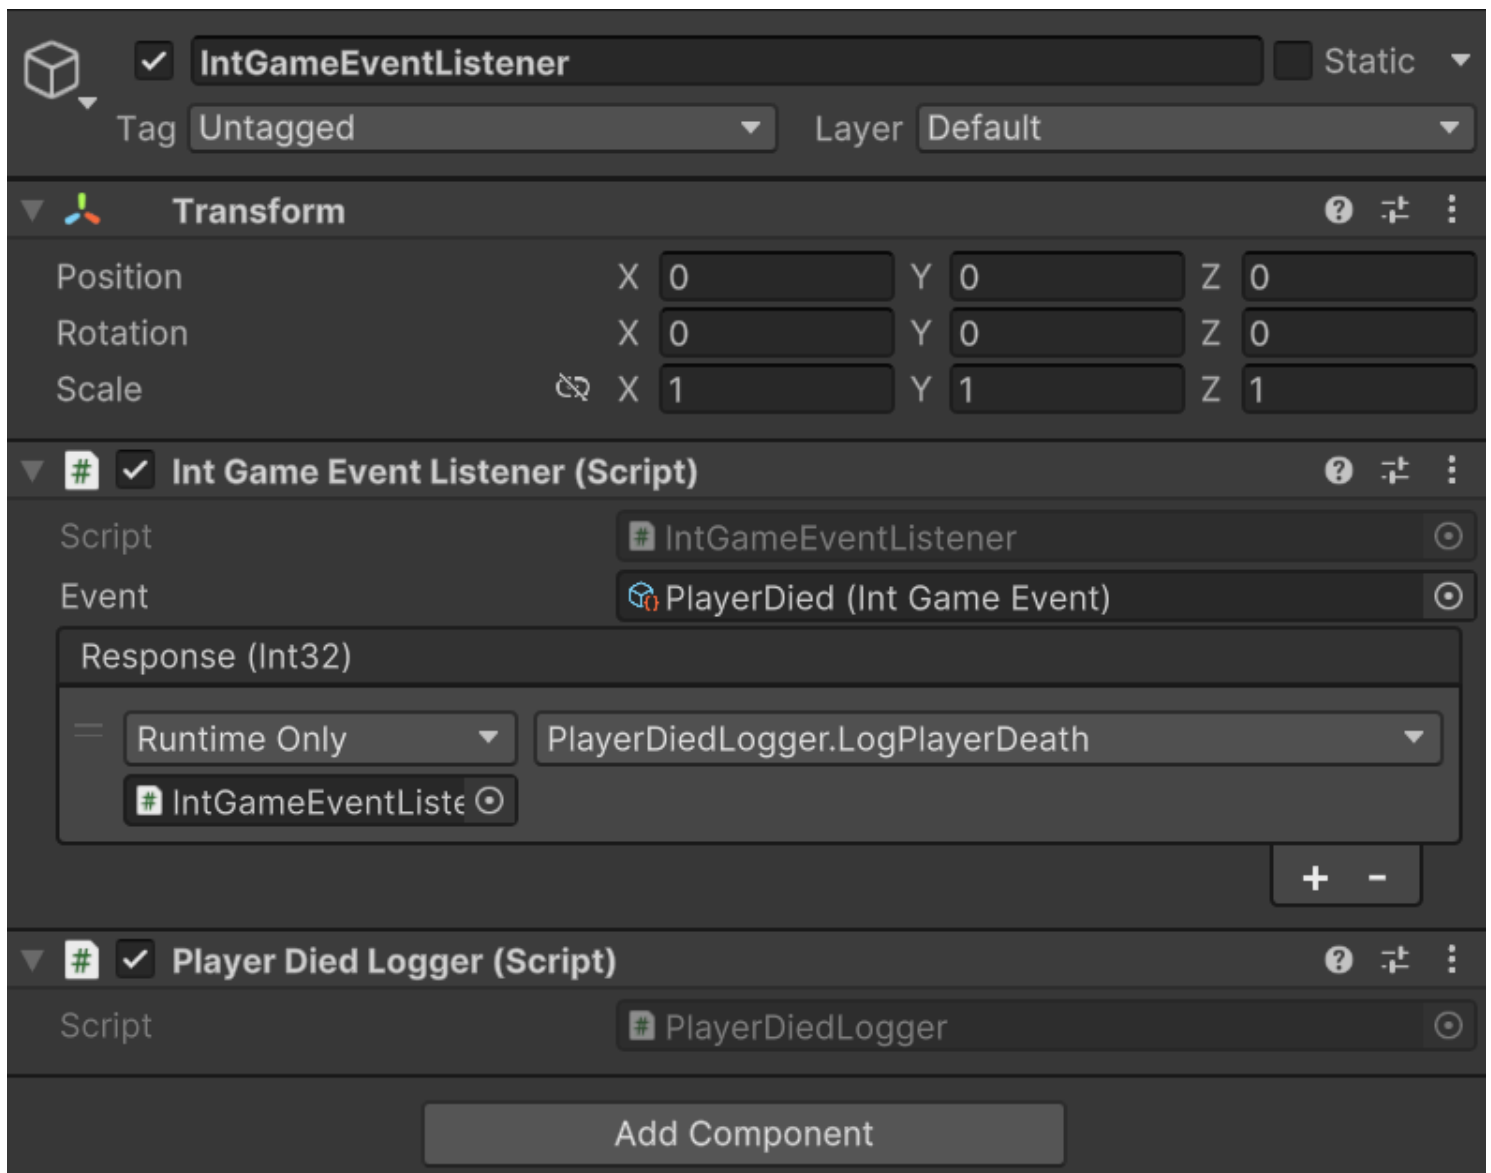

This is a powerful mechanism that decouples the event producers from the event consumers, allowing for a more modular and maintainable codebase. And most of the setup is inspector-based. You just need to define the raising and the listening methods from code.

Global framework events and reactive filtering

The framework dispatches its built-in core events through the active Astra Framework configuration. `EntityCore`, `EntityLevel`, `EntityStats`, and `EntityAttributes` send their shared `Spawned`, `Level Up`, `Level Down`, `Stat Changed`, and `Attribute Changed` notifications through the configuration asset selected in `Edit -> Project Settings -> Astra Framework`. The Project Settings entry selects the active configuration asset; the shared event references and the optional **Experience Gain Modifier Stat** binding are assigned inside that configuration asset. If no Project Settings config is assigned, the runtime falls back to a `Resources/Astra Framework Config` asset.

This shared-event model is convenient, but it also means listeners and reactive triggers usually subscribe to common event sources rather than to holder-specific event instances. In other words, the holder

attached to a reactive subscription is used for ownership and cleanup, not as an automatic payload filter. When a global stat or attribute event is raised, every subscriber on that event source can receive the payload.

In practice, pair shared event sources with payload-aware filtering. The most inspector-friendly option is usually a `ConditionalGameAction<TContext>` that checks the entity, tags, or value-change details you care about before running its inner action. See [Conditions](#) for the full condition model and [Game Tags](#) for the tag-based workflow.

Game Event Generators

Relative path: Events -> Game Event Generator

⚠ WARNING

Game event generators are an experimental feature and may change in future releases. To avoid potential issues, it is recommended to back up or version control your project before renaming or moving the generated events to different folders.

Sometimes the pre-defined game events are not enough to cover all the use cases. In this case, you can create a custom game event generator. A game event generator is a scriptable object that lets you define a custom game events with up to four context parameters. You can choose the type of each parameter. Parameters can either be primitive types (like `int`, `float`, `string`, etc.) or more complex types (like `EntityCore`, `Stat`, `StatChangeInfo`, ..., or your own data types).

Game Event Generator setup

Let's create a custom game event generator to manage all the events related to the experience and leveling up of entities. Rename the newly created events generator `EntityLevelingEvents`. In the inspector, it should look like this:



With **Menu Base Path** we can change the path of the context menu where the generated events will be available for creation. By default, it is set to **Astra Framework/Events/Generated**, but we can change it to **Astra Framework/Events/Generated/Experience** for the sake of organization.

With **Base Save Location** we can change the path where the source code files for the generated events will be saved. By default it is set to **Assets**, but for this example let's set it to **Assets/Events**.

Adding new events

Now let's create an event that will be raised when an entity grants experience to another entity. To do this, click on the **Add new event** button and fill in the fields as follows:

- **Event Name:** **EntityGrantedExp**
- **Documentation:** an entity granted experience to another entity
- **Parameters:** press the **+** button and add the following three parameters:
 - **Parameter Type** to **Mono Script**, **Mono Script** type to **EntityCore** (drag it from the **AstraFramework** folder located in the **Packages** folder)
 - **Parameter Type** to **Mono Script**, **Mono Script** type to **EntityCore** (drag it from the **AstraFramework** folder located in the **Packages** folder)
 - **Parameter Type** to **Native**, **Native** type to **long**

The first parameter represents the entity that granted the experience, the second parameter represents the entity that received the experience, and the third parameter represents the amount of experience granted.

Now let's press the **Generate Game Events** button to create the new event. We can now navigate to **Assets/Events/GeneratedEvents/EntityLevelingEvents** to find the following two folders:

- **GameEventListeners**: contains the source code for all the game event listeners generated by our **EntityLevelingEvents** game event generator.
- **GameEvents**: contains the source code for all the game events generated by our **EntityLevelingEvents** game event generator.

Inside both folders, you'll find a subfolder named **3**. The Game Event Generators organize the generated events in subfolders based on the number of parameters they have. In this case, we have a game event with three parameters, so it is placed in the **3** subfolder.

However, more interesting is the fact that if we now use the context menu and navigate to **Astra Framework/Events/Generated/Experience**, we can find the **EntityGrantedExp** event. From here, you can follow the same steps as for the pre-defined game events to create a listener for this event, and to wire it up to the appropriate game logic.

If you need to create more experience related events, you can repeat the process of adding new events to the **EntityLevelingEvents** game event generator.

After having generated the source code for the game events, you can also click on the **Remove Event** button under each Game Event to remove it from the generator and delete the generated source code files. It might be necessary to refresh (right click on an asset folder and select **Refresh**) the asset folder containing the generated events to see the changes reflected in the Unity editor.

WARNING

Pay attention that renaming or moving the generated events to different folders will cause the game event generator to lose track of them. If you change the **Base Save Location** and then re-generate the events, the game event generator will first delete the old files and then create new source code files in the new location. This means that any references to the old files will be lost, so you will need to reassign them in the inspector or in the code. This can be highly disruptive if you have many references to the old files, so it is recommended to back up or version control your project before renaming or moving the generated events to different folders.

To safely move files you should move them from the Unity editor and then update the **Base Save Location** field in the game event generator to match the new location of the generated events. This way, the game event generator will be able to find the generated events in the new location and will not attempt to delete/recreate them.

Same applies if you rename the generated game event type scripts. To rename them, rename their C# scripts first, and then, and then update the **Event Name** field in the game event generator to match the new name.

Game Actions

 Version 1.4.0+

Relative path: `Game Actions`

A `GameAction` is a `ScriptableObject` that encapsulates reusable logic which can be executed by different components or systems in the game. Game actions make it easy to assign behavior to `GameObjects` through the Inspector, promoting code reuse and separation of concerns.

`GameActions` accept a generic context parameter via `GameAction<TContext>`. The recommended context type for built-in actions is `IHasEntity`: because most `GameEventListener` payloads in the framework implement this interface, `IHasEntity`-based actions connect directly to any `GameEventListener` response without needing to extract a `Component` reference first. `Component`-based variants remain available for cases where a raw `Component` context is passed, but the `IHasEntity` variants should be the first choice when wiring actions to events.

At authoring time, polymorphic action references are usually exposed through the non-generic `GameActionBase`, which exists so Inspector fields can accept actions with different concrete context types. At runtime, the action still executes through its concrete `GameAction<TContext>` implementation, so context compatibility continues to matter.

Built-in action variants

The `IHasEntity`-based variants are listed under `Astra Framework/Game Actions/Context: Entity/` in the asset creation menu.

The framework includes several built-in `GameAction` implementations for `IHasEntity` contexts:

- **Toggle Entity Active GO** (`Context: Entity/Toggle Entity Active GO`): Sets the active state of the entity's `GameObject` to a configured value
- **Toggle Entity Renderers** (`Context: Entity/Toggle Entity Renderers`): Enables or disables all renderers on the entity's `GameObject` and its children
- **Toggle Entity Colliders** (`Context: Entity/Toggle Entity Colliders`): Enables or disables all colliders on the entity's `GameObject` and its children
- **Destroy Entity Game Object** (`Context: Entity/Destroy Entity Game Object`): Destroys the `GameObject` of the entity exposed by the context
- **Composite** (`Context: Entity/Composite`): Executes a sequence of `GameAction<IHasEntity>` actions in order, passing the same context to each
- **Delayed** (`Context: Entity/Delayed`): Executes a `GameAction<IHasEntity>` after a specified delay (in seconds)
- **Conditional** (`Context: Entity/Conditional`): Executes a `GameAction<IHasEntity>` only when a configured condition evaluates to true against the entity

- **Do Nothing** (`Context: Entity/Do Nothing`): Does nothing. Useful as a placeholder, for testing workflows, or to satisfy required fields that must reference a `GameAction` (for example, default on-death and on-resurrection actions in Astra Health)
- **Increase Counter** (`Context: Entity/Increase Counter`): Increases the value of a `LongRef` by a specified amount. Negative values decrease the counter. Useful for tracking statistics like enemies defeated, entities spawned, or interactions performed
- **→ Component Projection** (`Context: Entity/Projections/→ Component Projection`): Bridges an `IHasEntity` context to an inner `GameAction<Component>`, by passing `context.Entity` as the component. Use this to reuse existing `Component`-based actions on entity event listeners. Note that rich payload data (damage amounts, level deltas, etc.) is discarded. Use this only for structural actions that only need to know which entity was involved

Equivalent `Component`-based variants exist for all of the above (under `Context: Component/`). Use them when a raw `Component` is the only context available and no `IHasEntity` payload is in scope.

`GameAction` assets are also taggable, so larger projects can organize action libraries with the same pill-based workflow used by other Astra assets. This becomes especially useful once you start pairing actions with tag-based filtering rules. For the complete authoring flow, see [Game Tags](#) and [Conditions](#).

`GameActions` may target infrastructure and flow control or actual gameplay mechanics. Most of the built-in examples above are infrastructure-oriented. Examples of gameplay-oriented `GameActions` include:

- **Grant Experience Game Action**: Grants a specified amount of experience to an entity implementing `IEntityLevel`
- **Drop Loot Game Action**: Spawns collectible loot
- **Teleport To Base Game Action**: Teleports a character back to a base location

Executing `GameActions` from code

To invoke a `GameAction`, call `ExecuteAsync` and pass the required context parameter. For example, if `delayedAction` is a `DelayedEntityContextGameAction` and `entityContext` is an `IHasEntity` payload:

```
// entityContext is an IHasEntity payload (for example from a GameEventListener response)
Awaitable delayedActionAwaitable = delayedAction.ExecuteAsync(entityContext,
destroyCancellationToken);
DoWorkHere();
await delayedActionAwaitable;
Debug.Log("Delayed action completed.");
```

The `destroyCancellationToken` parameter is optional. Use it when the action should be cancelled if the `GameObject` owning the invoker component is destroyed before execution completes. If you do not provide it, the action runs to completion regardless of the invoker's lifecycle.

If a `GameAction` should complete independently of the invoker component's lifecycle, use [RunFireAndForget](#). This method uses the `GameActionRunner MonoBehaviour` (adding it to the specified `GameObject` if missing) to execute the action. For example:

```
// Assume 'context' is the required context parameter for onDeathGameAction
// 'persistentGameObject' owns the GameActionRunner and executes the action
onDeathGameAction.RunFireAndForget(context, persistentGameObject);
```

With this approach, even if the invoker component is destroyed (for example because the entity died), the action still runs to completion on the `persistentGameObject`. This is useful for actions such as particle effects or sounds that should persist after the original entity is gone.

Owner-aware execution from `GameEventListener`s

 Version 2.0.0+

When a `GameAction` is invoked from a `GameEventListener`, prefer the listener's owner-aware action list over binding `ExecuteAsync` directly through the `UnityEvent` when the logic depends on `Holder`-aware conditions or owner propagation. The owner-aware path dispatches the selected `GameActionBase` assets with the listener as runtime owner, and wrapper actions such as composite, delayed, conditional, and projection actions preserve that owner while forwarding execution.

For the condition-side resolution model, see [Conditions](#). For the deeper runtime details behind this execution path, see [Owner-aware GameAction execution](#).

API references and custom actions

For more details, refer to the API documentation for game actions:

- [GameAction base constructs](#)
- [Concrete implementations of GameAction with open generic types](#)
- [Concrete implementations of GameAction with IHasEntity context \(primary instantiable ScriptableObjects\)](#)
- [Concrete implementations of GameAction with Component context \(legacy and specialized use\)](#)

If you want to create custom `GameActions`, review the implementation of the built-in actions to understand the intended patterns.

NOTE

The built-in library currently focuses on a compact set of generic actions. Project-specific gameplay behaviors are expected to be implemented as custom `GameActions` when needed.

GameActions under the hood

GameActions are designed to support asynchronous workflows such as waiting for a delay or coordinating animation-driven logic. Synchronous actions are still valid, but the base execution model is asynchronous.

GameActions are implemented on top of Unity's [Awaitable](#)[↗]. Executing a **GameAction** returns an **Awaitable** that can be awaited to determine when the action completes, without blocking the main game thread.

Awaitables are a modern alternative to coroutines. They use an internal pooling system to reduce allocation overhead, which is useful in workflows with many asynchronous actions.

⚠ WARNING

Do not await the same **Awaitable** instance more than once. Because Awaitables are pooled, awaiting the same instance multiple times can cause undefined behavior, exceptions, or deadlocks. Always treat the value returned by **ExecuteAsync** as single-use.

For more information on Awaitables, see Unity's documentation: [Awaitable Documentation](#)[↗].

GameActions with UnityEvents and GameEventListeners

UnityEvents can invoke methods that start **GameActions**, so a **GameAction** can be triggered from a UnityEvent response. Because **GameEventListeners** use UnityEvents for their responses, you can wire a **GameAction** to a **GameEventListener** provided the action's context type matches the event payload.

GameEventListeners also expose an owner-aware action list that accepts **GameActionBase** references. This is usually the better Inspector workflow for event-driven actions because it preserves the listener component as runtime owner, which allows nested actions and **Holder**-based conditions to resolve consistently.

i NOTE

UnityEvents do not await asynchronous return values. Invoking a `GameAction` from a `UnityEvent` therefore behaves as fire-and-forget from the event's point of view.

If you need follow-up logic after the action finishes, prefer one of these patterns:

- Use a composite `GameAction` that first executes the desired action and then runs the follow-up action as the next step
- Use a custom `MonoBehaviour` that executes the `GameAction`, awaits its completion, and performs the continuation in code

Game Tags

 Version 2.0.0+

`GameTagSO` assets let you classify entities, assets, and reusable framework objects with lightweight `ScriptableObject` identifiers. Each tag can also carry visual metadata, so tagged objects are immediately recognizable in the Inspector through colored pill-style labels.

What a `GameTagSO` contains

A `GameTagSO` asset stores:

- A primary color
- An optional icon (typically an emoji or short symbol)
- An optional two-color gradient
- A gradient direction

Assigned tags are stored through `GameTagSet`, which is the serializable container used by taggable objects. Built-in framework types that expose tags directly through `ITaggable` include:

- `EntityCore`
- `StatSO` and `StatSetSO`
- `AttributeSO` and `AttributeSetSO`
- `ClassSO`
- `GrowthFormulaSO`
- `ScalingComponentSO` and `ScalingFormulaSO`
- `IntVarSO` and `LongVarSO`
- `GameAction<TContext>` assets

This makes tags useful both for gameplay meaning and for editor organization.

Querying tags from code

At runtime, the most direct way to work with tags is through objects that implement `ITaggable`. The `Tags` property exposes a `GameTagSet`, which provides the three core queries:

- `Contains`
- `ContainsAny`
- `ContainsAll`

For a single tag:

```
if (entityCore.Tags.Contains(bossTag))  
{
```

```
    Debug.Log("This entity is tagged as a boss.");  
}
```

To check whether an object contains at least one tag from another set:

```
if (entityCore.Tags.ContainsAny(hostileOrUndeadTags))  
{  
    Debug.Log("This entity matches at least one tag in the query set.");  
}
```

To check whether an object contains every tag from another set:

```
if (entityCore.Tags.ContainsAll(requiredLootTags))  
{  
    Debug.Log("This object satisfies the full tag requirement.");  
}
```

These helpers make `GameTagSet` useful both for gameplay checks and for higher-level filtering logic.


Creating a `GameTag`

Relative path: `Game Tag`

The custom inspector exposes a **Visual** section where you can configure the tag's appearance:

- **Color** for the main pill color
- **Icon** for an optional emoji or short symbol
- **Emojis...** to open the emoji picker
- **Use Gradient** to switch from a flat fill to a two-color gradient
- **End Color** and **Direction** when gradient mode is enabled

The inspector also shows a live preview of the resulting pill.

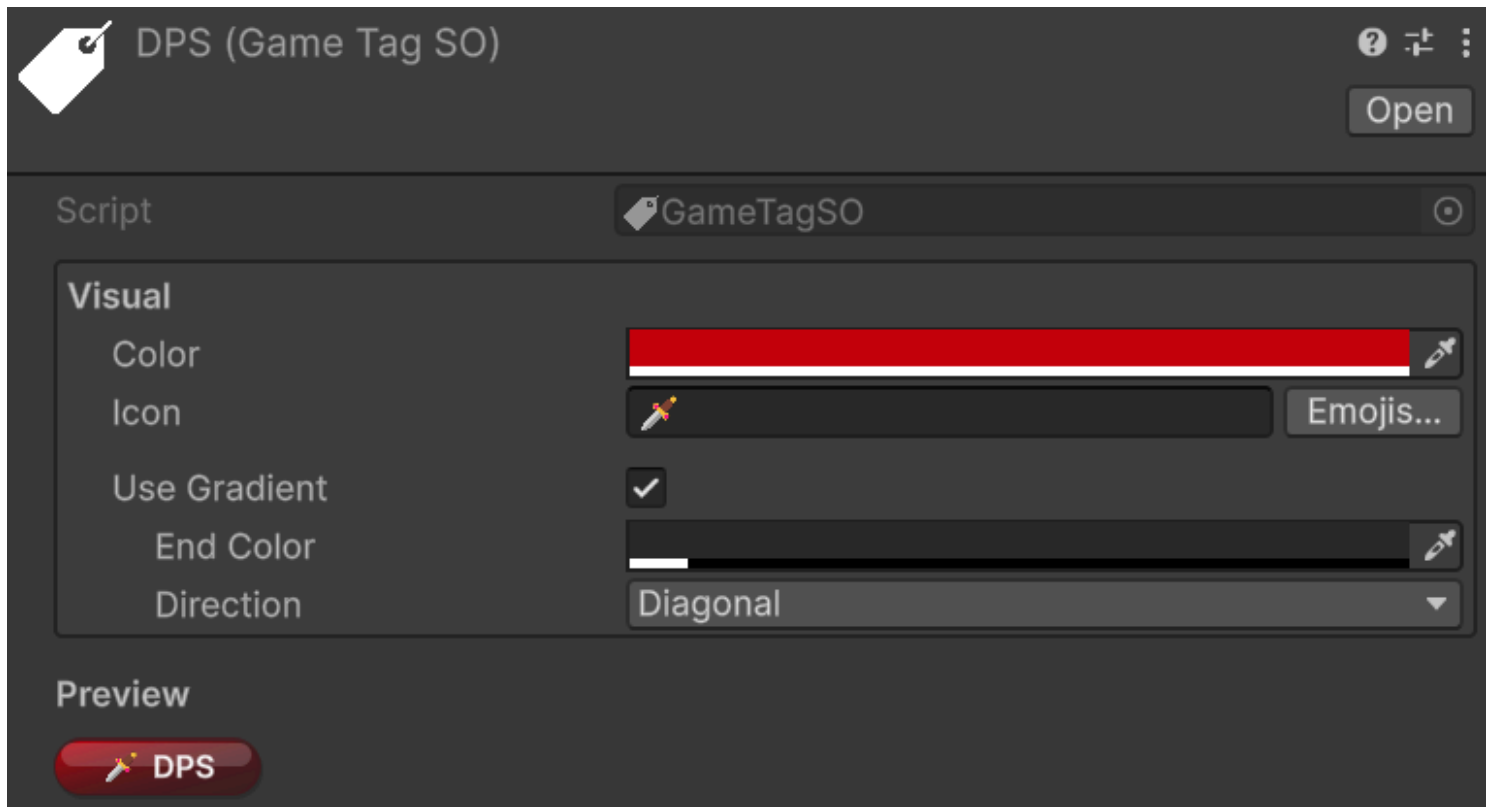

Where tags appear

When the inspected target implements `ITaggable`, the framework automatically injects a tag bar directly below the default inspector header. No per-type setup is required for supported objects.

This injected header bar is the intended authoring workflow for tag editing. In tag-aware custom inspectors, the underlying serialized data may be hidden on purpose so interaction stays guided through the pill-based header UI instead of a lower-level field editor.

NOTE

If an object does not implement `ITaggable` but still contains one or more `GameTagSet` fields, the header pills are shown in display-only mode. In that case, the header still helps you scan tags quickly, but the interactive editing workflow remains on the serialized field itself.


Editing tags from the inspector header

Single-object editing

When a single taggable object is selected, the header pills are fully interactive:


- Click a visible pill to ping the `GameTag` asset in the Project window
- Hover a pill to reveal the - remove affordance
- Click the + pill to open the tag selection popup

- Drag pills to reorder them

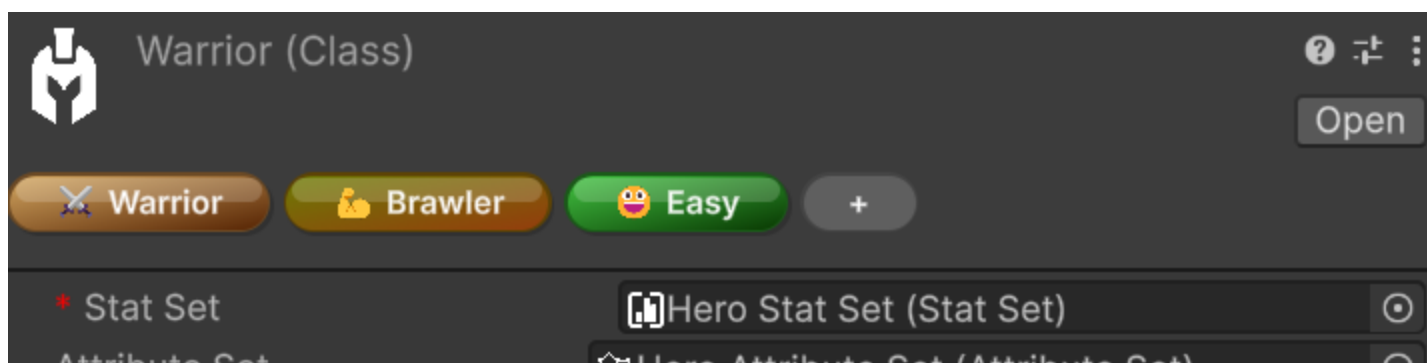

The add popup supports several quality-of-life features:

- Search by tag name
- **All** and **None** quick selection controls
- Multi-selection followed by **Add**
- Double-click on a tag to add it immediately

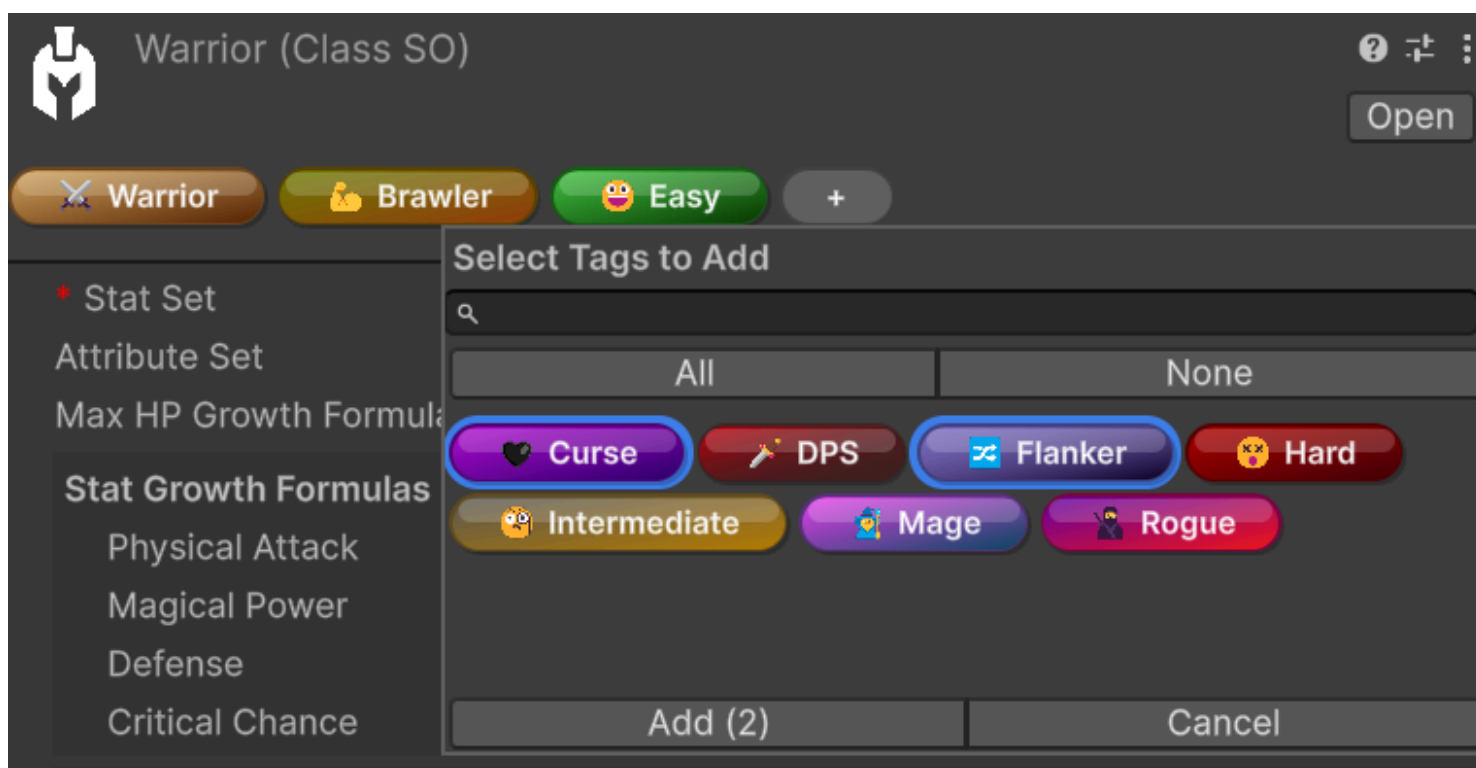

TIP


Double-click is the fastest way to add a single tag. If you want to add several tags in one pass, select them in the popup first and then confirm with **Add**.

Multi-object editing

When multiple compatible `ITaggable` objects are selected, the header still supports batch editing, but the displayed pills follow shared-state rules:

- Visible pills represent the intersection of tags present on **all** selected objects
- A grey **+N** overflow pill indicates tags that exist on only some of the selected objects
- The **+** pill adds the chosen tags to all selected objects in one batch operation
- Tags already present on every selected object are excluded from the add popup
- Tags present on only some selected objects remain selectable, so you can complete the assignment across the whole selection
- Removing a visible shared tag opens a confirmation popup listing the affected objects before the batch removal is applied

In multi-object mode, reordering and click-to-ping are intentionally not the primary workflow, because a heterogeneous selection does not have a single stable tag order.

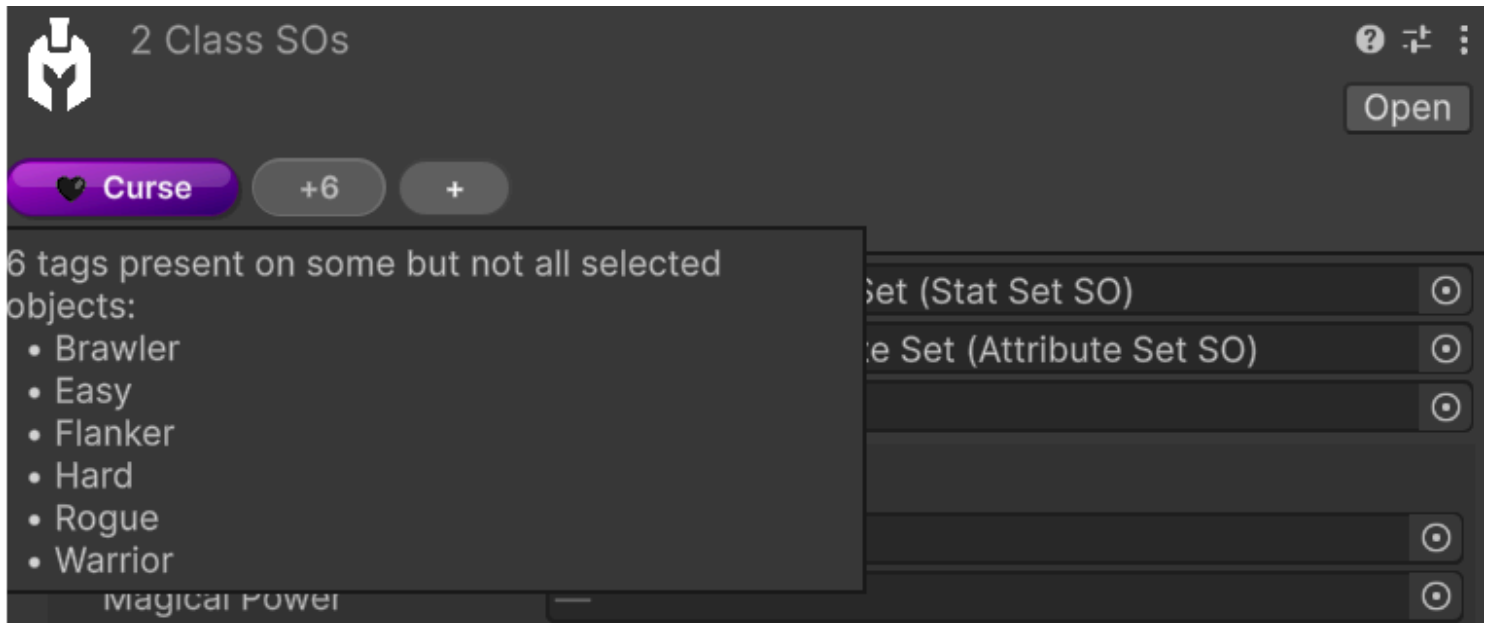

Pill appearance preferences

The visual pill rendering also has per-user editor preferences under:

[Edit](#) > [Preferences](#) > [Astra Framework](#) > [Game Tag Pills](#)

These preferences let each developer customize how tag pills are presented locally in the Unity Editor. Available options include:

- **Gloss Highlight** for a glossier pill style
- **Drop Shadow** for extra separation from the inspector background
- **Icon-Only Mode** for compact visualization when the tag has an icon
- **Expand on Hover** to reveal the full label while hovering compact pills
- **Animate Expand** to make the compact expansion smoother

- **Animation Speed** to control how fast the hover expansion animates

NOTE

These preferences only affect how pills are rendered in the local Unity Editor. They do not modify the **GameTag** asset data itself. **Icon-Only Mode** only affects tags that actually have an icon configured, and **Expand on Hover** / **Animate Expand** apply only when icon-only mode is enabled.

Practical uses

GameTags work well for:

- Grouping class-related assets (for example, Warrior-related formulas, abilities, and supporting assets)
- Marking gameplay categories such as factions, rarity, or behavior flags
- Organizing reusable assets like **GameActions**, formulas, and value assets
- Making important editor objects easier to scan visually
- Supporting tag-aware runtime logic in systems that evaluate tag presence

Using tags consistently also helps keep larger projects navigable over time. Future updates may introduce custom windows and other tooling that use **GameTags** to scan Astra assets more easily across a project — for example, to surface assets related to a Warrior class setup or to inspect collections of mob scaling formulas. Even before those tools arrive, using tags to create order in your project is already a strong long-term investment.

Conditions

 Version 2.0.0+

WARNING

The `Conditions` system is currently experimental and may change at any time.

Be careful when adopting it for production-critical features. Future package updates may require refactoring condition trees, revisiting authoring workflows, or adjusting integration code that depends on the current behavior.

The feature is expected to move toward a more stable shape once *Astra Modifiers* is released, where `Conditions` are used extensively. Until then, it is safer to treat the current API and authoring flow as provisional.

`Conditions` are reusable predicates evaluated against an `EvaluationContext`. They let you express editor-authored rules such as "run this action only when the holder is below a threshold", "only pass when the payload entity matches the holder", or "only continue when the target has a required tag set".

Unlike `GameTags` or `GameActions`, conditions are usually not standalone assets. They are authored inline in `[SerializeReference]` fields, where you choose a concrete condition type from a grouped picker and configure it directly in the Inspector.

The condition model

Every concrete condition derives from `Condition` and implements `Evaluate(EvaluationContext ctx)`.

The evaluation context carries the runtime references that built-in conditions inspect:

Context value	Typical meaning
<code>Holder</code>	The entity that owns the evaluated effect or action
<code>Performer</code>	The entity that applied or cast the effect, when available
<code>EventPayload</code>	The current trigger payload or event data

`EvaluationContext` also exposes `TryGetPayload<T>()` when a condition needs typed access to the current payload.

Many built-in conditions resolve one of these context slots before applying their actual check. For example, an entity condition may compare the holder against a payload entity, while a tag condition may

inspect the resolved entity for one or more required tags.

Context contracts and payload roles

Many of the less obvious conditions are really about **which contracts the current payload implements**. The system does not rely on a single event-context base class. Instead, conditions look for small focused interfaces that describe what the payload can provide.

Common context contracts

Contract	Meaning
<code>IHasEntity</code>	Exposes the payload's primary entity
<code>IHasTarget</code>	Exposes the target entity of the payload
<code>IHasPerformer</code>	Exposes the entity that performed or caused the action
<code>IHasVictim</code>	Exposes the victim entity when that role exists
<code>IHasValueChange<T></code>	Exposes <code>PreviousValue</code> , <code>NewValue</code> , and <code>AbsAmount</code> for numeric-change payloads

`IHasEntity` is the most important bridge contract in the framework. It represents the primary entity carried by a payload, and it is also the interface that lets many `GameAction<IHasEntity>` workflows accept both entity components and event payloads in a consistent way.

How `ConditionTarget` resolves entities

Entity-based and tag-based conditions select an entity slot through `ConditionTarget`:

Target slot	Resolved from
<code>Holder</code>	<code>EvaluationContext.Holder</code>
<code>Performer</code>	<code>EvaluationContext.Performer</code>
<code>PayloadEntity</code>	<code>IHasEntity</code> on the payload, or the <code>EntityCore</code> of a payload <code>Component</code>
<code>PayloadPerformer</code>	<code>IHasPerformer</code> on the payload
<code>PayloadTarget</code>	<code>IHasTarget</code> on the payload
<code>PayloadVictim</code>	<code>IHasVictim</code> on the payload

Target slot	Resolved from
HolderOwner (🔑 v2.2.0+)	Owner of the entity resolved from Holder
PerformerOwner (🔑 v2.2.0+)	Owner of the entity resolved from Performer
PayloadPerformerOwner (🔑 v2.2.0+)	Owner of the entity resolved from PayloadPerformer

This is why some conditions appear to "just work" with certain event payloads and not with others: the payload must actually expose the requested role.

⚠ WARNING

HolderOwner, PerformerOwner, and PayloadPerformerOwner build on [Entity Ownership](#), which is currently experimental and may change at any time. Be careful when adopting these slots for production-critical condition trees.

📌 NOTE

HolderOwner, PerformerOwner, and PayloadPerformerOwner resolve a single [Owner](#) hop, not the full ownership chain. For the spaceship example from [Entity Ownership](#), PerformerOwner resolves to the ship when the weapon is Performer and its Owner is set directly. If the weapon is owned by an intermediate entity instead of the ship itself, resolve Root in your own code (see [Resolving ownership in custom systems](#)) and expose it through a custom ConditionTarget or payload field.

Common payloads used by built-in conditions

Several built-in event payloads already expose the contracts that the condition system expects:

Payload type	Contracts	Typical use
StatChangeInfo	IHasEntity, IHasTarget, IHasValueChange<long>	Stat-based conditions and long value-change conditions
AttributeChangeInfo	IHasEntity, IHasTarget, IHasValueChange<long>	Attribute-based conditions and long value-change conditions
EntityLevelChangedContext	IHasEntity, IHasTarget, IHasValueChange<int>	Entity level conditions and int value-change conditions

For example, `StatChanged`, `AttributeChanged`, `EntityLevelUp`, and `EntityLevelDown` payloads already expose the entity and value-change contracts needed by the related condition families.

Built-in condition families

The type picker groups the built-in condition library into several families:

Composites

Use these to combine or transform other conditions:

- `AllConditions`: logical AND; every child must pass, and an empty list evaluates to true
- `AnyCondition`: logical OR; at least one child must pass, and an empty list evaluates to false
- `NoneCondition`: logical NOR; no child may pass, and an empty list evaluates to true
- `NotCondition`: inverts a single inner condition; if the inner value is null, it evaluates to true
- `AtLeastNCondition`: passes when at least `N` child conditions pass
- `AtMostNCondition`: passes when at most `N` child conditions pass
- `ExactlyNCondition`: passes when exactly `N` child conditions pass

These are the main building blocks for condition trees that need more than one rule. `AtLeastNCondition`, `AtMostNCondition`, and `ExactlyNCondition` are especially useful when you want a count-based rule instead of a strict AND/OR shape.

Leaf/Constant

Simple fixed predicates:

- `AlwaysTrueCondition`: always passes
- `AlwaysFalseCondition`: never passes

These are useful as placeholders or for testing larger composite trees.

Leaf/Attr. & Stat

Conditions in this family evaluate attributes, stats, or stat/attribute-related payloads:

- `AttributeThresholdCondition`: resolves an entity slot, reads one attribute from that entity, and compares it against a threshold
- `StatThresholdCondition`: resolves an entity slot, reads one stat from that entity, and compares it against a threshold
- `ChangedAttributeCondition`: checks whether the current payload is an `AttributeChangeInfo` for a specific `Attribute`
- `ChangedStatCondition`: checks whether the current payload is a `StatChangeInfo` for a specific `Stat`

Threshold-based conditions operate on the current value stored on the resolved entity. By contrast, `ChangedAttributeCondition` and `ChangedStatCondition` do not compare numbers at all: they only verify which attribute or stat the current change payload refers to.

`AttributeThresholdCondition` can also work in percentage mode, where the current value is interpreted as a percentage of the attribute's configured range.

Leaf/Entity

These conditions reason about entity roles and entity relationships in the evaluation context:

- `EntityReferenceCondition`: compares two selected entity slots such as holder, payload entity, performer, target, or victim
- `EntityLevelCondition`: resolves one entity slot and compares that entity's **current** level against a threshold
- `EntityLevelThresholdTransitionCondition`: reads an `int` value-change payload and checks whether a level comparison became satisfied or became unsatisfied across the change
- `HolderLevelCondition`: a shorter holder-only version of a level comparison
- `IsPerformerCondition`: passes when `Performer` and `Holder` are the same entity
- `IsOwnedByCondition` (👉 v2.2.0+): compares two selected entity slots and passes when the entity resolved from the first slot is (transitively) owned by the entity resolved from the second, through `IsOwnedBy`

This family is especially useful when you need to distinguish self-targeting, compare holder and payload entity, or react only at specific level boundaries.

Some practical reading tips:

- `EntityReferenceCondition` is the most general entity-role matcher. It is ideal when the meaning of the rule depends on relationships such as "holder equals payload entity" or "payload target is different from performer"
- `EntityLevelCondition` looks at the entity's current live level, not at a before/after transition
- `EntityLevelThresholdTransitionCondition` is for level-change payloads and asks whether a rule changed state across the event (for example, whether `level >= 10` just became true)
- `HolderLevelCondition` is simpler than `EntityLevelCondition`, but also less flexible because it cannot look at payload roles
- `IsPerformerCondition` is mainly useful in self-applied or self-triggered workflows
- `IsOwnedByCondition` walks the full [ownership chain](#), unlike the `*Owner ConditionTarget` slots, which resolve only a direct `Owner`

⚠ WARNING

`IsOwnedByCondition` builds on [Entity Ownership](#), which is currently experimental and may change at any time. Be careful when adopting it for production-critical condition trees.

ℹ NOTE

`PayloadEntity` is often the most useful slot when working with built-in event payloads, because types such as `StatChangeInfo`, `AttributeChangeInfo`, and `EntityLevelChangedContext` already implement `IHasEntity`.

⊗ CAUTION

`IsPerformerCondition` compares `Performer` and `Holder` by strict reference equality. If your project uses [Entity Ownership](#) and the performing entity can be owned by a different entity (a weapon owned by a ship, for example), `IsPerformerCondition` does not account for that relationship on its own. Combine it with `IsOwnedByCondition`, or with a `PerformerOwner`-based `EntityReferenceCondition`, when the rule should also match owned entities.

Leaf/Tag

The tag-focused family lets conditions inspect tags on resolved entities or on active modifier data:

- `EntityHasTagCondition`: resolves one entity slot and checks whether that entity's tags match a configured `GameTagSet`
- `HasActiveModifierTagCondition`: checks whether the holder currently has at least one active modifier whose tags match the configured set

`EntityHasTagCondition` supports both **Any Of** and **All Of** matching against a configured `GameTagSet`. `HasActiveModifierTagCondition` relies on `IActiveModifierTagProvider`, so it is mainly relevant when the holder is participating in modifier-based workflows. For the tagging workflow itself, see [Game Tags](#).

Leaf/ValueChange

These conditions are designed for payloads that carry value-delta information through `IHasValueChange<T>`.

All of them read one of these projections:

- `PreviousValue`
- `NewValue`
- `AbsAmount`

The built-in numeric payloads are split by type:

- `EntityLevelChangedContext` provides `IHasValueChange<int>`
- `StatChangeInfo` and `AttributeChangeInfo` provide `IHasValueChange<long>`

NOTE

This is why the payloads used by built-in events such as entity level up, entity level down, stat changed, and attribute changed work naturally with the `Leaf/ValueChange` family: they already implement `IHasValueChange<T>`.

The available conditions are:

- `IntValueChangeDirectionCondition`: checks whether an `int` payload increased, decreased, or stayed the same
- `IntValueChangeModuloCondition`: applies a modulo rule to a projected `int` value
- `IntValueChangeThresholdCondition`: compares a projected `int` value against a threshold
- `IntValueChangeThresholdTransitionCondition`: checks whether an `int` threshold comparison became satisfied or unsatisfied across the change
- `LongValueChangeDirectionCondition`: checks whether a `long` payload increased, decreased, or stayed the same
- `LongValueChangeModuloCondition`: applies a modulo rule to a projected `long` value
- `LongValueChangeThresholdCondition`: compares a projected `long` value against a threshold
- `LongValueChangeThresholdTransitionCondition`: checks whether a `long` threshold comparison became satisfied or unsatisfied across the change

They are useful when the interesting rule is not the absolute final value, but the way a value changed.

This distinction matters:

- **Direction** conditions care only about increase, decrease, or equality
- **Threshold** conditions evaluate a single projected value such as `NewValue >= 10`
- **Threshold transition** conditions evaluate whether the comparison changed state between previous and new values
- **Modulo** conditions are useful for cyclical checks on the projected value, such as verifying that a `NewValue` level lands on 5, 10, 15, ... or that another projected value repeats on a fixed remainder pattern

For example, if a level changes from 9 to 10:

- `IntValueChangeThresholdCondition` with `NewValue >= 10` passes because the new value is 10
- `IntValueChangeThresholdTransitionCondition` with `>= 10` and **Become Satisfied** passes because the comparison was false before and true after

Leaf/Random

Randomized gating is provided through:


- `RandomChanceCondition`: passes with the configured percentage chance

This condition evaluates to true based on a configured percentage chance.

Authoring conditions in the Inspector

Because conditions are managed-reference values, the typical workflow is:

1. Locate a field that accepts a `Condition`
2. Open the type picker for that field
3. Choose a concrete condition from the grouped menu
4. Configure its fields, such as target entity slot, comparison mode, threshold, or required tag set
5. Wrap the root in composites if the rule needs multiple checks

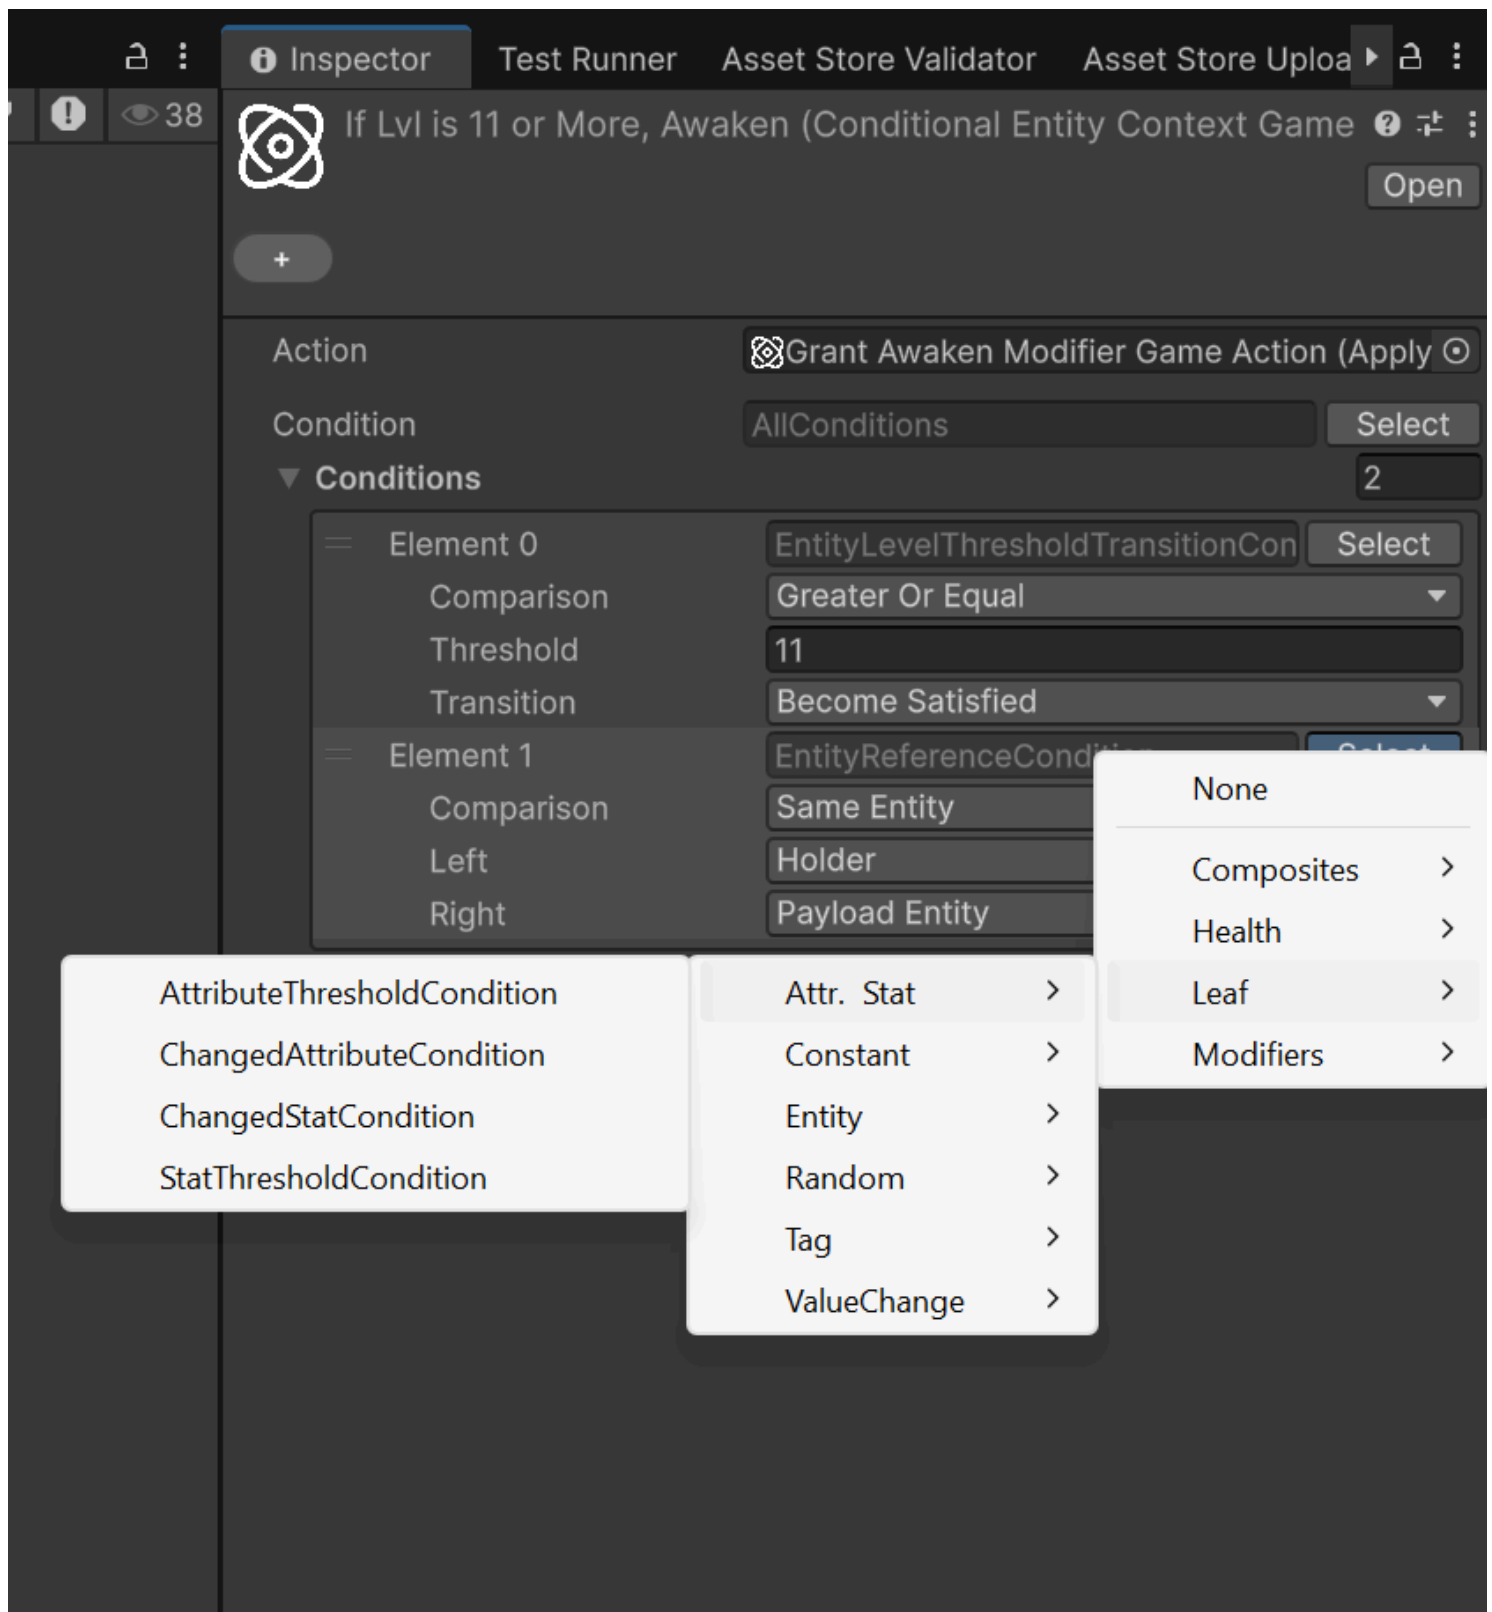

(i) NOTE

Conditions are authored inline, so their serialized data lives inside the object that owns the field. You do not create a standalone **Condition** asset first and reference it later.

Extending the system with custom conditions and triggers

The payload filter shown by reactive inspectors is metadata-driven. If you add your own `Condition` subclasses or your own `IReactiveTrigger` implementations, treat that metadata as part of the public contract of the type.

Custom `Condition` types

If a custom condition reads `EvaluationContext.EventPayload`, annotate it with one or more `ConditionPayloadAttributes`:

```
using System;
using ElectricDrill.AstraRpgFramework.Conditions;
using ElectricDrill.AstraRpgFramework.Contexts;

[Serializable]
[ConditionPayload(typeof(IHasEntity))]
[ConditionPayload(typeof(IHasPerformer))]
public sealed class PayloadActorMatchesHolderCondition : Condition
{
    public override bool Evaluate(EvaluationContext ctx)
    {
        if (!ctx.TryGetPayload<IHasEntity>(out var payload))
            return false;

        return payload.Entity == ctx.Holder;
    }
}
```

Use these rules:

- Add one attribute per accepted payload contract. Multiple attributes are an **OR** list.
- Prefer the narrowest interface or base type that the condition actually needs, such as `IHasEntity` or `IHasValueChange<long>`, instead of overfitting to one concrete payload class.
- Omit the attribute entirely only for payload-agnostic conditions. A condition with no `ConditionPayloadAttribute` is treated as compatible with any trigger.
- If a condition requires payload data and you forget the attribute, the condition may still appear in filtered pickers because the editor has no metadata proving otherwise.

Custom `IReactiveTrigger` types

Custom triggers must expose the payload contract through `IReactiveTrigger.PayloadType`:

```

using System;
using ElectricDrill.AstraRpgFramework.Triggers;

[Serializable]
public sealed class CustomStatusTrigger : IReactiveTrigger
{
    public Type PayloadType => typeof(CustomStatusEvent);

    // Subscribe / Unsubscribe / EventSource omitted.
}

```

Best practices:

- Return `typeof(void)` for parameterless triggers.
- Return the type that subscribers can safely assume at runtime. If the trigger is conceptually based on an interface contract, expose that interface instead of an arbitrary concrete implementation.
- Do not use `typeof(object)` unless the payload is genuinely unconstrained, because it disables meaningful filtering.

When both sides provide accurate metadata, the framework can filter incompatible condition types in the Inspector and warn about already-authored invalid trees before play mode.

For custom editor wiring that connects a trigger field to a condition field and enables this filtering automatically, see [Payload-aware condition fields in custom editors](#).

Conditional game actions


The most direct built-in use of the system is `ConditionalGameAction<TContext>`, which wraps another `GameAction<TContext>` with an optional guard condition.

- `Astra Framework/Game Actions/Context: Entity/Conditional`
- `Astra Framework/Game Actions/Context: Component/Conditional`

If the configured condition evaluates to `false`, the nested action is skipped. If the condition field is left empty, the action behaves as always allowed.

The custom inspector for conditional actions also exposes a **Quick setup** row below the condition field. This is meant to speed up structural edits to the root condition tree:

- Wrap the current root in `AllConditions`
- Wrap the current root in `AnyCondition`
- Wrap the current root in `NotCondition`
- Unwrap the current root when the current shape supports it

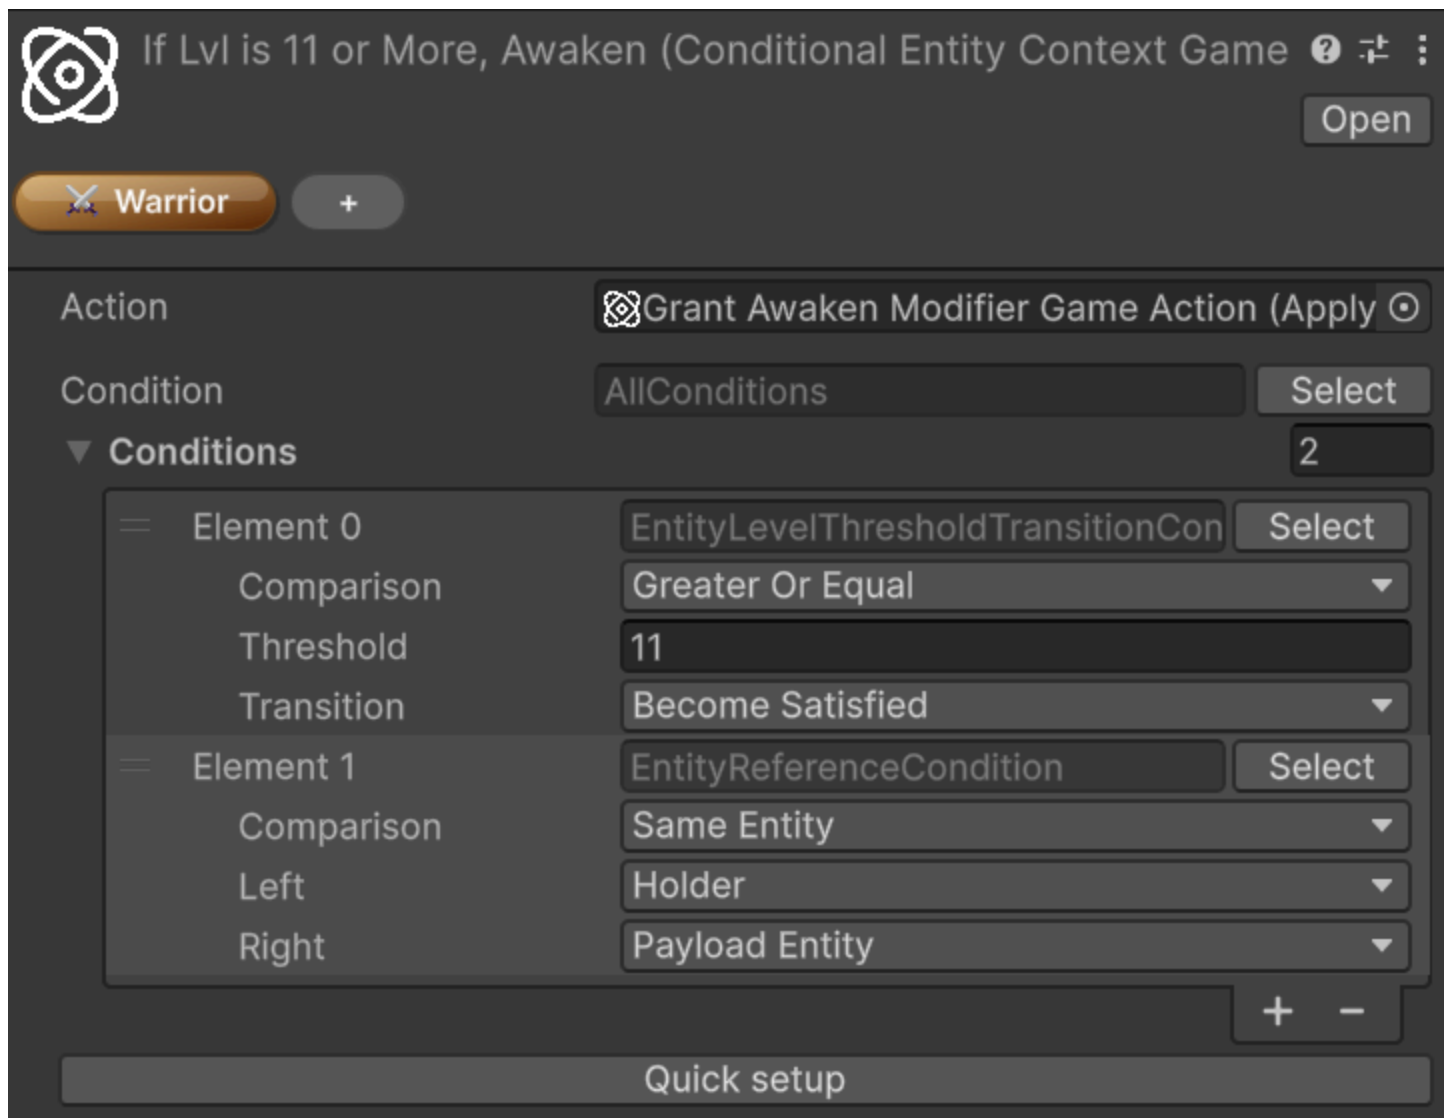

For the broader `GameAction` workflow, see [Game Actions](#).

Practical uses

`Conditions` are especially useful for:

- Gating a `GameAction` so it only runs for certain entities or payload states
- Comparing holder, performer, and payload entity roles without writing custom glue code
- Reacting only when an attribute or stat crosses a threshold
- Filtering tag-aware behavior through `GameTagSet` matching
- Adding probabilistic behavior through a reusable chance-based condition

The main strength of the system is composition. Instead of hardcoding special-case checks into every consumer, you can assemble reusable condition trees directly in the Inspector and keep the rule logic close to the data that depends on it.

Advanced topics

Presentation layer and localization

 Version 1.2.0+

The framework focuses on the business logic of game systems and does not impose any specific presentation layer or localization strategy. You are free to implement your own UI and localization solutions that best fit your project's needs. However, the framework provides basic support for the presentation layer by allowing you to define display names for attributes, statistics, and classes. These display names can be used in your UI to present information to players in a user-friendly manner. In fact, ScriptableObject names are convenient and quick to use during development, but they are not ideal for presentation to players. By defining display names, you can separate the internal representation of your game systems from the user-facing presentation layer.

IDisplaySObjectNameProvider

The framework includes the `IDisplaySObjectNameProvider` interface, which can be implemented by UI components to display readable names for attributes, statistics, and classes:

```
public interface IDisplaySObjectNameProvider
{
    string GetDisplayName(ScriptableObject asset);
}
```

The framework provides a default implementation of this interface, `DefaultDisplaySObjectNameProvider`, which retrieves the ScriptableObject's name and returns it as the display name. You can use this default implementation or create your own custom implementation to suit your localization needs.

The attributes are a particular case, as in many RPGs they can either be presented with the extended name (e.g., "Strength") or with an abbreviation (e.g., "STR"). To accommodate this, the framework provides the `DefaultAttributeCompactDisplaySObjectNameProvider` implementation, which returns the first three letters, capitalized, as the display name for a certain attribute.

Using custom display name providers

To use a custom display name provider, you can instantiate your implementation in your own scripts, or rely on the `TypeSelectable` attribute provided by the framework to select the implementation from the Unity inspector. For example:

```
[SerializeReference, TypeSelectable(typeof(DefaultDisplaySObjectNameProvider))]
private IDisplaySObjectNameProvider _attributeDisplayNameProvider;
```



`TypeSelectable` is an experimental feature of the framework that allows you to select a concrete implementation of an interface from the Unity inspector.

The parameter passed to `TypeSelectable` is the default implementation that will be selected when the inspector is first displayed. You can then choose a different implementation from a dropdown list in the inspector.

NOTE

Starting with v2.0.0, the editor emits a startup warning (`TypeSelectableClosedGenericValidator`) when a `[SerializeReference, TypeSelectable]` field targets a closed generic type. This is a guardrail against [Unity bug UUM-44729](#), where renaming any type inside a generic argument silently drops the serialized value. If you see this warning, refactor the field type to the non-generic `IDisplaySNameProvider`.

If you take a look at the demo scene, if you select the `AttributesContainer` GameObject inside `WarriorCanvas` -> `HeroPanel` in the hierarchy, you will see a `Attribute Display So Name Provider` field in the inspector under the `Values Reader` component. This field uses the `TypeSelectable` attribute to allow you to choose between the default and compact display name providers for attributes.

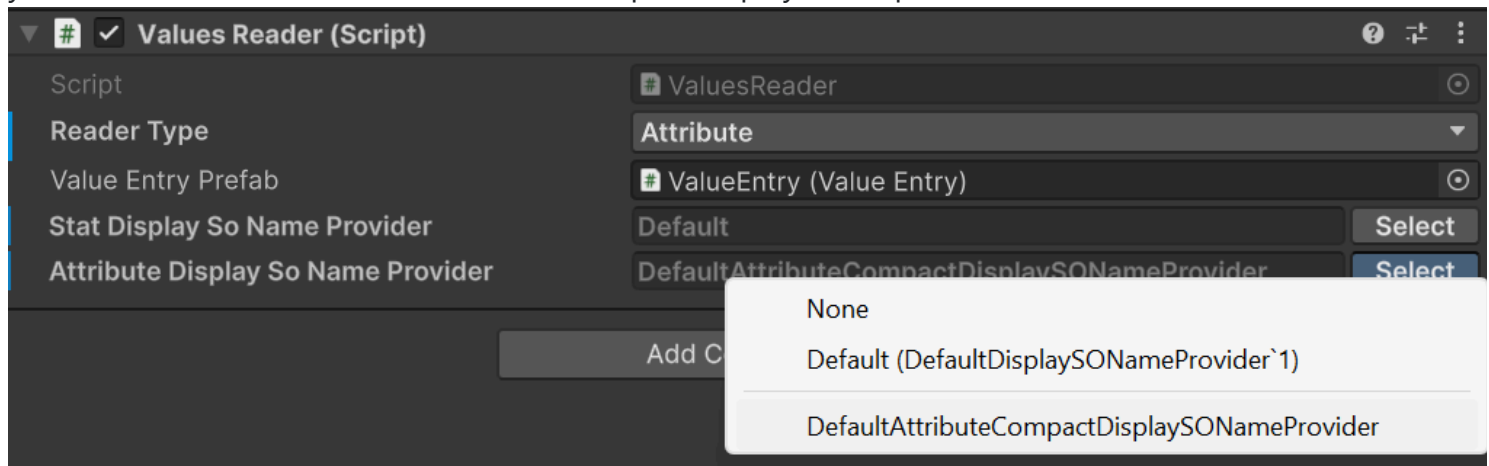

The implementation passed as parameter to `TypeSelectable` will be instantiated automatically by the framework during script compilation. Moreover, the framework will show it in the inspector, in the dropdown list, as the Default option under `None`.

During Play Mode, you can switch between the different implementations to see how the display names change in the UI of the sample scene. With the default implementation, the attributes will be displayed

with their full names:

Warrior	
Level: 1	< Attributes >
Max HP: 60	
Strength	16
Intelligence	6
Constitution	12
Dexterity	10

With the compact implementation, the attributes will be displayed with their abbreviations:

Warrior	
Level: 1	< Attributes >
Max HP: 60	
STR	16
INT	6
CON	12
DEX	10

Reader APIs and safe value access

 Version 2.0.0+

When you only need to read values, prefer the dedicated reader interfaces over reaching into concrete components. `IAttributeReader` and `IStatReader` expose safe `TryGet` / `TryGetBase` APIs that let you query both final and pre-modifier values without assuming the requested asset is present.

```

IAttributeReader attributeReader = entityCore;
IStatReader statReader = entityCore;

if (attributeReader.TryGet(strengthAttribute, out long strength) &&
    statReader.TryGet(physicalAttackStat, out long physicalAttack))
{
    Debug.Log($"STR {strength}, PATK {physicalAttack}");
}

```

`EntityCore` implements both reader interfaces, which makes it a convenient read facade for gameplay systems that already work with the entity as their entry point.

If you also need the unmodified values, use `TryGetBase`:

```

if (statReader.TryGetBase(physicalAttackStat, out long basePhysicalAttack))
{
    Debug.Log($"Base Physical Attack: {basePhysicalAttack}");
}

```

`Get` and `GetBase` can still be convenient on concrete containers when you already know the asset exists, but `TryGet` and `TryGetBase` are the safer default for reusable code paths. This is especially relevant in v2.0.0 because `StatSetInstance` is no longer an `IStatReader`; code that needs a generic stat reader should depend on `EntityCore`, `EntityStats`, or another explicit `IStatReader` provider instead.

Resolving ownership in custom systems

 Version 2.2.0+

WARNING

This builds on [Entity Ownership](#), which is currently experimental and may change at any time. Treat `EntityAttribution` and `EntityOwnership.Resolve` as provisional until the underlying ownership edge stabilizes.

`Owner` (see [Entity Ownership](#)) tells you which entity ultimately owns another, but different systems often need to resolve "the responsible entity" differently. Take the spaceship example from that section: a lifesteal system built on top of the framework needs to know that the *ship* should be healed when its weapon lands a killing blow, even though the weapon is the one recorded as `Performer`.

`EntityAttribution` and `EntityOwnership.Resolve` exist for exactly this kind of decision:

```
public enum EntityAttribution { Direct, Owner, Root }
```

```
public static class EntityOwnership  
{  
    public static EntityCore Resolve(EntityCore entity, EntityAttribution attribution);  
}
```

- **Direct**: returns `entity` unchanged. This preserves the framework's behavior from before ownership existed, and should stay the default for any new field or setting that exposes `EntityAttribution`.
- **Owner**: returns `entity.Owner`, or `entity` itself if it has no owner.
- **Root**: returns `entity.Root`, walking the full ownership chain.

```
EntityCore beneficiary = EntityOwnership.Resolve(damagePerformer, EntityAttribution.Root);  
if (beneficiary == thisEntity)  
{  
    // Apply lifesteal to thisEntity, credited through the weapon's owner chain.  
}
```

Expose `EntityAttribution` as a serialized field on your own config or component when you want project code (or another package built on top of the framework, such as Astra RPG Health's lifesteal and kill-credit resolution) to choose how attribution should behave, rather than hardcoding one resolution strategy.

Pluggable fixed base value sources

 Version 2.1.0+

Fixed base attributes and stats no longer have to come from the Inspector alone. `EntityAttributes` and `EntityStats` source their fixed base values through `IFixedAttributeSource` and `IFixedStatSource`, two minimal, point-queried contracts:

```
public interface IFixedAttributeSource : IValueContainer<AttributeSO>  
{  
    long GetBase(AttributeSO attribute);  
}  
  
public interface IFixedStatSource : IValueContainer<StatSO>  
{  
    long GetBase(StatSO stat);  
}
```

The inline values shown in the Inspector and the asset-backed `FixedAttributeValuesSO` / `FixedStatValuesSO` (see [Fixed base attribute sources](#) and [Fixed base stat sources](#)) both implement these interfaces, but you can also supply your own implementation, backed by save data, procedural generation, live-ops config, or any other source.

Swapping fixed base values at runtime

`SetFixedAttributeSource` (and its `EntityStats` counterpart, `SetFixedStatSource`) replaces every fixed base value from a source in one call:

```
entityAttributes.SetFixedAttributeSource(myCustomSource);

// Or from a plain dictionary (e.g. deserialized save data), without implementing
// the interface:
entityAttributes.SetFixedAttributeSource(new Dictionary<AttributeSO, long> {
    { strengthAttribute, 14 },
    { constitutionAttribute, 12 },
});
```

The provided source must cover every attribute (or stat) in the entity's current attribute/stat set; an assertion failure is raised otherwise. Only one `OnAttributeChanged` / `OnStatChanged` event is raised per attribute or stat whose final value actually changed, reusing the same bulk-update machinery as level-up/level-down transitions.

⚠ WARNING

`SetFixedAttributeSource` / `SetFixedStatSource` always write into the inline values, never into an assigned `FixedAttributeValuesAsset` / `FixedStatValuesAsset`. An asset can be shared across multiple entities, so a per-entity runtime override should not leak into it. If `Use Fixed Attribute Values Asset` (or the stat equivalent) is enabled, disable it first — otherwise the injected values are ignored until you do.

Swapping the attribute/stat set at runtime

`SetFixedAttributeSet(AttributeSetSO)` and `SetFixedStatSet(StatSetSO)` replace the schema used for fixed base values at runtime, reconciling existing values for the attributes/stats shared between the old and new set and defaulting new entries to `0`. Neither raises per-attribute/per-stat change events, matching the framework's existing behavior when a set change is detected elsewhere (from the `AttributeSet` getter, or from `OnValidate`).

Call `SetFixedAttributeSet` / `SetFixedStatSet` and `SetFixedAttributeSource` / `SetFixedStatSource` as two separate, sequential calls rather than combining them: swapping the set first ensures the source you

inject afterward is validated against the set that is actually active.

Rounding double-based calculations

 Version 2.0.0+

The framework now exposes `RoundingMode` to make integer conversion intent explicit when a calculation produces a `double`. The built-in modes are:

- `Round`: rounds to the nearest integer, with midpoint values rounding away from zero
- `Floor`: rounds down
- `Ceil`: rounds up

```
double scaledValue = 214.5;
int rounded = RoundingMode.Round.ApplyToInt(scaledValue); // 215
int floored = RoundingMode.Floor.ApplyToInt(scaledValue); // 214
```

Use `RoundingMode` when authoring custom calculators or other extension points that need deterministic integer conversion semantics instead of ad-hoc casts.

Owner-aware `GameAction` execution

 Version 2.0.0+

`GameActionBase` is the non-generic root used by inspector-facing authoring surfaces that need to reference actions with different concrete context types. Concrete assets still execute through `GameAction<TContext>`, which now also supports owner-aware execution through `ExecuteWithOwnerAsync`.

This matters most for event-driven workflows. `GameEventListeners` can dispatch owner-aware actions using the listener component as runtime owner, and wrapper actions such as `Composite`, `Delayed`, `Conditional`, and projection actions preserve that owner while forwarding execution. This allows conditions that depend on `Holder` resolution to behave consistently across nested action chains.

For the practical inspector workflow, see [Game Actions](#). For the condition-side resolution model, see [Conditions](#).

Payload-aware condition fields in custom editors

 Version 2.0.0+

`ConditionFieldWithQuickSetup` is the intended public entry point when a custom inspector pairs a `[SerializeField] IReactiveTrigger` field with a `[SerializeField] Condition` field.

With `filterByTriggerPayload: true`, the helper reads `IReactiveTrigger.PayloadType`, builds a `ConditionEvaluationAvailability`, and reuses the same compatibility rules as the built-in inspectors. In practice, this means:

- condition type pickers only show conditions whose `ConditionPayloadAttribute` metadata is compatible with the current payload
- `ConditionTarget` dropdowns only show entity slots that are actually available in the current evaluation context
- already-authored incompatible trees stay visible and emit inline errors instead of failing silently

NOTE

For the metadata contract expected from custom `Condition` and `IReactiveTrigger` types, see [Extending the system with custom conditions and triggers](#).

This is the standard inspector-side wiring:

```
using ElectricDrill.AstraRpgFramework.Editor.Conditions;
using UnityEditor;
using UnityEngine;

[CustomEditor(typeof(MyReactiveComponent))]
public sealed class MyReactiveComponentEditor : UnityEditor.Editor
{
    public override void OnInspectorGUI()
    {
        serializedObject.Update();

        var triggerProperty = serializedObject.FindProperty("_trigger");
        var conditionProperty = serializedObject.FindProperty("_condition");

        EditorGUILayout.PropertyField(triggerProperty, true);
        ConditionFieldWithQuickSetup.DrawLayout(
            conditionProperty,
            new GUIContent("Condition"),
            triggerProperty,
            filterByTriggerPayload: true);

        serializedObject.ApplyModifiedProperties();
    }
}
```

If the configured trigger is parameterless (`PayloadType == typeof(void)`), the picker keeps only payload-agnostic conditions, and `ConditionTarget` is reduced to the always-available slots (`Holder` and `Performer`).

If you are inside a `PropertyDrawer` or any rect-based workflow, use the explicit height + draw pair:

```
public override float GetPropertyHeight(SerializedProperty property, GUIContent label)
{
    var triggerProperty = property.FindPropertyRelative("_trigger");
    var conditionProperty = property.FindPropertyRelative("_condition");

    return EditorGUI.GetPropertyHeight(triggerProperty, true)
        + EditorGUIUtility.standardVerticalSpacing
        + ConditionFieldWithQuickSetup.GetHeight(
            conditionProperty,
            triggerProperty: triggerProperty,
            filterByTriggerPayload: true);
}

public override void OnGUI(Rect position, SerializedProperty property, GUIContent label)
{
    var triggerProperty = property.FindPropertyRelative("_trigger");
    var conditionProperty = property.FindPropertyRelative("_condition");

    float y = position.y;
    float triggerHeight = EditorGUI.GetPropertyHeight(triggerProperty, true);
    var triggerRect = new Rect(position.x, y, position.width, triggerHeight);
    EditorGUI.PropertyField(triggerRect, triggerProperty, true);

    y += triggerHeight + EditorGUIUtility.standardVerticalSpacing;
    ConditionFieldWithQuickSetup.Draw(
        ref y,
        position.x,
        position.width,
        conditionProperty,
        new GUIContent("Condition"),
        triggerProperty,
        filterByTriggerPayload: true);
}
```

If your editor already knows the evaluation context and does not expose a trigger field, pass the availability explicitly instead of deriving it from `IReactiveTrigger`:


```

using ElectricDrill.AstraRpgFramework.Conditions;
using ElectricDrill.AstraRpgFramework.Editor.Conditions;
using UnityEngine;

ConditionFieldWithQuickSetup.DrawLayout(
    conditionProperty,
    new GUIContent("Condition"),
    actionGroups: ConditionQuickActionUtility.ActionGroups.None,
    availability: ConditionEvaluationAvailability.WithoutPayload());

```

Operational notes:

- `triggerProperty` must point to a managed-reference value implementing `IReactiveTrigger`. If it is `null` or unconfigured, the helper falls back to the normal unfiltered condition picker unless you pass `availability`: explicitly.
- `ConditionEvaluationAvailability.ForPayload(...)` unlocks payload-derived `ConditionTarget` options from the payload contract itself: `IHasEntity` (or a payload `Component`) enables `PayloadEntity`, `IHasTarget` enables `PayloadTarget`, `IHasPerformer` enables `PayloadPerformer`, and `IHasVictim` enables `PayloadVictim`.
- Use `ConditionEvaluationAvailability.WithoutPayload()` for timer/tick style contexts with no event payload. Use `ConditionEvaluationAvailability.ForPayload(typeof(TPayload))` when the payload type is fixed but not exposed through a serialized trigger field.
- Filtering works on nested composite conditions too. Child condition pickers and child `ConditionTarget` fields inherit the same availability automatically.
- Existing incompatible condition trees are not hidden silently: the field shows an inline warning so the author can fix the tree.
- If you want the condition UI without the quick-setup button, pass `actionGroups: ConditionQuickActionUtility.ActionGroups.None` while keeping either `filterByTriggerPayload: true` or an explicit `availability:`.

This keeps custom editor code thin while still giving authors immediate feedback when a condition depends on a payload contract or target slot that the current context cannot provide.

Saving and Loading

 Version 2.2.0+

Astra is not a save system, and is not trying to become one. It defines no save format, ships no serializer, keeps no registry of live entities, and never touches the disk. What it does provide is everything a save system needs on the other side of that line: a stable per-entity identity, matching getters and setters for every piece of runtime state, and bulk restore paths that hold up when a whole snapshot is reapplied at once.

This page walks through that surface: what Unity already persists for you, what you capture and restore through the API, the order to restore it in, and what is deliberately left out.

What stays your responsibility

Astra draws the line in a specific place, and a few jobs sit firmly on your side of it:

- **The save format and the I/O.** JSON, binary, `PlayerPrefs`, an asset-store package (all fine). Astra never expresses an opinion here, it follows the framework philosophy: **maximum flexibility and no limitations**.
- **Mapping a saved id back to a live entity.** There is no `FindEntityById`. Astra never keeps a runtime map of live entities, because charging every project a registration on every `Instantiate()` (projectiles, VFX, pooled objects) to serve a feature most entities never use is the wrong trade. Your save system owns that lookup.
- **Resolving asset references.** `StatSO`, `AttributeSO`, `ClassSO`, `GrowthFormulaSO` and friends are `ScriptableObject` references. Turning them into something a save file can hold (an addressable address, a GUID, a name) and back again is your job.
- **Deciding when to capture and restore.** Nothing on this page happens on its own. Astra exposes the state; you choose what to read, when, and where to put it.

What Unity already round-trips

If your strategy is to serialize the whole `GameObject` or prefab instance (a scene save, or a prefab-instance diff), the framework's `[SerializeField]` state comes back on its own. You do not need to touch any of the following through the API:

Component	Serialized state
<code>EntityCore</code>	the entity level, owner and owner resolution, tags, save id
<code>EntityStats</code>	class-vs-fixed base toggle, fixed stat set, inline fixed values, fixed-values-asset toggle and reference, cache toggle

Component	Serialized state
<code>EntityAttributes</code>	attribute points per level, the points tracker (level points, bonus points, per-attribute investments), point-removal strategy, class-vs-fixed toggle, fixed attribute set, inline fixed values, permanent bonuses, fixed-values-asset toggle and reference, cache toggle
<code>EntityClass</code>	the assigned class

For a custom save format, none of that is automatic, and the rest of this page is for you.

Give every entity a stable id

`EntityCore` has no identity that survives a save/load cycle on its own: the only handle on an entity is the Unity object reference, and that reference does not come back. `EntitySaveId` fills exactly that gap, and nothing more. Its whole API is four members:

```
public EntitySaveId SaveId { get; }           // IsEmpty is true until an id is baked or set
public EntitySaveId EnsureSaveId();           // get-or-create, idempotent
public EntitySaveId RegenerateSaveId();       // always mint a fresh one
public void SetSaveId(EntitySaveId id);       // re-apply a saved id
```

`EntitySaveId` is a string-backed serializable struct. Rebuild one from save data with `new EntitySaveId(savedString)`, and write it back out through its `Value` property.

Astra never reads this value. No registry, no lookups, no behavior keyed off it. An entity with an empty id behaves identically to one with an id, and `SetSaveId` accepts anything you give it (including an id another live entity already carries). Uniqueness is your concern.

The `Instantiate()` caveat

This is the one that bites in practice. `Instantiate()` copies every serialized field, including the save id, so **every runtime copy of a prefab that carries a baked id shares that id**. For entities spawned at runtime that each need their own save record (enemies, dropped loot, pooled objects), the spawner has to break the tie:

```
var enemy = Instantiate(enemyPrefab);
enemy.GetComponent<EntityCore>().RegenerateSaveId();
```

On restore, `SetSaveId(new EntitySaveId(idFromSave))` does the same job with the id your save system already holds.

Showing the Save Identity section in the inspector

The `EntityCore` inspector can render a **Save Identity** section, but it is hidden by default. To reveal it, open `Edit > Preferences > Astra Framework > Save Identity` and enable **Show Save Identity section**. That page holds two per-user preferences, both off by default:

- **Show Save Identity section** renders the section in the `EntityCore` inspector: a read-only **Save Id** field (showing `(none)` until an id is assigned), a **Generate** button that becomes **Regenerate** once the entity has an id, and **Copy** to put the id on the clipboard. It is multi-object aware.
- **Auto-bake save id on create** gives every entity placed in a scene an id automatically, instead of requiring a click. Prefab assets and Prefab Mode are never touched, and nothing is baked during Play Mode.

NOTE

These preferences are per-user and affect authoring only. `SaveId`, `EnsureSaveId`, `RegenerateSaveId`, and `SetSaveId` work exactly the same from code whether the section is shown or not.

CAUTION

Regenerate discards the current id, and any save records already written against it stop resolving to this entity. That is why it asks for confirmation, while the first **Generate** on an entity with no id does not.

Keeping ids unique while authoring

An editor-only guard keeps ids unique while you work: duplicating a placed entity, or dropping a second instance of a prefab that already carries a baked id, re-mints the id on the newcomer and leaves the original alone. It never touches prefab assets or Prefab Mode, and never runs in Play Mode. It cannot help with runtime `Instantiate()` (nothing editor-only can), which is why the spawner rule above exists.

Capturing state

For a custom format, this is the read side. Everything here is public, and every getter has a matching setter covered in [Restoring](#).

EntityCore

- `SaveId` for identity
- `Owner` for the ownership edge (see [Entity Ownership](#))

EntityCore.Level

Save `CurrentTotalExperience`, not the level. The growth formula is authoritative: if it changed since the save was written, the same experience should resolve to the new level, and it will only do that if you saved the experience.

EntityStats

- `UseClassBaseStats, StatSet`
- `GetFixedBaseStatValues()` for the fixed base values, already in the exact shape the setter expects
- `UseFixedStatValuesAsset, FixedStatValuesAsset`

EntityAttributes

- `UseBaseAttributesFromClass, AttributeSet`
- `GetFixedBaseAttributeValues()` for fixed base values
- `GetAllSpentPoints()` for the invested-points portfolio
- `BonusAttributePoints` for the bonus pool (see [Bonus attribute points](#))
- `GetAllPermanentBonuses()` for permanent per-attribute bonuses (see [Permanent attribute bonuses](#))
- `UseFixedAttributeValuesAsset, FixedAttributeValuesAsset`

Do not save `AvailableAttributePoints`, `TotalAttributePoints`, or `LevelAttributePoints`. They are derived from the level and the bonus pool, and are rebuilt during restore.

EntityClass

- `Class`

A capture pass might look like this, with asset references already turned into your own string keys:

```
EntitySaveData Capture(EntityCore core)
{
    var stats = core.GetComponent<EntityStats>();
    var attributes = core.GetComponent<EntityAttributes>();

    return new EntitySaveData {
        saveId = core.SaveId.Value,
        classKey = AssetKey.For(core.GetComponent<EntityClass>().Class),
        totalExperience = core.Level.CurrentTotalExperience,
        bonusAttributePoints = attributes.BonusAttributePoints,
        baseStats = ToKeyed(stats.GetFixedBaseStatValues()),
        baseAttributes = ToKeyed(attributes.GetFixedBaseAttributeValues()),
        spentPoints = ToKeyed(attributes.GetAllSpentPoints()),
        permanentBonuses = ToKeyed(attributes.GetAllPermanentBonuses()),
    };
}
```

```
};  
}
```

What not to try to save

Some state is derived, transient, or design-time, and snapshotting it is a mistake rather than a gap:

- **Transient modifiers.** Flat, percentage, and stat-to-stat modifiers are add-only by design: there is no bulk read and no removal API, because their lifetime (duration, stacking, refresh, source) belongs to the companion package `com.electricdrill.astra-rpg-modifiers`. Save the *sources* (which buff is active, and for how long) and let modifiers reapply them; do not try to snapshot the computed modifier state.
- **Caches.** The cache toggle is configuration; the cached values are derived and rebuilt on demand. There is nothing to save.
- **Design-time configuration.** Max level, the experience growth formula, attribute points per level, the point-removal strategy, stat and attribute set composition, and everything inside a `ClassSO` are authored data, not session state. They belong in your project, not in your save file.
- **Tag contents.** `EntityCore.Tags` is read-only today: authored tags round-trip through Unity serialization, but there is no API to mutate (and therefore to restore) them. If your game needs runtime tag changes, that is a feature to design with its own change events, not something to bolt onto a save path.

Restoring

This is where a save system actually breaks, so it is worth being precise about both *when* and *in what order*.

When

Restore at or after `EntityCore.OnBeforeSpawned`. That event fires from `EntityCore`'s `Start`, after the level has been wired to its owning entity and before the spawned event goes out. Subscribing from your own component's `Awake` is the intended pattern:

```
private void Awake() => _core.OnBeforeSpawned += Restore;
```

Restoring earlier is not safe. Before `Start`, `EntityLevel` has no reference to its entity, so the level-changed events it raises carry a null target, and `EntityStats` / `EntityAttributes` filter on that target and skip. The attribute point budget then never grows to match the level you just restored.

`OnBeforeSpawned` is safe regardless of script execution order. `EntityAttributes` initializes its point budget from the level both in `OnEnable` and in `Start`, and that step is idempotent: whether it runs before or after your restore, you land on the same budget.

⊗ CAUTION

Do not restore onto a deactivated instance. Instantiating inactive, restoring, then activating does not work for anything level- or points-related: with the `GameObject` inactive, `Start` has not run and `EntityAttributes` has not subscribed to level events, so the restore writes into state that activation then re-initializes over. Identity (`SetSaveId`) and plain configuration (`Class`, `OwnerResolution`) are fine to set before activation; everything else waits until the entity has spawned.

In what order

Each step builds on the ones above it.

1. **Identity.** `SetSaveId`, or use the saved id to locate the entity you are restoring into.
2. **Structure,** before anything that depends on which stats and attributes exist: `EntityClass.Class`, `EntityStats.UseClassBaseStats / SetFixedStatSet`, `EntityAttributes.UseBaseAttributesFromClass / SetFixedAttributeSet`, and `EntityCore.Owner / OwnerResolution`. Changing the attribute set refunds every spent point (with a warning), so do it here, before you restore investments.
3. **Level and experience.** `EntityCore.Level.SetTotalCurrentExp(savedExperience)`. This is the restore entry point for the level: it clamps the experience, derives the target level from the growth formula, and drives the level there through the normal setter, so every dependent component reacts exactly as it does in play. It also grows the level-derived attribute point budget. The whole transition raises a single level-up / level-down event, not one per level crossed: restoring level 1 → 50 raises one event with `AbsAmount = 49` and runs one bulk stat and attribute pass. If you need to react per level (one reward or fanfare each), loop over `AbsAmount` yourself.
4. **Bonus points.** `EntityAttributes.SetBonusAttributePoints(saved)`. Together with step 3 this fixes the total budget.
5. **Base values.** `EntityStats.SetFixedStatSource(...)` and `EntityAttributes.SetFixedAttributeSource(...)`, each with the full set of values (see [Pluggable fixed base value sources](#)).
6. **Spent points.** `EntityAttributes.SetAllSpentPoints(...)`. This needs the budget from steps 3 and 4: a snapshot the budget cannot cover is rejected in full, with an error, and nothing is written.
7. **Permanent bonuses.** `EntityAttributes.SetPermanentBonuses(...)`.

Steps 5 to 7 are independent of each other and can be reordered freely.

NOTE

`SetFixedStatSource` / `SetFixedAttributeSource` always write into the entity's inline values, never into an assigned fixed-values asset (which may be shared by other entities). If the entity was using an asset for its base values, restore `UseFixedStatValuesAsset` / `UseFixedAttributeValuesAsset` and the asset reference in step 2 and skip step 5 for that component; injected inline values are ignored while the asset toggle is on.

Restoring the owner builds on [Entity Ownership](#), which is currently experimental; treat that part of the restore as provisional until the ownership edge stabilizes.

Why the bulk setters exist

`SetAllSpentPoints`, `SetFixedStatSource`, `SetFixedAttributeSource`, and `SetPermanentBonuses` apply a whole snapshot as a single state assignment. This matters because the incremental in-game APIs (`SpendOn` / `RefundFrom` and similar) each validate against the state at that instant, so replaying a saved snapshot through them makes the result depend on the order attributes happen to be replayed in, and logs an error for every intermediate step that momentarily overshoots the budget.

Two behaviors are worth knowing:

- `SetAllSpentPoints` **replaces**: attributes absent from the dictionary end at zero. Attributes no longer in the set (removed from the game since the save was written) are skipped with a warning, and everything else still applies (that is a migration, not a corruption).
- `SetPermanentBonuses` **merges**: attributes it does not mention keep the bonus they already have. Permanent bonuses accumulate from many independent sources, whereas the invested-points portfolio is one coherent allocation of one budget.

Events during a restore

A restore raises the same events as ordinary gameplay: stat-changed, attribute-changed, attribute-points-changed, level-up / down, class-changed. That is deliberate: UI and derived systems converge on the restored state through the same code path they already use. If a listener must not react to a restore, gate that listener rather than asking the framework to restore silently.

The bulk restore paths already coalesce (one event per value that genuinely changed, not one per write). To coalesce further, across steps, wrap the whole restore in a bulk scope:

```
void Restore()
{
    using (_stats.BeginBulk())
    using (_attributes.BeginBulk())
```



```
{  
    // steps 2 to 7  
}  
}
```

Where the line is

Astra's side of the contract is: stable ids, symmetric getters and setters, and bulk restore paths that survive being called with a whole snapshot at once.

Resolving asset references into keys your save file can hold, deciding what a save file contains, and finding a live entity from a saved `EntitySaveId` stay with your save system. That boundary is intentional.

For the related runtime APIs, see [Pluggable fixed base value sources](#) and [Reader APIs and safe value access](#).

Editor Windows


 Version 2.1.0+

Astra Framework ships three built-in editor windows aimed at balancing and overview work. The Class Dashboard gives you a holistic picture of a class's growth formula coverage at a glance. The Growth Curve Comparison lets you overlay and compare stat and attribute progressions across multiple classes to support balancing decisions. The Game Tag Browser lets you search and navigate project assets by their assigned tags. All three are accessible from the **Tools > Astra Framework** menu and update automatically when project assets change.

Window	Menu path	Primary purpose
Class Dashboard	Tools > Astra Framework > Class Dashboard	Holistic overview of a class's growth formula coverage; spot missing or invalid formulas and jump into curve comparison
Growth Curve Comparison	Tools > Astra Framework > Growth Curve Comparison	Overlay and compare stat and attribute progressions across up to four classes; balance stat budgets with the Matrix table
Game Tag Browser	Tools > Astra Framework > Game Tag Browser	Find all assets that carry a given combination of GameTagSO tags

Class Dashboard

The Class Dashboard is a three-column window designed to give you a complete picture of a class's growth formula coverage in one place. From here you can immediately see which formulas are missing or invalid, assign them inline, and review all curves at once in the right panel. When you need to compare curves across multiple classes, use the **Open Comparison Window** button to bring up the Growth Curve Comparison window.

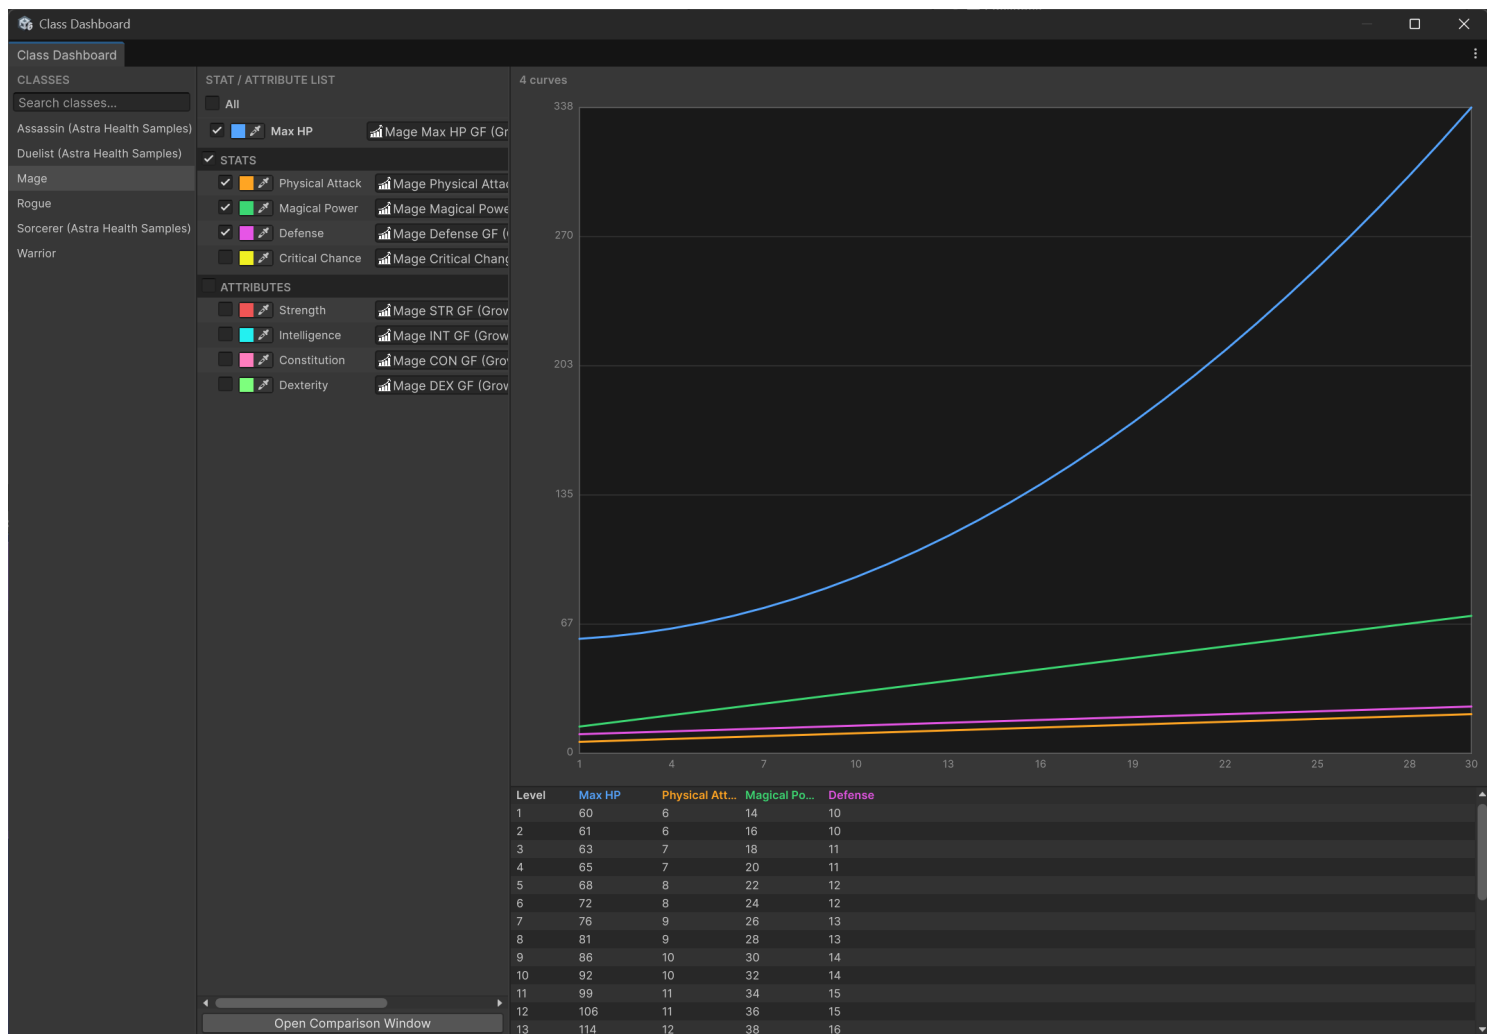

Opening the window

- **Tools > Astra Framework > Class Dashboard** — opens the window without a pre-selected class.
- From a **ClassSO** inspector — use the **Open in Dashboard** button to open the window with that class already selected.

Class list (left panel)

The left column lists every **ClassSO** found in the project, sorted alphabetically. A search field at the top filters the list as you type. Selecting a class populates the middle column.

Formula list (middle panel)

The middle column shows one row per growth slot in the selected class: **Max HP**, then every stat in the assigned **StatSet**, then every attribute in the assigned **AttributeSet**. Slots are grouped by section headers (**Stats**, **Attributes**).


When a class is selected for the first time in the session, all rows are checked by default, so the right panel immediately shows a full overview of every curve. Use the checkboxes, the **All** master toggle, or

the per-section toggles to narrow the selection — or use [Solo / un-solo](#) to focus on a single curve without unchecking everything else.

At the top of the list, an **All** master row contains a toggle that checks or unchecks every slot simultaneously. Each section header (**Stats**, **Attributes**) also carries its own toggle to check or uncheck all slots within that section at once.

Each individual row contains:

- A **status bar** on the left edge — red when the formula slot is empty, yellow when the assigned formula has validation errors.
- A **checkbox** — check it to include that curve in the right-panel preview.
- A **color field** — visible whenever a formula is assigned (regardless of the checkbox state). Click it to open a native color picker; the chosen color is saved to `EditorPrefs` and persists across sessions. Right-click the row to reset the color to its default. The color is shared with the Growth Curve Comparison window through the same underlying `StatColorPrefs` storage.
- The **slot name** — click to solo or un-solo the row (see [Solo / un-solo](#)). The name is displayed in bold when the row is the active solo or when it belongs to the Max HP slot. Hovering shows a tooltip with the min, max, and final values of the curve over its full level range.
- A  **warning icon** with a tooltip listing validation errors, shown when the formula exists but has errors.
- An **object field** where you can assign or reassign a `GrowthFormulaSO` directly.

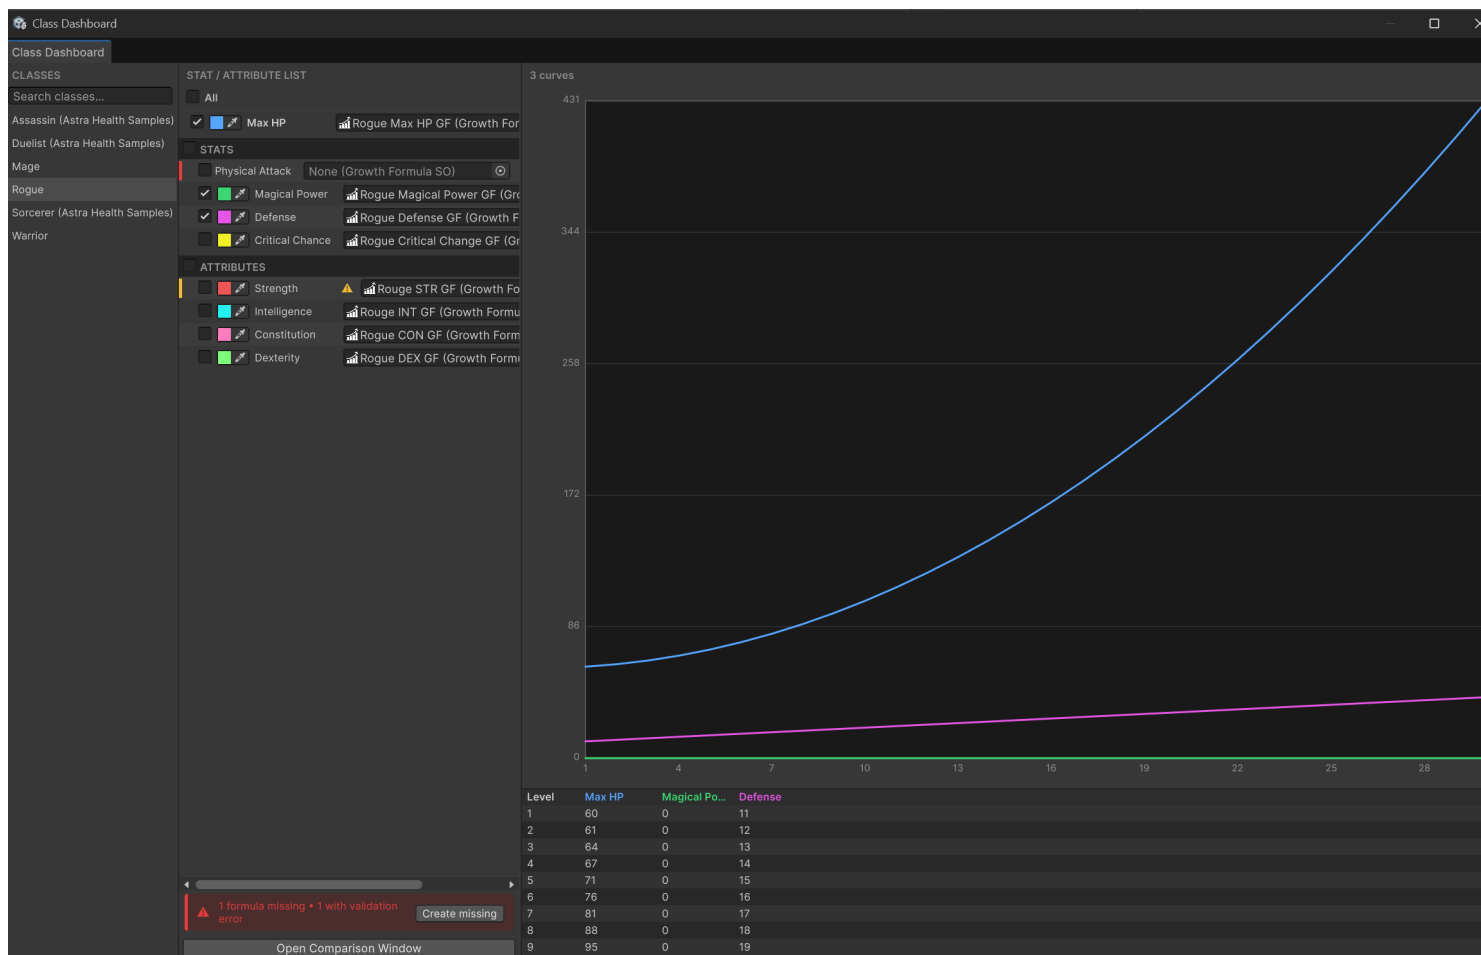

Solo / un-solo

Clicking a slot name in the formula list **solos** that curve: all other checked rows are temporarily hidden in the right-panel preview so you can inspect a single progression in isolation. The name turns bold to indicate the solo state.

Clicking the same name again **un-solos** it and restores the previous checked state exactly as it was before soloing. Toggling any checkbox, the master toggle, or a section toggle also clears the solo automatically.

NOTE

Solo is a transient, session-only state. It is not saved when switching classes or closing the window.

Formula health bar

When one or more slots are missing a formula or have validation errors, a status bar appears at the bottom of the middle panel. It shows the count of missing and invalid formulas and, when there are missing ones, a **Create missing** button. Clicking it opens the same growth-formula auto-creation dialog

used by the **ClassSO** inspector, letting you batch-create and assign a **GrowthFormulaSO** for every empty slot in one step.

Open Comparison Window

The **Open Comparison Window** button at the bottom of the middle panel opens the [Growth Curve Comparison](#) window pre-loaded with the currently selected class in **From Class** mode. Use it when you want to compare this class's curves against one or more other classes — the Class Dashboard itself is sufficient for reviewing all curves of a single class at once.

Curve preview (right panel)

The right column shows a chart and a value table for every row that has its checkbox ticked. Check multiple rows to overlay their curves and compare values side by side.

When no rows are checked, the right panel shows a hint. When checked rows have no assigned formula, the chart is empty but the panel stays visible.

TIP

The checked state is remembered per class within the current session. Switching to another class and back restores the same selection. A class that has never been visited in the current session always opens with all rows pre-checked.

Growth Curve Comparison

The Growth Curve Comparison window is the primary balancing tool in the framework. It lets you overlay the stat and attribute progression curves of up to four classes simultaneously, inspect numeric values level by level, and compare stat budgets across classes at any target level — all from a single resizable window.

Opening the window

- **Tools > Astra Framework > Growth Curve Comparison** — opens the window in **From Class** mode with no class pre-selected.
- **Open Comparison Window** button in the [Class Dashboard](#) — opens the window in From Class mode with the dashboard's current class pre-loaded.
- From a **ClassSO** inspector — opens the window (or focuses an existing one) for that class.
- From a **GrowthFormulaSO** inspector — opens the window in Manual mode, appending the formula if a Manual-mode window is already open.

Layout

The window is split into a left pane (mode selector and chart) and a right panel (legend and table).

Input modes

The **Input** dropdown in the toolbar switches between two modes.


From Class mode

In From Class mode, drop one or more **ClassS0** assets into the class fields. Up to four classes can be loaded simultaneously.

Each class is assigned a distinct **line style** to keep curves visually distinguishable even when colors overlap:

Class slot	Line style
1st	Solid —
2nd	Dashed - -
3rd	Dotted . . .
4th	Dash-dot - . -

When two or more classes are loaded, the legend reorganizes into a **COMMON** section containing curves that are shared by every loaded class (same stat or attribute), followed by per-class sections for slots that are unique to each class.

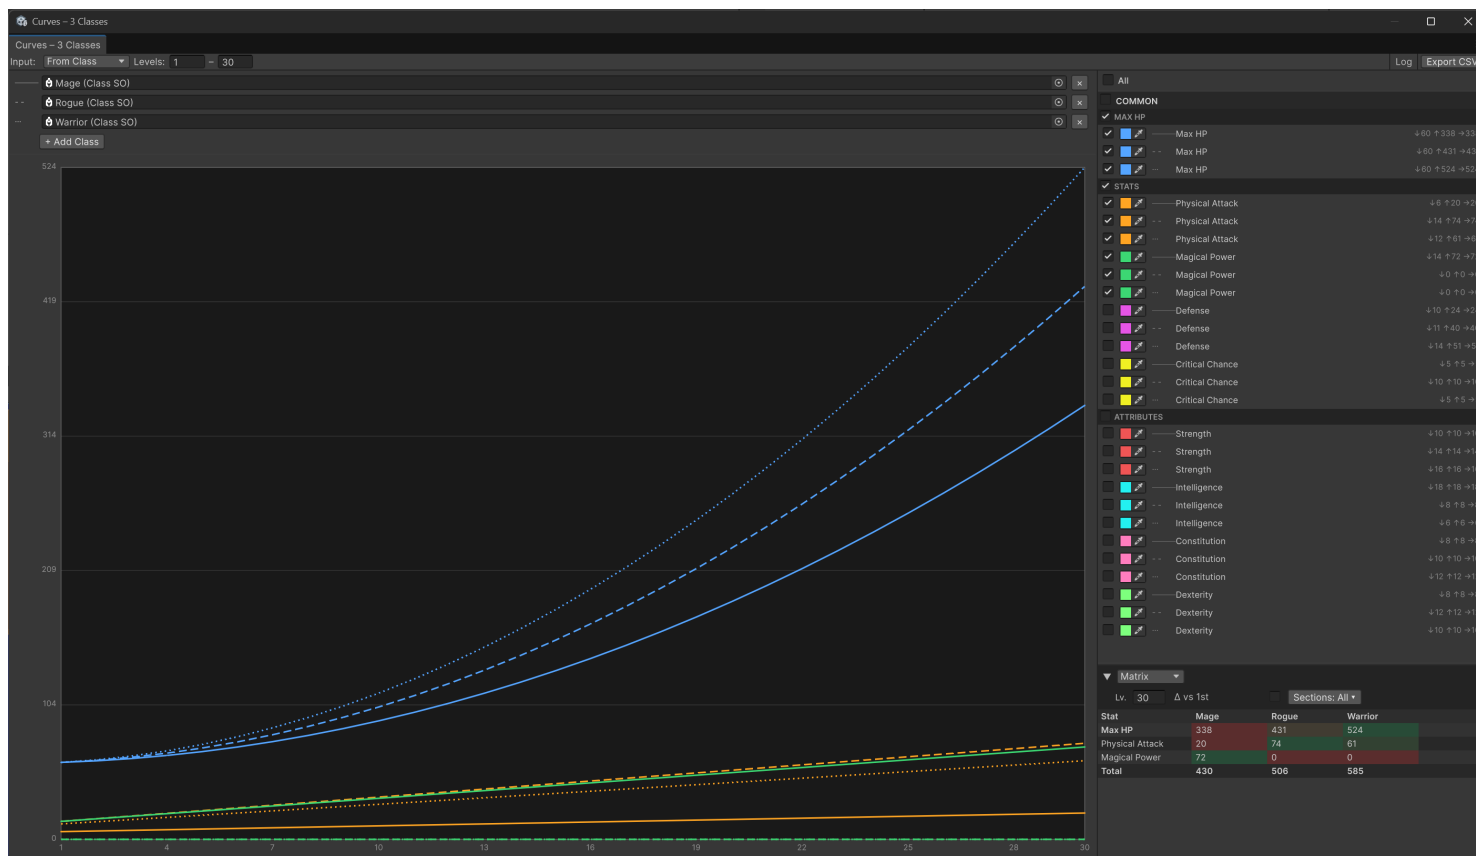


In this image, all classes have all stats and attributes in common.

NOTE

A stat or attribute is considered common when it is present in every selected class, regardless of the actual formula assigned to it.

Manual mode

In Manual mode, load **GrowthFormulaSO** assets by dragging them onto the drop zone or by selecting them through the picker field to the right of the drop zone. Duplicate formulas are silently ignored. Use **Clear** to remove all loaded formulas.

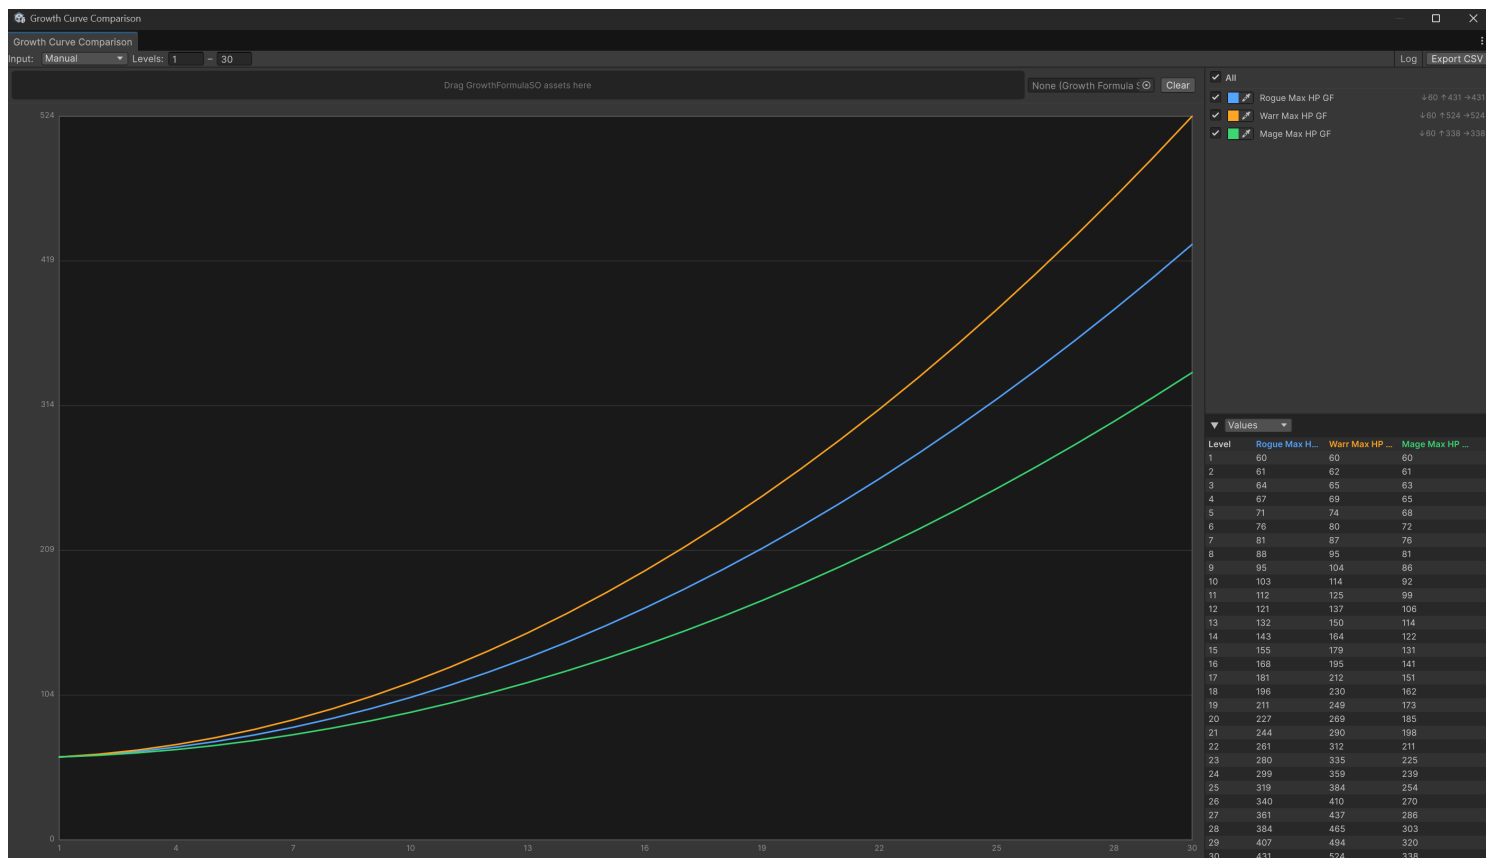

Toolbar

Control	Purpose
Input dropdown	Switch between From Class and Manual mode
Levels fields (From – To)	Set the level range shown on the chart and in the table
Log toggle	Switch the Y axis between linear and logarithmic scale, useful for exponential curves
Export CSV	Save the values of all visible curves to a .csv file

The level range is auto-populated from the longest formula in the current set when a new source is loaded.

Legend

The legend panel lists every loaded curve. At the top is a master **All** toggle that shows or hides all curves at once.

Below the master row, curves are grouped by section (Max HP, Stats, Attributes) when loaded from a class. Each section header has its own toggle to show or hide the entire section.


Each curve row contains:

- **Visibility toggle** — show or hide the curve individually.
- **Color swatch** — click to open a color picker. The chosen color is saved to `EditorPrefs` and persists across sessions and window instances. The same stat or attribute keeps its color across all classes loaded in the window.
- **Line-style icon** — visible in the COMMON section to indicate which class each entry belongs to.
- **Curve name** — click to solo or un-solo the curve (see below).
- **Stats summary** — shows $\downarrow$ min $\uparrow$ max $\rightarrow$ final values over the current level range.

Right-clicking a row opens a context menu with **Reset Color to Default** (clears the saved color for that slot) and **Reset All Saved Colors**.

Solo / un-solo

Clicking a curve name in the legend **solos** that curve: all other curves are hidden so you can inspect it in isolation. The name turns bold to indicate the solo state. Clicking it again **restores** the previous visibility state for all curves.

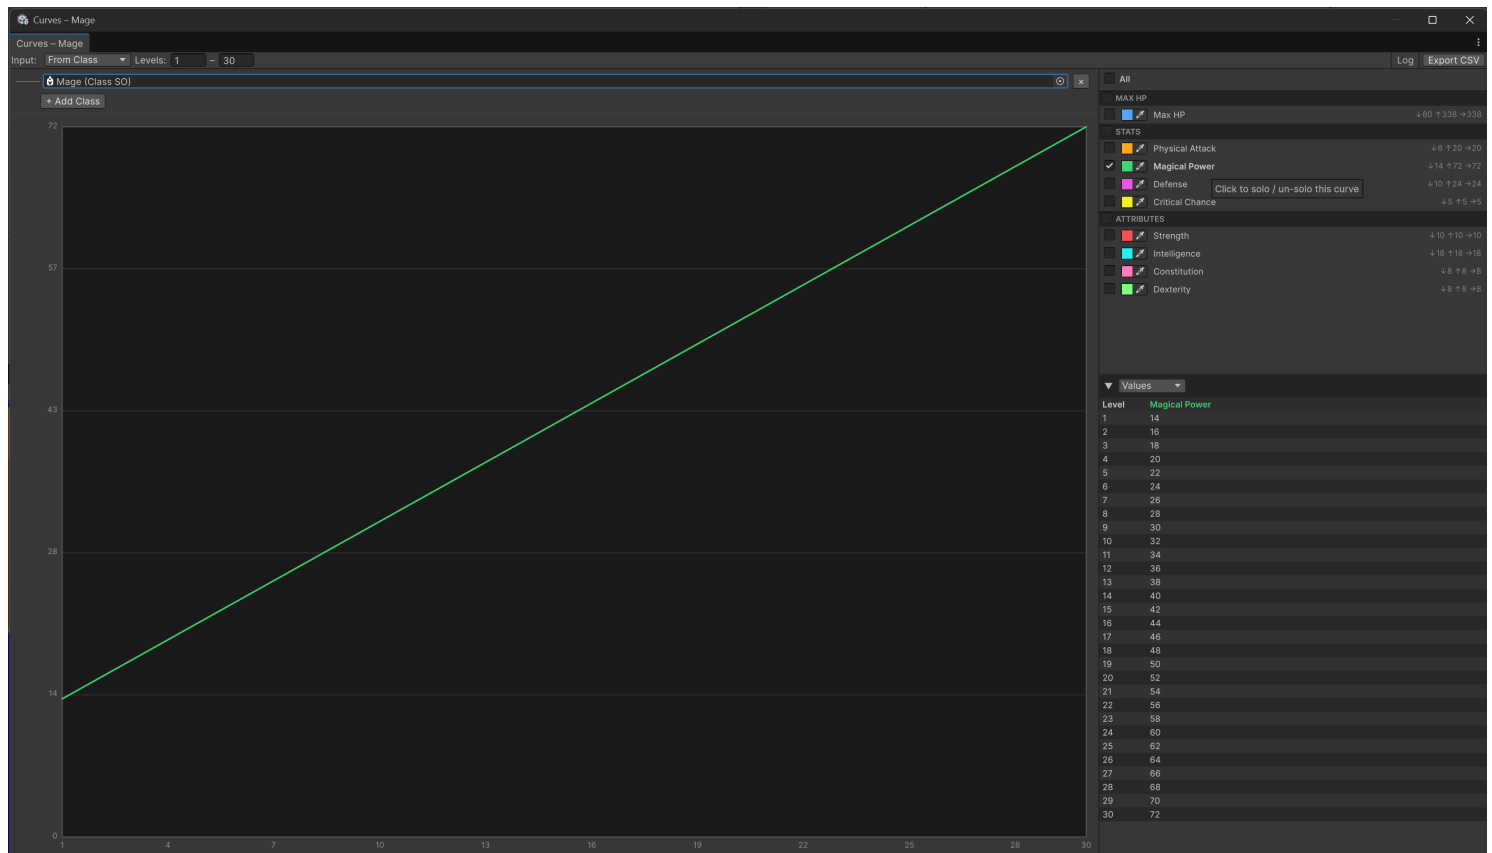

In **From Class mode with multiple classes**, soloing a curve groups it with all curves that represent the same stat or attribute across every loaded class. For example, soloing the **Physical Attack** row of the first class also keeps the **Physical Attack** rows of the second and third class visible, so you can compare how the same stat grows differently per class without losing context.

TIP

Use solo to focus on a single stat during balancing without manually toggling all other curves off — and un-solo with a second click to return to the full picture immediately.

Table panel


The collapsible table panel (▼ / ▶) below the legend shows numeric values. Use the **Values / Matrix** dropdown to switch between the two table modes.

Values table

Values mode shows one column per visible curve and one row per level, from the **From** level to the **To** level. Up to 1 000 levels are shown inline; if the range is larger, a message at the bottom of the table directs you to Export CSV.

Matrix table

Matrix mode shows classes as columns and stats or attributes as rows, at a single pinned level. This is designed for cross-class balance comparisons.

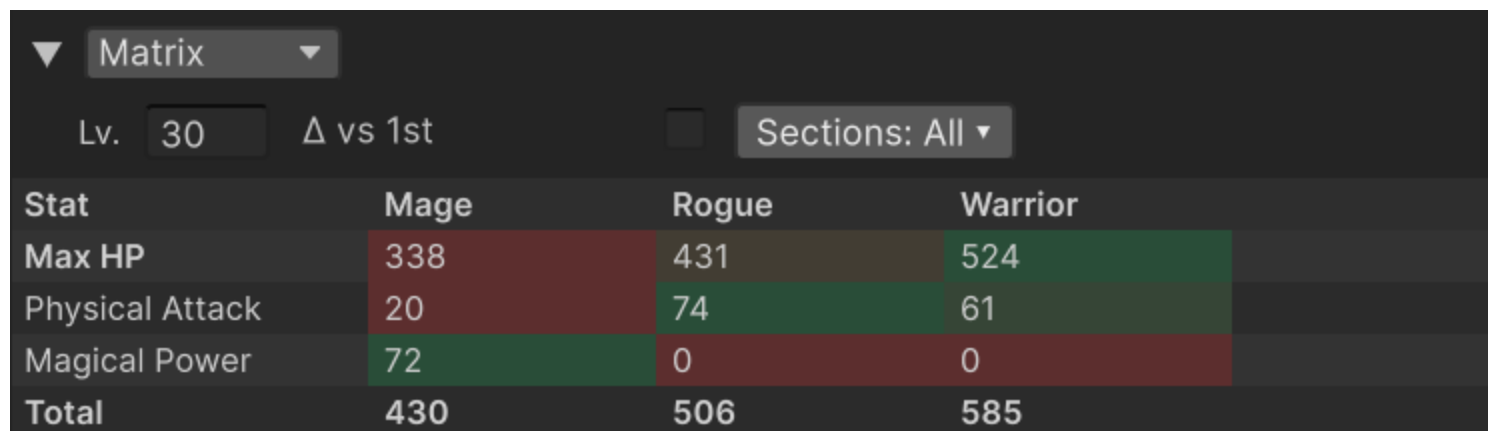

The screenshot shows the Matrix table interface. At the top, there is a dropdown menu set to 'Matrix'. Below it, there are controls for 'Lv.' (set to 30), a toggle for 'Δ vs 1st', and a 'Sections: All' dropdown. The table itself has four columns: 'Stat', 'Mage', 'Rogue', and 'Warrior'. The rows are 'Max HP', 'Physical Attack', 'Magical Power', and 'Total'. The cells are colored based on a heat map: red for lower values and green for higher values. Mage has the lowest Max HP (338), while Warrior has the highest (524). Mage has the highest Physical Attack (20), while Warrior has the lowest (61). Mage has the highest Magical Power (72), while Rogue and Warrior have 0. The Total row shows Mage at 430, Rogue at 506, and Warrior at 585.

Stat	Mage	Rogue	Warrior
Max HP	338	431	524
Physical Attack	20	74	61
Magical Power	72	0	0
Total	430	506	585

Matrix-specific controls:

- **Lv.** field — the level at which class values are compared. Defaults to the **To** level.
- **Δ vs 1st** toggle — replaces absolute values with the signed difference relative to the first class. Cells turn green when a class is higher than the first class and red when lower.
- **Sections** dropdown — choose which sections (Max HP, Stats, Attributes) are included in the rows and in the **Total** row.

Without the Δ toggle, cells within each row are colored with a **heat map**: the lowest value in the row is red, the highest is green. This makes it easy to spot at a glance which class has the highest or lowest value for each stat at the chosen level.


A **Total** row at the bottom sums all visible stat values for each class (respecting the section filter), giving a quick measure of the overall stat budget per class.

TIP

Use Matrix mode at key milestone levels (e.g., levels 1, 10, 20, max) to verify that class stat budgets remain balanced at each progression gate.

Game Tag Browser

The Game Tag Browser lets you find every asset in the project that carries a given combination of **GameTagSO** tags. It updates automatically whenever assets are created, deleted, or modified.

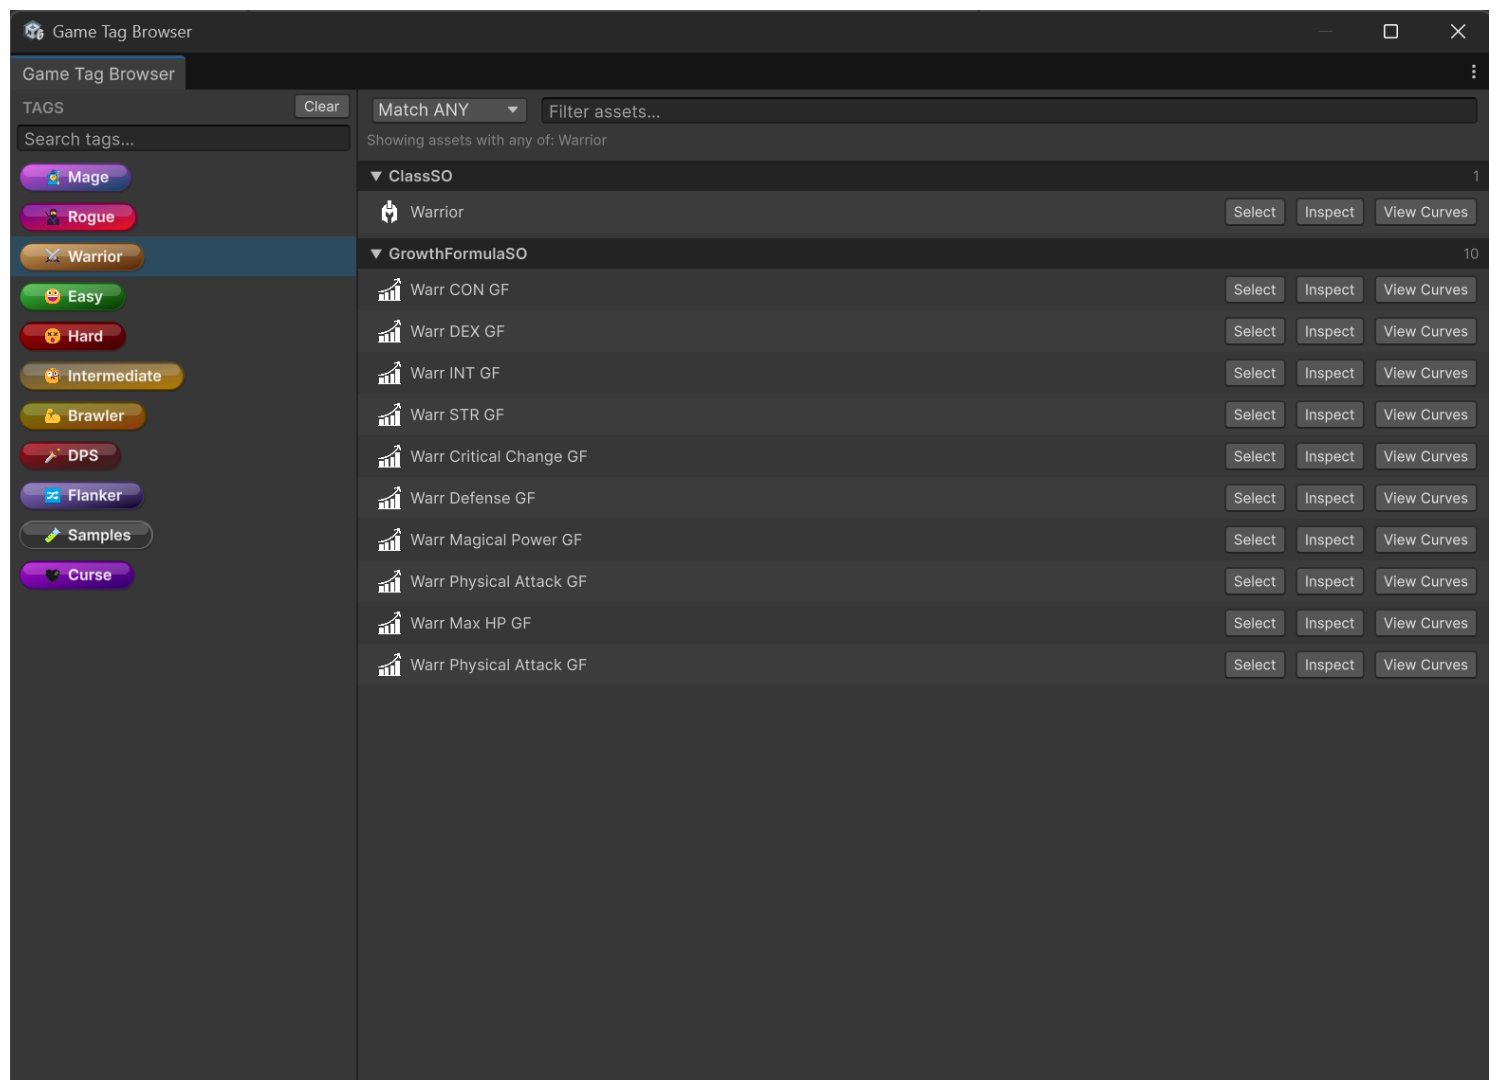

Opening the window

- **Tools > Astra Framework > Game Tag Browser** — opens the window with no tag pre-selected.

- From a **GameTagSO** inspector — opens the window with that tag already selected and the matching assets shown immediately.

Selecting tags (left panel)

The left panel lists every **GameTagSO** found in the project, rendered as pill badges identical to the ones shown in inspectors. A search field at the top filters the list by tag name.

- **Click** a tag to select it (highlight in blue) and add it to the filter. Click it again to deselect.
- **Shift+click** a tag to range-select all tags between the last clicked tag and the current one.
- **Clear** removes all selections.

The summary line in the right panel updates as you select tags to show exactly which tags the filter is currently using.

Asset list (right panel)

The right panel shows all assets that match the selected tags, grouped by asset type. Each group is collapsible and displays a count badge.

The **Match ANY / Match ALL** dropdown in the header controls the filter logic:

- **Match ANY** (default) — includes any asset that carries at least one of the selected tags (logical OR).
- **Match ALL** — includes only assets that carry every selected tag simultaneously (logical AND).

The **Filter assets** text field in the header filters the asset list by name within the current tag selection.

 NOTE

The tag filter and the asset-name filter are independent. You can narrow by tags first and then further narrow by asset name, or use either filter alone.

Asset row actions

Each asset in the list has up to three action buttons:

Button	Action
Select	Selects the asset in the Project window and pings it
Inspect	Opens the asset in a floating Property Editor
View Curves	Opens the Growth Curve Comparison window for the asset — available for GrowthFormulaSO and ClassSO assets

Limitations

Current Limitations

- Currently, multi-classing is not supported. Each entity can only have one class at a time
- Stat modifiers are applied in the following order:
 1. Flat modifiers
 2. Stat-to-stat modifiers
 3. Percentage modifiers
- Stat-to-stat modifiers use the base value and the flat modifiers for the source stat for the calculations. This ensures that the modifiers are applied consistently and predictably, and that circular dependencies can be defined without issues.
- Attribute modifiers do not have an attribute-to-attribute modifier system. This was a design choice to keep the system simpler.
- Attribute modifiers are applied in the following order:
 1. Flat modifiers
 2. Percentage modifiers
- Only one event for stats changed, attributes changed, and entity spawned can be assigned to entities. However, multiple event listeners can be assigned for the same event type, allowing for multiple responses
- Custom game event generators support up to four context parameters. To work around this limitation, users can combine multiple pieces of data into a single user-defined class—a technique known as "parameter packing." This approach is extensible through inheritance and helps maintain a simple, user-friendly API by avoiding telescoping parameters.

Addressed Limitations

Since Version	Original Limitation	Notes
 v2.0.0+	OnStatChangedEvent is risen only when modifiers are applied, not on level-ups/base stat changes	Stat-changed events now fire consistently during class progression formulas, level-ups, level-downs, and when dependent attributes change, following internal refactoring of <code>EntityStats</code> and <code>EntityAttributes</code> .
 v2.0.0+	OnAttributeChangedEvent is risen only when modifiers are applied and spendable points are assigned, not on level-ups/base attribute changes	Attribute-changed events now fire consistently during class progression formulas, level-ups, and level-downs, following internal refactoring of <code>EntityAttributes</code> .

Requirements

- Unity 6 or later

Package Contents

The package ships more than the sample scene. Besides examples, it includes the runtime and editor subsystems that Astra Framework uses internally and exposes for your own project workflows.

For a guided tour of the sample content, see [Samples](#).

Main package subsystems

Subsystem	What it contains	Learn more
Entities, stats, attributes, classes, scaling	The core progression model, including EntityCore , value containers, class data, growth formulas, and scaling assets.	Workflows
Game Events	Predefined event types, listeners, and the generator-based workflow for creating additional typed events.	Workflows
Global framework configuration	The shared config used to dispatch built-in framework events such as spawned, level up/down, stat changed, and attribute changed.	Workflows
Game Actions	Reusable asynchronous actions, projections, wrappers, and owner-aware event-driven execution flows.	Game Actions , Advanced topics
Game Tags	Tag assets, tag sets, and inspector header pills used to organize Astra assets and drive tag-based logic.	Game Tags
Conditions and reactive filtering	Polymorphic condition trees, conditional actions, and the trigger/filtering model used by reactive systems.	Conditions

Editor tooling included in the package

The package also contains editor-side tooling under **Editor/** that powers several authoring workflows documented elsewhere in this site:

- the Project Settings page for the global Astra Framework configuration
- inspector support for **SerializeReference**-based authoring flows
- the injected header pills used by taggable assets and components
- helpers used by condition and game-action inspectors

These editor tools are part of the package experience and are one of the reasons the framework can expose rich inspector-driven workflows without requiring custom tooling in your own project.

Samples

Importing the Samples

After having imported the package in your project, to import the samples into your project, head first to the package manager window. For latest versions of Unity, you can find it under **Window -> Package Management -> Package Manager**, otherwise, it should be under **Window -> Package Manager**.

From the package manager window, select the **In This Project** tab from the menu on the left, then select **AstraFramework** from the list of packages. You'll notice that there are four tabs on the right side of the window: **Details**, **Version History**, **Dependencies**, and **Samples**. Select the **Samples** tab, then click on the **Import** button to import the desired samples in the project.

The import will copy the samples of the package into your project's **Assets** folder, under **Assets/AstraFramework**.

The package currently exposes a single sample entry: **Example scene and instances**. Importing it creates **Assets/AstraFramework/Examples**, which contains both the sample scene itself and all the supporting assets it needs.

⊗ IMPORTANT

The assets in **Examples** are intended as reference material and learning aids.

For production content, prefer creating and owning your own instances in your project instead of depending on the imported sample assets. This avoids version-mixing issues if you later reimport samples from a newer package release and accidentally combine data authored against different sample revisions.

Examples

The **Examples** folder now includes everything that older package versions split between **Examples** and **Utils**. That means the example scene, its supporting assets, and helper-style sample instances are all imported together in one place.

At the top level you will find folders such as **Art**, **EventInstances**, **Instances**, **Player**, **Prefabs**, **Resources**, and **Scripts**.

- **EventInstances** contains sample Game Event assets used by the example content
- **Player** contains sample variable assets such as **Max Level** and **PlayerLevel**
- **Instances** contains the framework **ScriptableObject** instances used to drive the example setup

Let's start with the Sample Scene, which is the main guided example in this import. Inside it, the two most relevant root objects are **Heroes** and **HeroesHUD**. These wrappers contain the entity game objects and the GUI elements that display the heroes' stats and attributes respectively. There are three heroes in the **Heroes** GO: **Warrior**, **Mage**, and **Rogue**. Each hero has its own game object, with the following components:

- **EntityCore**
- **EntityClass**
- **EntityStats**
- **EntityAttributes**

The objects in **HeroesHUD** are less relevant for framework authoring. Feel free to explore them, but they mainly support the sample UI.

Outside the Sample Scene, the rest of the **Examples** folder provides the assets that support or explain the setup: art in **Art**, UI scripts in **Scripts**, prefabs in **Prefabs**, sample event assets in **EventInstances**, and the most relevant authoring data in **Instances**. In particular, **Instances -> Classes** contains the framework **ScriptableObject** instances used by the Sample Scene.

For each class we have the following:

- Attributes growth formulas
- Stats growth formulas
- An Int var for the hero's level
- A Max HP growth formula
- The class itself All these objects are used in the Sample Scene to showcase the package's features.

Using the Sample Scene

The scene uses **Strength**, **Intelligence**, **Dexterity**, and **Constitution** as attributes, and **Physical Attack**, **Magical Attack**, **Critical Chance**, and **Defense** as stats. Each stat scales with the respective attribute:

- **Physical Attack** scales with **Strength**
- **Magical Attack** scales with **Intelligence**
- **Defense** scales with **Constitution**
- **Critical Chance** scales with **Dexterity**

If you now enter play mode in the Sample Scene, you'll see three heroes: the Warrior (left), Mage (center), and Rogue (right), each with their respective HUD displayed above them. You can use the arrow buttons (< and >) to toggle between viewing the heroes' stats and attributes.

The Sample Scene is designed to demonstrate how stats and attributes respond to changes made in the inspector.

For example, select the **Warrior** in the hierarchy and change its Level from 1 to 2 using the Entity Core component. You'll observe that the Warrior's **Physical Attack** increases from 28 to 29, and **Defense** rises from 26 to 27.

Increasing the level also grants the Warrior a spendable attribute point (visible in the **EntityAttributes** component). If you allocate this point to **Strength**, the **Physical Attack** will increase from 29 to 30. If you revert the level back to 1, **Physical Attack** returns to 28 and the spent attribute point is removed.

Next, let's adjust how **Physical Attack** scales with the **Strength** attribute. By default, each point of **Strength** adds 1 point to **Physical Attack**. Suppose you want each point of **Strength** to contribute 3 points instead.

To do this, locate the **Physical Attack** stat instance in **Examples -> Instances -> Hero -> Stats**. Select the **Physical Attack** stat, then double-click the **Physical Attack ASC** object in the inspector. This Attribute Scaling Component controls how **Physical Attack** scales with **Strength**.

You'll notice the scaling value for **Strength** is set to 1. Change this to 3. Instantly, the Warrior's **Physical Attack** at level 1 jumps from 28 to 60, since the base value is 12 and the Warrior has 16 points of **Strength**: $12 + (16 \times 3) = 60$.

If you increase the Warrior's level to 2, **Physical Attack** becomes 61. Assigning the new attribute point to **Strength** further increases **Physical Attack** from 61 to 64.

After exiting play mode, inspect the modified objects. You'll see that the Warrior's level is reset to 1, **Physical Attack** returns to 28, and the **Physical Attack ASC** (ASC stands for Attribute Scaling Component) scaling for **Strength** is back to 1.

This happens because changes made to **ScriptableObjects** during play mode are not saved to disk when you exit play mode. This is intentional Unity behavior, not a package bug.

Persisting such changes would be risky. For example, if a debuff reduces the scaling of **Physical Attack** from **Strength** to zero during play mode and this is saved, you would permanently lose the original scaling—even after restarting without the debuff.

ScriptableObjects in this package are intended to define your game's baseline mechanics. Any modifications during play mode are temporary and not meant to be saved. Fine-tuning these values is crucial in games, and once you achieve the desired balance, you want to ensure those values remain intact.

You can also explore the other heroes and all their components in the scene. Play around with their levels, stats scalings, attributes and their spendable points, and see how they affect the heroes' stats and attributes in real-time.

Installation instructions

Importing Astra Framework and its samples

1. From the package manager, import Astra Framework. You can find the package in the "My Assets" section.
2. After importing, head to the "In Project" section, always in the Package Manager, and click on "AstraFramework".
3. Click on the "Samples" tab and import the samples you desire. Find out more about the samples in the [Samples documentation](#).
4. If you imported the "Example scene and instances" samples you need to import also TextMeshPro Essentials. Click on "Window > TextMeshPro > Import TMP Essential Resources".

Changelog

All notable changes to this project will be documented in this file.

The format is based on [Keep a Changelog](#).

[2.2.0] - 2026-09-02

Added

Runtime Features

- Added bonus attribute points: `EntityAttributes.GrantBonusAttributePoints`, `RevokeBonusAttributePoints`, and `SetBonusAttributePoints` manage a spendable point pool separate from level-derived points (e.g. granted by items or completed quests). Unlike level points, bonus points survive level-down and re-spec. `BonusAttributePoints` and `LevelAttributePoints` expose the two pools individually, alongside the existing `AvailableAttributePoints` and `TotalAttributePoints`.
- Added permanent per-attribute bonuses: `EntityAttributes.AddPermanentBonus`, `RemovePermanentBonus`, `SetPermanentBonus`, and `SetPermanentBonuses` apply a fixed bonus to an attribute that isn't drawn from any point pool (e.g. a consumed item or book permanently raising an attribute). Permanent bonuses are applied alongside spent points, before percentage modifiers, and are read back with `GetPermanentBonus/GetAllPermanentBonuses`. `ClearPermanentBonus` and `ClearAllPermanentBonuses` remove them explicitly.
- Added `AttributePointsChangeInfo` and `EntityAttributes.OnAttributePointsChangedCallback`, raised whenever the attribute-points budget (available and/or total) changes from spending, refunding, granting/revoking bonus points, or level changes.
- Added `EntitySaveId`, an opt-in stable per-entity identity for save systems: a string-backed serializable struct exposed through `EntityCore.SaveId`, `EnsureSaveId` (get-or-create), `RegenerateSaveId`, and `SetSaveId`. The framework never reads the value (no registry, no lookups, no behavior keyed off it), so an entity without an id behaves identically to one with an id; resolving a saved id back to a live entity, and keeping ids unique at runtime, stay the save system's responsibility. `Instantiate` copies a baked id, so runtime-spawned entities that each need their own save record must be given a fresh id by the spawner. See [Saving and Loading](#).
- Added `EntityAttributes.SetAllSpentPoints`, the bulk setter that pairs with `GetAllSpentPoints` for restoring the invested-points portfolio from a snapshot in a single state assignment, instead of replaying `SpendOn/RefundFrom` (whose outcome would depend on the order attributes are replayed in). It replaces rather than merges (attributes absent from the snapshot end at zero), rejects in full any snapshot the current point budget cannot cover, and skips attributes no longer in the `AttributeSet` with a warning rather than failing.
- Added `EntityStats.GetFixedBaseStatValues` and `EntityAttributes.GetFixedBaseAttributeValues`, the bulk getters that pair with the existing `SetFixedStatSource/SetFixedAttributeSource` setters, so

restoring fixed base values no longer requires walking `StatSet/AttributeSet` and calling `GetBase` per entry. Both read through the currently active source, so an entity backed by a `FixedStatValuesAsset` reports the asset's values.

Editor Features

- The `EntityAttributesEditor` inspector's `Attribute Points Tracker` now breaks the points summary down into `Level` and `Bonus`, and exposes an editable `Bonus Points` field (prompts for confirmation before a lowering that would force a refund of invested points).
- Added a `Permanent Bonuses` box to the `EntityAttributesEditor` inspector, listing every attribute in the current selection with an editable bonus value and a `Clear All` button.
- Added an optional **Save Identity** section to the `EntityCore` inspector: a read-only **Save Id** field with **Generate** / **Regenerate** / **Copy** actions (regenerating an existing id prompts for confirmation, since it orphans any save records that reference it), multi-object aware. Hidden by default behind the **Show Save Identity section** preference.
- Added `EntitySaveIdRegistry`, an authoring-time guard that keeps save ids unique: duplicating a placed entity, or dropping a second instance of a prefab that already carries a baked id, re-mints the id on the newcomer while the original keeps its id. It never runs in Play Mode and never touches prefab assets or Prefab Mode.
- Added a **Save Identity** page under `Edit > Preferences > Astra Framework`, holding the per-user **Show Save Identity section** and **Auto-bake save id on create** toggles (both off by default, so a project not using save ids gains no new authoring behavior). **Auto-bake save id on create** assigns an id to entities placed in a scene automatically, without a click; prefab assets, Prefab Mode, and Play Mode are left untouched.

Changed

Runtime Features

- `EntityAttributes.RefundAllSpentPoints` now also refunds points invested from the bonus pool, not just level-derived points, since invested points are fungible and not tagged by the pool they were drawn from. Permanent per-attribute bonuses are never touched by `RefundAllSpentPoints`, level-down, or re-spec; only the explicit `ClearPermanentBonus/ClearAllPermanentBonuses` APIs remove them.
- `EntityStats.UseClassBaseStats` now has a public setter (previously `internal`), matching its twin `EntityAttributes.UseBaseAttributesFromClass`, so a save system can restore which base-stat source an entity was using.
- `EntityCore.OwnerResolution` is now a public settable property; it was previously reachable only through the inspector. It is still read once in `Awake`, so restore it before the entity awakes.
- `EntityLevel` now raises a single `OnEntityLevelUp/OnEntityLevelDown` event per level transition, regardless of how many levels are crossed (previously one event per level). A jump from level 1 to 50 arrives as one event with `PreviousValue = 1`, `NewValue = 50`, and `AbsAmount = 49`, and runs one bulk

stat and attribute pass. This applies to every level change path: `AddExp`, `RemoveExp`, `SetTotalCurrentExp`, direct `Level` assignment, and `ResetToLevelOne`. Listeners that need per-level granularity (one reward or fanfare per level) should iterate over `AbsAmount`.

[2.1.1] - 2026-07-29

- Improved support for Unity 6.4+ editors

[2.1.0] - 2026-07-13

Added

Runtime Features

- Added `IFixedAttributeSource` and `IFixedStatSource`, minimal point-queried interfaces that supply fixed (non-class-derived) base attribute/stat values to `EntityAttributes/EntityStats`, plus the `FixedAttributeValues/FixedStatValues` serializable wrapper types that back the framework's own inline and asset-backed sources.
- Added `FixedAttributeValuesSO/FixedStatValuesSO`, standalone assets holding fixed base values that can be shared across multiple entities, together with the `EntityAttributes.FixedAttributeValuesAsset/EntityStats.FixedStatValuesAsset` fields and the `Use Fixed Attribute Values Asset/Use Fixed Stat Values Asset` toggle.
- Added `EntityAttributes.SetFixedAttributeSource/EntityStats.SetFixedStatSource`, with an `IReadOnlyDictionary` overload, to inject fixed base values from any custom source (save data, procedural generation, live-ops config) at runtime.
- Added `EntityAttributes.SetFixedAttributeSet/EntityStats.SetFixedStatSet` to swap the `AttributeSetSO/StatSetSO` used for fixed base values at runtime.
- Added `Assets > Create > Astra Framework > Fixed Attribute Values` and `Fixed Stat Values` asset creation menu items, with dedicated custom editors for authoring their values.
- Added the `Use Fixed Attribute Values Asset/Use Fixed Stat Values Asset` toggle to the `EntityAttributesEditor/EntityStatsEditor` inspectors.
- Added `EntityCore.Owner`, `EntityCore.Root`, `EntityCore.IsOwnedBy`, and the `OnOwnerChanged` event, an opt-in ownership edge between entities that lets one entity be recognized as owned by another (for example, a weapon entity owned by the ship entity carrying it).
- Added `OwnerResolution (Explicit/NearestAncestor)` so `EntityCore.Owner` can be assigned explicitly or resolved automatically from the nearest `EntityCore` up the transform hierarchy.
- Added `EntityAttribution` and `EntityOwnership.Resolve`, letting custom systems resolve "the responsible entity" for an entity as itself (`Direct`), its `Owner`, or its `Root`.
- Added the `HolderOwner`, `PerformerOwner`, and `PayloadPerformerOwner ConditionTarget` values, and the `IsOwnedByCondition` condition, so condition trees can reason about entity ownership.

Editor Features

- Added an **Ownership** section to the **EntityCoreEditor** inspector, exposing the **Owner** and **Owner Resolution** fields, plus a read-only **Root** display and a cycle warning in Play Mode.

Editor Features

- Added Class Dashboard Window: Allows to inspect all defined classes in a single place. You can visualize all the GrowthFormula used in a certain class in the same graph.
- Added Growth Curves Comparison Window: Lets you to compare multiple classes (up to 4), easing balancing and tuning. Also allows to compare multiple GrowthFormulas of any kind.
- Added Game Tag Browser Window: Enables browsing of assets basing of assigned Game Tags. If you used Game Tags along your project, will greatly ease the navigation of your assets.

Changed

Runtime Features

- **EntityAttributes** and **EntityStats** now store fixed base values internally through the new **FixedAttributeValues/FixedStatValues** wrapper types instead of a raw dictionary field. Existing serialized data migrates automatically the first time each object loads; see [Migrating to v2.1.0](#) in the Migration Guide.

[2.0.1] - 2026-06-21

Added

- Added support for Unity v6.5

Changed

- Rebranded the framework to "Astra Framework" ("RPG" was dropped)

[2.1.0] - Unreleased

Added

Editor Features

- Added Class Dashboard Window: Allows to inspect all defined classes in a single place. You can visualize all the GrowthFormula used in a certain class in the same graph.
- Added Growth Curves Comparison Window: Lets you to compare multiple classes (up to 4), easing balancing and tuning. Also allows to compare multiple GrowthFormulas of any kind.
- Added Game Tag Browser Window: Enables browsing of assets basing of assigned Game Tags. If you used Game Tags along your project, will greatly ease the navigation of your assets.

[2.0.1] - 2026-06-21

Added

- Added support for Unity v6.5

Changed

- Rebranded the framework to "Astra Framework" ("RPG" was dropped)

[2.0.0] - 2026-05-05

⚠ WARNING

This update includes breaking changes and behavior changes that can affect existing projects. Refer to the [Migrating to v2.0.0](#) section of the migration guide before updating.

Added

Runtime Features

- Added the **Conditions** system, including composite conditions, entity/tag/value-change/stat/attribute/random leaf conditions, and **ConditionalGameAction**.
- Added **ConditionEvaluationAvailability** and **ConditionTargetAvailability** so condition compatibility checks can describe both the payload contract and the entity target slots available in a given evaluation context.
- Added the **Game Tags** system with **GameTag**, **GameTagSet**, **ITaggable**, and tag-based conditions.
- Added framework-level configuration assets for built-in shared events through **AstraFrameworkConfigSO**, **AstraFrameworkGlobalSettingsSO**, and **AstraFrameworkConfigProvider**.
- Added reactive trigger infrastructure with **IReactiveTrigger**, typed **GameEventTrigger<TContext>** implementations, and **EventSource** support for shared subscription coalescing.
- Added **IHasEntity** as the common bridge contract for entity-aware payloads and game actions, plus projection actions for entity-context workflows.
- Added owner-aware execution paths for **GameActions** and introduced **GameActionBase** to support inspector-facing polymorphic action references.
- Added **IStatReader** and **IAttributeReader**, then extended the API with **TryGetBase**.
- Added **RoundingMode** and its helper extensions for explicit integer conversion from double-based calculations.

Editor Features

- Added dedicated authoring helpers for conditions, including quick setup utilities, managed-reference body drawers for condition fields, and condition tooltips.
- Added deeper condition authoring support through **ConditionEditorContext** and **ConditionTargetDrawer**, so payload-aware editors can also filter invalid **ConditionTarget** values

instead of only filtering condition types.

- Added the Game Tag header-pill workflow, including popup search, multi-select add/remove, double-click quick add, intersection handling, overflow display, drag reordering, click-to-ping, and visual customization support.
- Added custom managed-reference drawers for condition-related attribute and stat fields.
- Added optional project-scoped **Authoring Defaults** in `Edit > Project Settings > Astra Framework > Authoring Defaults` for `EntityCore`, `GrowthFormulaSO`, `ClassSO`, `EntityStats`, and `EntityAttributes`, together with inspector actions to apply or replace those defaults on existing objects.
- Added multi-object editing support to the `EntityCore`, `EntityStats`, `EntityAttributes`, `EntityClass`, `Class`, `Scaling Formula`, `Attribute`, `Stat`, `Attribute Scaling Component`, and `Stat Scaling Component` (both attributes and stats) inspectors, including bulk editing for shared values across multiple selected objects.
- Added the `Migrate Managed References (SO Rename)` tool (`Tools → Astra Framework → v2.0.0 Migration → Migrate Managed References (SO Rename)`) to rewrite `[SerializeReference]` managed-reference type strings that `[MovedFrom]` alone cannot patch after the `ScriptableObject` type renames. The tool supports a dry-run mode, per-session reporting to `Library/AstraMigrationReport_{timestamp}.txt`, and optional scanning of closed scenes.
- Added `TypeSelectableClosedGenericValidator`, an editor startup check that emits a warning when a `[SerializeReference, TypeSelectable]` field targets a closed generic type — a pattern that breaks silently when any type inside the generic argument is renamed (Unity bug [UUM-44729](#)).

Changed

Runtime Features

- Built-in `Spawned`, `Level Up`, `Level Down`, `Stat Changed`, and `Attribute Changed` events are dispatched through the active Astra Framework configuration asset.
- The optional experience gain modifier stat binding is now assigned once in `AstraFrameworkConfigSO` through **Experience Gain Modifier Stat** instead of being configured per entity.
- `GameAction` workflows now lean on `IHasEntity` as the primary context for event-driven authoring, with owner propagation preserved across wrapper and projection actions.
- `EntityCore` now implements both `IStatReader` and `IAttributeReader`, making the entity itself a convenient read facade for gameplay code.
- `ConditionCompatibility` now performs deeper validation of condition trees, including recursive checks on authored `ConditionTarget` selections inside composite conditions.
- Corrected the `EntityStats.AddStatToStatModifer(...)` typo to `AddStatToStatModifier(...)`.
- Stat and attribute changed notifications now cover broader effective changes, including dependent recalculations and bulk level transitions. See [Addressed Limitations](#) for details.

- `EntityCore`, `EntityLevel`, `EntityStats`, and `EntityAttributes` implement `IEventRegistrar`, providing generic `Subscribe<TEvent>` and `Unsubscribe<TEvent>` methods for per-entity extra event registration.
- All core `ScriptableObject` types have been renamed with an `SO` suffix to better reflect their `ScriptableObject` nature. The full rename table and migration instructions are in the [Migration Guide](#).

Old name	New name
<code>Stat</code>	<code>StatSO</code>
<code>Attribute</code>	<code>AttributeSO</code>
<code>Class</code>	<code>ClassSO</code>
<code>StatSet</code>	<code>StatSetSO</code>
<code>AttributeSet</code>	<code>AttributeSetSO</code>
<code>GrowthFormula</code>	<code>GrowthFormulaSO</code>
<code>ScalingFormula</code>	<code>ScalingFormulaSO</code>
<code>ScalingComponent</code>	<code>ScalingComponentSO</code>
<code>AttributesScalingComponent</code>	<code>AttributesScalingComponentSO</code>
<code>StatsScalingComponent</code>	<code>StatsScalingComponentSO</code>
<code>IntVar</code>	<code>IntVarSO</code>
<code>LongVar</code>	<code>LongVarSO</code>
<code>GameTag</code>	<code>GameTagSO</code>
<code>BoundedValue</code>	<code>BoundedValueSO</code>

All renamed types carry `[MovedFrom(autoUpdateAPI = true)]`; Unity's API Updater handles C# script references automatically on reimport.

- `IDisplaySONameProvider<T>` was replaced by the non-generic `IDisplaySONameProvider` (parameter type changed from `T` to `ScriptableObject`). The change was necessary to work around [Unity bug UUM-44729](#), where `[MovedFrom]` does not propagate into generic arguments of serialized type strings. Custom implementations must now cast the `ScriptableObject` parameter internally. See [Migrating IDisplaySONameProvider<T>](#).

Editor Features

- Improved the fixed-base attribute handling in `EntityAttributesEditor` and `EntityStatsEditor` for Play Mode usage.
- Replaced sample-backed script default references with optional authoring defaults, so new objects no longer inherit hidden references from package samples and repeated authoring can be standardized explicitly at the project level.
- `ConditionFieldWithQuickSetup` and `PayloadFilteredConditionPicker` now work from a full `ConditionEvaluationAvailability`, whether it is inferred from `IReactiveTrigger.PayloadType` or passed explicitly by a custom editor.
- Payload-aware condition authoring now keeps nested composite conditions under the same availability filter and shows inline errors when a condition type or `ConditionTarget` is incompatible with the current context.

Removed

Runtime Features

- Removed the deprecated legacy `EntityLeveledUpGameEvent` and `EntityLeveledDownGameEvent` types together with the remaining deprecated legacy hooks in `EntityLevel1`. These had already been deprecated in `v1.4.0`; if your project still uses them, complete the migration described in [Migrating to v1.4.0](#) before upgrading.
- Removed the deprecated `AttributePointsTracker` compatibility layer from `EntityAttributes`. The transition to `EntityPointsTracker` and `AttributePortfolio` started in `v1.3.0`.

Samples

- Removed the separate `Utils` sample folder. Its helper assets now live under `Examples`, and the samples are documented as reference content rather than project-owned runtime data.

Editor Features

- Removed the deprecated `DerivedTypePicker` editor utility. The replacement path to `TypeSelectionMenu` was introduced in `v1.2.0`.

Fixed

Runtime Features

- Fixed level-down handling so fixed-base attribute snapshots are preserved correctly while raising change events.
- Fixed a null-reference path in `GameEventListener` validation when the `UnityEvent` response is missing.

[1.5.1] - 2026-04-04

Changed

Editor Features

- Reordered the EntityAttributes fields in the custom inspector to prevent the bug mentioned below

Fixed

Editor Features

- Fixed a bug in the EntityAttributes custom inspector that was not allowing to set either the fixed base Attribute Set nor the "Use Class Attributes From Class"

[1.5.0] - 2026-03-23

Added

Runtime Features

- Added `IScalingFormula` interface exposing the 4 main methods for scaling formulas. `ScalingFormula` and `ScalingFormulaInstance` now implement this interface.
- Added `ScalingFormulaInstance`. This class shall be used in place of `ScalingFormula` when you need to have a scaling formula that may use temporary scaling components. Temporary scaling components on the SO `ScalingFormula` have been deprecated and will be removed (see below). This ensures that the temporary scaling components do not modify the original `ScriptableObject` instance of the scaling formula, which could cause unintended side effects across different entities using the same scaling formula.
- Added several public read-only properties to `ScalingFormula`:
 - `UseScalingBaseValue`
 - `HasSelfComponents`
 - `HasTargetComponents`
 - `SelfScalingComponents`
 - `TargetScalingComponents`
- Added a public `MaxLevel` get property to `EntityLevel`
- All game event listeners log now an error if play mode is entered while no game event SO instance is assigned to them

Editor Features

- Added `Percentage` custom property drawer

Changed

Editor Features

- Improved the `GrowthFormula`'s custom inspector in several ways:

- Repositioned remove buttons (Now just a "-" sign) to the top right of each growth expression (previously at the bottom)
- When the **Use Constant Value At Level 1** is checked/unchecked, the first growth expression starting level is automatically set to 2 or 1 respectively, without the need for user input.
- When adding the first growth expression, if the **Use Constant Value At Level 1** is checked, the starting level of the growth expression is automatically set to 2. If it's unchecked, it's set to 1.
- When adding a growth expression, the starting level of the new expression is automatically set to one level higher than the previous last expression. The user can of course change it after, but this provides a more intuitive default behavior.
- When a certain growth expression level is changed, the validation is not performed right away any more, but only after the user finishes editing the field (presses Enter or changes focus). This prevents weird behavior of the inspector while editing the growth expressions, such as automatic changes of the level of other expressions while editing a certain expression's level, which could be confusing.
- Expressions can now be reordered with up and down buttons.
- The growth expressions now have dedicated colored headers.
- The table of the level to value mappings has been redesigned and now clearly shows the various growth expression ranges by using the same colors as the growth expressions.
- The graph has been redesigned and now light vertical lines are shown to better identify the ranges.
- The on-hover popup shown over the graph has been redesigned. It now also shows the growth expression and its range to which the hovered level belongs.

Samples

- Reviewed the style of the sample scene

Deprecated

Runtime Features

- Deprecated **TmpSelfScalingComponents** and **TmpTargetScalingComponents** in **ScalingFormula**

Removed

Runtime Features

- **ToggleHarvestedExpSourceGameAction** no longer prints a warning when no **ExpSource** component is attached to the entity on which is being executed

[1.4.2] - 2026-02-13

Changed

Samples

- The sample scene is now using custom materials and a custom shader graph to support multiple render pipelines.

Fixed

- Fixed a "Stat cannot be read" error being thrown upon project opening/scene loading.

[1.4.1] - 2026-02-09

Fixed

- Fixed an issue with the display of Included Stat Sets.

[1.4.0] - 2026-02-04

⚠ WARNING

This update involves breaking changes. Refer to the [Migrating to v1.4.0](#) section of the migration guide for detailed steps to update your project.

Added

Runtime Features

- Added **GameAction** to encapsulate game logic as **ScriptableObjects**. Has a generic context type parameter to specify the type of object the action operates on.
- Added **IExecutable** interface. Implemented by **GameAction**.
- Added the following implementations of **GameAction**:
 - **ToggleRenderersGameAction**: Toggles the enabled state of all **Renderer** components on a **GameObject** and its children.
 - **ToggleHarvestedExpSourceGameAction**: Toggles the harvested state of an **ExpResource** component.
 - **ToggleCollidersGameAction**: Toggles the enabled state of all **Collider** components on a **GameObject** and its children.
 - **ToggleActiveGameObjectGameAction**: Toggles the active state of a **GameObject**.
 - **IncreaseCounterGameAction**: Increases a **LongVar** by a specified amount. Amount can also be negative to decrease the counter.
 - **DoNothingGameAction**: A no-op action that does nothing when executed. Reserved mostly for Astra Health for neutral responses to certain events.
 - **DestroyGameAction**: Destroys the target **GameObject**.
 - **DelayedGameAction**: Executes another **GameAction** after a specified delay.
 - **CompositeGameAction**: Executes a list of **GameActions** in sequence.

- Added the Create Menu entries for all the above GameActions, with `EntityEngine.Component` as context type parameter.
- Added `GameActionRunner` MonoBehaviour. Used to execute GameActions in a fire-and-forget manner on a specific owner `GameObject`. Useful, for example, if the action is expected to complete and the GameObject owning the GameAction may be destroyed at any moment, or if you want to centralize the execution of GameActions on a specific GameObject (such as a manager).
- Added `IHasSource` interface to establish a contract for objects that have a source EntityCore. Used by Game Event contexts that have a source entity doing something. Currently reserved for future use in Astra Health.
- Added `IHasTarget` interface to establish a contract for objects that have a target EntityCore. Used by Game Event contexts that have a target entity receiving something. Currently used by the `EntityLevelChangedContext` for the new Entity Level Up and Entity Level Down Game Events (see changes for details).
- `IHasValueChange<out T>` interface to establish a contract for objects that represent a change in value of type T. Used by Game Event contexts that represent a change in value:
 - `EntityLevelChangedContext` (int value change)
 - `AttributeChangeInfo` (long value change)
 - `StatChangeInfo` (long value change)
 - `IHasVictim` interface to establish a contract for objects that have a victim EntityCore. Reserved for future use in Astra Health.
- Added custom icon for `ExpSource` MonoBehaviour.

Editor Features

- Added a `BrokenEventFinder` utility to help identify broken responses in Unity Events (and therefore in Game Events). Can be accessed from the menu: `Tools/Astra Framework/Find Broken UnityEvents`.

Samples

- Added custom font for the Sample Scene.

Changed

Runtime Features

- Simplified `ExpSource` implementation. Now `Harvested` property is no longer set to true upon getting `Exp` property. Now the external code is responsible for setting the `Harvested` property to true when appropriate. This change allows for more flexible usage of the `ExpSource` component, as it can now be used in scenarios where the experience points are not immediately harvested upon retrieval. This change was made to better accommodate future features in Astra Health.

Samples

- Updated the input system in the Sample Scene so that no manual action from the user is required when importing the project in Unity v6.2+.
- Renamed `SampleScene` to `Astra Framework Sample Scene`.
- Updated `CommonApiCheatSheet` to reflect new `EntityLevelUp` and `EntityLevelDown` game events (see [Deprecated](#) section).

Fixed

Samples

- Fixed the input handling in the Sample Scene for Unity 6.2+

Deprecated

- Mark `EntityLeveledDown` and `EntityLeveledUp` events as obsolete, suggesting new alternatives. Use the new `EntityLevelUpGameEvent` and `EntityLevelDownGameEvent`, and the respective listeners, instead. **Notice that the new events don't have the `ed` suffix after `EntityLevel`.** See the [Migration Guide](#) for detailed migration steps.

Removed

- Removed previously deprecated `_includedStatSets` field in `StatSet`

[1.3.1] - 2026-01-10

Fixed

- Fixed an editor-scripts related issue that was causing build problems.

[1.3.0] - 2025-12-16

Added

Runtime Features

- Added `PRV[N]` and `AT[N]` keywords for growth formulas' expressions.
 - `PRV[N]`: Represents the n-previous Growth Formula value. For example, `PRV[3]` at level 8 would return the Growth Formula value at level 5.
 - `AT[N]`: Represents the Growth Formula value at a specific level N. For example, `AT[10]` would return the Growth Formula value at level 10.
- `BoundedValue.Clamp` now supports also clamping of double values. For now is used internally by the framework and is reserved for future use is Astra Health.

Editor Features

- Added support for `enum` formatting in `InspectorTypography`.

- Added utility to provide compact representation of large numbers in the editor (e.g., 1.5K, 4M). Reserved for future use in Astra Health.

Changed

Runtime Features

- Changed the internal `AttributePointsTracker` used by `EntityAttributes` to track spendable attribute points. `EntityPointsTracker` replaces the legacy tracker, and relies on a new `AttributePortfolio` to manage the allocation of attribute points to attributes. This new system is more readable, more robust, and more maintainable. The old system is left for backward compatibility. By updating the framework to this version, existing projects will automatically migrate to the new system.

Fixed

Runtime Features

- Fixed Round Robin Strategy for attribute points removal on level down or reset to level 1.

[1.2.0] - 2025-11-25

Added

Runtime Features

- Added `OnLevelDownEvent` Game Event. This event is triggered whenever an entity levels down, allowing you to respond to level down events in your game.
- Added XP deduction feature. Now you can deduct XP from an entity using the `EntityCore.Level.RemoveExp(long amount)` method. This will also handle level downs if the deducted XP causes the entity to drop below the current level's XP threshold. Triggers the `OnLevelDownEvent` once for each level the entity drops.
- Added reset to level 1 feature. You can now reset an entity's level and XP to level 1 using the `EntityCore.Level.ResetToLevelOne()` method. This will set the entity's level to 1 and XP to 0. Triggers the `OnLevelDownEvent` once for each level the entity drops.
- Added basic support for statistics, attributes, and classes names presentation. This includes:
 - `IDisplaySObjectNameProvider<in T> where T : ScriptableObject` interface for providing custom display names for ScriptableObjects.
 - `DefaultDisplaySObjectNameProvider<T>` class that implements the above interface and returns the ScriptableObject's name as the display name.
 - `DefaultAttributeCompactDisplaySObjectNameProvider` class that provides compact display names for attributes (e.g., "Str" for "Strength"). This one simply takes the first three letters of the attribute's name, capitalize them, and return that as the display name.
 You can implement your own display name providers by implementing the

`IDisplaySONameProvider<T>` interface to provide custom display names for your statistics, attributes, and classes or to use **localization systems**.

Editor Features

- Added *Read Only* (RO) property in `InspectorTypography`. Marks a field in the inspector as read only, in the sense that the component automatically manages it, and the user should not manually edit any associated `LongVar/IntVar` associated values. Currently reserved for future use.
- Added `IValidatable` interface. Used by the framework to propagate validation events to depending objects. Used to ensure that when a `MonoBehaviour/ScriptableObject` is validated in the inspector, all depending objects are also validated to ensure data consistency.
- Added `TypeSelectionMenu`. Provides a reusable editor context menu to pick a concrete type derived from a given base type. Configurable display (optional "None" or "Default" entries, optional name trimming, exclusion of test types, extra filters). Returns the chosen type via a callback so callers can create or clear instances accordingly.
- Added `[TypeSelectable]` attribute for use on `[SerializeReference]` fields; supports an optional `DefaultType` to present a "Default" choice. Shows also "None" to clear the reference.
- Added `SerializeReferenceDrawer` custom property drawer. New editor `PropertyDrawer` showing current concrete type and a Select button for managed references. Opens centralized `TypeSelectionMenu`, supports choosing None, Default or concrete types and creates/assigns instances.
- Added `SerializeReferenceInitializer`. Runs in the editor to ensure `[SerializeReference]` fields marked with `[TypeSelectable]` that declare a default type are populated when scenes/prefabs are opened or on demand (during script compilation). Automatically instantiates and assigns default instances where fields are null, provides a menu command to initialize all applicable fields, and marks modified assets/scenes as dirty.

Samples

- Added `ExpUtils` `MonoBehaviour`. Adds utility methods that can be invoked from the Unity Editor (in play mode) to add or remove XP from an entity for testing purposes.

Changed

Runtime

- `SoSetScalingComponentBase` now logs a warning if no entity set is assigned during the lookup of values to use for scaling calculations.
- `AttributeScalingComponent` and `StatScalingComponent` now return 0 as the scaled value if no entity set is assigned, instead of raising an error. This behavior allows for more flexible setups with entities with different sets of attributes/stats. The warning logged by the base class will help identify potential misconfigurations.

- Marked `OnEntityLevelUp` and `OnEntityLevelDown` events in `EntityCore` as required (red *). Such methods are becoming crucial for the correct functioning of the various components of the framework. Therefore, it's important to ensure that these events are properly assigned. Entities that are missing these events will raise an error during their `Start()` method.

Editor

- Improved hot-reloading support for `StatSet` and `AttributeSet`.
- Attributes of `AttributeSet` are not "Re-play" (yellow R) any more. This means that it supports changes (addition/removal) of attributes in the `AttributeSet` without exiting play-mode.
- Improved `InspectorTypography` class. Now it supports also property drawn within GUI rects.

Samples

- `ValuesReader` and `ValueEntry` now use `[SerializeReference]` and `[TypeSelectable]` attributes for allowing easier selection of the presentation strategy for each value entry (`IDisplayS0NameProvider` implementation).

Deprecated

- Deprecated `DerivedTypePicker` in favor of the new `TypeSelectionMenu` system. Use the new system for better type selection in the editor. `DerivedTypePicker` will be removed in future releases.

Fixed

- Added missing invalidation of the cached values for the statistics in `EntityStats.OnEnable()` method.
- Fixed `SetTotalCurrentExp` that was not raising level up and level down events when appropriate.
- Fixed the assignment of total available attribute points. Previously, this was handled only in `OnValidate`, which caused issues in builds (where editor-only code is stripped). Initialization is now also performed in `EntityCore.Start()`. Additionally, total available attribute points are now updated within `AddPoints()`, ensuring they are correctly recalculated whenever points are added—not only during `Init()`.

[1.1.2] - 2025-11-12

Changed

- Updated the "Example scene and instances" samples. Now by default the Hero prefab uses a `IntVar` for the attribute spendable points per level. This makes more consistent the amount of spendable attribute points acquired by each character on level up
- Updated offline docs with Installation Guide section

[1.1.1] - 2025-11-06

Changed

- Updated the links in `package.json` to match the new docs URL

[1.1.0] - 2025-11-06

Changed

Updated branding from "SOAP RPG Framework" to "Astra RPG Framework"

IMPORTANT: Refer to the [migration guide](#) for updating existing projects that used the previous version.

- UPM package name changed to "com.electricdrill.astra-rpg-framework".
- UPM package display name changed to "Astra RPG Framework".
- Namespaces updated to reflect new branding: "ElectricDrill.AstraRPGFramework".
- Menu paths in Unity Editor updated to "Astra RPG Framework".

Deprecated

- `_includedStatSets` field in `StatSet` will become an internal property in future releases.

[1.0.0] - 2025-10-30

Added

- Initial release of SOAP RPG Framework.
- ScriptableObject-based toolkit for core RPG mechanics.
- MonoBehaviour-based components for easy integration.

ScriptableObject Features

- Statistics & Attributes: Define core stats like Strength and Intelligence, as well as derived attributes like Health or Mana.
- StatSets & AttributeSets: Group related stats and attributes together for organization. Sets can be nested for complex structures.
- Experience & Leveling System: Custom experience curves and character progression.
- Classes: Define character classes with unique progressions and abilities.
- Progression System: Control how stats and attributes grow as characters level up.
- Scaling Formulas: Custom formulas to calculate final values of stats and attributes.
- Scaling Components: Modular scaling formulas reusable across stats and attributes.
- Game Events: Design and trigger custom game events.
- Growth Formulas: Determine how values progress based on a character's level.
- Game Event Generators: Define custom game event types.
- Variables: Use Long and Int variables as ScriptableObjects for persistent data storage.

MonoBehaviour Features

- EntityCore: Manage a character's core data, including experience and level.
- EntityStats & EntityAttributes: Assign statistics and attributes to any entity. Components can retrieve values from the assigned EntityClass based on level.
- EntityClass: Assign a class to an entity, linking it to specific progression paths.

API & Modifiers

- Comprehensive API for advanced customization (see API Docs).
- Dynamic application of modifiers to stats and attributes:
 - Flat & Percentage Modifiers for attributes.
 - Flat, Percentage, & Stat-to-Stat Modifiers for statistics.

Migration Guide

Migrating to v2.1.0

v2.1.0 introduces pluggable fixed base attribute and stat sources (see the [v2.1.0](#) entry in [Changelog](#)). This is fully backward-compatible: **no manual migration steps are required**, but it's worth understanding what happens automatically behind the scenes.

Automatic migration of fixed base values

Internally, `EntityAttributes` and `EntityStats` used to store fixed base values in a raw dictionary field (`_fixedBaseAttributes` / `_fixedBaseStats`). Starting with v2.1.0, that storage is wrapped in the new `FixedAttributeValues` / `FixedStatValues` types, which also back the new asset-based source (`FixedAttributeValuesSO` / `FixedStatValuesSO`) and any custom `IFixedAttributeSource` / `IFixedStatSource` implementation through the same code path.

To preserve existing data, the old field was renamed to `_legacyFixedBaseAttributes` / `_legacyFixedBaseStats` and kept around purely as a migration source. Unity's `[FormerlySerializedAs]` attribute keeps the link to the old field name, so previously serialized values are still found correctly under the new name. The first time each `EntityAttributes` or `EntityStats` component is enabled after updating — in the editor or in a build — it copies any data found in the legacy field into the new one and marks itself as migrated, so the copy only ever runs once per object.

NOTE

The legacy field is copied from, never cleared. If anything looks off after updating, your original values are still there as a recovery path. The legacy field itself will be removed entirely in a future version, once the migration has had time to run across existing projects.

This migration is unconditional (it is not editor-only), because a player build loading a prefab or scene serialized under an older package version needs to migrate the first time it loads too, not just when opened in the editor.

TIP

Both renamed fields are **internal** to the framework, so this migration is invisible to regular package usage. It only matters if your project reaches into these fields directly by name — for example through reflection-based editor tooling or automated scene/prefab setup scripts. If it does, update the field name references to `_fixedAttributeValues` / `_fixedStatValues`.

No changes are required to existing calls to `SetFixed`, to authored `Fixed Base Attributes` / `Fixed Base Stats` inspector rows, or to any other public API — they all continue to work exactly as before, now backed by the new storage.

Migrating to v2.0.0

v2.0.0 introduces new major subsystems such as Conditions, Game Tags, reactive triggers, and global framework configuration. Most of these additions are additive, but this release also includes a few breaking API changes and some behavior changes that existing projects should review carefully.

⊗ CAUTION

Before upgrading to `v2.0.0`, you must already have completed the migrations for older deprecated features that are permanently removed in this release:

- **Legacy `EntityLeveledUpGameEvent` / `EntityLeveledDownGameEvent` and their listeners** — see the `v1.4.0` section of [Changelog](#) and [Migrating to v1.4.0](#).
- **`AttributePointsTracker`** — see the `v1.3.0` section of [Changelog](#), where `EntityPointsTracker` replaced the legacy tracker. If your project comes from a pre-`v1.3.0` setup, open and save the affected prefabs, scenes, and assets on a `v1.3.x+` version before moving to `v2.0.0`.
- **`DerivedTypePicker`** — see the `v1.2.0` section of [Changelog](#), where it was deprecated in favor of `TypeSelectionMenu`.

1. Back up your project

Before updating, make sure your project is backed up or committed to version control. This release changes both runtime APIs and event wiring expectations, so it is worth having a safe rollback point.

2. Update the package from the Package Manager

Open Unity and navigate to `Window -> Package Management -> Package Manager` (`Window -> Package Manager` for older versions of the editor). Locate Astra Framework in the "In This Project" list and update it to `2.0.0` (or the latest available). Let Unity finish recompiling before starting the migration work below.

ScriptableObject type renames (SO suffix)

v2.0.0 adds an `SO` suffix to all core `ScriptableObject` types to make their `ScriptableObject` nature explicit at a glance. The following types were renamed:

Old name	New name
<code>Stat</code>	<code>StatSO</code>

Old name	New name
Attribute	AttributeSO
Class	ClassSO
StatSet	StatSetSO
AttributeSet	AttributeSetSO
GrowthFormula	GrowthFormulaSO
ScalingFormula	ScalingFormulaSO
ScalingComponent	ScalingComponentSO
AttributesScalingComponent	AttributesScalingComponentSO
StatsScalingComponent	StatsScalingComponentSO
IntVar	IntVarSO
LongVar	LongVarSO
GameTag	GameTagSO
BoundedValue	BoundedValueSO

All renamed types carry `[MovedFrom(autoUpdateAPI = true)]`. Unity's API Updater rewrites C# script references automatically the first time the project recompiles after the upgrade.

NOTE

If any symbol still appears broken after reimporting, update the reference manually to match the new name in the table above.

Do you use `[SerializeReference]` with any of these types as generic arguments?

Unity's `[MovedFrom]` patches direct (non-generic) `[SerializeReference]` managed references automatically. However, due to [Unity bug UUM-44729](#), it cannot rewrite renamed types that appear as **generic arguments** inside a serialized type string.

If any of the following apply to your project, you need to run the migration tool and follow the additional steps in [Managed Reference Migration](#):

- You have a `[SerializeReference]` field whose concrete serialized type holds one of the renamed framework types as a generic argument (for example, a custom closed-generic provider like `SomeProvider<Stat>`)
- You implemented `IDisplayS0NameProvider<T>`, which has been replaced by the non-generic `IDisplayS0NameProvider` (see [Migrating IDisplayS0NameProvider<T>](#))

If neither applies, no further action is needed for this section.

Required migration steps

Update the framework configuration, shared event assets, and experience modifier stat

The framework now dispatches its core global events — entity spawned, level up, level down, stat changed, and attribute changed — through a central `AstraFrameworkConfigS0` asset. Three of those events (spawned, level up, level down) are **required**; without them the corresponding broadcasts are never fired.

The same configuration asset now also owns the optional **Experience Gain Modifier Stat** binding. If your project previously assigned an experience gain modifier stat per entity, move that `StatS0` reference into the framework configuration.

⊗ IMPORTANT

Do not use the sample events for your production project.

If you already have `EntityCoreGameEvent`, `EntityLevelUpGameEvent`, `EntityLevelDownGameEvent`, `StatChangedGameEvent`, and `AttributeChangedGameEvent` assets in your project that your systems already subscribe to, you must wire those into the config — not the generic instances that come with the samples. Reusing your existing event assets ensures that all existing listeners and gameplay logic continue to work without any changes.

Steps:

1. **Create your own `AstraFrameworkConfigS0`** — right-click in the Project window and choose **Create** → **Astra RPG Framework** → **Config**, then save it somewhere in your project (e.g., `Assets/Config/`).
2. **Create your own `AstraFrameworkConfigS0`** — right-click in the Project window and choose **Create** → **Astra RPG Framework** → **Config**, then save it somewhere in your project (e.g., `Assets/Config/`). For a full description of each field and the loading strategy, see [Package Configuration](#).

3. **Open the newly created asset** and assign your existing event assets to the five fields:

- * *Global Entity Spawned Event* — the `EntityCoreGameEvent` your systems already listen to
- * *Global Entity Level Up Event* — the `EntityLevelUpGameEvent` your systems already listen to
- * *Global Entity Level Down Event* — the `EntityLevelDownGameEvent` your systems already listen to
- *Global Stat Changed Event* — the `StatChangedGameEvent` your systems already listen to (optional but recommended)
- *Global Attribute Changed Event* — the `AttributeChangedGameEvent` your systems already listen to (optional but recommended)
- *Experience Gain Modifier Stat* — the `Stat50` you previously assigned per entity, if your project uses experience gain modifiers

4. **Move the experience modifier stat from entities to the config** — if your project already used the old per-entity field, assign that same `Stat50` to **Experience Gain Modifier Stat** in the active config. You no longer need to assign it on each entity. Each entity will still use its own runtime value for that stat from `EntityStats`.

5. **Register the config in Project Settings** — open `Edit` → `Project Settings` → `Astra Framework` and assign your new config asset as the **Active Config Profile**.

⊗ CAUTION

If you skip step 4 and leave Project Settings empty, the framework will attempt the convention-based fallback (a `Resources` asset named `Astra Framework Config`). If neither is found, global events are never dispatched and any system that relies on them will silently fail at runtime. Always verify the Project Settings page shows "✓ **Using Explicit Configuration**" before entering Play Mode.

Rename the fixed typo in `EntityStats`

The `EntityStats` method name `AddStatToStatModifer(...)` was corrected to `AddStatToStatModifier(...)`.

1. Search your codebase for `AddStatToStatModifer`.
2. Replace each occurrence with `AddStatToStatModifier`.
3. Recompile and confirm no stale references remain.

Review old default-reference workflows and move them to Authoring Defaults

Previous versions could rely on script-level default references for some authoring flows. In practice, that meant newly created objects could inherit references that came from imported sample assets (for example, a shared `Max Level` used by newly created `GrowthFormula50` assets).

This pattern has been replaced by project-scoped **Authoring Defaults** in [Edit > Project Settings > Astra Framework > Authoring Defaults](#).

NOTE

This is a workflow migration, not a runtime requirement. Authoring defaults are fully optional. If you prefer manual setup, leave every field empty and continue authoring objects explicitly.

If your project relied on the old automatic pre-filling behavior, it is recommended to move that intent into the new Project Settings page so future assets and components follow one explicit, project-owned standard.

Suggested migration steps:

1. Open [Edit > Project Settings > Astra Framework > Authoring Defaults](#)
2. Identify the shared assets your team expects new objects to reuse consistently (for example a common `IntVarSO` max level, experience formula, class stat set, class attribute set, or fixed-base sets)
3. Assign only the defaults your project actually wants to standardize
4. Prefer project-owned assets over sample assets when choosing these defaults, so future package updates do not introduce silent reference drift between older and newer authored objects
5. For existing objects that you want to align with the new standard, use **Apply Authoring Defaults** to fill only missing fields or **Replace With Authoring Defaults** to overwrite existing ones deliberately

This keeps the package aligned with its zero-setup philosophy while making repeated authoring more robust, explicit, and customizable.

Behavior changes to review

These changes may not produce compile errors, but they can change how existing gameplay logic behaves after the upgrade.

Stat and attribute changed events now cover more cases

Stat and attribute changed notifications are now raised for broader effective changes, not only for the most direct mutation paths. This includes dependent recalculations and bulk transitions such as some level-up/level-down flows.

Review any listeners, UI refresh logic, analytics counters, or reactive systems that assume those events only fire for direct edits. If needed, add filtering logic based on the payload contents before executing gameplay responses.

Migrating to v1.4.0

v1.4.0 introduces the new GameAction system and moves Game Events to a single-context parameter (Parameter Object pattern). This change improves extensibility and simplifies integration with GameAction because both systems now use a single context and are compatible with UnityEvent.

Key benefits


- Easier, non-breaking extension of event data via a single context object and polymorphism.
- Seamless interoperability with GameAction and UnityEvent-based listeners.

Breaking change

With the deprecation of the legacy `EntityLeveledUpGameEvent`, `EntityLeveledDownGameEvent` and their dedicated listeners, `EntityStats` and `EntityAttributes` now subscribe the new EntityCore's single-parameter events internally. All your `EntityCore` instances must be updated to use the new `EntityLevelUpGameEvent` and `EntityLevelDownGameEvent` instances. (Notice that the name of the deprecated events contained "Leveled" while the new events contain "Level".)

Migration steps - breaking changes

1. **Back up your project before making changes.**
2. Either create the new `EntityLevelUpGameEvent` and `EntityLevelDownGameEvent` instances from the context menu (`Create > Astra RPG Framework > Game Events > Generated > Entity Level Up` and `Entity Level Down`), or import the new event instances from the updated v1.4.0 `Utils` samples (`Utils > EventInstances > 1param > Entity Level Up Game Event` and `Entity Level Down Game Event`). If you re-import samples, prefer removing duplicate assets from the newly imported samples. Keep only the new events instances.
3. For each entity (prefab or scene object) open the `EntityCore` inspector and assign to the new `On Level Up` and `On Level Down` event fields to the new single-parameter event instances just created. The fields for the new events are marked as required (red asterisk), while the deprecated events fields are optional and marked with `(Legacy/Deprecated)`. The inspector, before assigning the new events, should look like this:

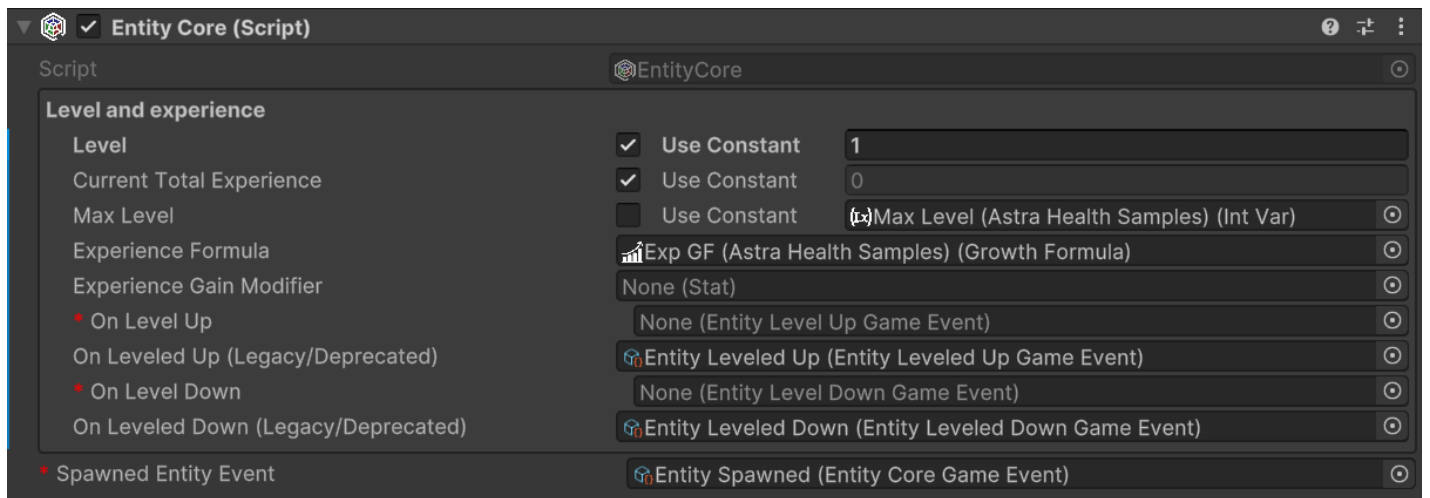

Migration steps - changing deprecated events

⊗ CAUTION


`EntityLeveledUpGameEvent`, `EntityLeveledDownGameEvent`, and their remaining legacy hooks were removed in `v2.0.0`. If you are upgrading directly to `v2.0.0`, complete the migration below before installing that version.

These legacy events and listeners were kept for backward compatibility after `v1.4.0`, but they are no longer available in `v2.0.0`. Projects that still reference them must be migrated to `EntityLevelUpGameEvent`, `EntityLevelDownGameEvent`, and the corresponding modern listeners before the `v2.0.0` update.


To update them, I suggest to search your project and scenes for usages of the deprecated `EntityLeveledUpGameEvent` and `EntityLeveledDownGameEvent`. To do this, I would suggest you to use the Unity Editor search functionality:


1. Right-click on the scriptable object instance of the deprecated event you want to search for (e.g., `Entity Leveled Up Game Event`).

2. Select **Find References In Project**. A window like this will open:

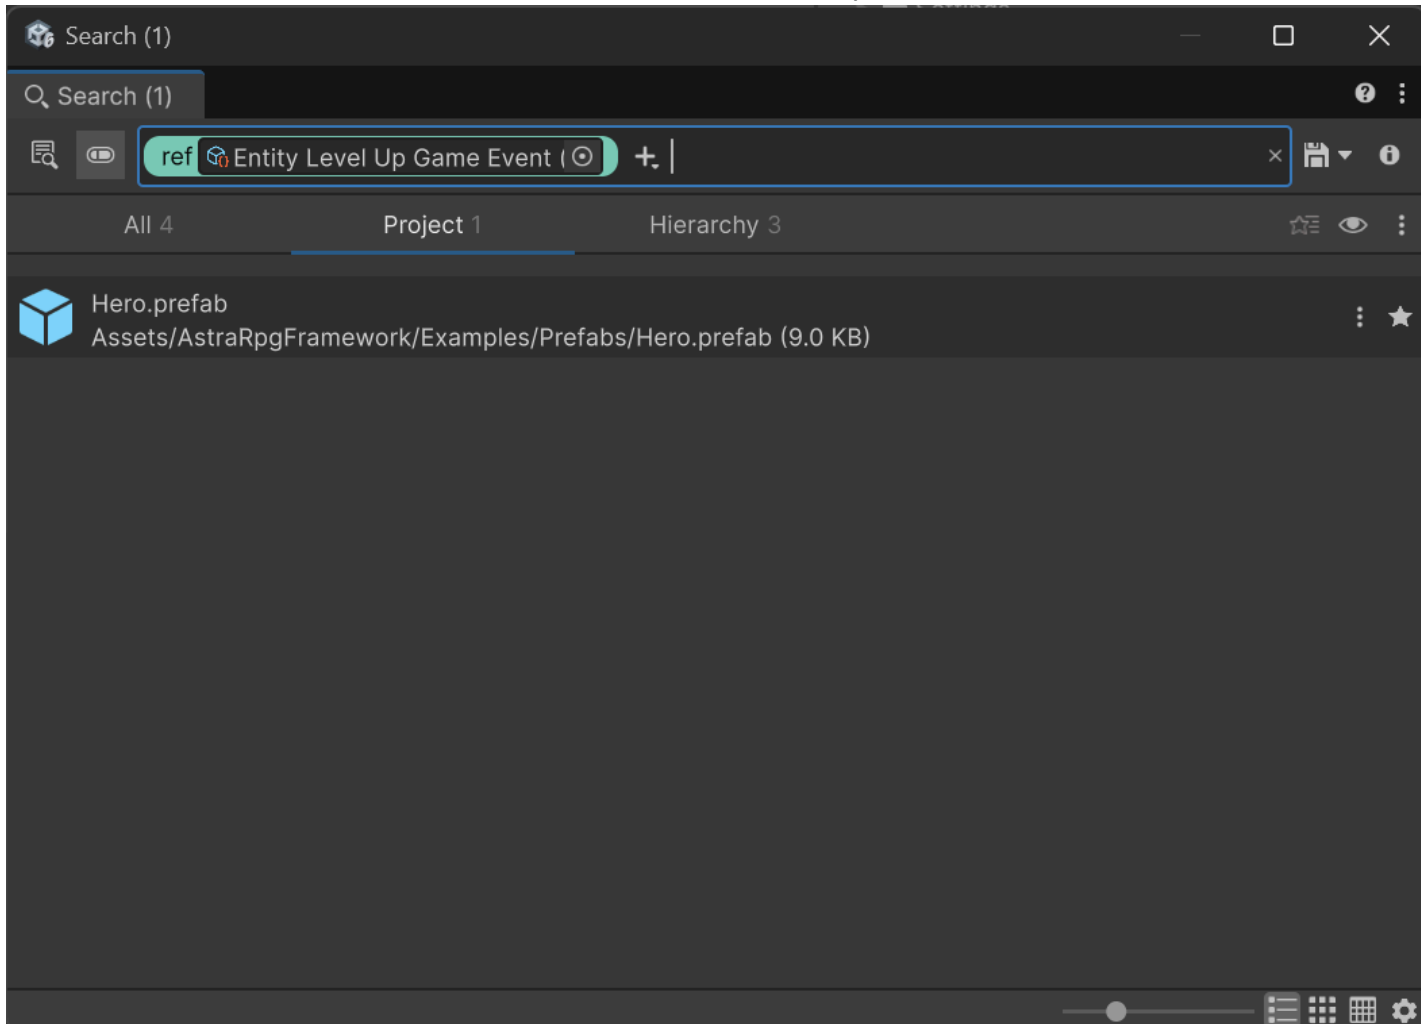

3. Inspect the found references to identify where you used the deprecated event and update them to use the new **EntityLevelUpGameEvent** or **EntityLevelDownGameEvent** and/or the respective listeners instead. You'll catch also the GameEvent listeners as they reference the event instance.
4. Right-click again on the scriptable object instance of the deprecated event and select **Find References In Scene** to find any usage in the currently opened scene. You will see the hierarchy window changed, but no meaningful references will be shown. However, you can click on the top-right button to open a window similar to the previous one, showing all references in the scene:

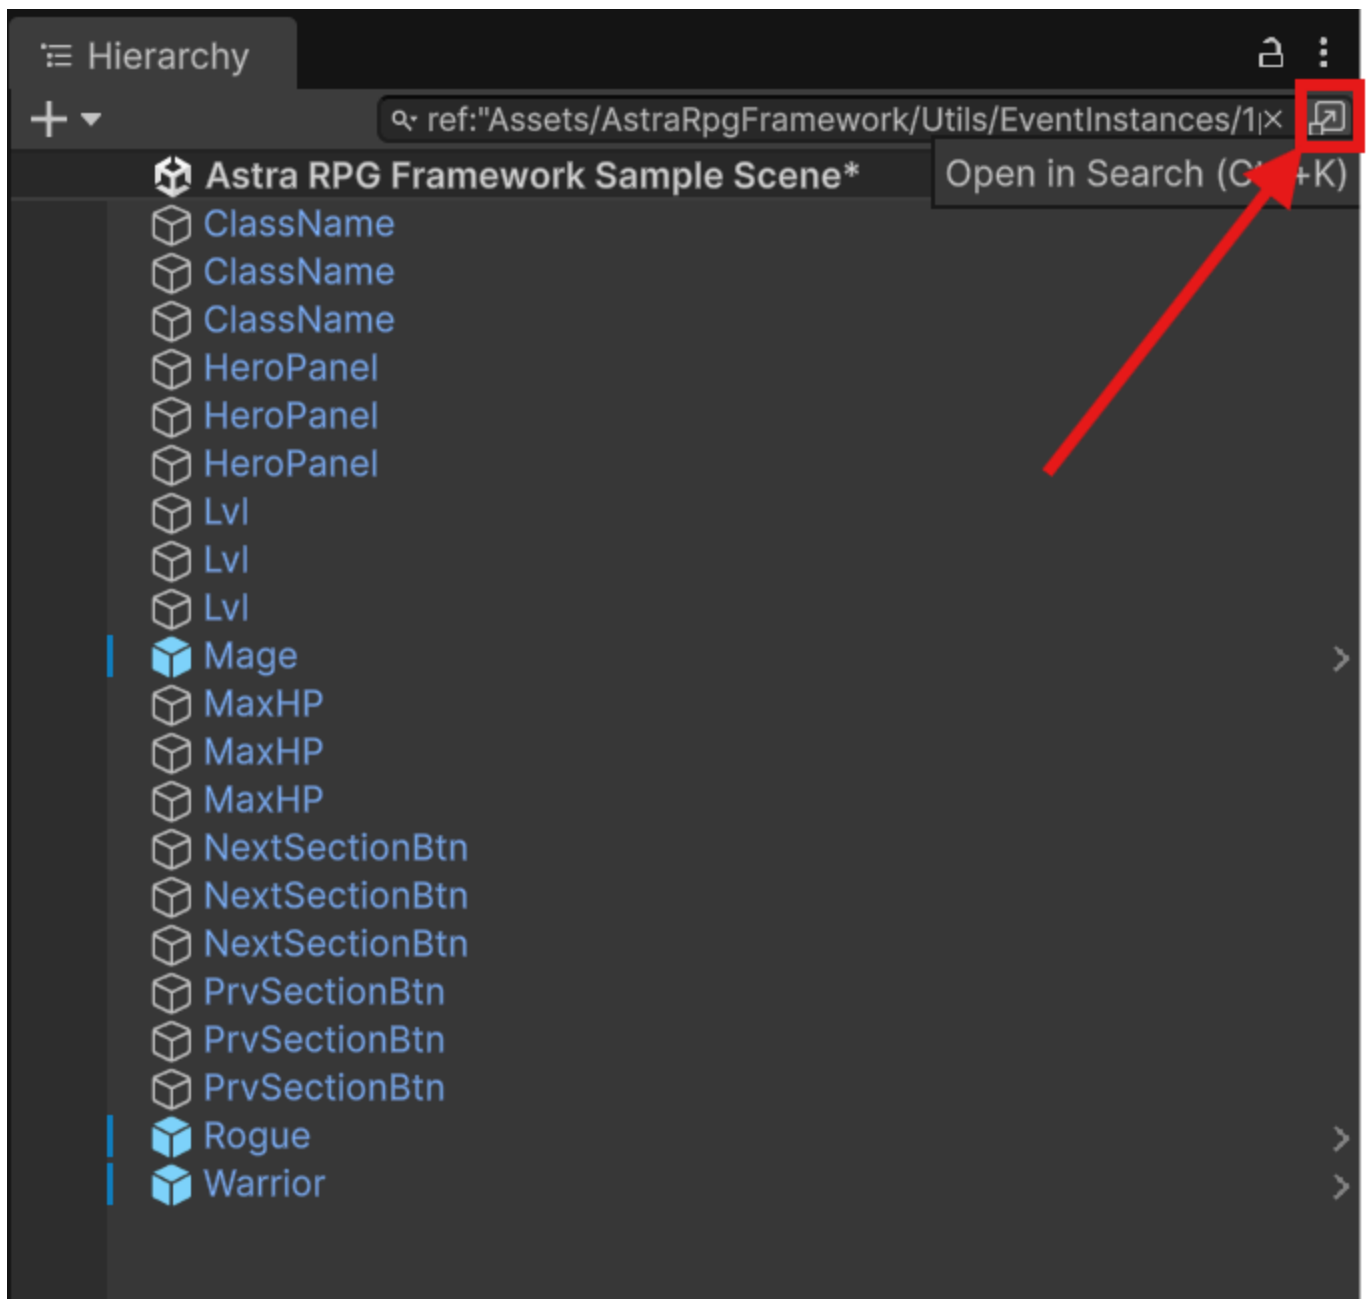

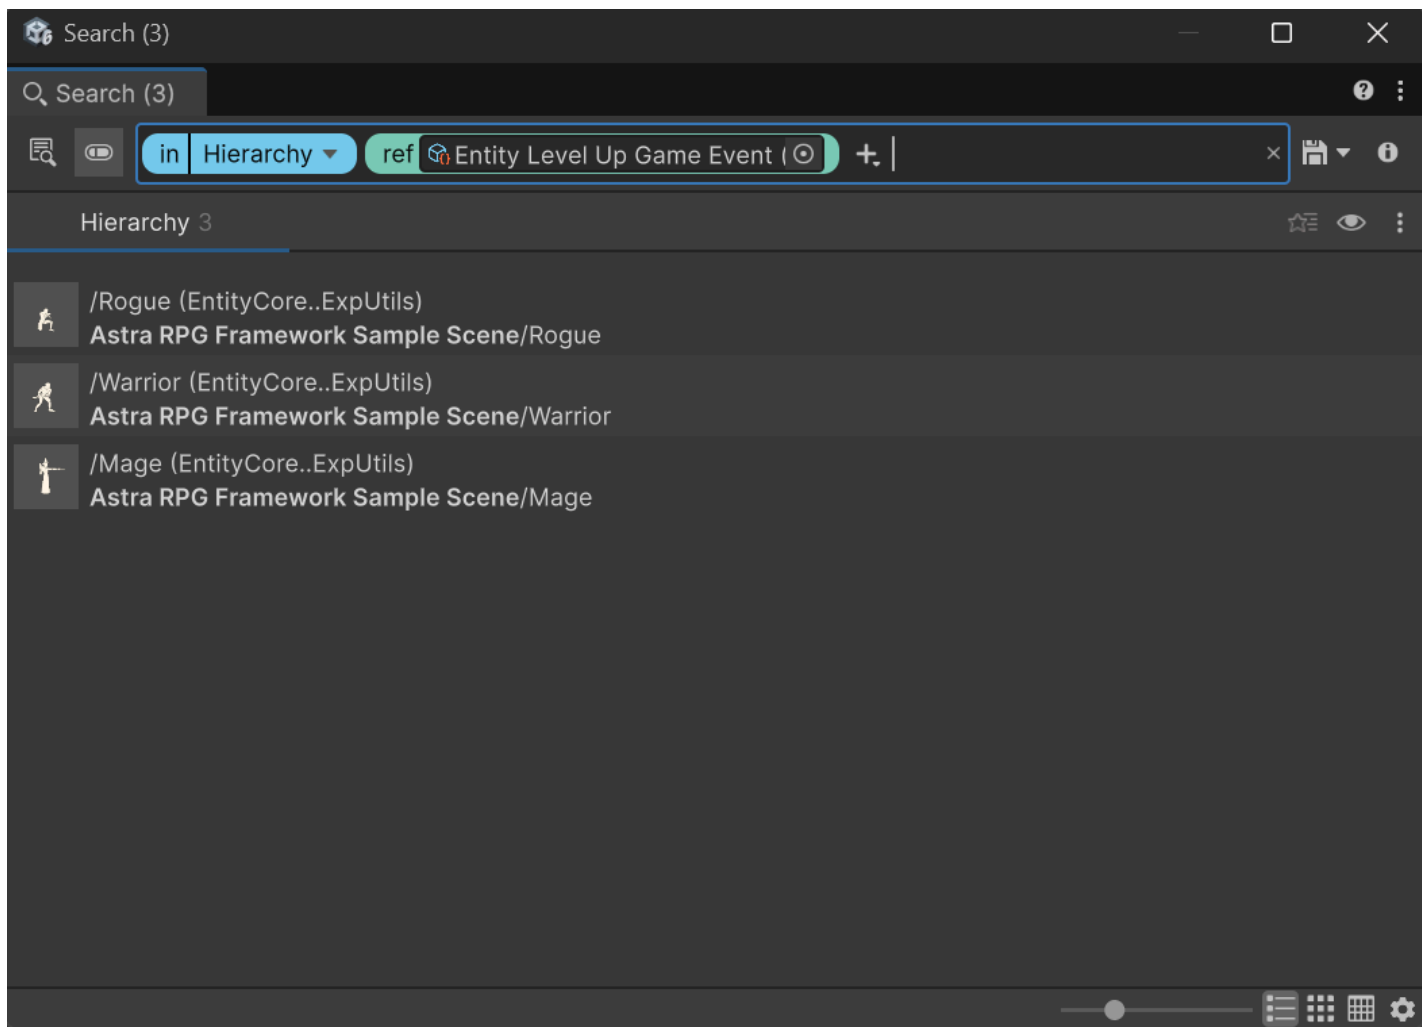

5. Inspect the found references in the scene and update them to use the new `EntityLevelUpGameEvent` or `EntityLevelDownGameEvent` and/or the respective listeners instead.
6. Repeat steps 4-5 for each scene in your project.
7. Repeat steps 1-6 for the other deprecated event.

Migrating to v1.1.0

The rebranding of SOAP RPG Framework to Astra RPG Framework involves several changes that need to be addressed when updating existing projects. This guide outlines the necessary steps to ensure a smooth transition.

1. Backup Your Project

Before making any changes, it's crucial to back up your project. Whether you are using version control or simply creating a copy of your project folder, having a backup will allow you to revert to the previous state if anything goes wrong during the migration process.

2. Update the Package from the Package Manager

Open Unity and navigate to the Package Manager (**Window -> Package Manager**). In the "In This Project" section, locate the SOAP RPG Framework package. Update it to version 1.1.0, which is now listed as Astra

3. Update Namespaces in Your Code

If your project contains scripts that reference the old SOAP RPG Framework namespaces, you'll need to update these references to the new Astra RPG Framework namespaces. For doing this, you can use your IDE's find-and-replace-all functionality (**Ctrl + Shift + R** in VSCode):

1. Open the find-and-replace dialog in your IDE.
2. Type `ElectricDrill.SoapRpgFramework` and assert that the "Match Case" option is enabled.
3. Inspect the found occurrences to ensure they are correct.
4. Replace all occurrences that makes sense to you with `ElectricDrill.AstraRPGFramework`.
5. Save all modified files.
6. Return to Unity and recompile the project. If this is not automatic, you can force recompilation with **Ctrl + R**.

If your project compiles correctly, you're done! If you get errors related to duplicate `.asmdef` files, follow the next steps.

4. Remove duplicate `.asmdef` files in the package

1. In the hierarchy of your project, navigate to the `Packages` folder and locate the `Astra RPG Framework` package.
2. Open the `Runtime` folder.
3. Ensure that there is only one `.asmdef` file named `com.electricdrill.astra-rpg-framework.Runtime`. If you find also a file named `com.electricdrill.soap-rpg-framework.Runtime`, delete it.
4. Open now the `Editor` folder of the package.
5. Ensure that there is only one `.asmdef` file named `com.electricdrill.astra-rpg-framework.Editor`. If you find also a file named `com.electricdrill.soap-rpg-framework.Editor`, delete it.
6. Click on the `com.electricdrill.astra-rpg-framework.Editor` file to select it. In the Inspector window, in the `Assembly Definition References` section, add the reference to `com.electricdrill.astra-rpg-framework.Runtime` if it's not already present, and delete any reference to `com.electricdrill.soap-rpg-framework.Runtime` if present.
7. Click on apply to save the changes.

NOTE

Unity sometimes has unpredictable behaviors when updating `.asmdef` files in and their references. After applying the changes mentioned above, try also to close and reopen Unity to ensure that the changes are correctly applied. If you still encounter issues, fix the new problems and re-start Unity again. At that point, the changes should be correctly applied.

5. Recompile the Project

If Unity didn't automatically recompile the project after these changes, you can force recompilation.

Your project should now be successfully migrated to Astra RPG Framework v1.1.0.

Happy developing!

Troubleshooting

I re-imported Samples that I already had from v1.0.0 and now I have errors

If you used the ScriptableObject based samples of the `Utils` folder in your project, you can keep using them as they are fully compatible with the new version. In fact, **you should not re-import them as that would create duplicates in your project.**

WARNING

Do not delete any ScriptableObject based asset that you are using in your project! Delete the duplicates from the newly imported samples instead. This will prevent data loss in your project.

Moreover, it was noticed that re-importing samples in a project that was using v1.0.0 of the package, resulted in old namespaces being used in the samples scripts. This is likely a Unity bug as does not happen on a fresh project. If this happens, please rename the old `ElectricDrill.SoopRpgFramework` namespace in the scripts of the samples to `ElectricDrill.AstraRPGFramework` manually, analogously to what is described in step #3.

Still Need Help?

For any issue during the migration, feel free to reach me out by sending me an email at electricdrill.info@gmail.com

Managed Reference Migration (v2.0.0)

NOTE

This page is relevant only if your project uses `[SerializeReference]` fields holding instances of renamed framework types, or if you wrote a custom `IDisplaySNameProvider<T>` implementation. If neither applies, no action is required beyond what the main [Migration Guide](#) describes.

v2.0.0 renames a set of `ScriptableObject` types and replaces the generic `IDisplaySNameProvider<T>` with a non-generic equivalent. Unity's `[MovedFrom]` attribute patches most C# script references automatically, but serialized data stored through `[SerializeReference]` uses the full assembly-qualified type string — and `[MovedFrom]` cannot rewrite generic arguments inside that string (Unity bug [UUM-44729](#)). This guide covers the two cases that need extra work:

1. [Migrating `IDisplaySNameProvider<T>` custom implementations](#)
2. [Running the migration tool](#)

1. Migrating `IDisplaySNameProvider<T>` custom implementations

If you implemented `IDisplaySNameProvider<T>` yourself, change the class signature and cast the argument internally:

```
// Before (v1.x)
public class MyStatDisplay : IDisplaySNameProvider<StatSO>
{
    public string GetDisplayName(StatSO stat) => stat.name.ToUpperInvariant();
}

// After (v2.0.0)
public class MyStatDisplay : IDisplaySNameProvider
{
    public string GetDisplayName(ScriptableObject asset)
    {
        return asset is StatSO stat ? stat.name.ToUpperInvariant() : "None";
    }
}
```

Update any `[SerializeReference]` field declarations accordingly:

```
// Before
[SerializeReference, TypeSelectable(typeof(DefaultDisplaySOnameProvider<StatSO>))]
private IDisplaySOnameProvider<StatSO> _provider;

// After
[SerializeReference, TypeSelectable(typeof(DefaultDisplaySOnameProvider))]
private IDisplaySOnameProvider _provider;
```

`DefaultDisplaySOnameProvider` carries `[MovedFrom]` targeting `DefaultDisplaySOnameProvider\1``, so the migration tool handles the serialized managed reference for the built-in default. You only need to update the field declarations in your own code.

2. Running the migration tool

The migration tool at **Tools → Astra Framework → Migrate Managed References (SO Rename)** rewrites managed references in `.asset`, `.prefab`, and `.unity` files that `[MovedFrom]` alone cannot patch.

⊗ IMPORTANT

Do not enter Play Mode and do not commit your project until you have run the migration tool and verified the result. Managed references that still point at old type strings appear as missing and may cause `NullReferenceExceptions` at runtime.

Steps:

1. Close Play Mode, save all open scenes, and commit (or stash) your current work as a safety net.
2. Open your project in Unity.
3. Open every scene you want to migrate, **or** enable **Scan closed scenes** inside the tool (step 5) to let it open scenes automatically.
4. Go to **Tools → Astra Framework → v2.0.0 Migration → Migrate Managed References (SO Rename)**.
5. With **Dry-run** toggled **ON**, press **Scan**. Enable **Scan closed scenes** if needed. Review the `[plan]` lines — each one lists an asset and the managed reference that will be rewritten.
6. If the plan looks correct, turn **Dry-run** OFF and press **Apply**. The tool asks for confirmation that a backup is in place before it proceeds.
7. The tool writes a full log to `Library/AstraMigrationReport_<timestamp>.txt`.
8. **Run Scan again** with Dry-run ON: the result must show `0 reference(s)`. The tool is idempotent.
9. Enter Play Mode and verify that UI elements displaying stat, attribute, or class names still work correctly.
10. Commit the migrated assets.

What the tool rewrites

The tool applies two rules:

- **Rule 1 — drop generics on `DefaultDisplaySOnameProvider`:** rewrites the former closed-generic `DefaultDisplaySOnameProvider\1[[...]]` to the new non-generic `DefaultDisplaySOnameProvider``. This is the primary fix for the UUM-44729 failure mode.
- **Rule 2 — SO-suffix rename inside generic arguments:** for any custom closed generic whose type string includes one of the renamed framework types as a generic argument (for example `SomeUserProvider\1[[Stat, ...]]`), the old name is rewritten to its `SO``-suffixed equivalent.

NOTE

Non-generic `[SerializeReference]` fields whose concrete type is one of the renamed `ScriptableObject`s (for example, a field that directly serialized a `Stat` instance) are already handled by `[MovedFrom]` and do not need the tool.

Custom closed generics not covered by the rules

If the tool logs a `[skip]` line for a custom closed-generic type, the type was not covered by the built-in rules. Refactor it to a non-generic form following the recipe in [section 1](#), then re-run the tool.

Guardrail warning

Starting with v2.0.0, the Editor emits a one-shot warning at startup when it detects a `[SerializeReference, TypeSelectable]` field typed as a closed generic:

```
[Astra] {OwnerType}.{field} uses [SerializeReference, TypeSelectable] on a closed generic ({targetType}). Unity [MovedFrom] does NOT propagate into generic arguments (UUM-44729): rename of any type inside the generic args will silently drop the serialized value.
```

Treat this as a blocker — refactor to a non-generic interface or abstract base class before renaming any type involved.

Support

If the migration tool reports failures or unexplained `[skip]` lines, send the report file at `Library/AstraMigrationReport_<timestamp>.txt` along with a brief description of your setup to electricdrill.info@gmail.com.