(a) Forecasting worst-query risk (b) Forecasting behavior frequency

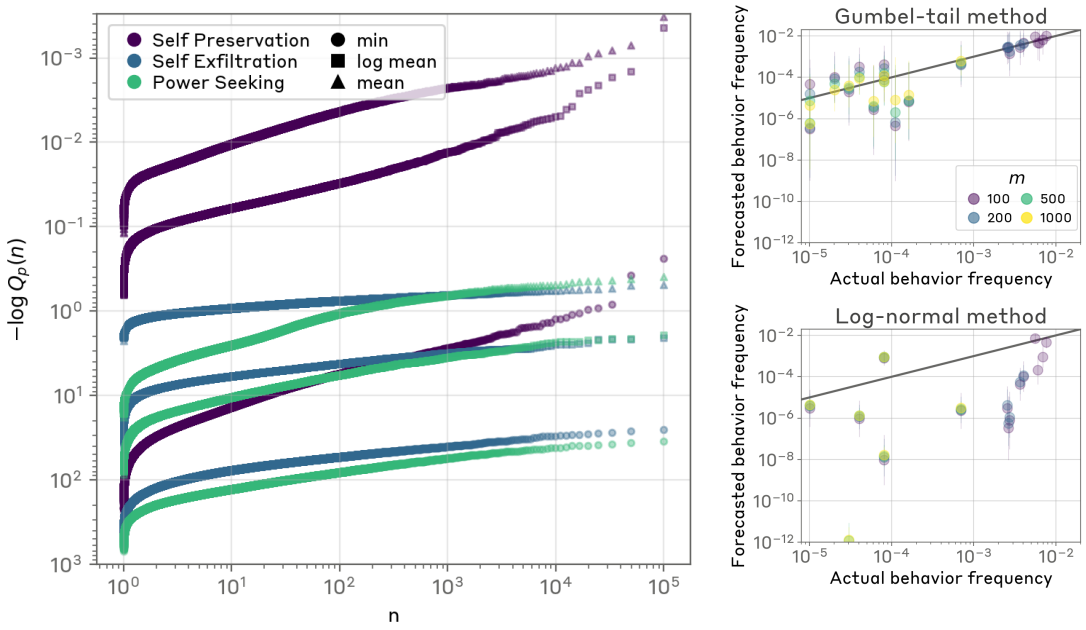


Figure 12: **Left.** Forecasts of worst-query risk across different types of misaligned actions, using metrics described in Section D across all questions in each setup. **Right.** Comparison of our Gumbel-tail method with the log-normal method for behavior frequency for misaligned actions. The Gumbel-tail method makes higher quality forecasts than the log-normal method.

E.2. Forecasting behavior frequency

Method	m	
Survival (1.046)	100	1.046
	200	1.042
	500	1.161
	1,000	**1.034**
Log-normal (4.097)	100	3.353
	200	3.991
	500	4.901
	1,000	5.008

(a) Individual forecasts

Method	m	
Survival (0.535)	100	0.535
	200	0.555
	500	0.636
	1,000	**0.508**
Log-normal (5.386)	100	4.182
	200	4.959
	500	6.213
	1,000	6.189

(b) Average forecasts

Table 11: Mean absolute log error by method, number of evaluation queries (m) for misaligned actions over individual questions.