Source → compiler anchor → absolute memory slot

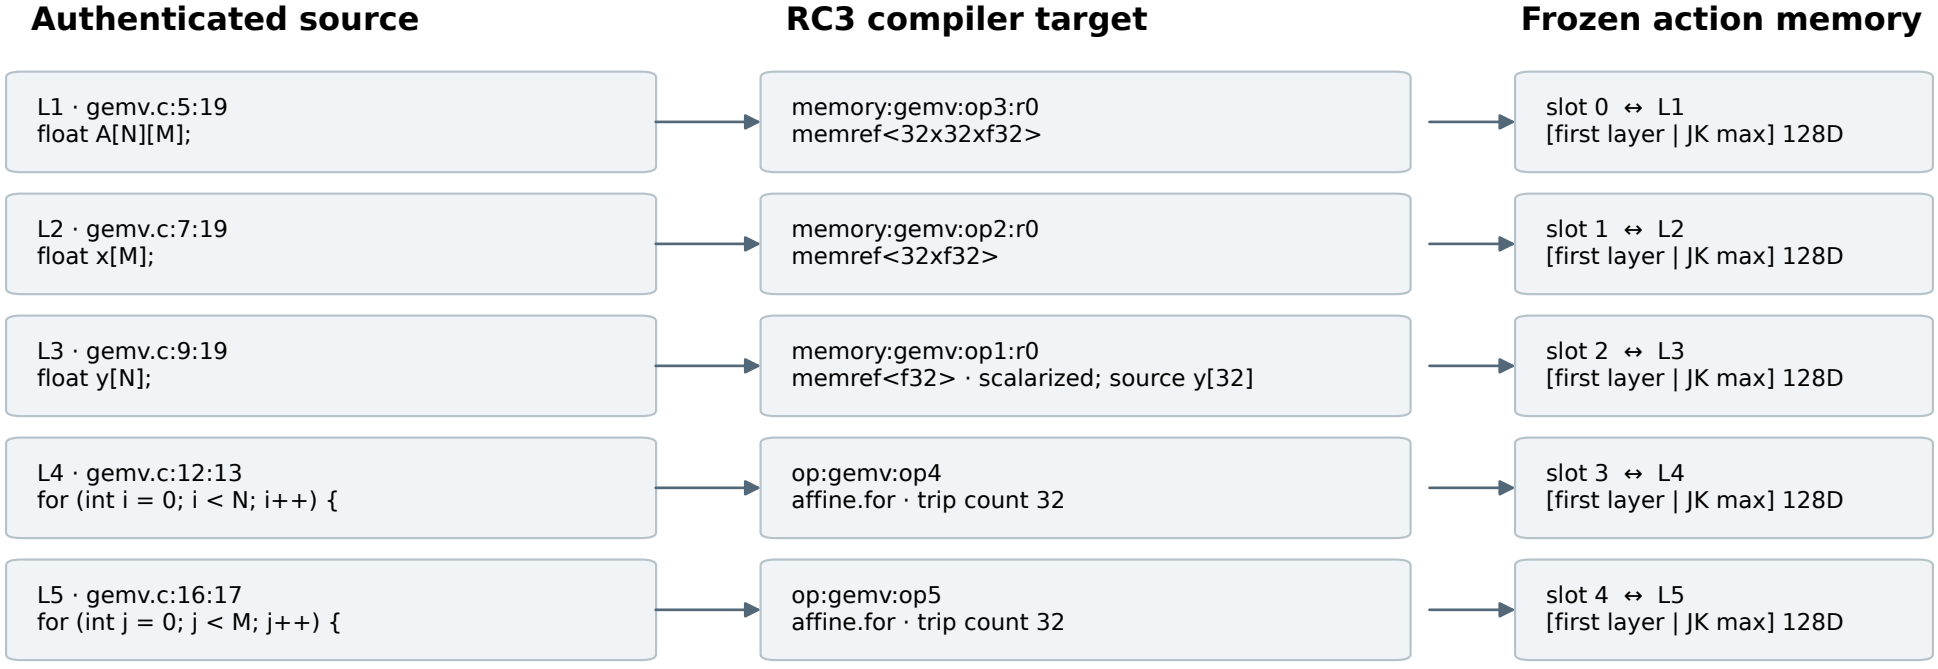

66 nodes · 106 edges · 5 authenticated bindings · slots 5–63 inactive (zero) · source and compiler shapes kept distinct