




CSCI 2270 – Data Structures

Recitation 5, Sept 2018

Trees and traversal techniques

Objectives

1. Tree Data Structure
2. Binary Trees
3. Preorder traversal
4. Inorder traversal
5. Postorder traversal
6. Exercise on traversal techniques

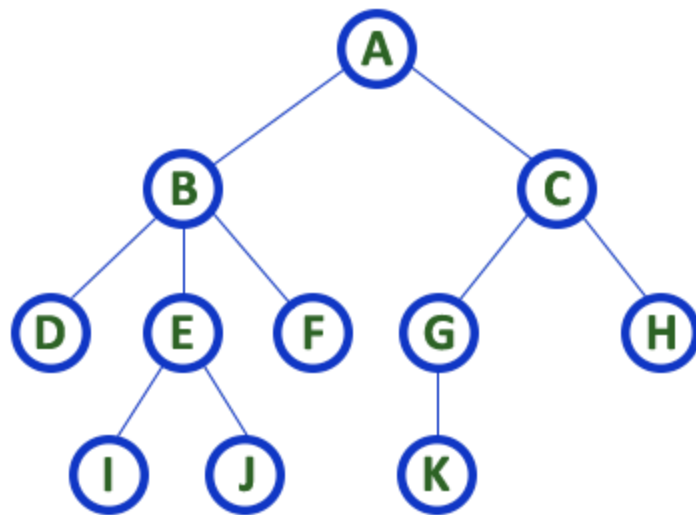



CSCI 2270 – Data Structures

Recitation 5, Sept 2018

Trees and traversal techniques

1. Tree Data Structure

Technical Definition: A tree is a collection of entities called nodes. Nodes are connected by edges. Each node contains a value or data, and it may or may not have a child node.

Tree is an example of non linear data structures. A structure is a way of representing the hierarchical nature of a structure in graphical form.

In simple terms, a tree is a data structure that is similar to a linked list but instead of each node pointing simply to the next node in a linear fashion, each node points to a number of nodes.

In trees ADT(Abstract data type), order of elements is not important. If we need ordering information linear data structures like linked lists, stacks, queues, etc can be used.

- The root of a tree is the node with no parents. There can be at most one root node in a tree.
- An edge refers to the link from parent to child.
- A node with no children is called leaf node.
- Children of same parent are called siblings.
- A node p is an ancestor of node q if there exists a path from root to q and p appears on the path.
- Set of all nodes at a given depth is called level of the tree. The root node is at level 0.

2. Binary Trees

A tree is called a binary tree in which each node has at the most two children, which are referred to as the left child and the right child i.e each node has zero child, one child or two children. Empty tree is also a valid binary tree. We can visualise a binary tree as consisting of a root and two disjoint binary trees, called the left and right subtrees of the root.

Types of binary trees

1. Strict Binary Tree - If each node in the tree has exactly 2 children or no children.
2. Full Binary Tree - A binary tree is called full binary tree if each node has exactly 2 children and all leaf nodes are at the same level.
3. Complete Binary Tree - A complete binary tree is a binary tree in which every level, except possibly the last, is completely filled, and all nodes are as far left as possible.



CSCI 2270 – Data Structures

Recitation 5, Sept 2018

Trees and traversal techniques

Example code to create a Binary Tree:

```
struct Node
{
    int data;
    Node *left;
    Node *right;
};
```

Applications of trees data structure

1. Expression trees are used in compilers.
2. Manipulate hierarchical data.
3. Used to implement search algorithms.

3. Binary Tree Traversals

In order to process trees, we need a mechanism for traversing them. The process of visiting all nodes of a tree is called tree traversal. Each node is processed only once but it may be visited more than once. As we have seen already that in linear data structures like linked lists, stacks and queues the elements are visited in sequential order. But, in tree structures, there are many different ways.

Traversal possibilities

Starting at the root of a binary tree, there are 3 main steps that can be performed and the order in which they are performed defines the traversal type. These steps are: performing an action on the current node, traversing to the left child node, and traversing to the right child node. This process can be easily defined through recursion.

1. LDR: Process left subtree, process the current node data and then process the right subtree
2. LRD: Process left subtree, process right subtree, process current node data.
3. DLR: Process current node data, process left subtree, process right subtree.
4. DRL: Process current node data, process right subtree, process left subtree.
5. RDL: Process right subtree, process current node data,, process left subtree.
6. RLD: Process right subtree, process current node data, process left subtree.



CSCI 2270 – Data Structures

Recitation 5, Sept 2018

Trees and traversal techniques

Classifying the traversals

The sequence in which these nodes are processed defines a particular traversal method. The classification is based on the order in which current node is processed. That means, if we are classifying based on current node(D) and if D comes in the middle it does not matter whether L is on the left side of D or R is on the left side of D. Similarly, it doesn't matter whether L is on the right side of D or R is on the right side of D. Due to this, the total possibilities are reduced to 3 and these are:

1. Preorder Traversal (DLR)
2. Inorder Traversal (LDR)
3. PostOrder Traversal (LRD)

There is another traversal method which does not depend on above orders and it is :
Level Order Traversal. (We will cover this later.)

Note - The below traversal techniques can be done using both using recursion and iterative techniques. However for this class we will only focus on recursive techniques, since it is much simpler and easy to understand.

PreOrder Traversal

In preorder traversal, each node is processed before(pre) either of its subtrees. This is the simplest traversal to understand. However, even though each node is processed before the subtrees, it still requires that some information must be maintained while moving down the tree. Processing must return to the right subtree after finishing the processing of the left subtree. To move to the right subtree after processing left subtree, we must maintain the root information. The obvious ADT for such information is a stack. Because of its LIFO structure, it is possible to get the information about the right subtrees back in reverse order.

Pre order Traversal is defined as follows.

1. Visit the root.
2. Traverse the left subtree in Preorder.
3. Traverse the right subtree in Preorder.



CSCI 2270 – Data Structures

Recitation 5, Sept 2018

Trees and traversal techniques

```
void preorder(int *root)
{
    if(root != NULL)
    {
        print(root->data);
        preorder(root->left);
        preorder(root->right);
    }
}
```

InOrder Traversal

In inorder traversal the root is visited between the subtrees, inorder traversal is defined as follows.

1. Traverse the left subtree in Inorder.
2. Visit the root.
3. Traverse the right subtree in Inorder.

```
void inorder(int *root)
{
    if(root != NULL)
    {
        inorder(root->left);
        print(root->data);
        inorder(root->right);
    }
}
```

PostOrder Traversal

In post order traversal, the root is visited after both subtrees. Postorder traversal is defined as follows.

1. Traverse the left subtree in PostOrder.
2. Traverse the right subtree in PostOrder.
3. Visit the root.




CSCI 2270 – Data Structures

Recitation 5, Sept 2018

Trees and traversal techniques

```
void postorder(int *root)
{
    if(root != NULL)
    {
        postorder(root->left);
        postorder(root->right);
        print(root->data);
    }
}
```

Example tree with PreOrder, InOrder and PostOrder Traversals:

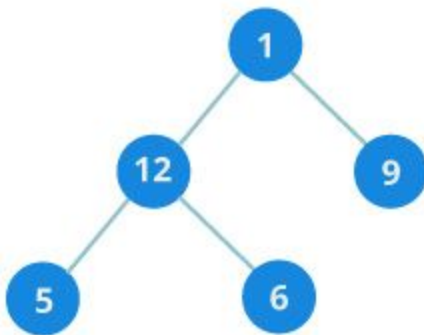

Inorder (Left, Root, Right) : 5, 12, 6, 1, 9

Preorder (Root, Left, Right) : 1, 12, 5, 6, 9

Postorder (Left, Right, Root) : 5, 6, 12, 9, 1

4. Complexity Analysis of Binary Tree Traversals

For all of these traversals - whether done recursively or iteratively we visit every node in the binary tree. That means that we'll get a runtime complexity of $O(n)$ - where n is the number of nodes in the binary tree.



CSCI 2270 – Data Structures

Recitation 5, Sept 2018

Trees and traversal techniques

Exercise

Download the tree.cpp file from moodle.

1. You will be provided with the root node of a tree.
2. Implement preorder traversal technique using recursion.
3. Implement inorder traversal technique using recursion.
4. Implement postorder traversal technique using recursion.