

A chart score needs a task and a robustness check

DECLARE

Five quantile differences
Common units and axes

RECOVER

Rendered pixels + calibration
Two computational observers

AUDIT

Contrast + group error
Strong baselines and failures


$$S_c = 100 / (1 + L_c)$$

Reference score: lower recovery error

$$R_c = \max_e \{ L_{c,e} - \min_j L_{j,e} \}$$

Robust choice: lower worst-environment regret

Example: tumour radius standard error

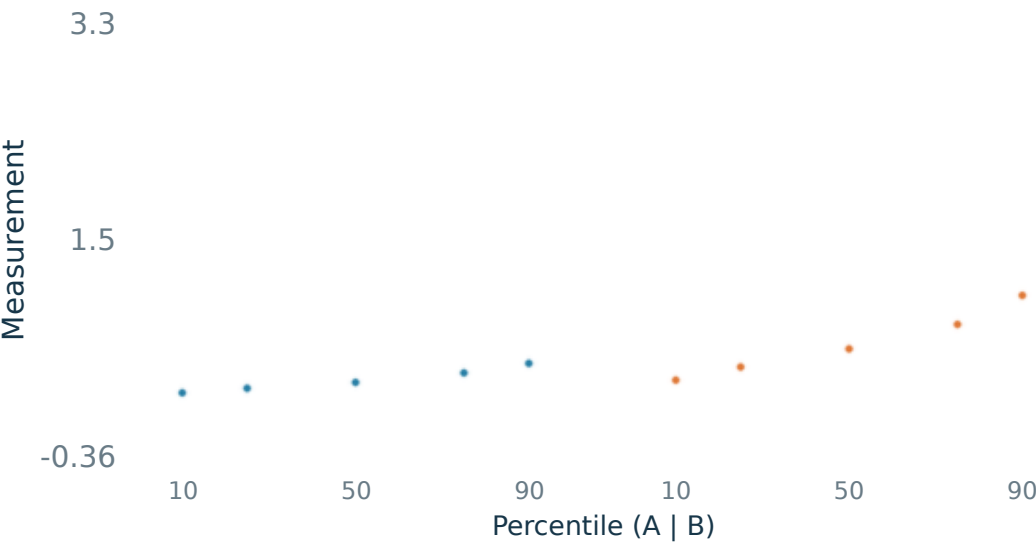

FAMILY	SCORE
1. Quantile plot	98.973
2. ECDF	98.719
3. Heatmap	97.981
4. Dot plot	96.956
5. Histogram	96.686
6. Violin plot	92.868
7. Bar chart	60.525
8. Interval plot	52.309
9. Box plot	52.136

Ranks are conditional on the decoder.

A high score means accurate computational recovery of this task; it does not establish human readability.