

Shokunin v4.2


Linux Port — Cross-Platform Ecosystem · May 2026

Overview

Shokunin is now cross-platform. The same 37 skills, ChromaDB memory, MCP servers, and subagents that worked on Windows now work on Linux. All existing Windows scripts are untouched — Linux support was added alongside, not by replacing.

Architecture

The shared Python core (chroma-helper.py, mcp-server.py) now detects the OS and uses the correct home directory path: `USERPROFILE` on Windows, `HOME` on Linux. The platform-specific wrappers handle terminal capture, installation, and scheduling.

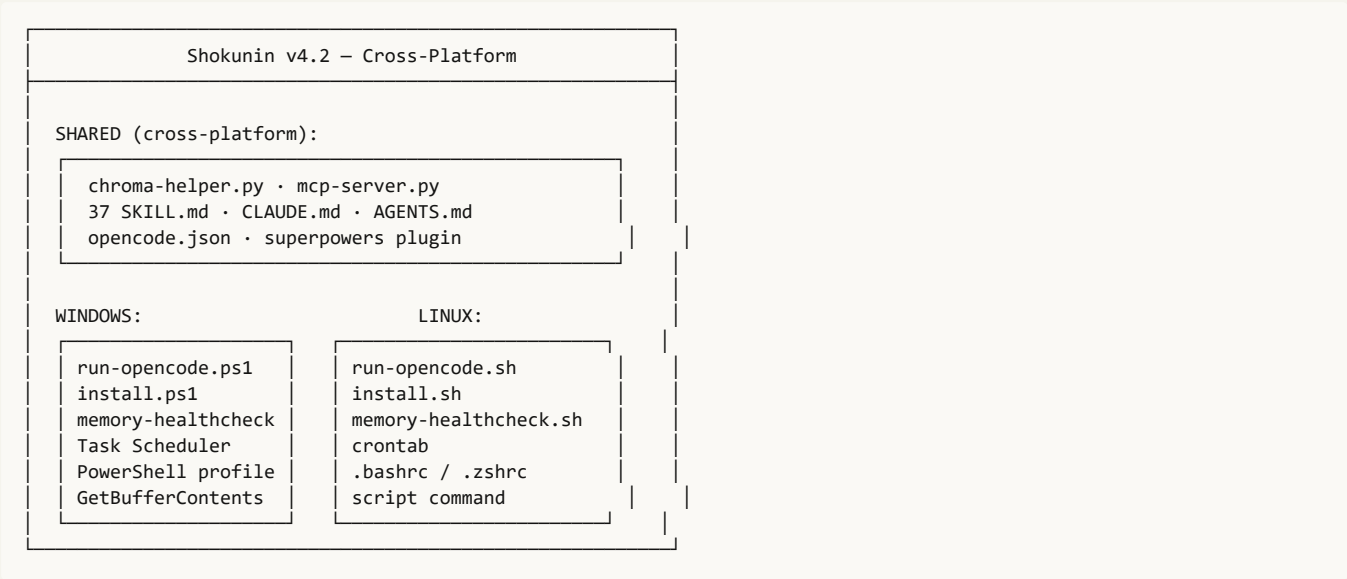

Files Created

File	Lines	Purpose
<code>.pack/scripts/linux/run-opencode.sh</code>	95	Main wrapper: env vars, MCP check, checkpoint timer, script capture, ChromaDB save
<code>.pack/scripts/linux/memory-healthcheck.sh</code>	60	CI + local validation (8 checks)
<code>.pack/scripts/linux/weekly-maintenance.sh</code>	25	Crontab-ready: backup, cleanup, disk check
<code>.pack/scripts/linux/profile.sh</code>	35	bash/zsh aliases + opencode shadow function
<code>install.sh</code>	175	Linux one-command installer

Files Modified

File	Change
<code>chroma-helper.py</code>	Cross-platform paths: <code>USERPROFILE</code> or <code>HOME</code> or <code>expanduser("~")</code>
<code>mcp-server.py</code>	Same cross-platform path change
<code>README.md</code>	Linux badges, install commands, quick start, commands section

Files NOT Touched (all Windows .ps1)

install.ps1	run-opencode.ps1	save-memory.ps1
search-memory.ps1	read-transcript.ps1	test-memory.ps1
memory-healthcheck.ps1	CLAUDE.md	AGENTS.md
All 37 SKILL.md	All PDFs	opencode.json

How It Works on Linux

Terminal Capture

Uses the `script` command to capture all terminal I/O during an opencode session. Unlike the Windows buffer capture (limited to 5000 lines), `script` captures everything with no line limit.

Installer

`install.sh` clones the repo, installs dependencies, sets up ChromaDB, configures `opencode.json`, copies `CLAUDE.md` and `AGENTS.md`, adds profile aliases to `.bashrc/.zshrc`, and creates a crontab entry for weekly maintenance.

Profile Shadow

The `opencode` function in `.bashrc` shadows the raw binary, ensuring every invocation goes through the memory wrapper. Same pattern as the PowerShell profile on Windows.

Fallback Chain

- `script` installed → full terminal capture
- no `script` → direct opencode, env vars preserved
- ChromaDB available → semantic storage
- ChromaDB unavailable → markdown files

Comparison: Windows vs Linux

Capability	Windows	Linux
Terminal capture	5000 lines (buffer)	Unlimited (script)
Checkpoint timer	PowerShell Timer	bash background process
Memory storage	ChromaDB + markdown	ChromaDB + markdown
MCP servers	Filesystem + fetch + memory	Filesystem + fetch + memory
Scheduling	Task Scheduler	crontab
Profile shadow	PowerShell function	bash/zsh function
Skills	37	37
Subagents	4	4

Install on Linux:

bash <(curl -sL https://raw.githubusercontent.com/EliasOulkadi/shokunin/master/install.sh)

Repo: github.com/EliasOulkadi/shokunin

