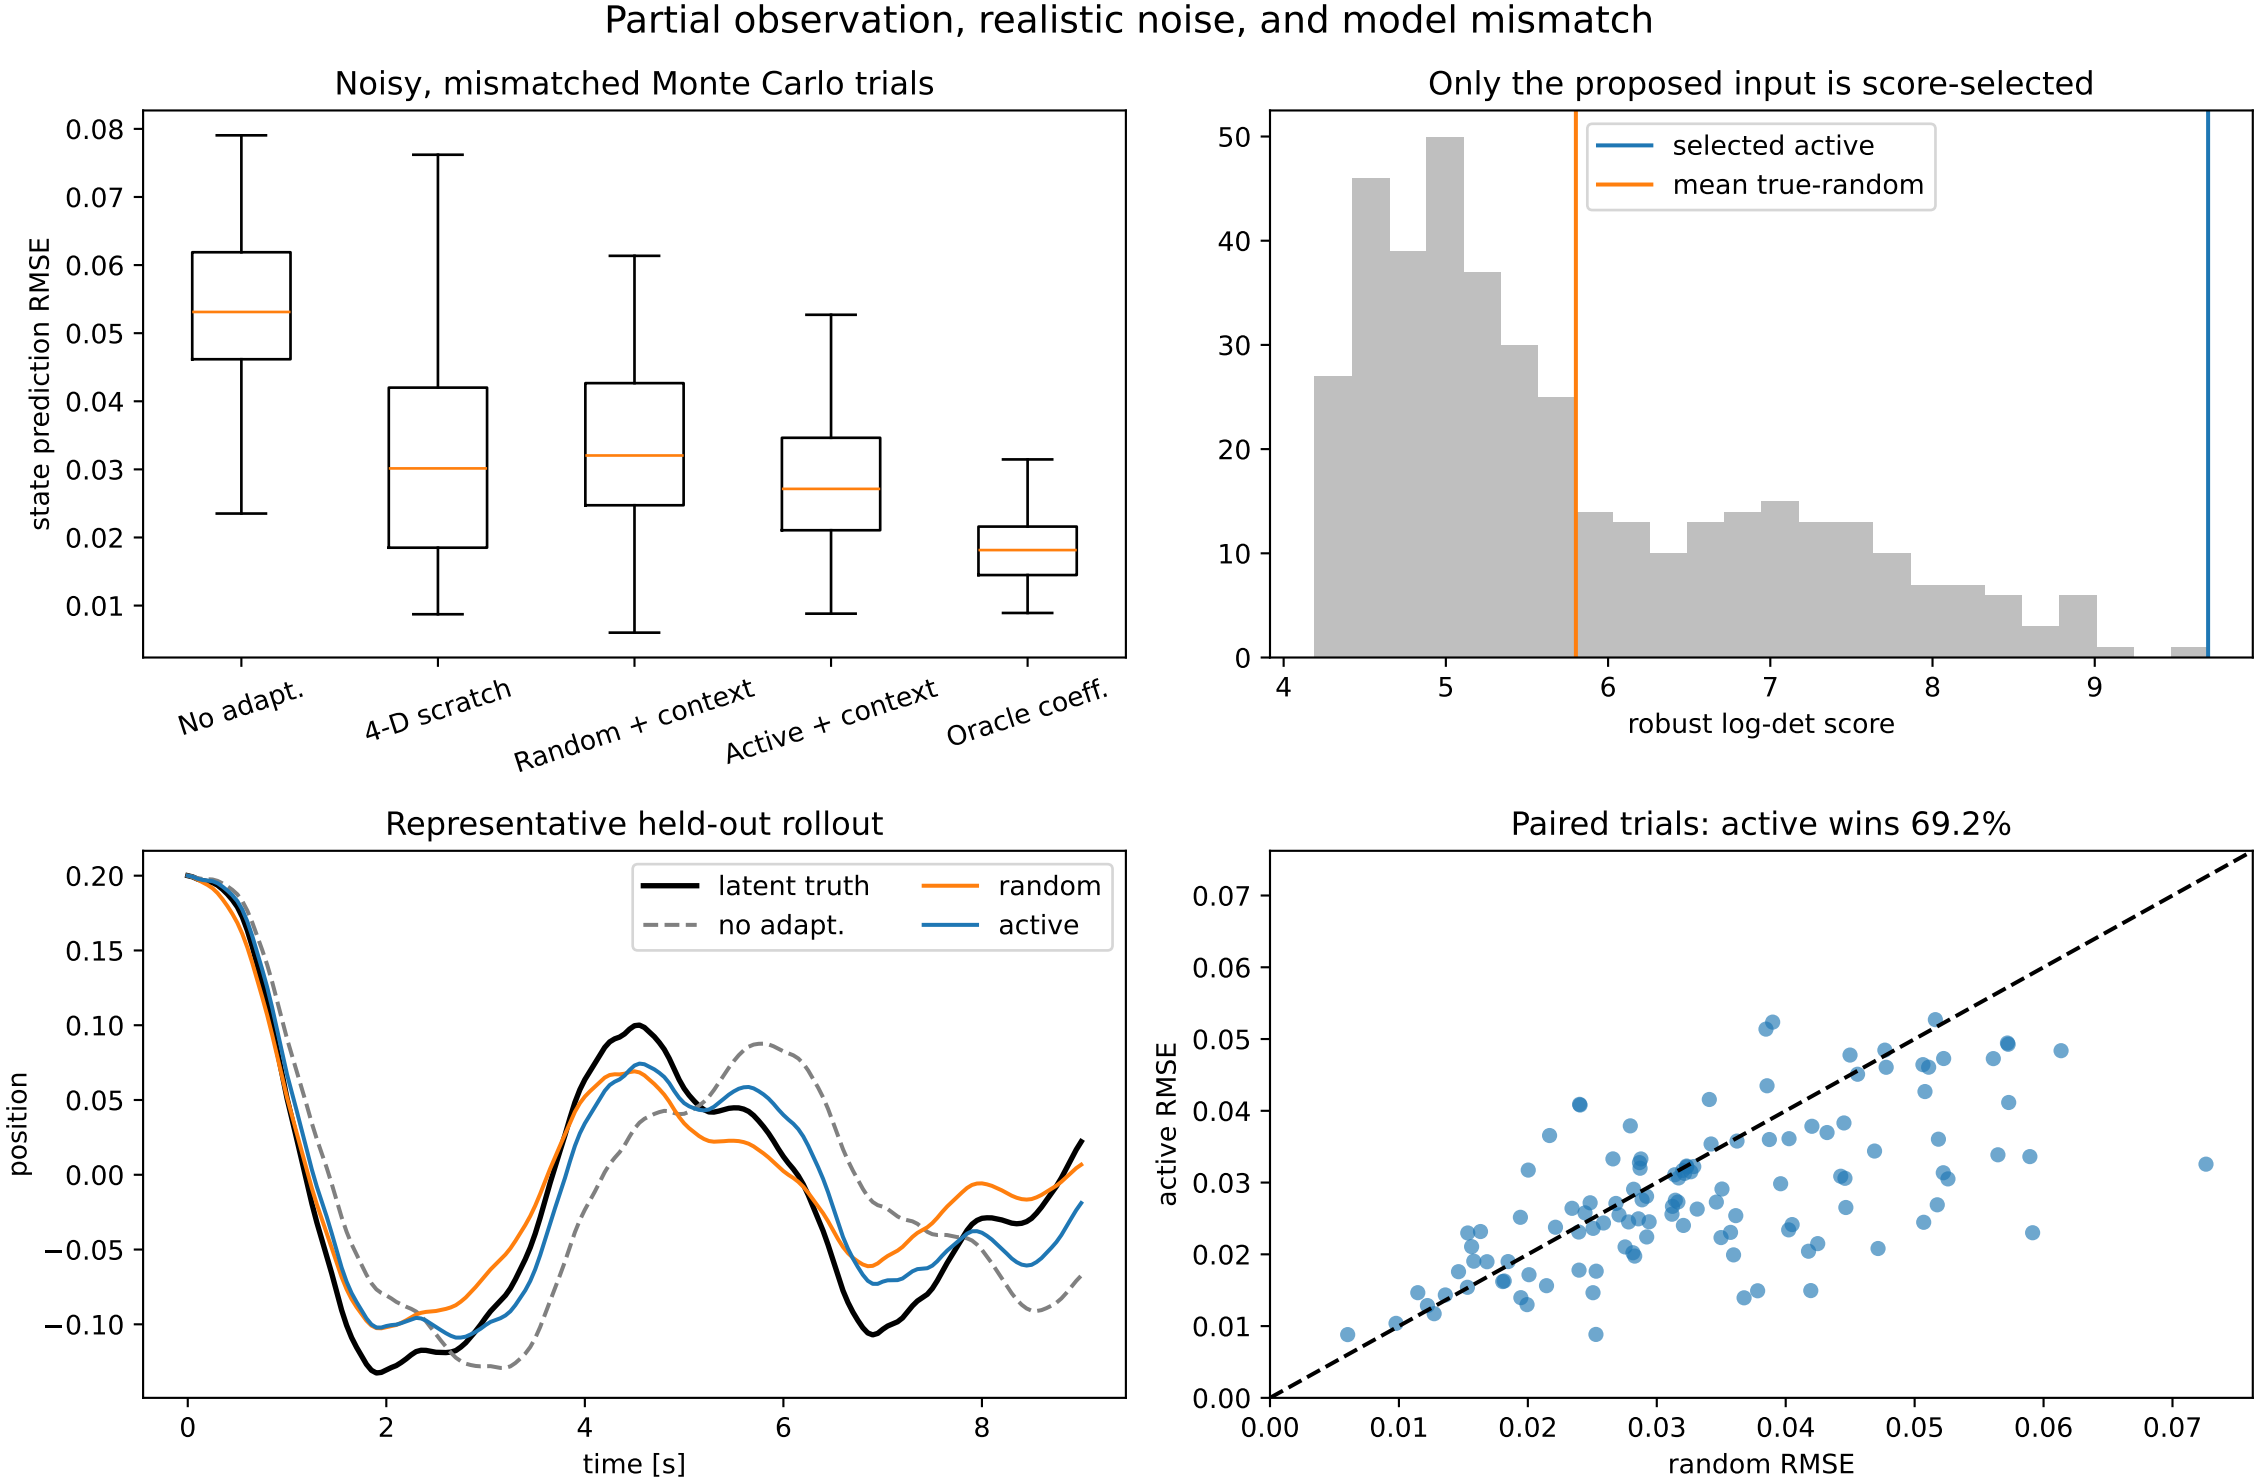
Partial observation, realistic noise, and model mismatch
Noisy, mismatched Monte Carlo trials
state prediction RMSE
0.08
0.07
0.06
0.05
0.04
0.03
0.02
0.01
No adapt.
4-D scratch
Random + context
Active + context
Oracle coeff.
Only the proposed input is score-selected
selected active
mean true-random
50
40
30
20
10
0
4
5
6
7
8
9
robust log-det score
Representative held-out rollout
latent truth
no adapt.
random
active
position
0.20
0.15
0.10
0.05
0.00
−0.05
−0.10
0
2
4
6
8
time [s]
Paired trials: active wins 69.2%
active RMSE
0.07
0.06
0.05
0.04
0.03
0.02
0.01
0.00
0.00
0.01
0.02
0.03
0.04
0.05
0.06
0.07
random RMSE