


# SQL\_LEVEL1


lets add new idea in our program to make the user enter the admin and password ;  
hint [user name is = admin ];

## ▼ use sample payload

the project now be :

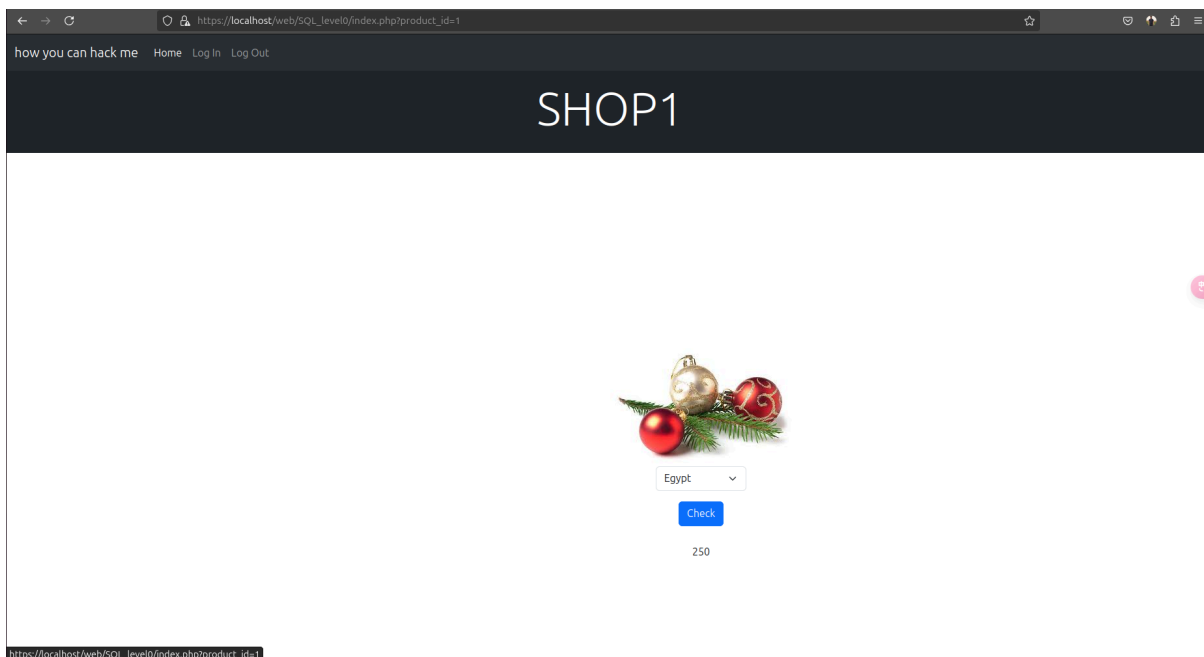


now we have 3 buttons home ⇒ page we are  
Log In ⇒ lets obtain what is ?

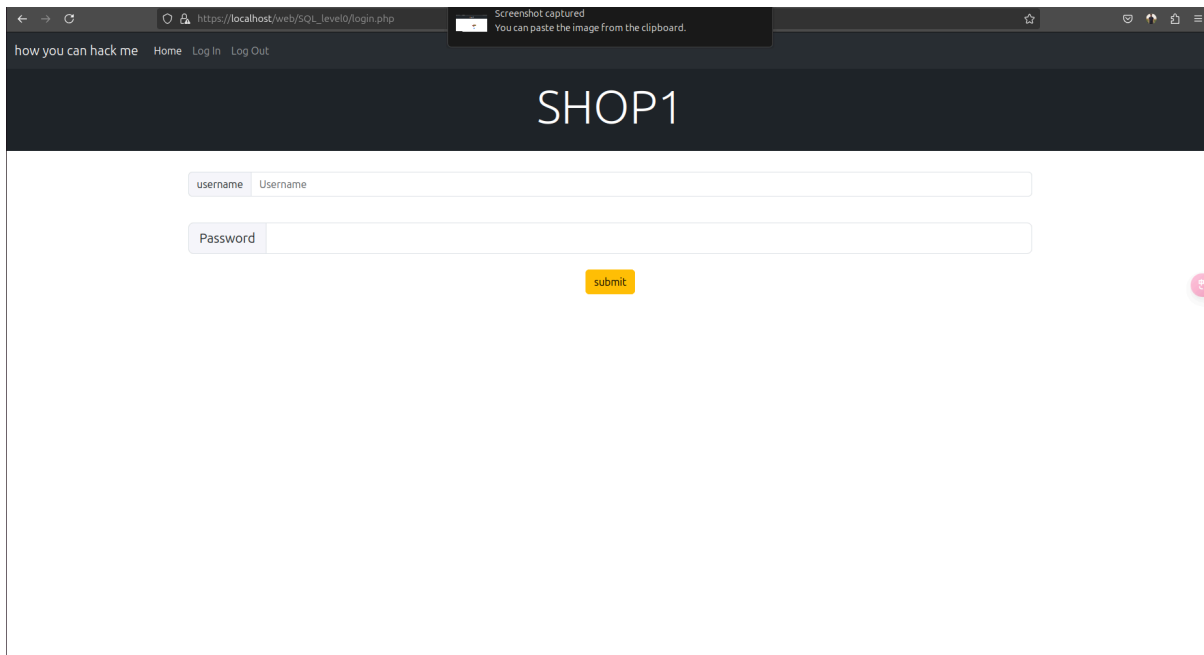


hint user name we know that  $\Rightarrow$  admin

lets try to enter any password:

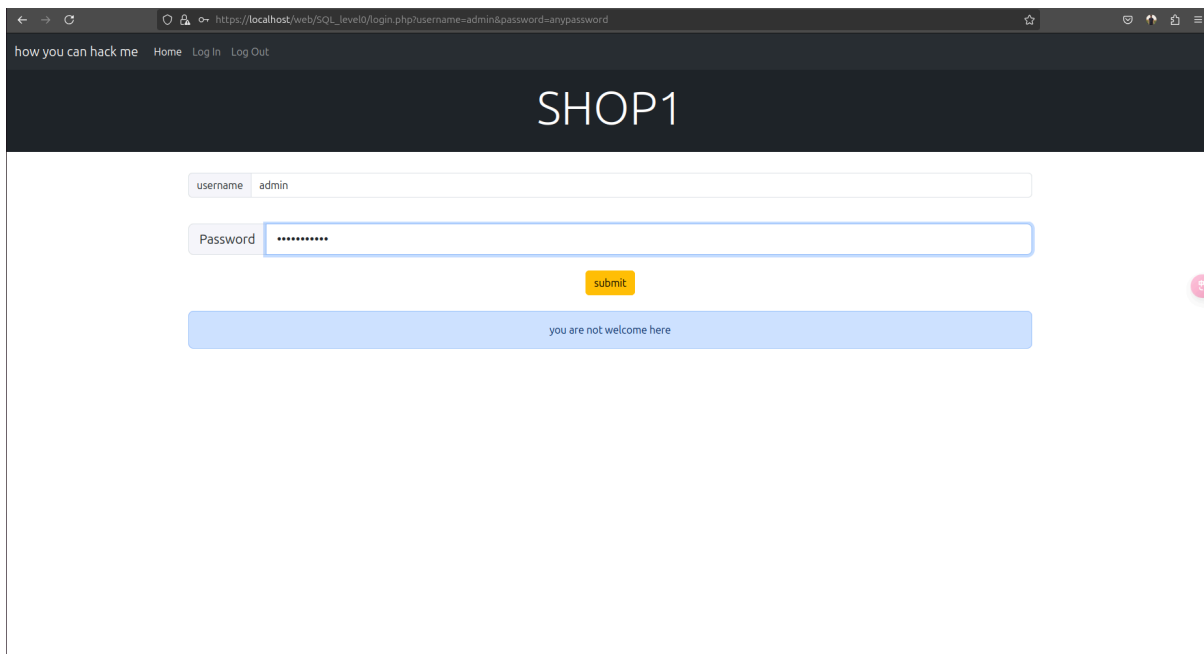

he give me you are not welcome , know i want to crack this and enter :

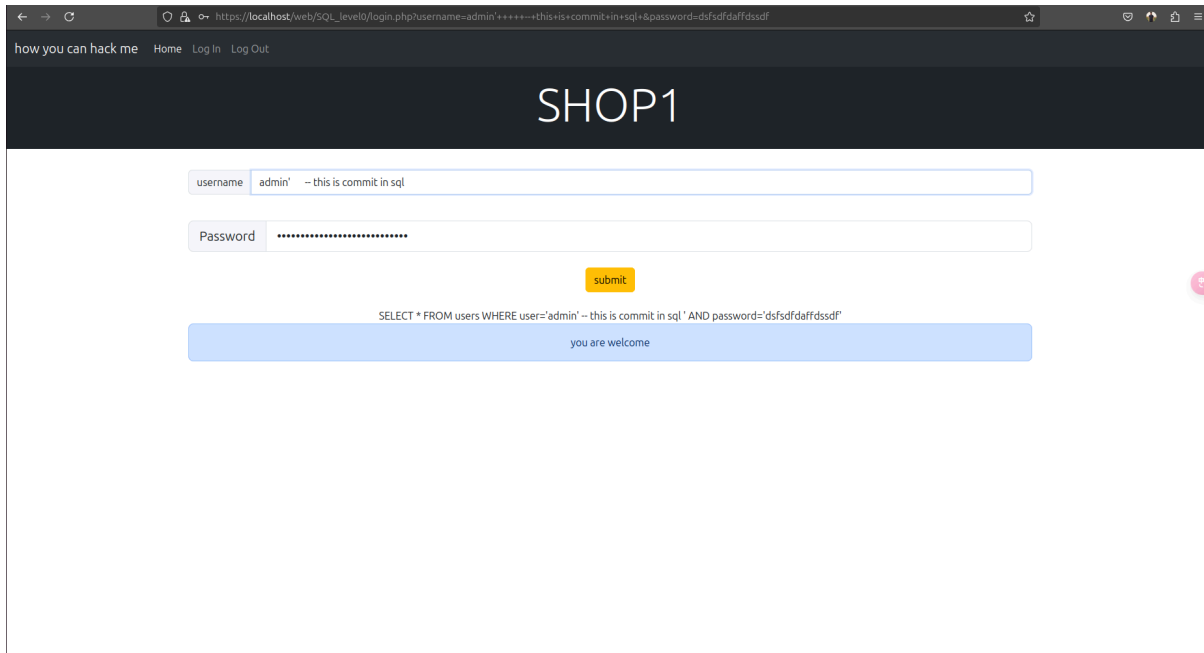

i print the sql that send to server to make us more understand what happen:

now you ask why we using ' this character to close the first single quote of user and - -


to commit the remain sql .

## ▼ stop payload by sample function


-lets create anther page code called test.php

and make loop to stop in each character to check if equal any payload characters of [ ' or - -]

and if true return you still hacker like that =

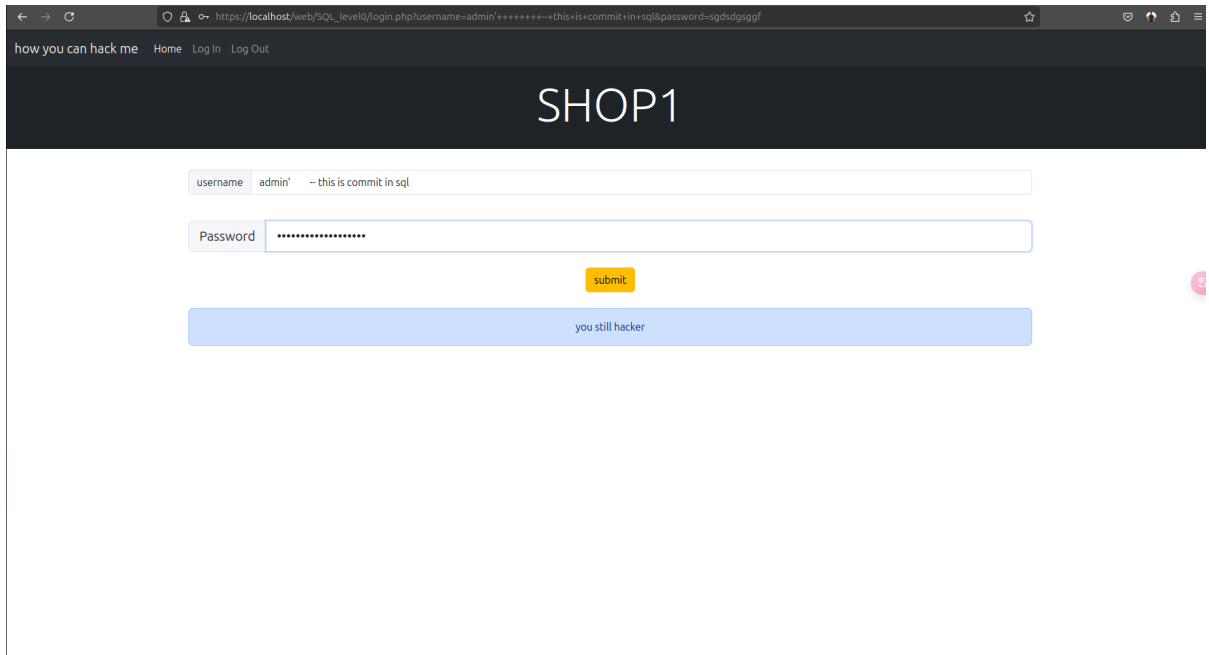

and stop ascii-table :

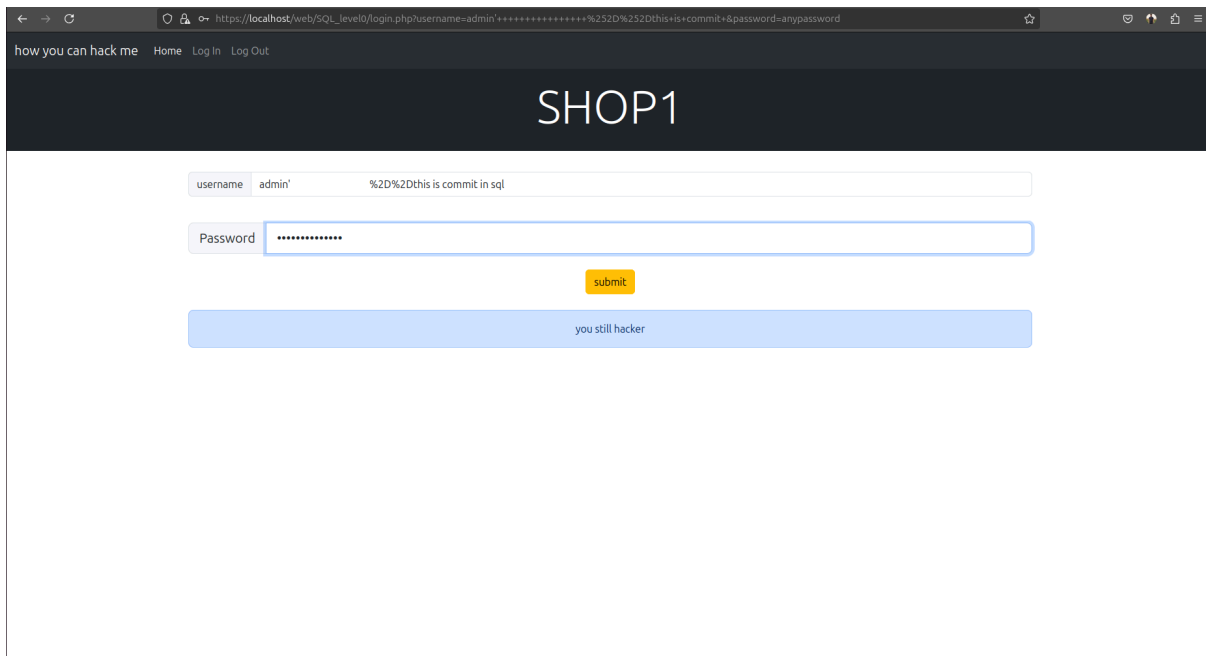

end : the program still have inject lets obtain that in SQL\_LEVEL2.