

Facets

Glossary Facet:

1. **Summary** > Glossary Table (except for last approved date and next review date)

Summary > Strategic Source >
Glossary_X_System, glossary_x_system_relationType

2. Relationships

a. **Hierarchy** > Glossary **except for:**

- i. **The relationship type column > join between** Glossary_X_Glossary, glossary, Glossary_X_Glossary_relationType
- ii. **The Data Attributes Column > Attribute Table** (we'll count the number of rows having a glossary id = ? where the deleted date is null)
- iii. **The Data Items Column > Dataset Table** (we'll count the number of rows having a glossary id = ? where the deleted date is null)
- iv. **The Strategic Source System Column >** using Glossary_X_System table that will be

joined with the System table on the System ID column (At the end we want to display the name of the system)

b. Relationships >

i. Relationship Type Column >

Glossary_x_Glossary Joined with Glossary_x_Glossary_RelType To display the name of the relationship .

ii. Glossary Column > Glossary_x_Glossary joined with the Glossary Table to display the name of the target glossary.

iii. Glossary Type Column >

Glossary_x_Glossary joined with the Glossary Table to display the Type of the target glossary.

3. Data Quality > Later

4. Stakeholders

a. **Stakeholders > Stakeholders >**

i. **Direct Stakeholders > join between**

1. Glossary_x_objectxPeople
2. object_X_People
3. People
4. Object_role

Note: the Role Accepted column uses the AcceptedID column in the object_x_people where if it is null then the value displayed in Axon is No otherwise Yes

ii. Stakeholder Community

STAKEHOLDER COMMUNITY						
All 8 Data Set 5 System 3						
Object Name	Object	Role	Name	Org Unit	Accepted	Delegate
dataset creation222	Data Set	Data Steward	John Admin	Group	No	
Customer Dataset	Data Set	Data Owner	Sally Ghozal	Group	Yes	
Customer Dataset	Data Set	Data Steward	John Admin	Group	Yes	
Warehouse_Customer_Analytics	Data Set	Data Steward	John Admin	Group	No	
Customer Dataset	Data Set	Data Steward	Liam Johnson	Group	No	

1. Stakeholder Community > Datasets >

dataset, dataset_x_objectXpeople,
object_X_People, People, Object_Role

2. Stakeholder Community > Systems >

Dataset,System,
System_x_objectxPeople ,
object_X_People, People, object_role

3. Same thing for any

glossary_X_OtherFacet or
otherFacet_X_glossary

(the tab is only shown if the glossary is linked with that object of the other facet)

b. Stakeholders > Followers > Glossary_Follow

5. Impact > Glossary_x_OtherFacetName or OtherFacetName_x_Glossary

6. Data:

a. Data Discovery > Later

b. Datasets > Dataset sub tab (not editable) >

System	Data Set Ref.	Data Set	Data Set Definition	Child Glossary	Child Glossary Type
Compliance Reporting Tool	DS-29	dalkj	dalkj		
Compliance Reporting Tool	DS-30	dataset creationnnn	Testing the child glossary in the data , datasets		
Compliance Reporting Tool	DS-31	dataset creation222	testing the child glossary in data, dataset	Customer	DOMAIN
Data Warehouse	DS-4	Warehouse_Customer_Analytics	Dataset containing enriched customer analytics data aggregated from transactional systems.	Customer	DOMAIN
CRM system	DS-5	Customer Dataset (clone)	Contains customer personal and contact information	Customer	DOMAIN
CRM system	DS-1	Customer Dataset	Contains customer personal and contact information	Customer	DOMAIN

Dataset (to display the dataset reference , data set name, dataset definition and it will be joined with the **System** to show the system name)

Note the datasets coloured in orange, these are not directly associated with the opened object, instead they are associated with its child and thus we can see the name of this child in the Child Glossary column and its type , where both of them use the glossary table using the rows whose parent ID = to the id of the opened glossary object

c. Data Attributes (not editable) > we will show the columns that are linked with the opened glossary object (or his children), alongside their dataset and system (thus the attribute glossary name should always be = to the opened glossary object or his children)

ال Datasets subtab w el attributes subtab
لو تيجي تعمل dataset وتحط لها X glossary = يبق في ال
data tab > datasets subtab of X
هيظهر لنا ال dataset دي
طيب لو جينا عملنا attributes في ال dataset دي او اي
dataset فانت او ربطناهم (كلهم او جزء منهم) ب X يبق في ساعتها
ال attributes دي هتبان في ال data attributes subtab.

طب لو كان X عنده child اسمه y اللي عنده child اسمه Z
 يبقى اللي هيطبق علي X هيطبق علي Y , Z
 وساعتها اللي موجود في ال Y هيروح يسمع برودو في ال X
 وساعتها هيبقي عندنا values لل child glossary and child
 glossary type

(orange rows)

واللي هيبقي موجود في ال Z هيبقي موجود في ال X , Y

(orange rows)

- i. **System column** > System
Table.PrimaryName
- ii. **Dataset column** >
Dataset.PrimaryName
- iii. **Glossary column (glossary of the
dataset)** > glossary.PrimaryName
- iv. **Attribute Glossary** >
glossary.PrimaryName
- v. Attribute name whose ID = id of the
opened object or whose parentID = id of
the opened object

- vi. **Editability** > join between attribute.Editability and attribute_editability table
- vii. **Editability Role** > join between attribute.EditabilityRole and attribute_edit_role table
- viii. **Key column** > Attribute.isPrimary
- ix. **Rank column** > Attribute.rank
- x. **Ref** > Attribute.rank
- xi. **DB Field Name** > glossary_alias_name
- xii. **Definition** > Attribute.Definition
- xiii. **Origin** > join between Attribute.Origination and Attribute_Origination table
- xiv. **KDE** > Glossary table will be joined with Glossary_KDE_Type to get its values (true / false)
- xv. **Attribute Glossary Definition** > Glossary.Definition
- xvi. **Requirement** > Attribute.Requirement

- xvii. **Business Logic >**
Attribute.BusinessLogic
- xviii. **Data Type >** Attribute.dataType
- xix. **Data Length >** Attribute.dataLength
- xx. **Confidence Score >**
Attribute.ConfidenceScore
- xxi. Child Glossary >
Glossary.primaryName who is in the
children of the opened glossary
- xxii. Child Glossary type > glossary type
table joined with glossary table on
glossary.type = glossaryType.ID
- xxiii. **Physical Fields > Later (After
integration with EDC)**
- xxiv. **Review status >**
- xxv. **Related To >**
attribute_X_attribute.targetAttributeID
Joined with attribute table to get the
name of the attribute and to which
dataset it belongs to thus it will be joined
with the dataset table as well

xxvi. Relationship Type >

attribute_X_attribute table joined with
attribute_x_attribute_reltype table to get
PrimaryName

xxvii. Interface > attribute_X_attribute joined
with interface table to get the name of
the interface

xxviii. Sourcing Logic >

xxix. Attribute Data Quality columns > later
(it will be the table of the DQ_Type)

7. Enterprise Catalog > Later

8. History:

- a. Glossary audit
- b. Glossary alias name audit
- c. glossary_X_objectxip_audit
- d. Glossary_Follow_audit
- e. glossary_X_
- f. _X_Glossary

g. Also when the Role is accepted then we can get it from object_X_People

9. Change > Later

10. Impact Tab:

Lets say we opened the impact tab of the Customer Data glossary where the hierarchy of Customer Data is as follows:

Customer Data has 2 children Customer Email, and Customer (which has 1 child which is Gloss1).

Let say in the impact tab of Customer Data glossary, products subtab I have added "Online product". Then the values for the child glossary, child glossary type will be empty as the product is linked directly to the opened glossary and not to one of its children (This is the blue colored row).

While if we went to the children of the opened glossary and added products to them through the impact tab, then they will appear in their products subtab as blue rows AND will appear in their parent's products subtab as orange rows. Thus for the orange rows we have to fill in the values of the child glossary and its type (the glossary that is in the hierarchy of the opened glossary which is Customer Data and was linked to these products).

Note: Gloss1 is the child of Customer which is the child of customer data, thus the product that is linked to Gloss1 will appear as a blue row in the impact of Gloss1 and as an orange row in both the customer data glossary and the customer glossary as well

Relationship Type	Product Name	Product Owner	Child Glossary	Child Glossary Type
Is related to	Online Diagnosis Service			
Is related to	Electronic Health Records (EHR)	Mayar Kamel	Customer	DOMAIN
Is related to	Mobile Appointment Booking App	Mayar Kamel	Customer Email	TERM
Is related to	productm		gloss11	DOMAIN

Same thing across the other subtabs for the impact tab of the glossary.

Datasets Facet:

1. **Summary** > Dataset Table (except for last approved date and next review date)

2. **Attributes** > Attribute Table **except for:**

The DB Field Name column >

Attribute_Alias_Name Table

KDE Column > (Which **Glossary terms** have flagged this particular attribute as a **Key Data Element**) thus it uses the **Glossary table**.

Related To, Relationship Type >
attribute_x_attribute, attribute_x_attribute_RelType

Note: in the attribute_X_attribute table, the column named as SourceAttributeID will be the ID of the attribute of the opened dataset object and the TargetSourceID will be the ID of the attribute in the other dataset.

Interface > Interface table where the sourceSystemID will be the ID of the system of the **Other** dataset

3. **Relationships >** attribute_x_attribute,
attribute_x_attribute_relationType,
attribute_x_attribute_relationScope,
Interface table

Note: lets say for a dataset we have an inbound relationship from A to B then in the dataset with

attribute B , there will be an outbound relationship from B to A

Note: in the attribute_X_attribute table, the column named as SourceAttributeID will be the ID of the attribute of the opened dataset object and the TargetSourceID will be the ID of the attribute in the other dataset.

4. Stakeholders > Stakeholders > Datasets >

- a. Dataset_x_objectxPeople
- b. object_X_people
- c. People
- d. Object_Role

Note: the Role Accepted column uses the AcceptedID column in the object_x_people where if it is null then the value displayed in Axon is No otherwise Yes

5. Stakeholders > Stakeholders > Data Attributes > Attribute_x_objectxPeople, object_X_People, objectRole, People

Stakeholders > Stakeholders > Stakeholder_Community > any
Dataset_X_OtherFacet or otherFacet_X_dataset ,
object_X_People, objectRole, People.

(the tab is only shown if the dataset is linked with that object of the other facet)

It will be a Join between several tables.

Example to show the stakeholders of the **system** of the dataset:

```
26 SELECT
27     d.id                AS DatasetID,
28     d.mastersource      AS SystemID,
29     s.primaryName       AS SystemName,
30     concat(ip.FirstName,ip.LastName,' ') AS StakeholderName,
31     obj_role.primaryName AS ObjectRole
32 FROM dataset d
33 INNER JOIN system s
34     ON d.mastersource = s.id
35 INNER JOIN system_x_objectxip s_ip
36     ON s.id = s_ip.systemid
37 INNER JOIN object_x_ip o_ip
38     ON s_ip.objectxipid = o_ip.id
39 INNER JOIN involved_party as ip
40     ON ip.id = o_ip.ipid
41 INNER JOIN object_role obj_role
42     ON obj_role.id = o_ip.roleid;
```

Data Output Messages Graph Visualiser X Notifications

Showing rows: 1 to 29 Page No: 1 of 1

	datasetid integer	systemid integer	systemname character varying (256)	stakeholdername text	objectrole character varying (45)
1	1	1	CRM system	JohnAdmin	System Steward

Stakeholders > Followers > Dataset_Follow

6. Enterprise Catalog > Later

7. Values > Values update and availability > dataset_value_info

Values > Values - All Values > check for the datasets_values_BulkUpload tab in the document

8. Data Quality > Later

9. Impact > dataset_OtherFacetName / OtherFacetName_dataset

10. History >

- a. Attribute_X_Attribute_Audit
- b. Attribute_Audit
- c. Dataset
- d. Dataset_X_ _Audit
- e. _X_Dataset_Audit

- f. Dataset_Follow_audit
- g. Dataset_X_objectXpeople_Audit
- h. Also when the Role is accepted then we can get it from object_X_People

11. Change > Later

Systems Facet:

1. **Summary** > System table
2. **Summary** > **Data Content Summary** > Glossary_X_System, glossary_x_system_relation Type

Relationship status > To be documented, undocumented, documented

3. **Relationships** > System
4. **Interface** > **System Interface** > join between interface table and the system table **except for** Data Attributes:

We want to count the number of attribute X attribute using the corresponding interface thus we can **count** the result of this query:

SELECT

 axa.sourceAttributeID,

 axa.targetAttributeID,

 sxs.PrimaryName AS interface_name --
or sxs."PrimaryName" if that's your exact column

FROM attribute_x_attribute axa

JOIN attribute a_src ON a_src.id =
axa.sourceAttributeID

JOIN attribute a_tgt ON a_tgt.id =
axa.targetAttributeID

JOIN dataset d_src ON d_src.id =
a_src.datasetID

JOIN dataset d_tgt ON d_tgt.id =
a_tgt.datasetID

JOIN system s_src ON s_src.id =
d_src.MasterSource -- not masterSource
(adjust if needed)

JOIN system s_tgt ON s_tgt.id =
d_tgt.MasterSource

```

JOIN system_x_system sxs
    ON sxs.sourceSystemID = s_src.id
    AND sxs.targetSystemID = s_tgt.id
WHERE (axa.sourceAttributeID,
axa.targetAttributeID) IN ((?,?));

```

5. Interface > Data Flow outside interfaces > used to show the relationships made between the attributes without specifying an interface.

```

67  SELECT
68      s2.primaryname AS source_system,
69      s.primaryname  AS target_system,
70      COUNT(*)      AS mapping_count
71  FROM attribute_x_attribute axa
72  JOIN attribute a_src ON a_src.id = axa.sourceattributeid
73  JOIN attribute a_tgt ON a_tgt.id = axa.targetattributeid
74  JOIN dataset d_src ON d_src.id = a_src.datasetid
75  JOIN dataset d_tgt ON d_tgt.id = a_tgt.datasetid
76  JOIN system s ON s.id = d_src.mastersource -- now target system
77  JOIN system s2 ON s2.id = d_tgt.mastersource -- now source system
78  WHERE axa.relmethod IS NULL
79      AND (s.id = 1 OR s2.id = 1)
80  GROUP BY s2.primaryname, s.primaryname
81  ORDER BY mapping_count DESC;
82

```

Data Output Messages Notifications

SQL

Showing rows: 1 to 2

	source_system character varying (256)	target_system character varying (256)	mapping_count bigint
1	Enterprise Resource Planning (ERP) System	CRM system	4
2	CRM system	Enterprise Resource Planning (ERP) System	1

The source system id or the target system id will be = to the ID of the opened system object

6. Stakeholders > Direct Stakeholders >

Attribute_x_objectxPeople, object_X_People, objectRole, People.

7. Stakeholder Community > any

System_X_OtherFacet or OtherFacet_X_System, object_X_People, objectRole, People.

8. Impact > any System_X_OtherFacet or OtherFacet_X_System

9. Data > datasets > (it shows all of the datasets belonging to that system)

dataset table, it will be joined with the status table to get the Status.

10. Data > Data Attributes > (it shows all of the attributes of each dataset in that system)

- a. dataset
- b. glossary
- c. attribute
- d. Attribute_origination

Note:

The related to and relationship type columns have values only when there's a relationship between the corresponding

attribute and any other attribute ON ONE
CONDITION , that the corresponding
attribute is the target one (Inbound
relationship)

The Related To column contains the dataset
name_ Attribute Name.

DATA ATTRIBUTES									
Data Set	Glossary	Attribute Glossary	Attribute Name	Ref.	Definition	Origin	Requirement	Related To	Relationship Type
Customers	gloss11	gloss11	Att1	AT60	Def1	Sourced			
Customers	gloss11		Att2	AT61	Def2				
Warehouse_Customer_Analytics	Customer		City	AT18	Customer's city			DS-9: CRM_Customer_Info_Proj - City	Unenforced Lookup
Warehouse_Customer_Analytics	Customer	Customer ID	Customer_ID	AT14	Unique identifier for each customer			DS-1: Customer Dataset - CID	Enforced Lookup
Warehouse_Customer_Analytics	Customer	glossary test	Last_Purchase_Date	AT17	Most recent purchase date				
Warehouse_Customer_Analytics	Customer		Name	AT15	Full name of the customer			DS-24: dataset creation - Age	Enforced Lookup

7 records

11. Enterprise Catalog > later

12. History:

- System audit
- Interface audit
- System _X_objectXpeople_audit
- Interface _X_objectXpeople_audit
- System _Follow_audit

f. System _X_

g. _X_System

h. Also when the Role is accepted then we can get it from object_X_People

13. Change > later

Interface:

1. **Summary** > interface table

2. Summary > data content summary >

interface_X_System, interface_x_system_relation
Type

3. Stakeholders > join between

a. interface_x_objectxPeople

b. object_X_People

c. People

d. Object_role

**4. Impact > interface_x_OtherFacetName or
OtherFacetName_x_interface**

5. Data > data within interface >


```

SELECT
    a_tgt.primaryname      AS source_attribute,
    a_src.primaryname      AS target_attribute,

    d_tgt.primaryname      AS source_dataset,
    d_src.primaryname      AS target_dataset,

    s_tgt.primaryname      AS source_system,
    s_src.primaryname      AS target_system
FROM attribute_x_attribute axa
JOIN attribute a_src ON a_src.id = axa.sourceattributeid
JOIN attribute a_tgt ON a_tgt.id = axa.targetattributeid
JOIN dataset d_src ON d_src.id = a_src.datasetid
JOIN dataset d_tgt ON d_tgt.id = a_tgt.datasetid
JOIN system s_src ON s_src.id = d_src.mastersource
JOIN system s_tgt ON s_tgt.id = d_tgt.mastersource
WHERE axa.relmethode IS NOT NULL
      AND s_tgt.id = 1
      AND s_src.id = 2

```

Output Messages Notifications

Showing rows: 1 to 2 Page No: 1 of 1

source_attribute character varying (255)	target_attribute character varying (255)	source_dataset character varying (255)	target_dataset character varying (255)	source_system character varying (256)	target_system character varying (256)
Age	Price per unit	Customer Dataset	Sales Transaction	CRM system	Enterprise Resource Planning (ERP) System
Cus_Email	TransactionID	Customer Dataset	Sales Transaction	CRM system	Enterprise Resource Planning (ERP) System

In the where condition , we will write the system source and system target IDs = System IDs of the opened interface.

The only difference between this query and the upcoming one is in the where condition (not) Null

Add to the previous query the rest of the columns:

relationship type > Attribute_X_attribute_relytype

Attribute Description> Attribute

Data Length > Attribute

Editability > Attribute_editability

Editability Role > Attribute_editability_role

glossary > join between attribute and glossary to get its name

glossary Description > join between attribute and glossary to get its description

mandatory > isMandatory column in attribute table

origination > Attribute_origination

Reference = dataset reference

6. Data < data outside interface >

```
SELECT
    a_tgt.primaryname      AS source_attribute,
    a_src.primaryname      AS target_attribute,

    d_tgt.primaryname      AS source_dataset,
    d_src.primaryname      AS target_dataset,

    s_tgt.primaryname      AS source_system,
    s_src.primaryname      AS target_system
FROM attribute_x_attribute axa
JOIN attribute a_src ON a_src.id = axa.sourceattributeid
JOIN attribute a_tgt ON a_tgt.id = axa.targetattributeid
JOIN dataset d_src ON d_src.id = a_src.datasetid
JOIN dataset d_tgt ON d_tgt.id = a_tgt.datasetid
JOIN system s_src ON s_src.id = d_src.mastersource
JOIN system s_tgt ON s_tgt.id = d_tgt.mastersource
WHERE axa.relmethod IS NULL
      AND s_tgt.id = 1
      AND s_src.id = 2
```

ita Output Messages Notifications

Showing rows: 1 to 1 Page No: 1 of 1

source_attribute character varying (255)	target_attribute character varying (255)	source_dataset character varying (255)	target_dataset character varying (255)	source_system character varying (256)	target_system character varying (256)
CID	ProductID	Customer Dataset	Sales Transaction	CRM system	Enterprise Resource Planning (ERP) System

In the where condition , we will write the system source and system target IDs = System IDs of the opened interface.

Also add to the previous query the above mentioned columns.

7. History >

- a. Interface audit
- b. Interface _X_objectxPeople_audit
- c. Interface _Follow_audit
- d. Interface _X_
- e. _X_Interface
- f. Also when the Role is accepted then we can get it from object_X_People.

People:

About me > People, People details.

Team > People_X_People,
People_X_People_RelationType

Describes the details of the team that a user belongs to. The Team tab has the following sections:

- Management. Displays the details of the managers that the user reports to.
- Peers. Displays the other people report to the same line managers. You cannot edit the Peers section.
- Reports. Displays who all reports to the user.

Note:

Lets say for object B we set A as a manager then when we Open Object A we'll find B in the report. And if C reports to A then c will be in the report of A and A will be the manager of C.

Responsibilities > object_x_ip , object_Role, AnyTable_X_objectXPeople

Following > follow, anyTable_follow (for example dataset_Follow, thus we will join it with the dataset table too to get the dataset name)

Activity stream > **My Activity** > **stakeholder** >

- 1) We use object_X_People to get the objectXipid and the Role IDs of Person id = ?
- 2) Then using object_role with the role IDs we've got from the previous query, we get the module ID
- 3) Using the Module ID we will get the module name from the module table

Let's say that we found 2 modules datasets and Glossary

4) Then using the objectXipid we got from object_X_People, we get the IDs of the Glossaries from glossary_X_objectXPeople

5) Using the previous IDs , we get the Glossary Names, References, LastUpdatedUserID and we'll get his name from People Table

6) Repeat the steps 4 and 5 but with the dataset_X_objectXPeople and Dataset

(leave the events column for now)

In the column of the Events we can have Details Added, Details Updated, Relationships Added, Relationships Updated.

Lets say, for a specific object we changed 3 fields at once, then in the audit table , the 3 changes will be reflected in one row, but we will have in the events column, Details Updated 3 times .

When I have added one inbound relationship for a dataset I got relationships Added (3) ??

When we add a stakeholder > relationships added.

**When we edit a stakeholder > Relationships
Updated**

Activity Stream > My Activity > Following >

follow, anyTable_follow (for example
dataset_Follow, thus we will join it with the dataset
table too to get the dataset name)

**Note the notification section is not for editing ,
values are reflected from note_frequency table**

Activity Stream > My Jobs > Later

Activity Stream > API tokens > later

Change > later

Assigned Segments > Later

**Assigned Roles > object_X_People,object_role,
object_role_type**

Process:

Summary > Predecessor > Process_X_Process table. Such that the opened process object is the source process and the process we set in the predecessor section is the target process.

Components (not editable) > it shows the full hierarchy of the opened process object from the first parent to the last child. All of the columns get their data from the process table except for the predecessor column which gets its data from the process_X_process.

For example: as shown in the following picture for a process object of reference PRC-20 , the predecessors of Process 9 is COB-3 (reference of the process)

COMPONENTS ⚙️						
Ref.	Process	Description	Parent	Axon Status	Predecessors	Type
☰ > COB-9	🕒 No - Record client preference	No - Record client preference		Active	COB-3	Step
└─ > PRC-18	🕒 child2	testing predecessor	No - Record client preference	Active		Process
└─ > PRC-20	🕒 predecessor	testing predecessor	No - Record client preference	Active	COB-5 COB-6 COB-3	Process
└─ > PRC-17	🕒 Process_Predecessor	testing predecessor	No - Record client preference	Active	COB-6	Process

Data Tab > Isn't for editing. It gets its data from the process_X_dataset for the dataset section and the process_X_attributes table for the attributes section

DATA SETS						
Glossary	Data Set Ref.	Data Set	Data Set Definition		System	
Customer	DS-1	 Customer Dataset	Contains customer personal and contact info		CRM system	
Customer	DS-4	 Warehouse_Customer_Analytics	Dataset containing enriched customer analytics data aggregated from transactional systems.		Data Warehouse	
						2 records

DATA ATTRIBUTES						
Attribute Glossary	System	Data Set	Attribute Name	Ref.	Definition	
Customer Email	CRM system	Customer Dataset	 Cus_Email	AT-4	Contact email of the customer	
	Data Warehouse	Warehouse_Customer_Analytics	 Last_Purchase_Date	AT-17	Most recent purchase date	
Customer	CRM system	Customer Dataset	 Fname	AT-2	Customer's first name	
Product Category	CRM system	Customer Dataset	 AttributeTrial	AT-63	Definition	
Customer ID	CRM system	Customer Dataset	 CID	AT-1	Unique identifier for each customer	
x	CRM system	Customer Dataset	 Lname	AT-3	Customer's last name	
	CRM system	Customer Dataset	 PhoneNumber	AT-58	Customer's Phone Number	
	CRM system	Customer Dataset	 Age	AT-56	Customer's age	
	CRM system	Customer Dataset	 bus logic test	AT-78	test	
						0 records

Impact Tab > datasets (editable) >
Process_X_dataset.

Impact Tab > attributes (editable) >
Process_X_attributes table.

Note: if we added dataset A in the datasets sub tab ,
its attributes won't be reflected neither in the
attributes subtab (impact) nor in the
process_X_attributes table.

However, its attributes will be shown in the **data tab** ,
attributes section. And the dataset itself will be
shown in the datasets section.

Note: we can add an attribute in the attributes
subtab (impact) without adding its dataset in the
dataset subtab (impact) . Also the dataset of this
attribute won't be added to the process_X_dataset
table.

However, its dataset will be shown in the **data tab**,
datasets section and the attribute itself will be shown
in the attributes section.

Policy:

Impact and data tab are the same as those of the process facet.

Components > hierarchy (not editable) > show the full hierarchy of the policy object.

Components > Relationships (editable) > policy_X_policy table.

Project:

Impact and data tab are the same as those of the process facet.

Regulation Facet:

- **Summary tab** > Regulator >
Regulation_X_Regulator_RelationType and
Regulation_X_Regulator tables
- **Summary tab** > Geography >
Regulation_X_Regulator_X_Geography table

Note: lets say we have 3 regulators A,B,C and we have set geography for A & B only.

Then in a regulation D , i have set its regulators to be A and C.

Then in the geography section of D, the geography of A is the only one displayed?

As C doesn't have any geography and B isn't a regulator for D.

Note: if we wanted to delete a regulator from the Regulator section of the regulator then we should delete its geography as well Otherwise it is an error. (but after deletion the regulator stays as it is without being deleted, if we tried to delete it again , it will be deleted)
If we wanted to delete the geography only without its regulator , it won't show any error.

Note: if Regulation F has data displayed in the above mentioned 2 sections then any child of F whether direct or not will have the same data displayed along side its data if any.

If we deleted anything from its parent, it won't be deleted from its children.

- **Components Tab** > it shows the hierarchy of the regulation

All of the columns get their data from the Regulation table except for the Regulatory Theme which gets its data from Regulation_X_RegulatoryTheme

Note: the component column is the long name of the regulation.

- **Relationships tab** > Relationships > Regulation_X_Regulation table

- **Relationships tab** > Regulatory Theme > (not for edit) it takes its data from Regulation_X_RegulatoryTheme

Regulations column show all of the regulations linked to the corresponding regulatory theme

REGULATORY THEME																			
Ref.	Regulations	Name	Description																
REGTH-1		Theme1	Desc.																
<table border="1"> <thead> <tr> <th colspan="2">Root Regulation</th><th>Ref.</th><th>Regulation</th></tr> </thead> <tbody> <tr> <td>HIPAA</td><td></td><td>REG-6</td><td>reg3</td></tr> <tr> <td>HIPAA</td><td></td><td>REG-5</td><td>reg long name</td></tr> <tr> <td>reg4</td><td></td><td>REG-7</td><td>reg4</td></tr> </tbody> </table>				Root Regulation		Ref.	Regulation	HIPAA		REG-6	reg3	HIPAA		REG-5	reg long name	reg4		REG-7	reg4
Root Regulation		Ref.	Regulation																
HIPAA		REG-6	reg3																
HIPAA		REG-5	reg long name																
reg4		REG-7	reg4																

The root regulation is the greatest parent of it so if Regulation A is parent of B which is parent of C, then if C is shown as a regulation linked to the corresponding theme, then the root regulation of C will be A

- Stakeholders > Community > Stakeholders of the object (of different facet types as product) that linked with the opened regulation object.

Regulatory Theme:

Summary tab > if the theme has a parent then the summary tab shows 2 sections the hierarchy and the definition as shown in the picture. If it doesn't have a parent then only the definition section is shown.

Firefox browser window showing the 'theme 2' Regulatory Theme page. The page is titled 'theme 2 Regulatory Theme' and includes an 'Edit' button. The main content area is divided into two sections: 'HIERARCHY' and 'DEFINITION'.

HIERARCHY

Regulatory Theme	Description
Theme1	Desc.
theme 2	desc

DEFINITION

desc	
Ref.:	REGTH-2
Short Name:	Not specified

CLASSIFICATIONS

BASIC CLASSIFICATIONS

Axon Status: Active

Created: 05-Oct-2025

Last Updated By: John Admin

Last Updated: 05-Oct-2025

Components tab > hierarchy of the object.

Regulations tab > regulations linked to that theme :
Regulation_X_RegulatoryTheme table

My Items

Follow tab:

- 1st tab > join between follow table and the follow_type table
- 2nd Tab ? WithChildren Column (0s and 1s) in the follow table
- Additional Info = Description column in the follow table.

Note: lets say we followed object A (which is parent of B) with its children, then we won't have a record saying that Object B is followed as well in the follow table. Instead, when we open object B to follow it, we will find this

The screenshot shows a web application interface for Informatica Products. The main header includes navigation links like 'Data Governance', 'Search', 'Maps', 'My Items', and 'Create'. The user is logged in as 'Sally Ghosal'. The page title is 'Products Glossary | (Show Rollup View)'. The 'Following' tab is selected, displaying a list of items being followed. The first item is 'Kandy product only' with a 'Following' status of 'Active'. The 'Lifecycle' is 'APPROVED' and 'Axon Viewing' is 'Public'. The 'Created By' is 'John Admin'. The 'Definition' section shows 'Kandy product only' and a hierarchy of 'Products'. The 'Ref.' is 'GLOS-26', 'Alias Names' are 'product, itemes', 'Format Type' is 'Text', and 'Scope' is 'Global Department'.

DEFINITION
Kandy product only
Hierarchy:   Products
Ref.: GLOS-26
Alias Names: product, itemes
Format Type: Text
Scope: Global Department

CLAS
BAS
Axon Status: ● Active
Lifecycle: APPROVED
Axon Viewing: Public
OTHER INFORMATION
Security Classification: Public
Type: DOMAIN
Created By: John Admin

MyItems table

Type column has 3 values:

If i just visited the object the type will be
VisitedEntity

If I changed / added a stakeholder the type will be
ObjectXip

If I followed an object the type will be **follow**

Note: If I (john) have made Liam as a stakeholder for an attribute then the facet will be Attribute , type Object_X_IP , VisitedBy_ID = liam's ID

My items > Recent:

Select * from My_Items where visitedBy_ID = ID of the logged in person and type = 'VisitedEntity' using the the entity and entity_ID columns we can get the name of the object by joining it with the table corresponding to the entity (example if the entity was policy then we'll search for the object with ID = entity_ID in the Policy table)

My items > Following:


Select * from My_Items where visitedBy_ID = ID of the logged in person and type = 'Follow' then using the the entity and entity_ID columns we can get the name of the object by joining it with the table corresponding to the entity (example if the entity was policy then we'll search for the object with ID = entity_ID in the Policy table)

My items > Roles:

Select * from My_Items where visitedBy_ID = ID of the logged in person and type = 'ObjectXIP' then using the the entity and entity_ID columns we can get the name of the object by joining it with the table corresponding to the entity (example if the entity was policy then we'll search for the object with ID = entity_ID in the Policy table)

Note:

When we hover over any object in this tab, we can see other objects linked to it, lets say the object was a dataset then to get the objects linked to it, we'll use dataset_X_AnyOtherFacet or AnyOtherFacet_X_dataset

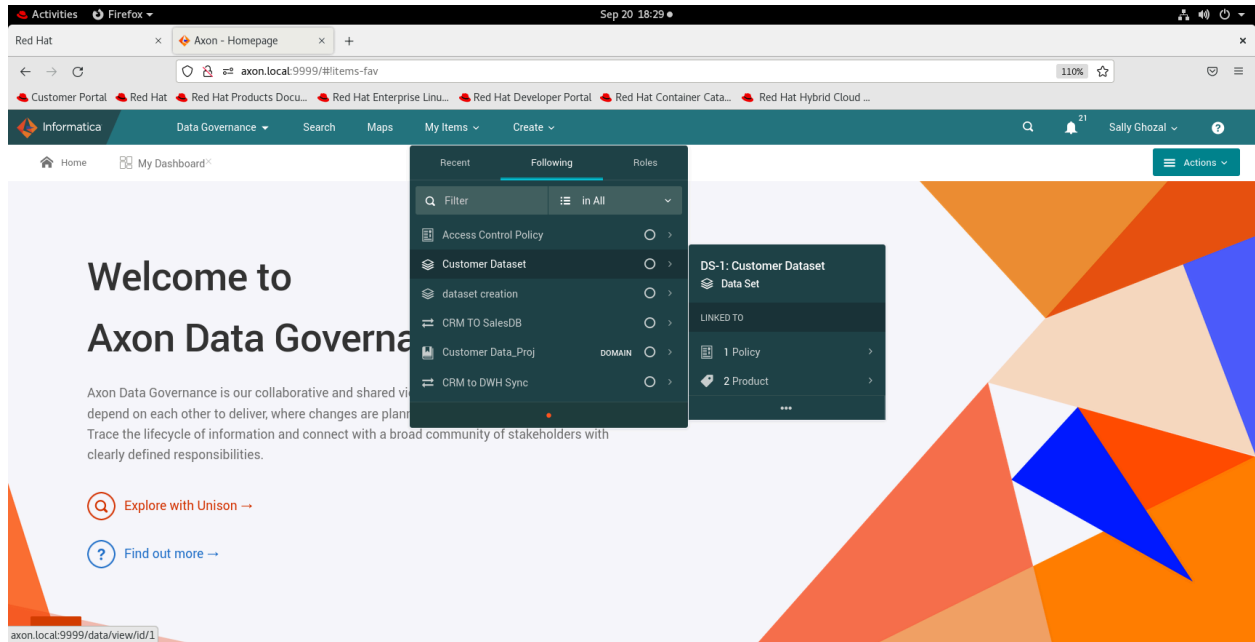

Unison Search

- app_config table is reflected by the admin panel > app & system settings
- when the users logs at least once into his account, he has a record in i_user (UserID, active)
- the unison table then takes this userID as a F.K, along with the facetVersion and puts them in a new record with a new ID
- then in the unison facets table we will have the id of the unison as F.K, ordering column = 0 if active = false, other wise incremental
- user_search > where we save our searches
- user_search_usage > when was the saved search last visited and by whom
- user_x_search > Shared With (limited)
- I need to store each user's recent views of the saved searches as it will be used in the dashboards

ملهاش جدول معين اعملها بالطريقة اللي عايزها

App Config Table > Config Key Column:

Authorization_enabled: Admin Panel > Customize and Configure > System Settings > Authorization

Event_Monitor_enabled: Admin Panel > Customize and Configure > System Settings > Event Monitor

Unison Fuzzy Default : Admin Panel > Customize and Configure > Application Settings > Search settings

Hide Non-Public : Admin Panel > Customize and Configure > Application Settings > Search settings

Unison Defaults: Admin Panel > Customize and Configure > Display Settings

```
{  
  "facets" : [ {
```

```
"id" : "POLICY",
"visibility" : true,
"activeFields" : "refNumber, name, description,
parentId, parentName, lifecycle"
}, {
  "id" : "DATASET",
  "visibility" : true,
  "activeFields" : "refNumber, name, definition,
lifecycle, systemId, systemName"
},

]
}
```

"SEARCH_MIGRATION_V1_TO_V2" :

L_user Table:

Has 2 columns:

Reference > User ID who has logged in at least once.

Active >

Unison Table:

We will have a row for each user reference (from the i_user table)

Facet_version

Unison Facet Table:

For each unison (unison.id) , we will have 25 rows (one row for each facet).

Active > is whether this facet is shown in the unison search by or not.

Active fields > the default columns that appear in the grid.

User Search table:

Definition is the search itself.

Example: sentences written in blue are the explanation.

```
{
  "userRef" : "1", (UserID who has made the search)
  "name" : "process with glossary", (Name of the
search)
  "searchGroups" : [ { (Definition of the filters (logical
conditions)).
    "operator" : "START",
    "active" : true,
    "searches" : [ {
      "operator" : "START",
      "active" : true,
      "facetId" : "PROCESS",
      "filterGroups" : [ ]
    } ]
  }, {
    "operator" : "AND",
    "active" : true,
    "searches" : [ {
      "operator" : "START",
      "active" : true,
      "facetId" : "GLOSSARY",
      "filterGroups" : [ ]
```

```

    }
  },
  "public" : true,
  "hitcount" : 0,
  "is_public" : true
}

```

If the histcount wasn't = 0 , we will see "hitCount" : its value

Hit count column by default it is 0, everytime we run this search, it is incremented by 1

Is_public is reflected by share with Public.

The screenshot shows the Informatica Data Governance Search interface. The main table displays data quality rules with columns: Ref., Name, Description, Attribute Name, System Measured In, Validity, and Hit Count. A 'Save Search' dialog box is open, allowing users to save the current search with a name and description, and an option to 'Share with Public'.

Ref.	Name	Description	Attribute Name	System Measured In	Validity	Hit Count
DQ-1	DQ_PortfolioCodeCompleteness	Verify the Code field contains a value.				0
DQ-2	DateRange	the range of the possible date values				0
DQ-3	Age_Local DQ Rule	Customer Age must be greater than 18	Age	CRM system		0
DQ-4	valid_email	email should be valid	Cus_Email	CRM system		0
DQ-5	Valid PhoneNumber	Validating the phone number being greater than 5 digits	PhoneNumber	CRM system	Validity	0

Legacy_id

User_search_usage Table:

Tracks when each of the search was last visited and by whom

User_x_search table:

This is reflected by the Shared column in the page of Managing the saved Searches.

Activities

Firefox

Sep 18 20:01

SYSINT-11 - iUnison DisplayUnison xUnison DisplayTEST View PaCompliance RiSYSINT-11 - iaxon.local:9999Sally Ghozal VPeriodic ReviewRoles & RespCustomer Data

axon.local:9999/search/110%

Customer PortalRed HatRed Hat Products Docu...Red Hat Enterprise Linu...Red Hat Developer PortalRed Hat Container Cata...Red Hat Hybrid Cloud ...

InformaticaData GovernanceSearchMapsMy ItemsCreate

FINDEnter the search text...PolicyFilterSearchMy searchesDatasets without st...

Search

process with glossarytestLimitedJohn Admin (admin@informatica.com)18-Sep-2025

Datasets without stakeholderdatasets that don't have stakeholdersNot SharedJohn Admin (admin@informatica.com)09-May-2025

Manage searches

Ref.	Name	Parent Name	Description	Lifecycle
POL-1	Data Retention Policy	Top Level	Specifies how long personal data must be retained before deletion.	Draft
POL-2	Customer Contact Information Update Policy	Top Level	All customer contact information must be reviewed and updated at least once eve... [Show More]	Draft
POL-3	AML Policy - 2025	Top Level	Defines mandatory AML rules and reporting obligations in line with financial re... [Show More]	Draft
POL-4	Data Retention Policy	Top Level	Defines how long medical data should be stored based on regulatory rules.	Draft
POL-5	Consent Policy	Top Level	Defines when and how patient consent must be collected before data usage.	Draft
POL-6	Access Control Policy	Top Level	Defines who can access sensitive patient data and under what conditions	Draft
POL-7	Data Anonymization Policy	Top Level	Guidelines for masking or anonymizing PII in data shared for research or analyt... [Show More]	Draft

axon.local:9999/datasearch/view/

Activities

Firefox

Sep 18 20:01

SYSINT-11 - iUnison DisplaySaved SearchUnison DisplayTEST View PaCompliance RiSYSINT-11 - iaxon.local:9999Sally Ghozal VPeriodic ReviewRoles & RespCustomer Data

axon.local:9999/datasearch/view/110%

Customer PortalRed HatRed Hat Products Docu...Red Hat Enterprise Linu...Red Hat Developer PortalRed Hat Container Cata...Red Hat Hybrid Cloud ...

InformaticaData GovernanceSearchMapsMy ItemsCreate


Manage SearchesSearchEdit

SAVED SEARCHESSEARCHES SHARED WITH ME

SAVED SEARCHES

Name	Description	Sharing	Shared With	Created Date
process with glossary	test	Limited	Sally Ghosal (sally@informatica.com), Mayar Kamel (mayar@informatica.com)	18-Sep-2025
Datasets without stakeholder	datasets that don't have stakeholders	Not Shared		09-May-2025

2 records

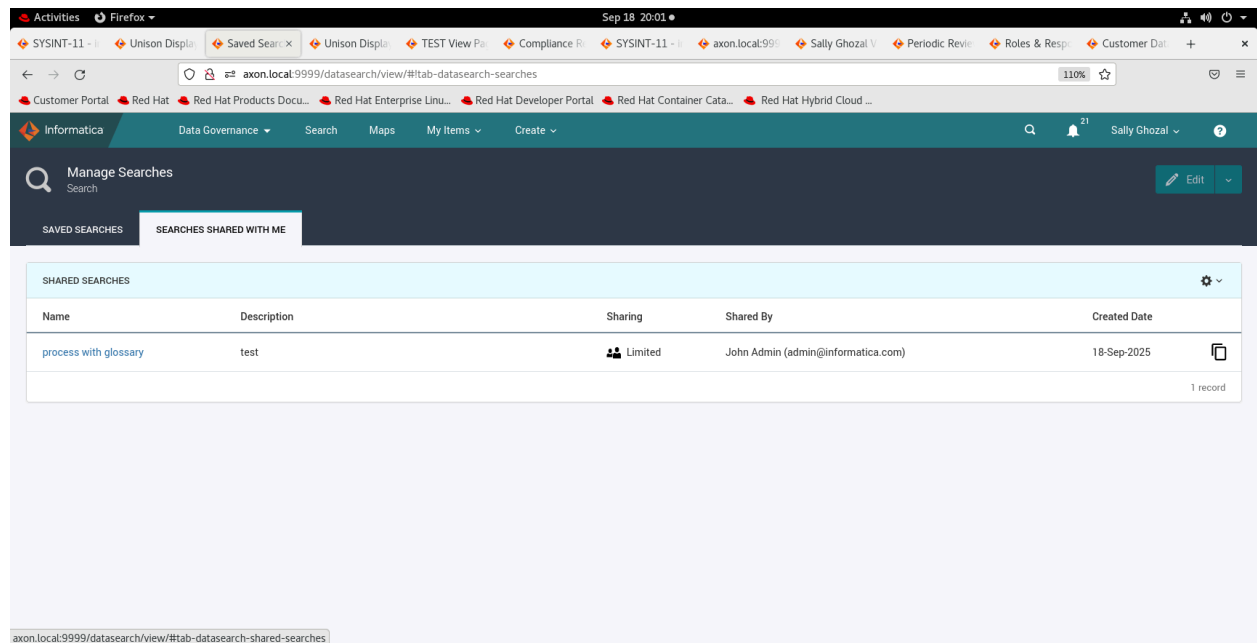


Note: if sharing was Limited then the value of is_public in the user_search is false

**Showing related objects in unison search:
Check the following link.
[Search Related Objects in Unison](#)**

Note:

Add Grid Items to Unison Search

You can manually add items from the grid to the current search to refine the search results. To add items to the current search, you need to select one or more rows that you want to include from the grid. To select multiple items, use the Shift or Control keys when you click the items.

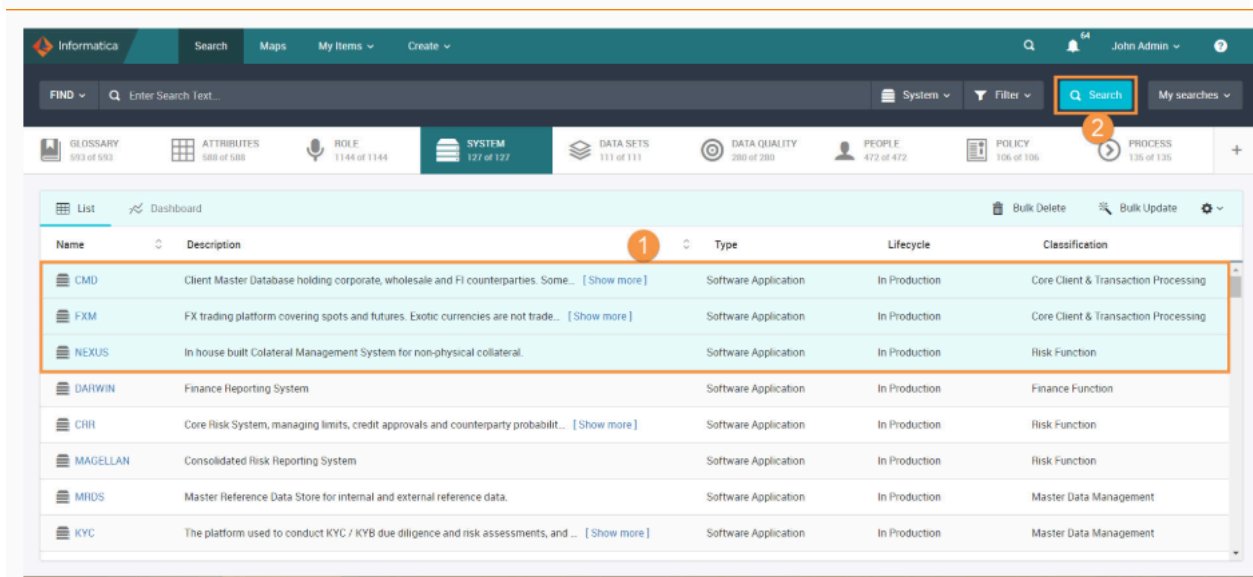


The screenshot shows the Informatica Unison Search interface. At the top, there is a navigation bar with tabs for Search, Maps, My Items, and Create. Below this is a search bar with the text "Enter Search Text...". To the right of the search bar are buttons for "System", "Filter", and "Search". The "Search" button is highlighted with a red box and a "2" label. Below the search bar is a grid of system items. The grid has columns for Name, Description, Type, Lifecycle, and Classification. The first three rows are highlighted with a red box and a "1" label. The first row is "CMD", the second is "FXM", and the third is "NEXUS".

Name	Description	Type	Lifecycle	Classification
CMD	Client Master Database holding corporate, wholesale and FI counterparties. Some...	Software Application	In Production	Core Client & Transaction Processing
FXM	FX trading platform covering spots and futures. Exotic currencies are not trade...	Software Application	In Production	Core Client & Transaction Processing
NEXUS	In house built Collateral Management System for non-physical collateral.	Software Application	In Production	Risk Function
DARWIN	Finance Reporting System	Software Application	In Production	Finance Function
CRR	Core Risk System, managing limits, credit approvals and counterparty probabilit...	Software Application	In Production	Risk Function
MAGELLAN	Consolidated Risk Reporting System	Software Application	In Production	Risk Function
MIDS	Master Reference Data Store for internal and external reference data.	Software Application	In Production	Master Data Management
KYC	The platform used to conduct KYC / KYB due diligence and risk assessments, and ...	Software Application	In Production	Master Data Management


And then you can add other conditions using And / Or / Not. And we can perform filters also on the selected rows.

Note: the criteria of these selected rows can't be edited, while other searches can be edited



The screenshot shows a search bar with the text "Customer Dataset" and a "Data Sets" button. Below the search bar is a button labeled "All in People".

In the search text, you can look for the object names, as it's shown this condition was made upon the people facet, then we can search for people using their names.



Also the conditions can be changed from here.

Example: From and to Or

Note:

Check this link for more filter info:


[Searching in Hierarchical Facets](#)

Note:

Searching with Direct and Indirect Relationships Filters

In Axon facets, you can search facets with either direct or indirect related object separately by selecting the filter.

When you search any facets, you can apply specific filters in Unison search. The filters help you explore direct and indirect related objects in a facet.

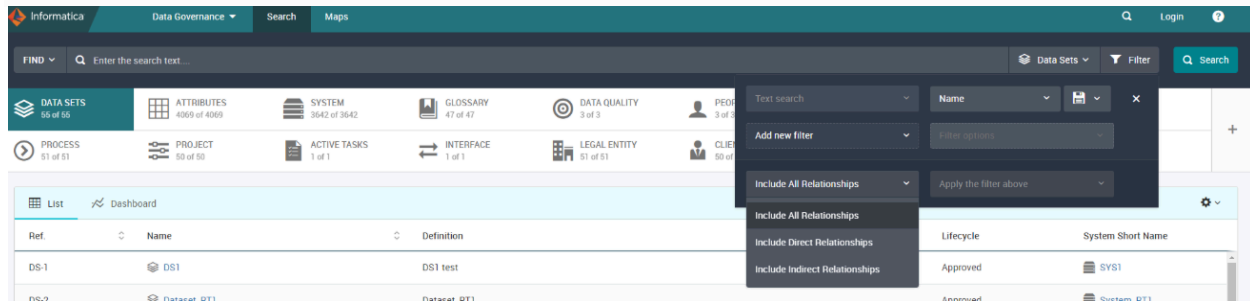

Note:

The save default layout option in the grid of the result of the unison search (visible to the super admin only) is used to save the column as a default layout. When the WebUser or Admin navigates to the facet, Unison displays the default layout set by the SuperAdmin.

Example: let's say the super admin sorted the order of the dataset objects using the ID in ascending or descending order and then clicked on save default layout , then when other users log in they will find the datasets being sorted using the ID column.

Save layout option: Saves personal preferences for that user

Reset Layout: If the SuperAdmin clicks **Reset Layout**, the sorting order of the object layout is reset to the default layout, and it will be reflected to other users as well

Note:

In the Glossary Facet, we can choose to expand and see the full hierarchy of a glossary. But it only appears next to the glossaries that are not Top Level (this means that it appears next to the objects who have parent)

 Customer	DOMAIN	An individual or organization that purchases goods or services from the business... [Show More]	Top Level
 Product	DOMAIN	Any good or service offered by the organization to meet customer needs or gener... [Show More]	Top Level
▼  glossary test Customer Data > Customer > glosss11 > glossary test	DOMAIN	bla bla	 glosss11

Fuzzy Search:

A fuzzy search finds matching results even when you misspell, interchange, or miss one of the keywords.

When you perform a search, Axon implements fuzzy search and displays matching results. For example, if you type "logal" instead of "legal," "legal record" instead of "legal entity record," or "Data Party" instead of "Party Data," Axon displays matching results by ignoring the typographical error.

Axon provides matching results if the two characters of the keyword are interchanged. For example, if you type "Cutsomer" instead of "Customer", Axon ignores the error and displays the matching results.

If fuzzy search is enabled, you can also use the wildcard character * at the beginning or end of the keyword in the search box to find matching entries.

An Admin or SuperAdmin profile user can choose to enable the fuzzy search behavior from the Admin Panel > customize and configure > App settings > search settings. The fuzzy search applies to both Unison and Quick searches.

AdminPanel_Customize And Configure

1) **Saved Search in Unison Search:** Admin Panel
> Configure & Settings > App Settings > Quick
Links > This section takes its data from the
User_search table.

**(Only one link of a saved search can be
added to the unison search)**

2) When we open Admin Panel > Customize and
Configuration> App Settings > Display Settings,
and we try to add a new facet to the active ones,
after saving it, it is reflected in the database in
the table called App Configuration But **not** in the
unison_facets table. It is also not reflected in the
unison search, it's only added there when I go
to the Unison search page, and then I click on
the plus sign of the facet grid, and then add
Reset to Default, only then it is reflected in the
database.

3) Admin Panel > Customize and Configure > App Settings > **Search Settings:**

Choose search options:

- ☐ Enable fuzzy search
Finds matching objects even if you misspell, interchange, or miss one of the keywords
- ☐ Hide non-public objects
Hide objects with the Axon Viewing field set to "Non-Public" for users that are not object stakeholders.

4) Admin Panel > Customize and Configure > App Settings > **Export Objects:**

Enable Export of Objects

- ☒ People
Enable export of People objects from the Unison search.

On clearing the People checkbox and saving the changes, the Export feature for People objects is disabled in Axon for **Admin** and **Webuser** profiles.

Custom Fields & Dropdown

What happens is that first when you choose a facet, then edit:

if you choose to add a new field, then the values that you will write in the opened window will be reflected in **Custom_Field_Metadata** table.

Note:

DisplayName should be unique.

Custom_Field_Name is generated automatically ex for a displayName Scope then the custom field name will be cf_Scope

Also data displayed in the view of the custom field of a specific field is shown from the **Custom_Field_Metadata** table.

Custom_Field_Metadata.is_Searchable.

if you choose the type of the field to be a dropdown, adding the values of it in the values box, then for each value we will have a record in the **Custom_Field_Enum** table, thus there's a relationship here between it and the **Custom_Field_Metadata** table.

Let's say we have made a custom field for the system facet, then when we make an object from the system, whether we fill in the value of the custom field or not (in case it was optional) then we will have a record of it in the **custom_field_data** table

Note:

Facet_Object_ID column is the id of the object being created HOWEVER, it is not a foreign key

Dropdown Configuration:

Note: Deleting a **relation type** value that you have added before , if there is a relationship that already uses this value , then a warning should appear to the user asking him whether he wants to proceed deleting the value or not. If he chose to delete it, then going back to the relationship in the object itself I will only get an error if I tried to edit and save the changes WITHOUT changing the relation type value.

Deleting a predefined value:

- 1) Cannot delete values in use in object(s). Remove the value from the object(s) and then delete the value.
(not talking about the relation type)
- 2) Cannot delete the last value left in the dropdown.
- 3) Cannot delete the upcoming values shown in the screenshot:

Deletion Exceptions

You cannot delete some of the default dropdown configuration values because of their impact and dependency across Axon. The following table lists the dropdown configuration parameters and the values that you cannot delete:

Dropdown Configuration Parameter	Values	Reason
Axon Status	Active and Deleted	Both values are used across all facets in Axon.
Data Set Lifecycle	Draft	During automated onboarding from Enterprise Data Catalog into Axon, the data sets are onboarded by default in the Draft stage of the data set lifecycle.
Data Set Type	Data Set	During automated onboarding from Enterprise Data Catalog into Axon, the data sets are onboarded by default as the Data Set type.
Access Control Type	Public and Non-Public	Both values are used for the Axon Viewing field of an object.
Attribute Sourcing Type	All values	All values are required for lineage recommendations during automated onboarding from Enterprise Data Catalog into Axon.
Attribute Origination	Enterprise Catalog	During automated onboarding from Enterprise Data Catalog into Axon, the origin of onboarded attributes is Enterprise Catalog .
Regulation Status	Active and Deleted	Both values are used to indicate the status of Regulation objects in Axon.

Access control type > Viewing table

Automation > Automation_Level table

Frequency >

Attribute Requirement > Requirement table

Attribute Sourcing Type > attribute_x_attribute_relation
type table

Data Set x Legal Entity Relationship Type > Data
Set_x_LegalEntity_Relationship_Type table

Glossary security classification > Security Classification

Glossary X System RelationType >

glossary_x_system_reltype table

Glossary KDE > glossary_kde_type table

People Employment Type > Employment_type table

Process classification > process_Class table

System interface transfer method > Interface_Transfer

**All the remaining links are represented by tables that
carry the same names as those links.**

Later

Change Requests

Document Type

Data Quality

Segments

- When a segment is created through the Admin Panel without assigning any users > it reflects in the segment table only.

Note: At least One admin must be added to the segment while creating it.

- Adding admins / Users to the segment first they will reflect in the Object_Reference table where its object_type_id will be the id of Involved_Party then in the Segment_X_Identity and Segment_X_Identity_audit tables.
- Adding Users via Org Units will also reflect in the same tables as Users but with Object_type_id = to the id of the Org Unit
- Any object added to a segment, will be reflected in the object_reference ,preCompute and the Segment_X_Resource, Segment_X_Resource_Audit tables


Note: An already created object, can be removed from one segment to another, and it will also be reflected in the Object_Reference and the Precompute tables.

Note: when an object is deleted from a segment, it is only deleted from axon itself, but its row in the Segment_X_resource still exists but with deleted_At = Now's date

Note: The association_Origin table has 3 rows (Manual , LDAP, SSO)

Note: The revInfo table is affected by any addition / update / deletion that happens to any segment.

Note: when at least one segment is created, this cube icon appears in the toolbar

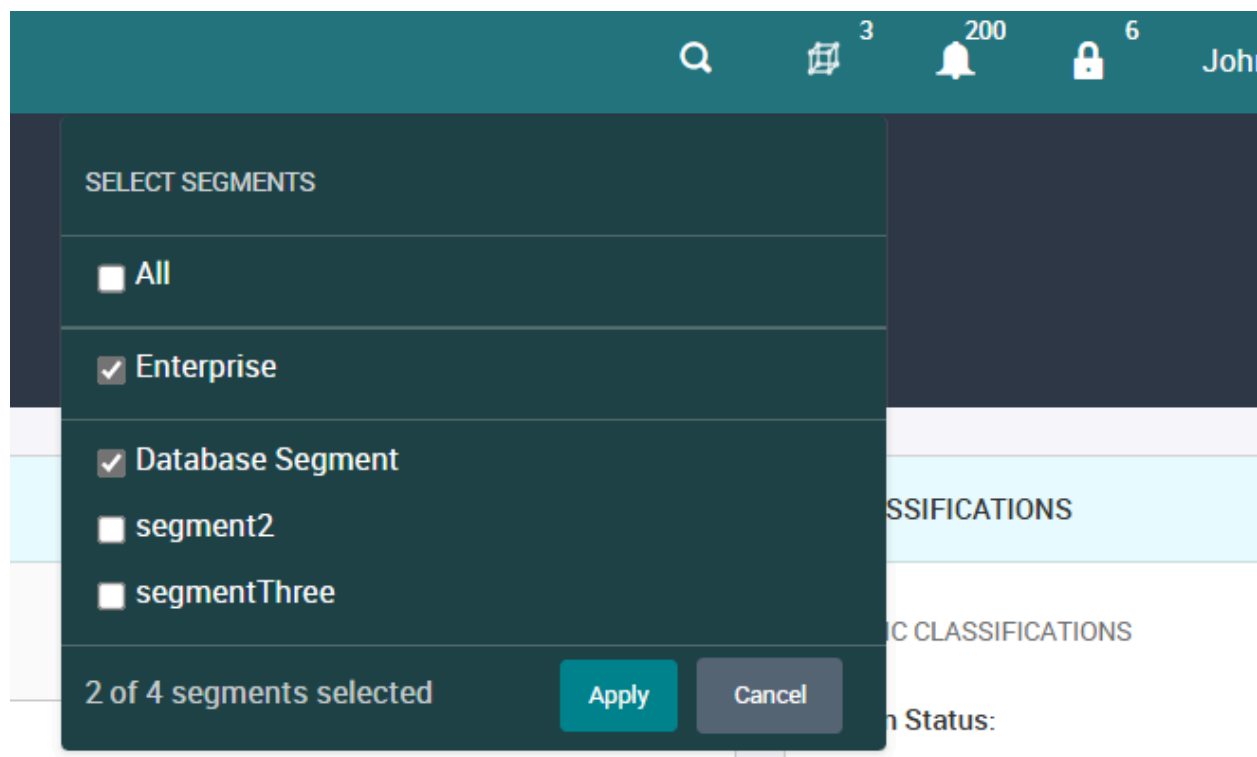

Note : the number placed on top of the cube refers to the number of selected segments and then clicking on Apply.

Note: the segment names displayed in the dropdown menu will be displayed according to the logged in User so if user A (who doesn't have access to segmentThree) logged in he won't see a segment called SegmentThree in the menu.

Note: after creating at least one segment, there is a field added to the creation / edit page (summary tab) of each facet asking to which facet we want it to belong:

OTHER INFORMATION

Segment *

segmentThree

Q

Database Segment

Enterprise

segment2

segmentThree

Also a column is added in the grid of each facet stating to which segment each object belongs to:

List Dashboard Bulk Delete Bulk Update Bulk Migrate			
Name	Parent Name	Description	Segments
No - Record client preference	Top Level	No - Record client preference	Enterprise
Yes - Send client offers / products pack	Top Level	Yes - Send client offers / products pack	Enterprise
Did client choose to receive offers / news?	Top Level	Did client choose to receive offers / news?	Enterprise
Client receives registration bonus	Top Level	Client receives registration bonus	Enterprise
No - Escalation	Top Level	No - Escalation	Enterprise
Yes - Activate customer	Client Onboarding	Yes - Activate customer	Enterprise
Is client cleared for onboarding?	Client Onboarding	Is client cleared for onboarding?	Enterprise
Client Onboarding	Top Level	Client Onboarding	Enterprise

Note: let's say we're creating a dataset in segment A, then its system and glossary should belong to the same Segment (A). Same concept applies to other facets.

Note: if a dataset was created in segment A and i want to move it to segment B, then this dataset along with its attributes will be removed to segment B.

Then Implement the Default Segment part in the Admin Panel > Customize and Configure > System Settings > Default Segment.

Inform abdelrahman to include the segment into the bulk upload page, and the templates.

Datasets_value_BulkUpload

1) Data Store table:

Stores the id of the datasets that we have uploaded values for.

2) Field Table:

Stores the column names of the datasets that exist in the data store table, and their type.

3) Rule table:

Type Column : Name of some of the columns found in the attributes tab of the dataset facet as Max Length, Primary.

Value Column : value of Max length , value of Primary (only displayed when it is true)

4) Entry Reference table:

Number of rows uploaded per each value uploaded. Say we have bulk uploaded 10 rows (for one or more columns) then new 10 ids will be inserted into the table (auto - incrementally)

5) Entry Table:

Say in a dataset we have 5 columns and we have inserted 2 rows (even if it is only for just one of the columns) then we'll have 2 rows x 5 columns = 10 new rows inserted in this table.

The values column for the rest of the columns that weren't inserted will have null values

6) Audit table:

Keeps history.

Notes:

- The type of the attributes in the dataset facet must be specified first , if they're not then an error should appear when the user tries to bulk upload the values without them being specified.
- The values type in the excel sheet should be the same as it is specified in the attributes tab.
- The action column in the audit table can be insert / delete. It is deleted when we choose to overwrite the values and not append it,

Bulk Upload

I_Job table:

For each bulk upload, there's a row in this table, specifying when it was **created**, **completed**,

type : FacetName + Update/ Delete/ Upload

items_count : Number of rows in the excel file

Child_jobs_order >

Foreign Keys:

File_Job > Job_resource_file table

Progress_Job > job_progress table

Report_job > job_report table

User_ID > i_user table

Meta_data_job_id > job_meta_data table

Parent_job_id > i_batch_job table

Job_Configuration_keys:

Option_key: fields as Cancel on warning, and if we have more than one segment then we'll have a key for the segment as well.

I_Job_Configuration table:

F.k:

I_job

Option_keyID >

Option_value > value of that key True / False. And the value of the segment will be the chosen segment name

I_job_field_mapping Table:

Mapping page

I_job_report_item table:

Report sheet where

ID column in the table > ID

Field_Name > Field (name of the field that caused an error)

Status > Status

Position > Position

I_job_report_item_message table:

The rest of the report sheet

Report_item_entity_id > Job_ID

Error_Code > Error_Code

Message > Message

Job_resource_fileName table:

FileName > name of the uploaded excel file.

StoreFile > whether the user wants the bulk uploaded file to be stored or not (this customization will be made through the Admin Panel)

Retention_Days > if StoreFile is True then the user has to specify the number of days that the file will be stored and accordingly the **Delete_At** column will be calculated automatically (Derived column)

Job_Resource_File table:

Is the table where the file is stored.

ValuesJob_Dataset table :

To which dataset does the job of these values belong

ValuesJob_Meta_Attribute Table:

Determines the suffix: whether it's Append or Overwrite.

Also determines the value of Overwrite (True or False)

job_meta_data_entity_job_id [PK] bigint	meta_attribute_value character varying (255)	meta_attribute_name [PK] character varying (255)
28965	Append	suffix
28965	false	isOverwrite

If the suffix was overwrite then the value of isOverwrite would be True.

Note:

- Lets say there's a webUser who only has the permission to create systems (with no edit or delete permissions) then in the upload type he will only see things related to the systems , and in the upload option he will only see the option to upload new objects without seeing the update or delete options.
- In the creation template, if the user didn't specify a user to that object, then the stakeholder of that object will be the user uploading the template. If he specified another user, then the stakeholder will be that user only.
- In the creation template, i can only add one stakeholder per object, while in the Role template we can have several stakeholders (several rows) for the same object.

- Cancel On Warning: lets say the user uploaded an excel sheet with 500 rows, where 495 objects were created successfully and 5 resulted in error.
 - If this field was checked , then after the 495 object creation, a rollback will happen resulting in the deletion of these 495 objects. (once an error occurs, the execution of the bulk upload stops)
 - If it was not checked, then the 495 won't be deleted and in the report the user can see the id of the 5 objects that caused errors.

Periodic Review

Admin Panel > DG Operating Model > Periodic Review: it can only be created for datasets / glossaries / systems / processes.

Select Facet > gets its data from Periodic Review Modules table.

The PERIODIC REVIEW CONFIGURATIONS section gets its data from periodic review config table.

Filters Section (for dataset):

- Type > Dataset_type table

- Axon status > Status table

- Lifecycle > Dataset_lifecycle

Filters Section (for glossary):

- Type > Glossary_type table

- Axon status > Status table

- Lifecycle > Glossary_lifecycle

- Top parent level > all of the glossaries with no parent

Filters Section (for system):

- Type > System_type table

- Axon status > Status table

- Lifecycle > System_lifecycle

- Top parent level > all of the systems with no parent

Filters Section (for process):

- Type > Process_type table

- Axon status > Status table

- Lifecycle > Process_lifecycle_status

Top parent level > all of the processes with no parent

Workflows and CR: (same for all of the 4 facets)

Default CR System:

Default Workflow > Process_Definition table where
Entity_ID = ID of the chosen facet.

Default CR Type > ChangeRequest_Type table.

Default CR Urgency > ChangeRequest_Urgency

Default CR Severity > ChangeRequest_Severity

User Email > People Table.


[Axon Data governance Periodic Review use case and configuration](#)

[Configure Periodic Review of Objects](#)

[When the last approved date field in the objects gets updated.](#)

Maps

Maps / Facet



First let's investigate the previous bar:

This is repeated across different facets except for few ones (I will be mentioning the difference in those facets)

Map Type: its values are System Lineage which is system oriented so the objects here are systems, Dataset Lineage which is more detailed than the system lineage as it decomposes the map into the datasets found in each system. Some facets have more values as glossary (will be explained in the glossary section)

Layout: controls how the objects will be displayed

The window next to the layout: controls the spacing between the objects.

The arrow besides the window: determines the arrows linking between the opened object and the other objects.

Overlay: Adds more info on the objects (the list shown in the system lineage is different than that of the dataset lineage)

Square next to the overlay: shows the dropdown columns of the chosen overlay. And it will be shown in the table of the overlay as a new column

Filters: Filters the objects shown based on either

(System interfaces / data attribute links) , (system type) , (system lifecycle) this if it was system lineage. However if it was dataset lineage then the filters will be based on dataset type and dataset lifecycle.

Two way arrow (interface): controls whether to show the interface name on the arrow or not.

Zoom in:

Zoom out:

Redraw:

Reset: the map to appear as it was at first

Export: Saving the map as Png.

Map Navigator (Eye): used to scroll and view the sections of a large map.

Arrow next to the eye: View the map in a new full screen browser tab.

Legend: shows the label of each of the arrows / object shapes used.

Check this link:

[Viewing Local Maps](#)

1) **System:**


Notice that the opened system is colored in Orange.

a) **System Lineage:** Say we opened the maps for the CRM System

Then, it will show all of the other systems that the crm system is connected to (interfaces) and systems that are connected to those systems. In other words, it will show all of the systems found in the System Interface section and the Data Flow Outside Interfaces section + those of the connected systems as the QWR2.

Note:


If a system is assigned to a segment that you cannot access, the lineage displays a lock sign for the system. Although Axon does not show the system details, the lineage shows that a hop exists in between the objects.

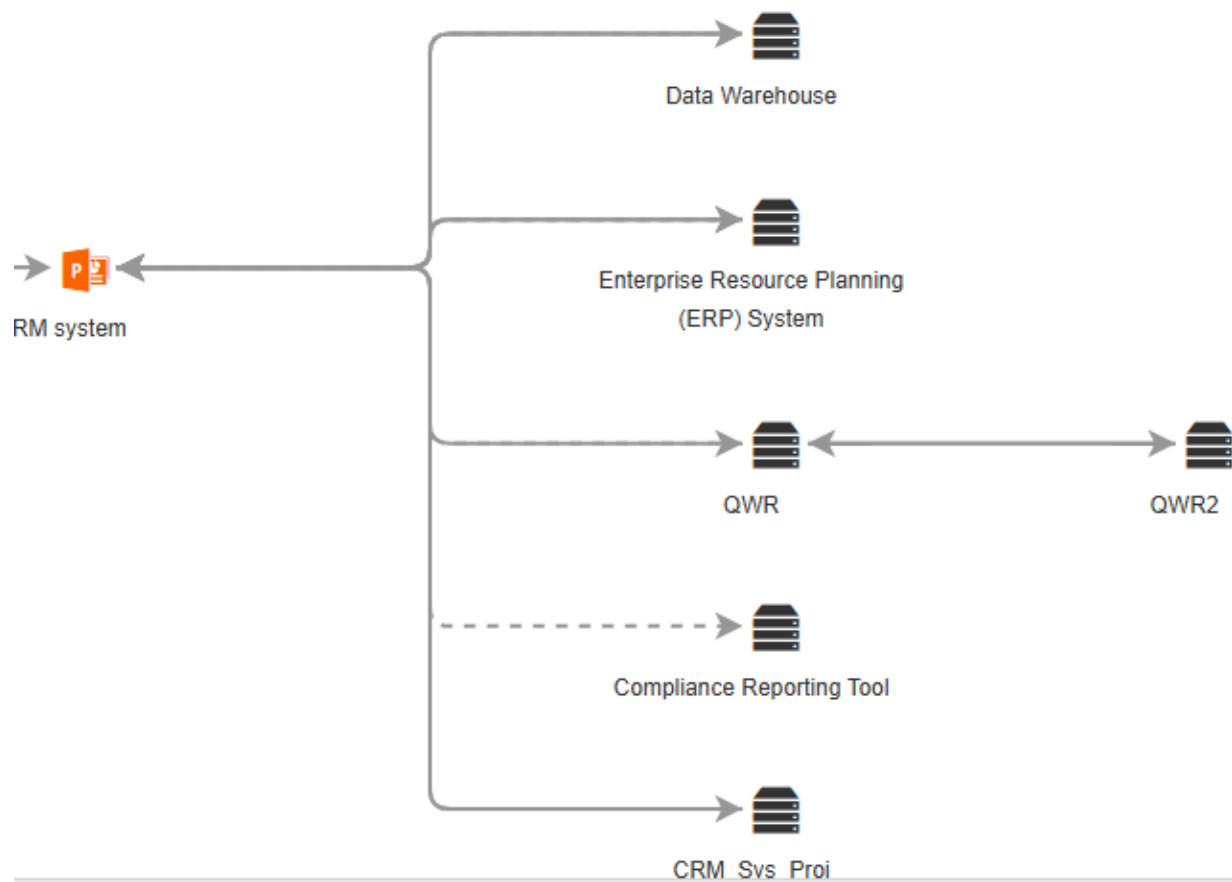

b) **Data Set Lineage** (a more detailed map). It shows the datasets found in each system (only the datasets that have a link between a dataset found in the opened system).

Notes:

- If a data set is assigned to a segment that you cannot access, you can see a lock sign for the data set. Though you cannot see the data set details, you can see that a hop exists in between the objects.
- it displays labels for both system names and the Data Set Name + DS Reference.

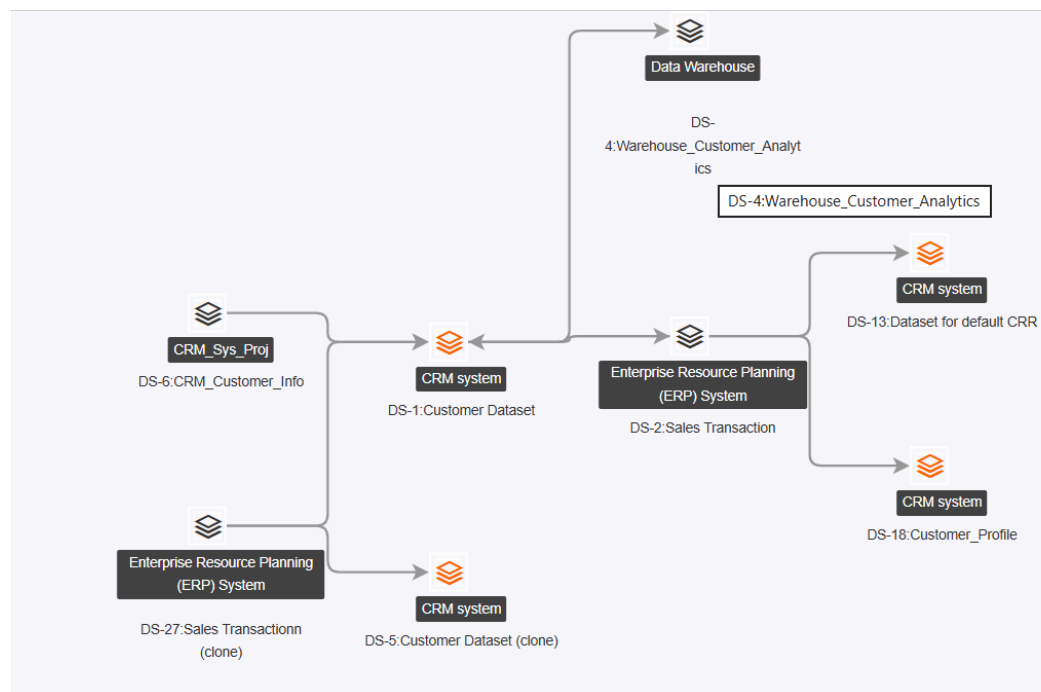


Lets say that we had an interface between crm and data warehouse systems, where the crm system has a customer dataset and the dwh system has a warehouse customer analytics dataset, if there's a linkage between attributes found in these 2 datasets, then these 2 datasets should appear in this map.

Notice the datasets that belong to the opened system will be colored in orange.

Notes :

- a) In all of the maps for all of the facets, if an element of the overlay is clicked (dark blue) it will show all of the elements of the other objects that are connected to them (light blue)

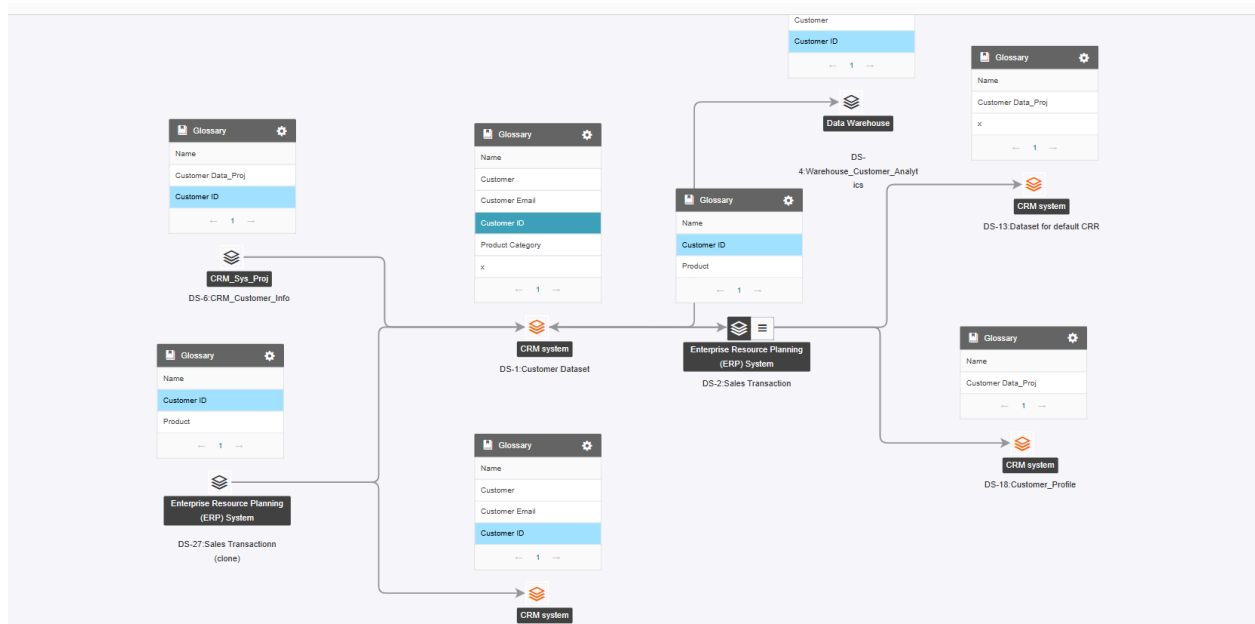


- b) The overlay in the system lineage view shows the details of the system while in the dataset lineage view, shows the details of each dataset.

For example, let's say we chose the stakeholders as the overlay, then in the system lineage, above each system we will see its stakeholders, while if we were in a dataset lineage view, then we will see the stakeholders of each dataset and so on. Same thing for description overlay, if it's system lineage then it shows the description of the system but if it's dataset lineage then it shows the description of the datasets.

Note:

Any overlay will have a grid next to its name and when it's clicked, we can filter by name or choose the max number of objects we want to display

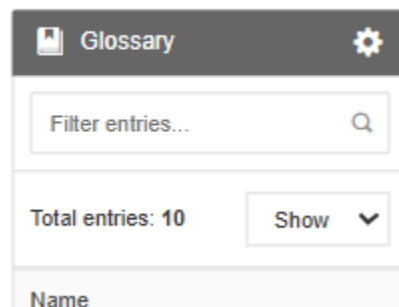


- a) **The dataset overlay** shows all of the datasets in the opened object, while in the other objects, it shows only the related datasets.

b) **The attribute overlay shows** all of the attributes in the datasets that belong to the opened system. while the **linking attributes overlay** only show the attributes of the opened system that are linked with other datasets. In both cases, the other systems' datasets, only the attributes that have a link with the opened system are shown.

Note: let's say we have these relationships:

$Att3 > Q_Att2$, $Att3 > Q_Att3$, $Att2 > Q_Att2$


Then if we pressed on Att3 (Dark blue) , Q_Att2, Q_Att3 and Q_Att2 will be highlighted in light blue though Att3 isn't directly related to Q_Att2 , but it's related to an attribute (Att2) that is related to it.

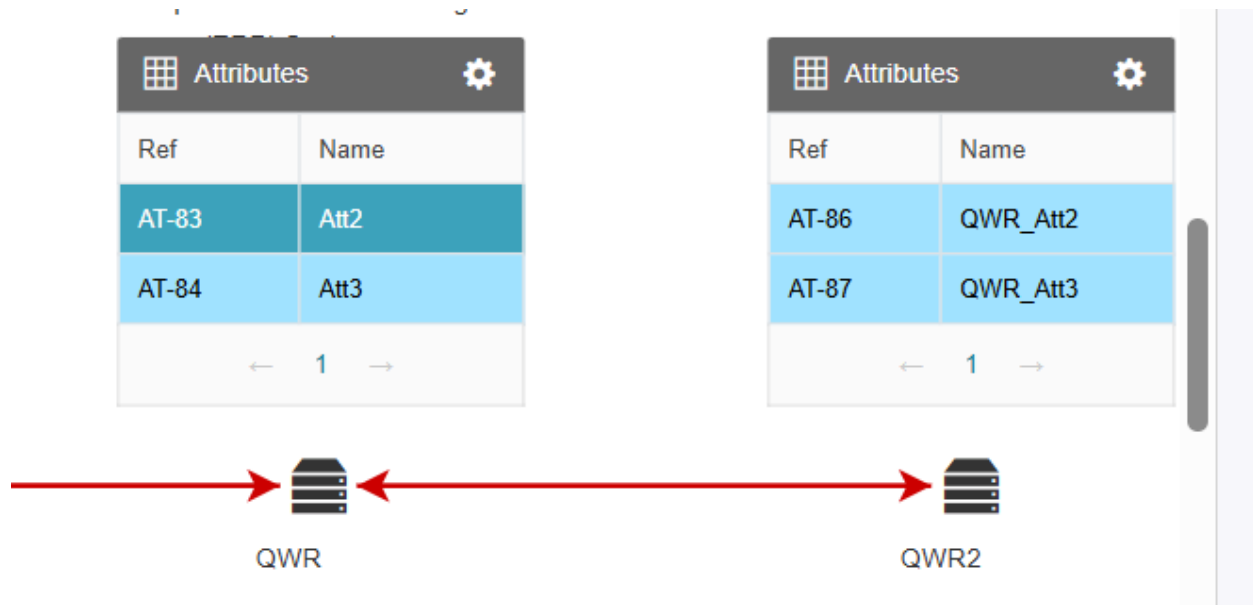

Note: if there's an interface made between 2 systems but with 0 attribute (in the system interface section and the data flow outside interface section) then its line will be dashed (called interface lineage while the others having data attributes called attribute lineage) . And at this point, that other system (compliance) will have not overlay tables for the attributes , linking attributes, glossaries, datasets.

Note: the compliance system will only be shown if in the filter we've chosen data attribute links. So the difference between the system interface and the data attribute links filter is that when we choose system interface, only objects that are shown in the interface sections will be shown with condition that the data attributes > 0 , while data attribute

links is responsible for showing systems that are found in the interface sections but with data attributes = 0

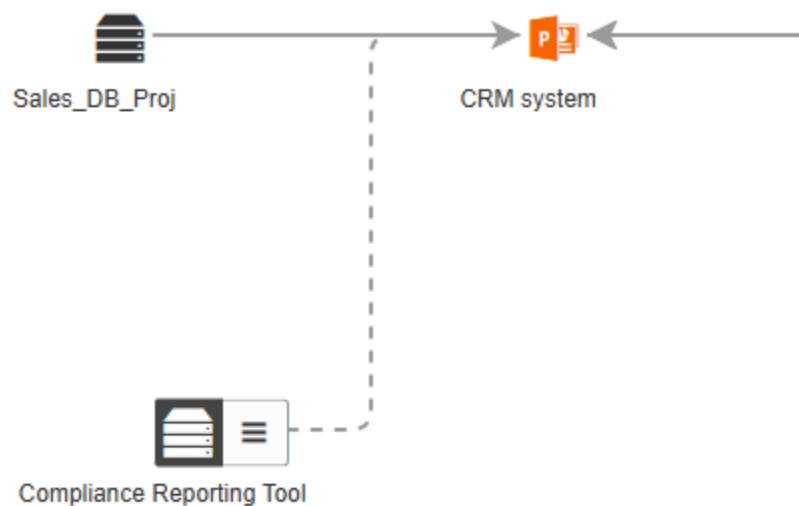

Note: when we choose in the filters, to shows the data attribute links, then this will also show the systems that have datasets with attributes having a relationship with an attribute of a dataset belonging to the opened system.

Example:

There's no interface between Sales_DB_Proj and the CRM_System though it is displayed

(as shown in the previous screenshot) and this is because the Sales_DB_Proj has a dataset with attribute called age that has an outbound relationship to an attribute belonging to a dataset in the CRM_system.

c) Glossary overlay in the dataset lineage :

For all of the systems, it shows the attribute that the dataset inside this system is attached to (without its parents) +

for the orange system, and all of the attributes associated with attributes of datasets found in this system.

while for the black systems, it shows the attributes associated with attributes of datasets that have link with the orange system


> Glossary overlay in the system lineage :

d) stakeholders > shows all of the stakeholders for each system + their roles. Lets say system 1 has user a and b and system 2 has a and c then when we click on a , it will be highlighted across all of the systems.

e) facets overlay as the products overlay:


Shows all of the products of the opened system or the other systems (impact tab). But only the highlight happens upon the same product across the different systems.

f) If an object is assigned to a segment that you cannot access, the lineage displays a lock sign for the object. Although Axon does not show the object details, the lineage shows that a hop exists between the objects.

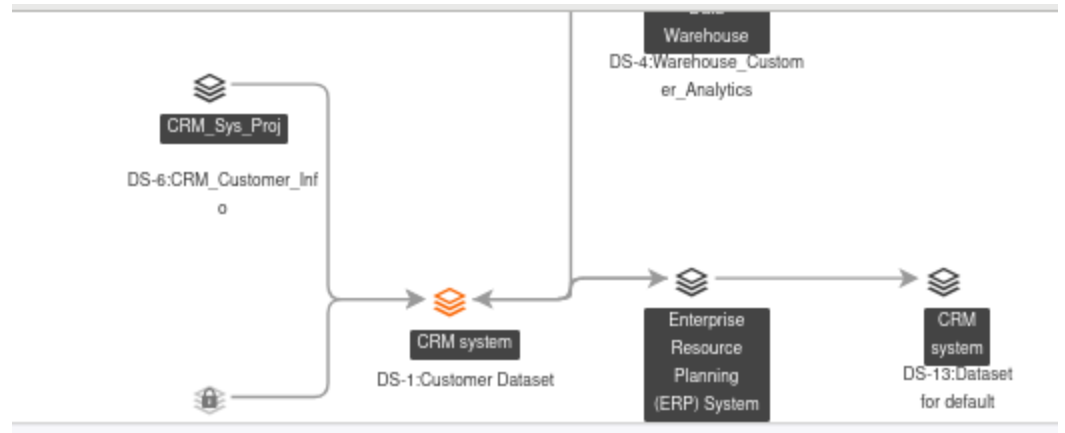


Note:

1) Upstream (inbound relationship),
downstream (outbound relationship)

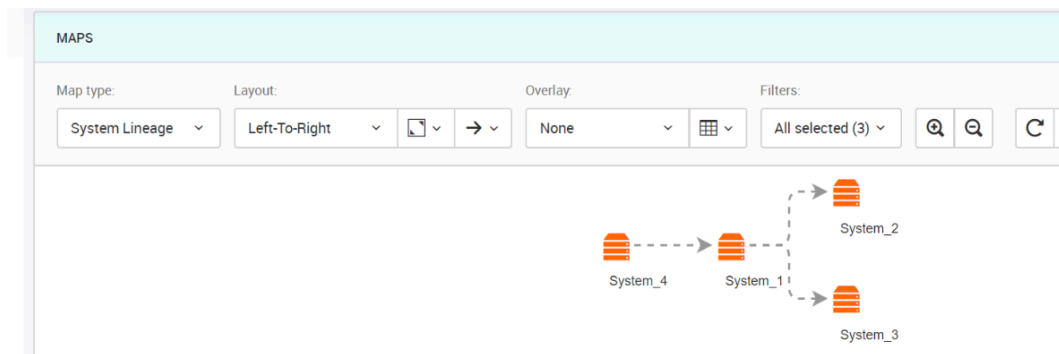


Information provided by the above screenshot: The screenshot above shows 3 system interfaces present in the environment:

- a) System_4 to System_1: This is the upstream lineage w.r.t to System_1 and downstream lineage w.r.t System_4
- b) System_1 to System_2: This is the upstream lineage w.r.t to System_2 and downstream lineage w.r.t System_1
- c) System_1 to System_3: This is the upstream lineage w.r.t to System_3 and downstream lineage w.r.t System_1

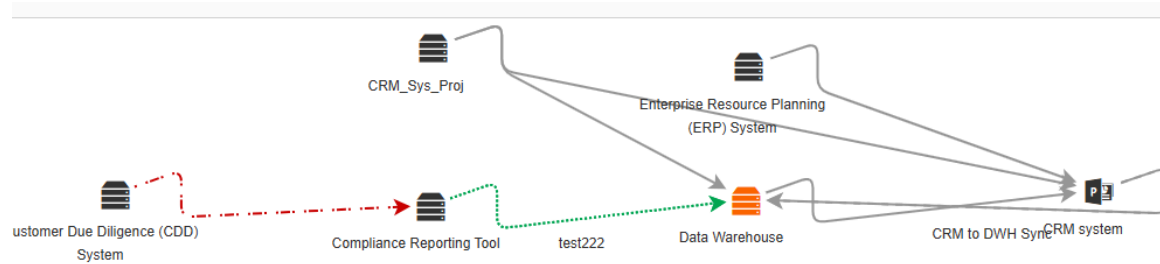

2) Clicking on any system in the map, it results in coloring the arrow of the systems directly linked to the clicked system, either in red (upstream lineage) or in green (downstream lineage) as it's shown in the previous map.

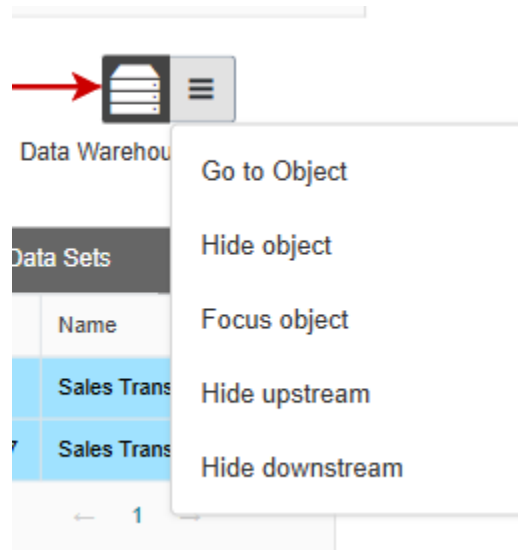


3) When we click on any object, we get this window.

a) Go to object: lets you go the view page of that object.

b) Hide object: hides it from the map.

Note: after I focus on the compliance object, i can go to other objects and hide / focus / etc..

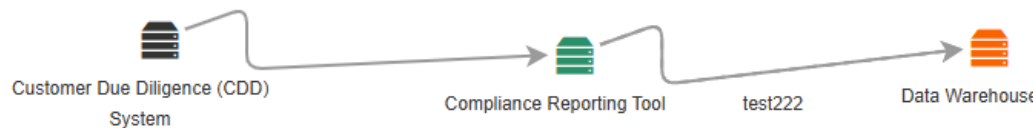

c)

Focus, only shows the clicked object with the objects directly linked to and the opened object. If we choose to focus on an object, then that choice will be undo focus. Here the focused object is the green one and the opened system is the data warehouse.

d) Hide upstream, hides the object with the red arrow, also when this choice is activated, the choice will be show upstream

e) Hide downstream, hides the object with the green arrow, also when this choice is activated, the choice will be show downstream

Note: there's another map for the systems in the data tab, that is the same as this of the interface in the dataset lineage.

2) Dataset Facet: System lineage :



shows the systems that have datasets with attributes having either inbound / outbound relationships with the

dataset attribute belonging to the system of the opened dataset. (case 1)

+

Systems that have interface with the system of the opened dataset with no data attributes. (case 2)


As shown in the previous screenshot, systems with solid lines belong to case 1, while systems dotted lines belong to case 2.

Here's the system interface section found in the interface tab of the CRM system (the system of the opened dataset)

SYSTEM INTERFACES				
From	To	Name	Data Attributes	Automation
 QWR	 CRM system	 QWR_To_CRM	0	Unknown
 CRM system	 Compliance Reporting Tool	 testtt	0	Unknown

Again these 2 systems will only be shown if the system interface option is chosen from the filters (as we mentioned before in the systems facet)

Dataset Lineage: will only show the datasets that have (direct) inbound / outbound relationship with the opened dataset AND the datasets that have relationships with an attribute from on of the present datasets (that is already linked with the opened dataset)

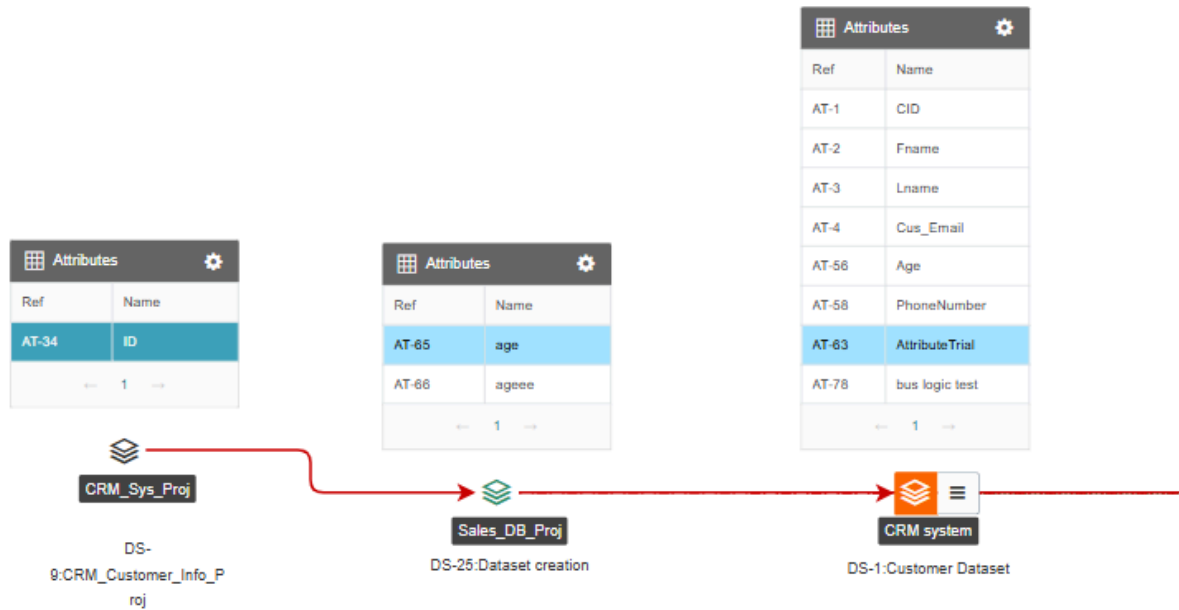

بمعني هنا انا ال opened dataset is customer dataset which is found in the crm system
 dataset creation > Direct Relationship كان فيه بينها وبين ال
 relationships وال dataset creation دي كان عندها 2
 واحدة مع ال dataset اللي باينة علي الشمال و واحدة تانية بس مظهرتش
 ليه؟ عشان اللي ظهرت دي معمولها link بحاجة وصلتنني في الاخر ل
 attribute in the opened dataset
 لكن ال dataset
 اللي مظهرتش فكانت ال relationship بتاعتها مع dataset تانية خالص
 (غير ال opened dataset)

3) Glossary Facet:

Data Tab > Data Map:

Let's say we have specified glossary G to be the glossary of a dataset, then in the data tab of G > datasets, we can see the name of this dataset, and it will reflect in the data map to show this system in orange and the directly linked systems (case 1_)

if we added G to be the glossary of an attribute of the same dataset, or a different one, then we will see this attribute in the data > attributes this attribute, and we will see the system of this attribute's dataset in the data map and is directly linked systems (case 2)

for the dataset overlay, we will display only the associated dataset in that system. for example if we have a system containing 2 datasets A,B and the glossary was directly associated with A dataset, then we'll show A only without B,

Same thing if we associated G with an attribute of A and not B then we'll also show A only


for the (linking) attributes overlay in case 1, we won't show its attributes, while in case 2 we'll only show the attributes directly associated with the opened glossary G and for the black systems, we'll show the attributes that are directly associated with the same glossary G

- **In the dataset lineage**, then we'll see the datasets either of case 1 or 2 in orange colour and the directly linked datasets.

- **In the Multi Node lineage:**

Relationships > Relationships subtab:

- a) **Glossary Lineage (new lineage)** : it shows which glossaries is the opened glossary object (orange one) related to. (relationships tab > relationships subtab)

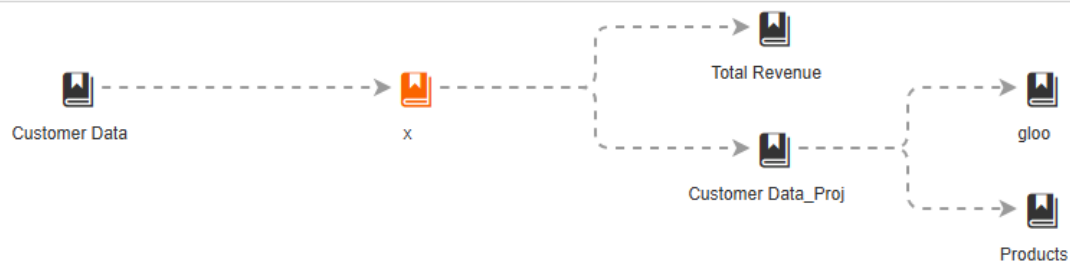

Here as we can see the X is related to Total Revenue glossary and to the customer data_proj glossary which is related to the products and gloo glossaries.

Note, if we opened the relationships subtab of the customer data proj, we won't see the total revenue, which means that we only see the linear relationships

Note: this lineage only has 2 overlays description and stakeholders which has 2 extra columns (accepted and org unit) and its filter displays the data of the glossary_x_glossary_relationtype table

b) Dataset Lineage: datasets linked with the opened glossary (orange ones) + other datasets

(linked datasets are: dataset directly associated with the opened glossary , or one of the attributes is associated to it, or the dataset's glossary is in the hierarchy of the opened glossary)

c) System Lineage: systems linked with the opened glossary (orange ones) + other systems

Capability:

It has one lineage type : Capability Lineage.

A > B And C where B is parent of D

In A we'll see A > B and C

In B we'll see A > B > D

In C we'll see A > C

In D we'll see A > B > D


In other words, we only show the hierarchy without showing the siblings of the opened object.

Different Overlays > shows all of the objects, for example
System overlay: will show all of the system objects specified in the impact tab , system subtab, either of the opened capability or the other related capabilities.


Process:

Process has 3 types and based on its type, it appears in a different shape:


- a) Process.

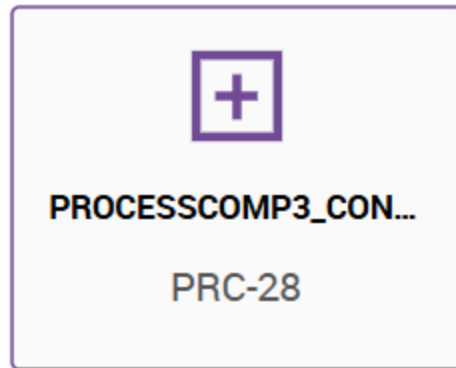

b) Step.




If step type: Starting (green circle)

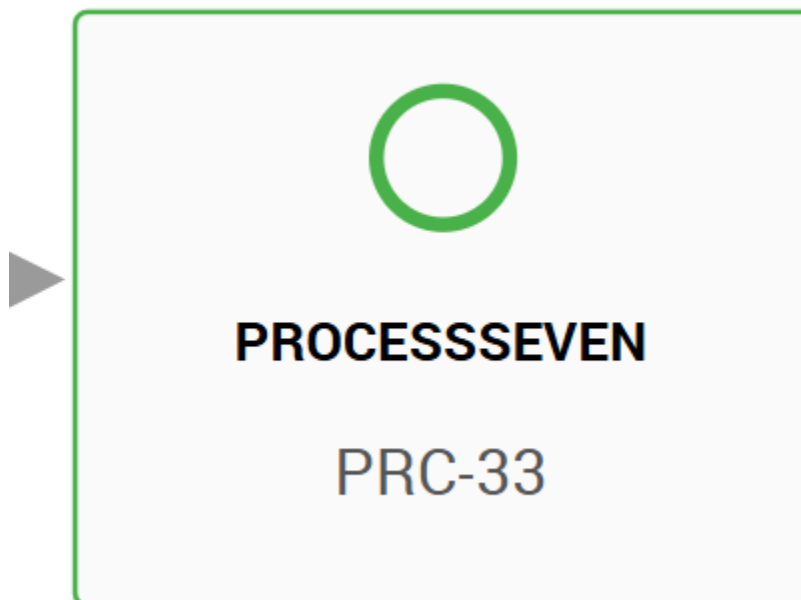

If type was end step: blue circle

Notice how the duration appears if it was specified in any kind of process

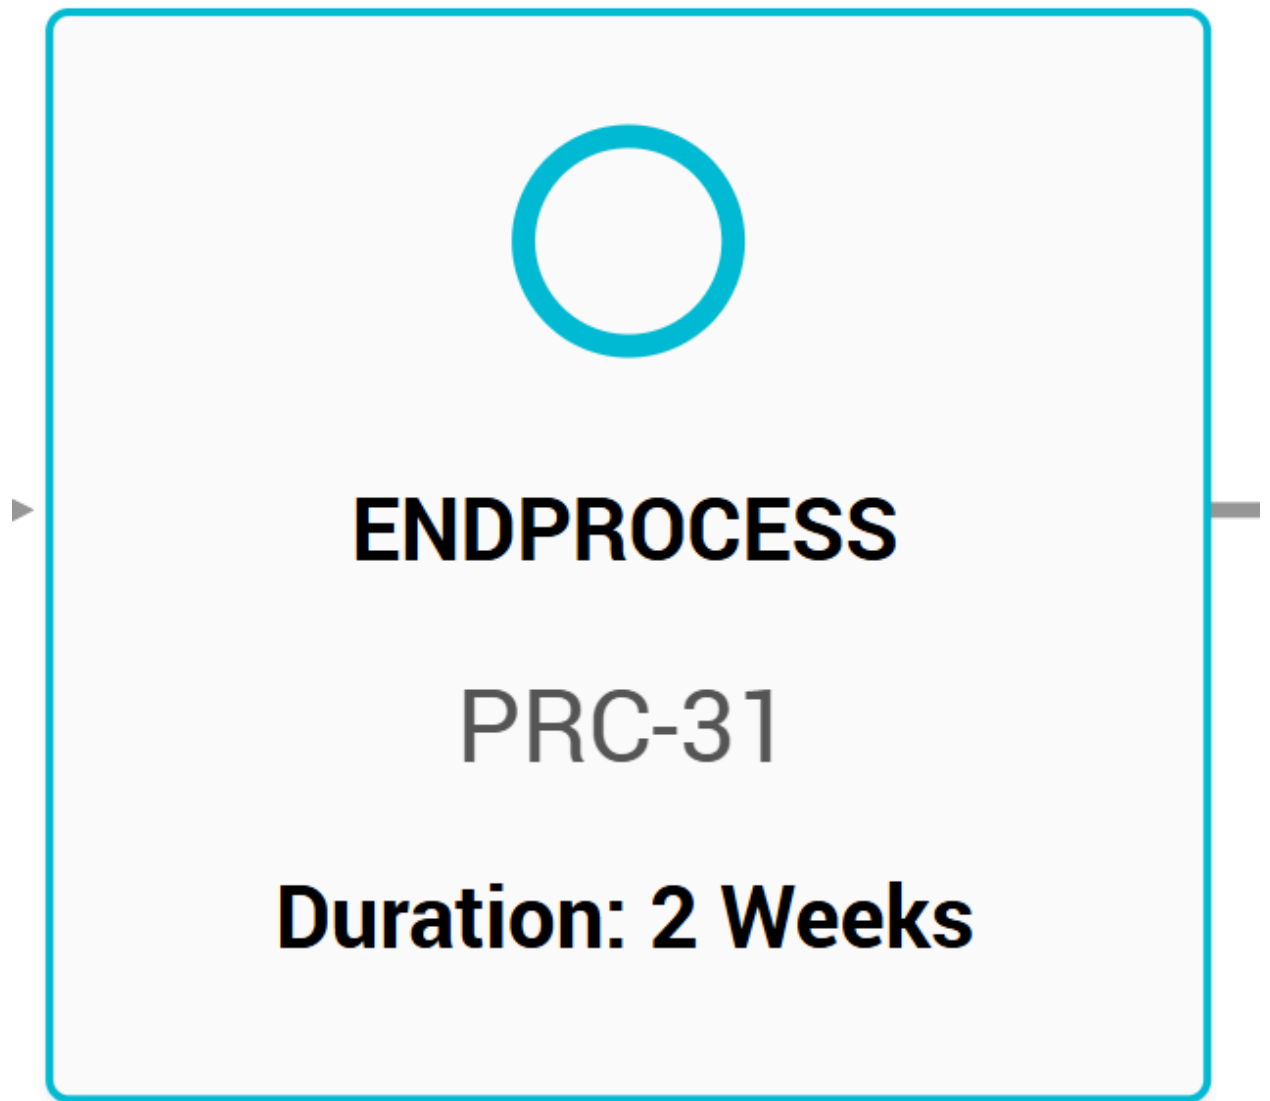

c) Control.




Process Maps are found in three tabs:


- 1) **Summary tab** in the context section: A context map provides a complete view of the dependencies for a process. In other words, for an opened process, it shows all of its predecessors (and predecessors of its predecessors), and its successors with a condition that it shows its successors only if it's directly in its dependencies

for example if Z is predecessor of A which is predecessor of B which is predecessor of D but D has another predecessor which is C, thus in B I will only show its predecessors Z, A, D (I will not show C as it's not in its dependencies)


Here's the context map of the process named as EndProcess

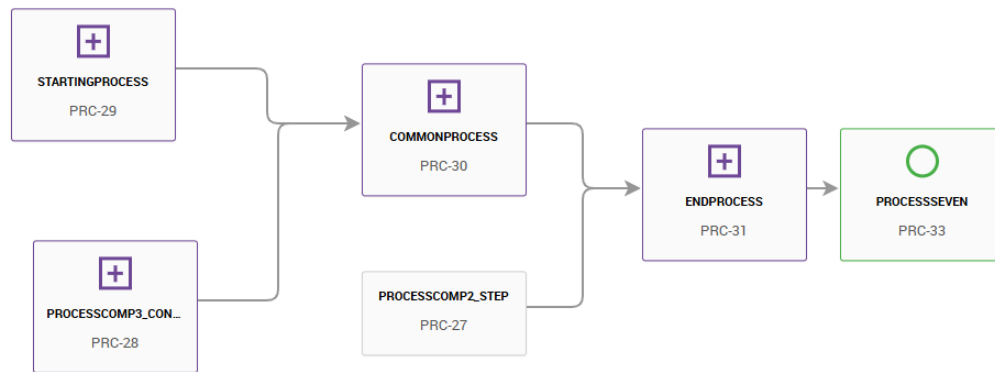

Common Process

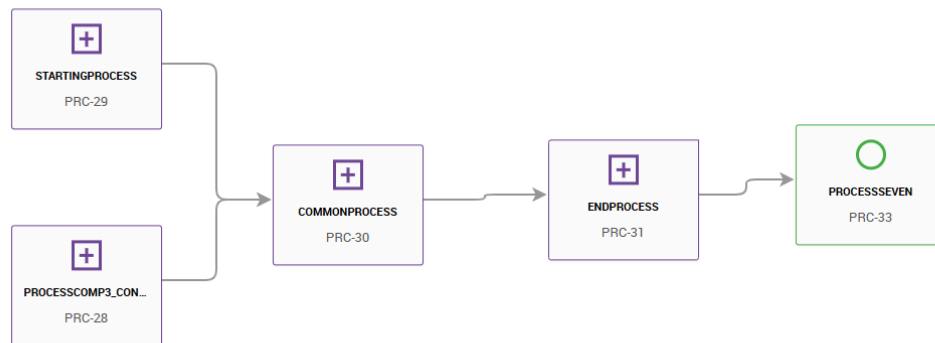

Starting Process

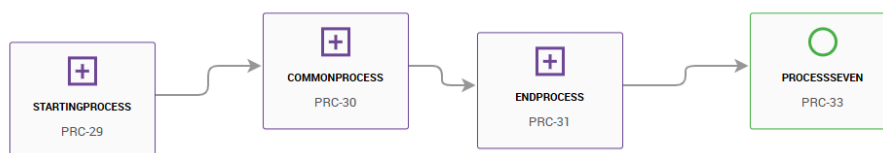

Note you can get the predecessor from the table named as Process_X_Process

2) Components tab: shows the process flow between the **immediate** child object of a process object. Which

means that if we have A parent of B which's parent of C, then in A we'll only see B with its dependencies (as we explained in the previous point).

3) Data Tab:

- It shows the systems of the datasets that have been added in the impact tab > datasets subtab (in orange) . let's name it system A
- Note: if we added a system in the impact tab , then all of its datasets will appear in the data > dataset section , and all of the attributes in these datasets will appear in data > data attributes. Thus these systems will appear too in the data map in orange, along with all of the systems directly linked to it.
- it also shows the system of the datasets of the attributes that have been added in the impact tab > attributes subtab (in orange). let's name it System B
- The data map will also show the systems that have direct relationships with only

example a dataset in System A has a relationship with a dataset in system X (which is linked to system Y) > then in

the data map of the process it will show A (orange) and X only (in black)

while for a dataset in system B , lets say that dataset had only 2 attributes (i and j) where only i was added to the data attributes subtab in the impact tab of the process, then in the data map, if a dataset in system Z had a relationship with i > then Z will appear too in the data map while if the relationship was between an attribute of Z's dataset and attribute j then System Z won't be shown in the data map

Note:

- Attributes overlay for A system , this overlay will display all of the attributes of the dataset that was added in the datasets subtab

(which means if system A had 2 datasets each one with two attributes, where only the 1st dataset was added to the impact tab, then the 2 attributes of dataset 1 will appear in the attribute overlay)

while for system B it will only display the attributes that are found in the attributes subtab.

for the black systems, it will only show the attribute that had a relationship with another attribute in the orange datasets

- Linking Attributes: as we said before that it only shows the attributes that have links in both the orange and black systems, so for an orange system, if its attributes didn't have any kind of relationship, then in the linking attributes no attributes would be displayed for this orange system.

linking attributes and attributes overlay are the same in both lineages system and dataset.

- Glossary overlay in system lineage > for system A will show the glossary associated with this system and all of the glossaries associated with its attributes

while for system B, would only show the glossary of that system, and the glossary attached to the attribute that was added in the impact, data attributes subtab

what is unknown is the glossary for the black systems (glossaries associated with the black system and for the glossaries associated with attribute > differ)

dataset lineage > for the black datasets > it shows the glossaries associated with the attributes that do appear in the attribute overlay (attributes that have relationship with the orange systems)

dataset overlay > only show the datasets that are found in the impact tab (either the one added directly in dataset subtab or the dataset of the attributes added in the attributes subtab) for the orange systems, and for the black systems it only show the datasets that have relationship with datasets in the orange systems

Project Facet:

Found in the data tab, and it just has 1 lineage (system lineage) same as that of the process

Here are some extra notes:


Displays the systems that I have added in the impact tab, along with the systems linked with that system (as we've seen before in the maps of the system facet) but with 1 difference which's that it doesn't show the systems linked to those systems that are directly linked to the system i have added in the impact

Example: if system A is linked to system B which is linked to system C, then when I add A in the impact of a project, the data map will show system A and B only where if there were attributes specified before (for this interface) then the line will be solid , if there wasn't any attributes specified then it will be a dashed line .

system and the other system (as the QWR) thus as a result it won't display any datasets nor attributes in the datasets / attributes overlay.

Note:

Look for the compliance reporting tool system, it has a dashed line between it and the crm system system yet it still shows attributes and that's because there's another lineage between the compliance system and the CDD system where attributes were specified. (these displayed attributes belong to the solid line between the compliance and the CDD system)

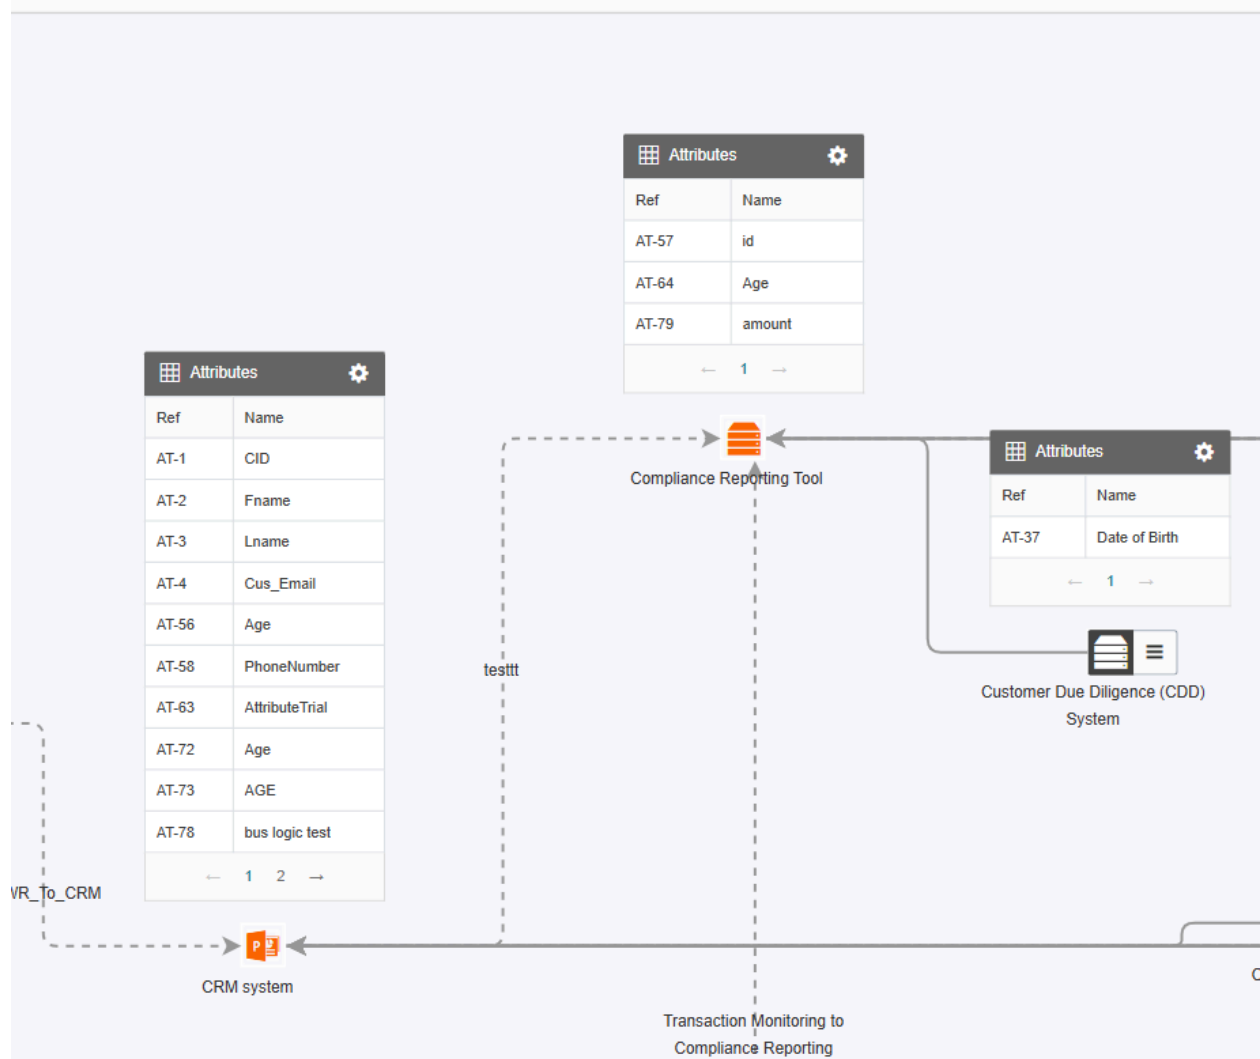


Change Requests

- **Workflows:**

- Admin Panel > DG Operating Model > default workflows > reflect in the process definition table and the changeRequest_Workflow_crType by 1 row to store the facet + process definition id + CR Type.

The default workflow tab is responsible for adding or editing existing workflows for each facet, where by default there is one (default) wf defined for each facet. This tab is only accessible to super admins. Thus if an admin tried to open it he'll get this

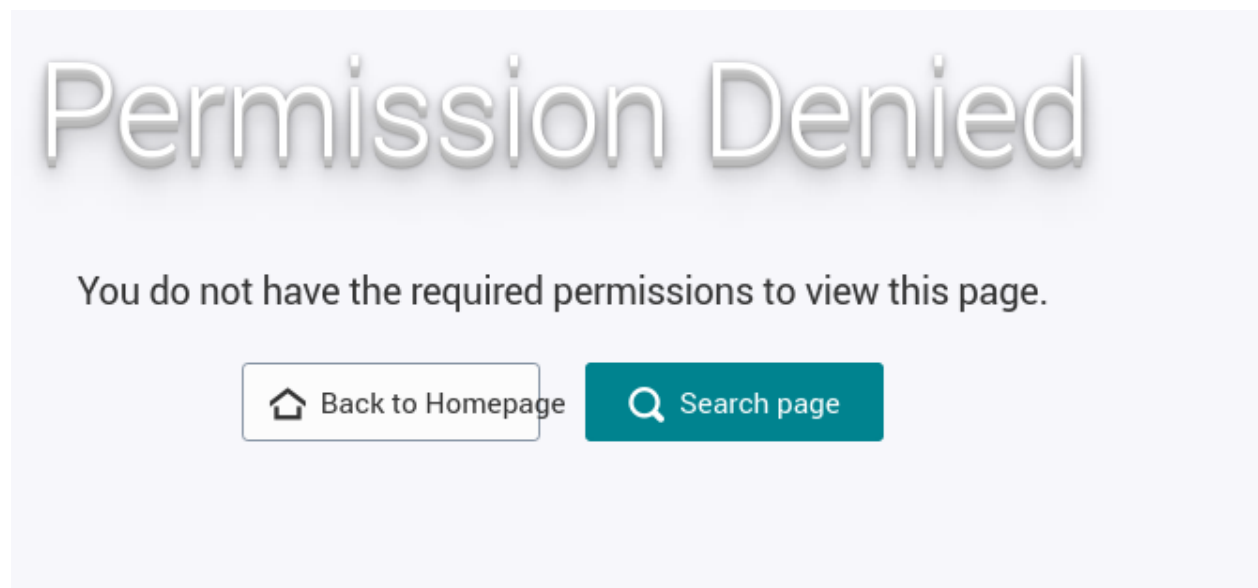

(in the admin panel of an admin he sees the default workflows tab but get permission denied when trying to visit it)

Only users with the SuperAdmin profile can create default workflows for facets and facet types.

The name of the Workflow = Process_Definition table Name column + its status if that workflow was disabled

The type of the workflow can be either request for change or request for information or we can choose both of them. In case we choose both of them then, in the ChangeRequest_Workflow_CRtype table we'll have 2 rows one with type 1 and the other with type 2.

let's say we've added a workflow for a System called WF1 then in any system object > change tab > workflow subtab > we can see this WF1 and any other workflows defined for the systems. However, if we have disabled WF1 from the admin panel, then it won't be shown in the workflow subtab

Note in the Default workflow tab, workflow section, the rectangle by default will be divided into sections (lanes) = to the number of roles defined in the roles and responsibilities tab for the selected facet.

This is how the page appears

SELECT WORKFLOW

Facet *

Glossary

Workflow *

Glossary Change Control Management Process

Workflow Name *

Glossary Change Control Management Process

Minimum 6 characters

Description *


Approval process for changes to a glossary item.

Active

☒

Type ⓘ

Select Type

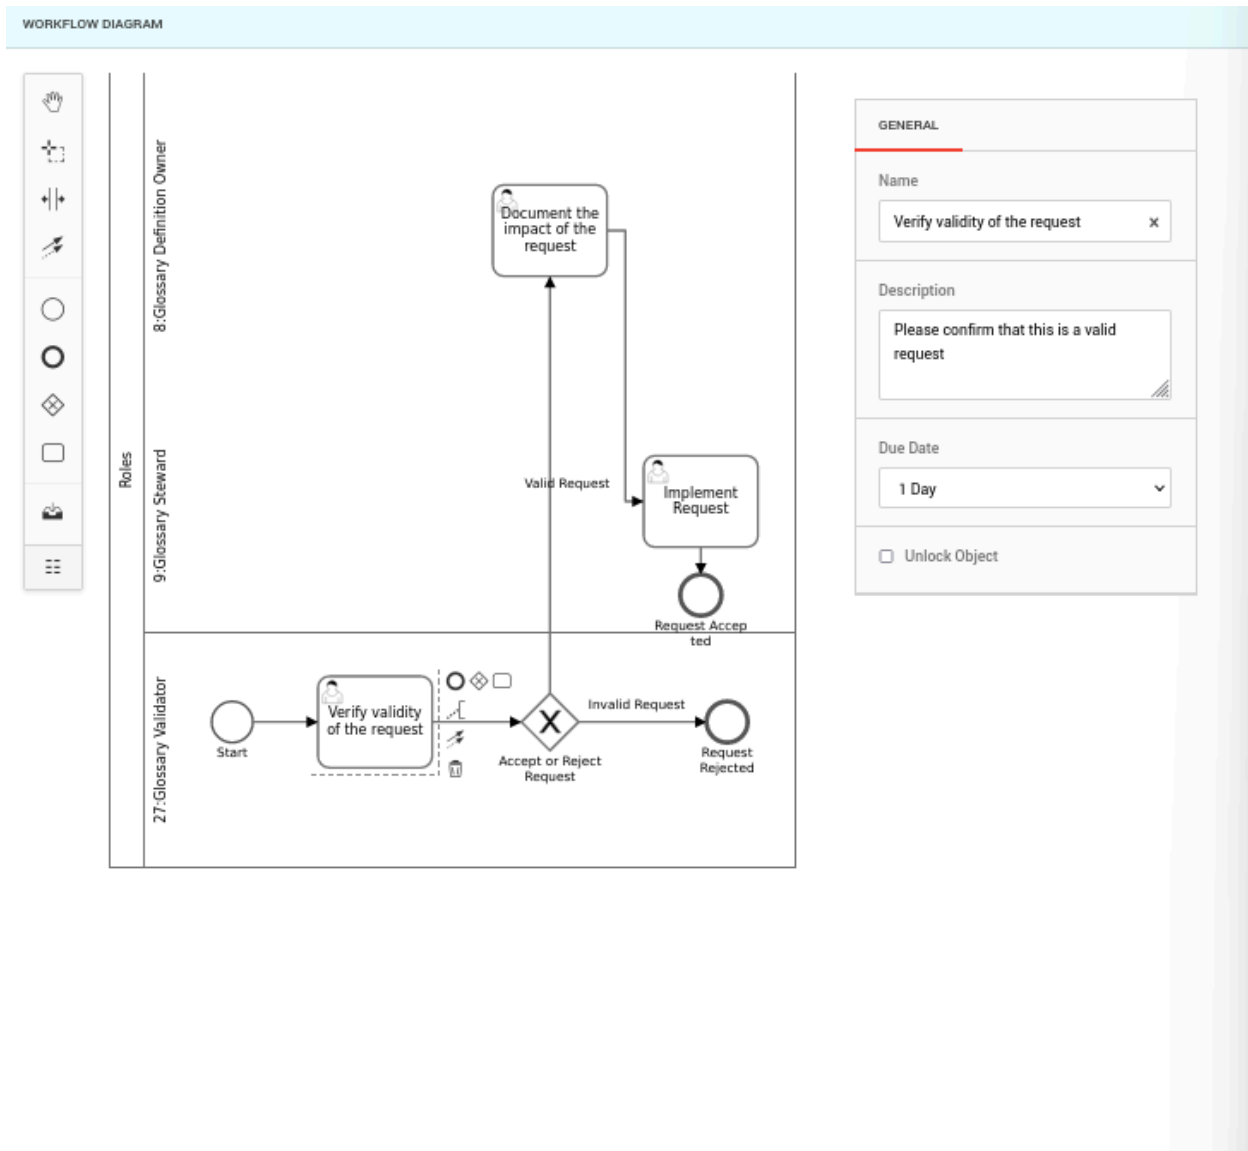

For the previous screenshot, we can see that in the left side it shows the shapes that can be used, then in the middle we can see the WF itself, in the right side, we see the details of each used task. Note these 3 things are movable.

Shapes that can be used in the workflows:

- Use circles for start and end points, square boxes for user tasks and diamonds for decisions.
- Decision boxes must have labels on the arrows.
- Each task / decision can be assigned a recommended amount of time to complete.
 - This will trigger reminders and move things along.

- Each workflow needs 1 Start and End event in order to be executable.
- The start event is depicted by a circle. The end event is depicted by a thicker circle. Workflows can have multiple end points.
- The workflow follows the path along the arrows.

Creating Workflows – Toolbar

- The top section gives you power tools to:

- Manoeuvre around diagram
- Select items
- Resize the Canvas
- Connect items



- The bottom section allows you to act outside of the workflow:

- Upload a workflow
- Download this workflow
- Hide the toolbar




- The middle section is the core of the toolbar. It lists the building blocks of the workflow. These can be dragged onto the canvas to form part of your workflow.



- Start point
- End point
- Decision point
- User task
- Swimlane



Each shape should have its name and description.
Each user task (rectangle) has sth at the bottom called Unlock objects, while the End points have something instead of it called Commit changes. (for the start point, it has neither of them) .

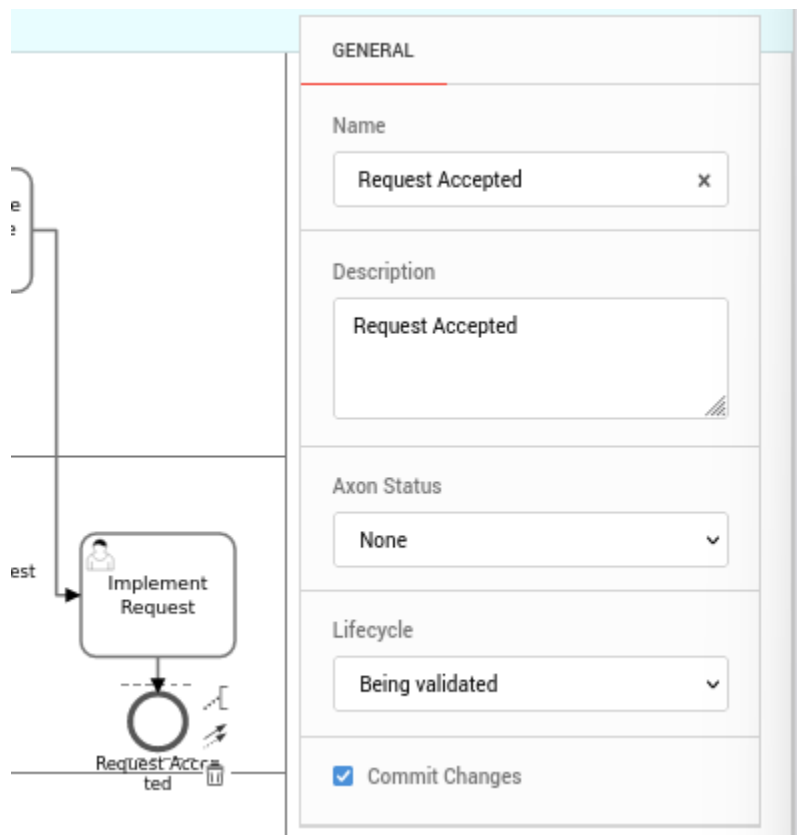


For the end points we have axon status and lifecycle by default they're none. Let's say we've chosen the lifecycle for an end point to be "being validated", then if the path that led to this end point was followed, then after the completion of the CR, the lifecycle will be updated automatically to being validated.

However, cancelling a CR (from the Cancel button in the classifications section in the right hand side of the CR) won't cause the lifecycle (or status) to be updated

The unlock and commit changes features are only used when the CR is raised automatically (Automatic CRs are explained later in this documentation).

- We can add the person who raised the CR as part of the workflow through making a new lane with role title Requestor

Note: A person with the Requestor role cannot start a change request.

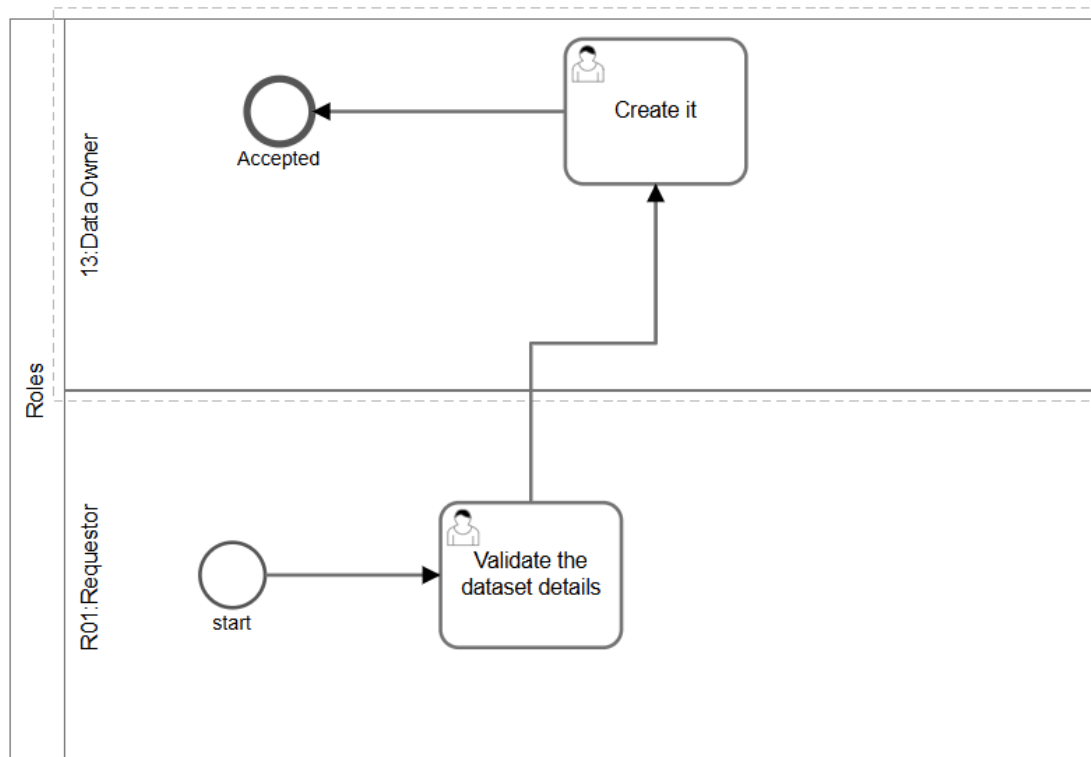

Manual Change Requests:

- Raising a CR:
 - if an object belongs to segment A, and a CR was raised upon this object, then this CR will also belong to segment A
- Reflects in change request table (1 row) . where if a cost and / or benefit specified then first a row for each will be inserted into ChangeRequest_Value table and then these IDs will be foreign keys in the newly inserted row in the change request table.

- Reflects in CR_Stakeholder (if the object that the cr was raised upon had 3 stakeholders then it will reflect in this table by 3 rows as well)

Note:

if for an object, it had a stakeholder X and then a CR was raised , thus the stakeholder of the CR would be X too, what if changes happened to the stakeholder of that object, then the same changes in the stakeholders should happen to the CR too automatically

- After raising a CR, its workflow isn't chosen yet, thus in the row of that CR in the Change request table, the processInstance_id (f.k) will be null.
- Note: if a CR (automatic or manual) was raised upon an object that belongs to segment X, and the stakeholders don't have access to that segment then, the stakeholders will get notification for the CR, but when the user opens the CR he'll get a permission denied message.
- In the view page of the CR, the Workflow section is responsible for allowing us to choose the WF we

want, where it gets the existing WFs from Process Definition table where the entity is equal to the object's facet where the CR was raised upon and Status = Enabled. After choosing the WF from the dropdown we need to click on the Start Button so that a new row is inserted into process instance table with processDefinition_id = to the id of the chosen wf , then the row of the CR in the Change request table , the processInstance_id column will be updated with id of that process instance. However, if we click on start and the stakeholders of the object (as a result the cr as well) are not specified then we should get an error saying that stakeholders should be specified (roles mentioned in the workflow should have a person assigned to them in the stakeholders of the **object that the CR was raised upon**). Only after that, we can start the workflow where a notification will be sent to the person who raised the CR, as well as informing all of the stakeholders that a CR is raised by John for example. Then for each stakeholder , when it's his turn in the WF , he'll be sent a notification to either accept or reject the step.

- The users who can choose a WF and start it are super admins, admins, stakeholders even if they don't have a role in the WF. thus, a web user who isn't a stakeholder can't choose a WF and start it.

- The discussion section will display when the CR was raised all of the completed steps + the step that it's its turn now including step name, description , Due Date: date of the step if it wasn't due yet (we can specify a duration for each step for example 1 day then if the CR was raised on 22nd of november then the due date of that step will be 23rd of november) , or if it was due then it will be OverDue, People responsible for this step, comments on that step if any.

DISCUSSION

► Change Request process started on: 22-Nov-2025 10:32:20

Verify

22-Nov-2025 10:32:20

Description not specified.

✓ Completed on 22-Nov-2025 11:02:10 as 'Complete Task' by Mayar Kamel

Mayar Kamel

22-Nov-2025 11:01:30

verifiedddd

Verify Two

22-Nov-2025 11:02:10

Description not specified.

✓ Completed on 22-Nov-2025 11:14:41 as 'Complete Task' by Sally Ghozal

after a step is completed then the step in the discussion section will be like this : **Completed on + Date + as + step result name (as completed) + by user**

note: if the step was a gateway that results in valid request or invalid request, if the user chooses Valid request then it will be

completed on date as valid request by the user name

Document the impact of the request 24-

Nov-2025 12:46:36

Document the impact of the change and share with Stakeholders.

✓ Completed on 24-Nov-2025 12:46:41 as
'Complete Task' by Mayar Kamel

Note :

- Any user can comment even if he isn't a stakeholder on the object.
- Tagging someone by writing @firstname and selecting the individual from the generated list will cause a notification to appear on their home screen
- If we have several users that have the same role on the same object where a change request was raised, then either one of them accepts or rejects the step, it will be enough.
- For the user whose turn is at the moment, then when he open the CR viewing page, at the top of the page he'll see this at the top of the page




The screenshot shows a task card titled 'YOUR NEXT ACTION' with a red header bar. The task is 'Validate the dataset details' with a timestamp of '22-Nov-2025 11:06:41'. Below the title, it says 'Description not specified.' and 'Due Date: 23-Nov-2025 11:06:41'. There are two buttons: 'Complete Task' and 'Comment'. At the bottom, there is a text input field labeled 'Enter a comment' and a 'Comment' button.

Shows the step that he has to take action upon , name of the step, description, due date, if he wants to write a comment, and the action as Complete Task.

If we clicked on go to details (on the red bar) it will take us to that step in the discussion section

The action as complete task differs according to the step itself, so if it was a user task then the action will

be complete task, if after that task we had a gateway then the actions will be the values of it
See the approval task has a gateway after it with three values. Approved , rejected, rework thus the actions will be these 3 for the approval step.

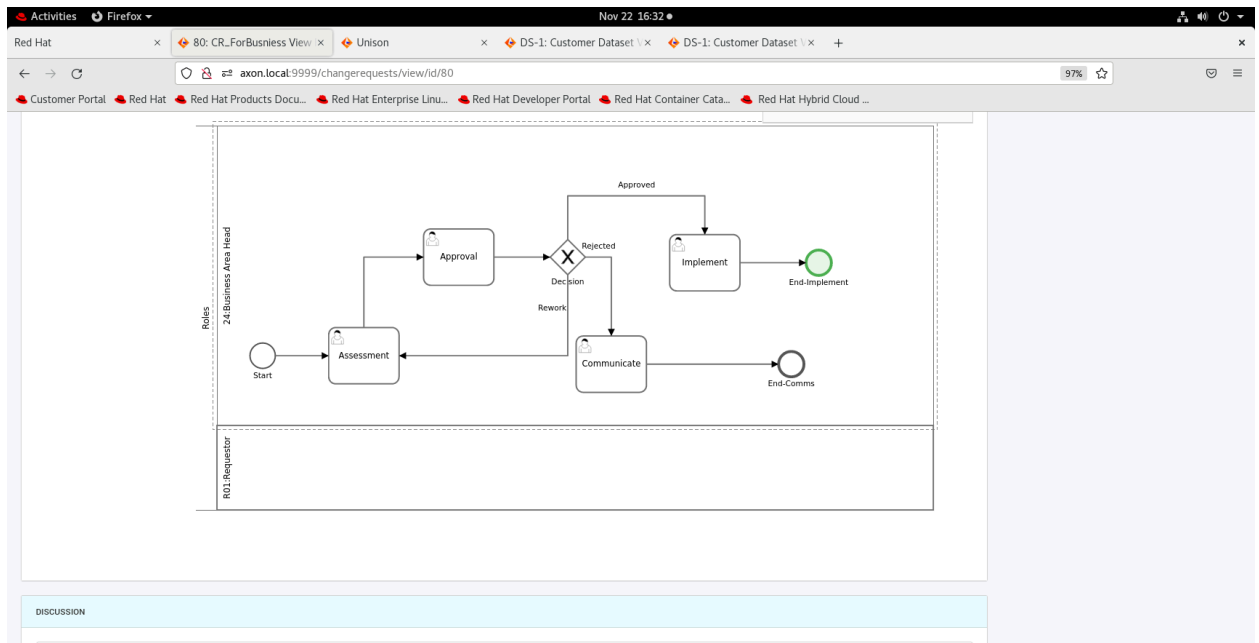

Activities Firefox Nov 22 16:32

Red Hat 80: CR_ForBusiness View Unison DS-1: Customer Dataset DS-1: Customer Dataset

axon.local:9999/changerequests/view/id/80

Customer Portal Red Hat Red Hat Products Docu... Red Hat Enterprise Linu... Red Hat Developer Portal Red Hat Container Cata... Red Hat Hybrid Cloud ...

DISCUSSION

Informatica Data Governance Search Maps My Items Create

80: CR_ForBusiness BusinessArea2 | Change Request Edit

SUMMARY RELATIONSHIPS STAKEHOLDERS HISTORY

YOUR NEXT ACTION Go to details →

Approval 22-Nov-2025 02:30:38
Recommendations are assessed for completeness and approval. Should this request be implemented?

Due Date: 27-Nov-2025 02:30:38

Enter a comment Comment

DEFINITION

dsess

Type: Request For Change

Affected Item: BusinessArea2

Analysis: No analysis recorded yet [+ Add]

CLASSIFICATIONS

Complete Cancel Request

BASIC CLASSIFICATIONS

Axon Status: Running

Severity: Low

Urgency: Low

ADVANCED CLASSIFICATIONS


Estimated Benefit: Not specified

Estimated Cost: Not specified

OTHER INFORMATION

Created By: John Admin

- The step that should be done now is highlighted in the workflow

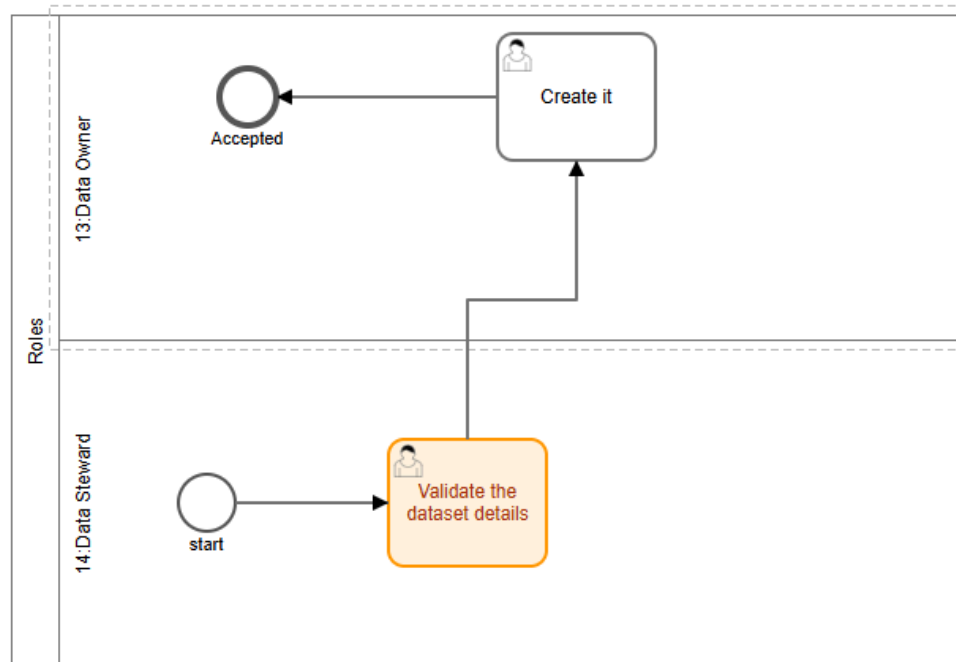

-

Note:

- the status column of the process instance table has one of two values (enabled / disabled). if the CR was cancelled or completed then the status will be disabled otherwise enabled.

Editing the CR, adding analysis to it > reflects by 1 row in CR_Analysis

Editing the CR, adding resolution to it > reflects by 1 row in CR_Resolution. Note.. the resolution type in the summary tab of the CR, get its data from ChangeRequest_Resolution_Status table


- CR > Relationships tab > reflect in the CR_Relationship table. to get the values of the relationship type > cr_Relationship_Type table.

note: if we added a relationship between cr A and B then this relationship will appear in the relationship tab of both CRs A & B

Notes:

- When a CR is raised, a notification will be sent to the stakeholders of the object (This includes stakeholders to the object whose role is not part of the active workflow) and to the person who raised it.

- Also a notification is sent to a user if it's his turn in the workflow.
- A notification is sent to the user who raised the CR every time a step is accepted / rejected till the CR is either cancelled or completed

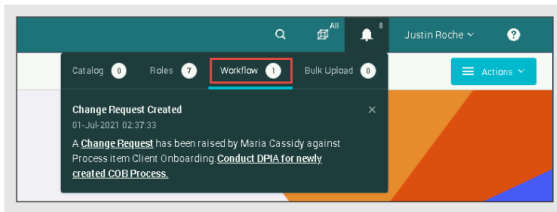

- The stakeholder can click the link to open the change request or open the object and click the Change tab.

- When a user choose to cancel the CR then, the resolution changes to Cancelled by Username (Email) + also the CR_status_id is changed to the id of the cancel in the CR_Resolution_Status

Note: Only the CR's Stakeholders (even if it's not their turn) can cancel the CR at any time.

Super admins , admins , the person who raised the CR can't cancel the CR.

- If Status of the CR is:

a) **Pending Start:** then we can see two buttons on the right Complete (disabled) and Cancel

b) **Running:** complete will be shown but disabled , and the cancel button will be enabled.

Note: only Stakeholders are able to cancel the CR

c) **Paused:** We'll only see the Cancel button

d) **Completed:** Neither of them will be displayed

e) **Cancelled:** Neither of them will be displayed

f) **Deleted:** Neither of them will be displayed (we can't delete an object while having a CR raised upon it that is pending start / running)

These buttons only appear to the Super admin , admin and the stakeholders of the CR.

.

The Complete button is not enabled until the final user task has been completed.

- CRs can't be edited after cancelling or completing it.
- we can only edit a CR if the status is pending start , running or paused

- Axon status for the cr can't be edited **at all**.

- Only the stakeholders of the CR and the person who raised it,super admins and admins can edit the CR.

- if I raise a CR to an object that has no stakeholders, then the status of the CR will be pending start.

- If the status of the CR is pending start, then first we have to choose the Workflow ourselves and click on Start .

- To add a parent for a CR, the parent and the child should be raised on the same object, Thus, don't show any CRs in the parent field unless they belong to the same object of the child CR.

Notes:

- Any CR that is raised upon any object of any type appears in 4 places:
 - 1) In the change tab of the object itself. Where it has 2 subtabs: Change subtab responsible for displaying the CRs that were raised on that object and it gets its data from the CR table. And the WF subtab responsible for displaying the steps of the chosen WF and it gets its data from process definition table .
 - 2) In the Change Requests Facet found in the Unison Search Page, such that clicking on any of the CRs will take us to is view page that has 4 tabs Summary, Relationships, Stakeholders, History.
- A CR can't be followed directly, instead if a CR was raised upon an object that has 2 followers , then these 2 followers will be following the CR as well and it will appear in the stakeholders > followers subtab
- 3) My Account: CR tab: 3 sections , one for the CRs I've raised , one for the ones i'm contributing to (you can

find its query in the documentation of the Dashboards but adjust the columns you want to select and remove the count), the last section is for the Workflow tasks which is pending tasks of the logged in user

- 4) **Dashboard widgets**. In the Change Requests widget, view the change requests that are **assigned to you** and the change requests **you have raised**. In the Pending Tasks widget, see your pending tasks in workflows where you are a stakeholder.

Pending Tasks Widget:

Displays a list of your pending tasks in a workflow step for a change request. If you are a stakeholder for a step in a workflow, you need to complete your tasks to proceed with the next step of the workflow. You can view the task information such as the workflow step name, associated change request name, and number of days that you have to complete the task

Pending Tasks | 3 (1 Overdue)



Your workflow step 'Verify Two ' for change request zeft - Overdue

Your workflow step 'Validate the dataset details' for change request cr_ds5 - Due in 1 days.

Your workflow step 'Validate the dataset details' for change request cr for dataset - Overdue by 3 days.

Clicking on the title of the widget takes you to My Account > CR tab > 3rd section

WORKFLOW TASKS					Complete Task	
No.	Active Task Name	Description	Due Date	Change Request Name		
1	Validate the dataset details		23-Nov-2025	cr for dataset		
2	Validate the dataset details		27-Nov-2025	cr_ds5		
3	Verify Two		26-Nov-2025	zeft		
					3 records	

Notice the complete button in the upper right hand side of the table, it's used to complete the selected tasks, as a result that task will be removed from the pending tasks and the active tasks (the active tasks facet : same idea as pending tasks, also it's explained below).

Complete Workflow Tasks						
Sr	Active Task Name	Description	Due Date	Action	Comment	
1	Validate the dataset details		23-Nov-2025	Complete		
3	Verify Two		26-Nov-2025	Complete		
						2 records
						Submit Close

- Admin Panel > Default CR:

- This is used to raise a CR automatically whenever we edit an object / create an object.

- It is only applicable on some of the facets, not all of them.

- The name of the automatically raised CR, is the chosen WF name in the admin panel + object name that the CR was raised upon.

Enable Workflow Approval for
Administrators



-

If unticked, then changes made by admin or super admin users are applied on the objects without any review from stakeholders.


> creating an object in a facet that has default CR FOR creation:

- during creation its status is pending review and lifecycle is being validated (these two fields are disabled , we can't change their values unless the CR is approved)
- when we create the object and click save, then a CR will be raised automatically but the WF won't be started as we haven't set stakeholders of that object (the start button is displayed but when we click on it a message will appear asking me to set the object's stakeholders first)
- note: if for a glossary we have 3 roles A,B,C but in the workflow of the glossary I'll be using A,B roles then setting stakeholders for roles A and B is enough
- after we set its stakeholders, we can start the WF and the same steps will happen as we've explained before
- after the approval of the created object, status and lifecycle (and any other field) can be edited.
- Note: if a CR (automatic or manual) was raised upon an object that belongs to segment X, and

the stakeholders don't have access to that segment then, the stakeholders will get notification for the CR, but when the user opens the CR he'll get a permission denied message.

> when we set it, just for editing the objects, any edits made to the object won't be shown , instead a CR will be raised for approval or rejection. However we can see this changes if we press on Views Changes (but won't be reflected in the Database).

Notice the Viewing Original and view changes next to the object's name

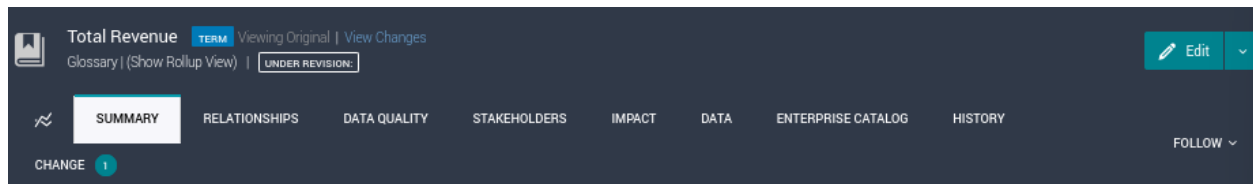

see the **View Original** and **Viewing Changes** views for the objects if you are a stakeholder of the object, a user with edit permission for all objects for that facet, the Admin, or the SuperAdmin user.

You can see whether the page displays the original version or modified version of the object.

You cannot see changes in the **Viewing Changes** view for the following sections:

- Summary > Strategic Source**
- Summary > Hierarchy**
- Relationships > Hierarchy**
- Relationships > Map**
- Stakeholders > Stakeholder Community**

If you modify the **Stakeholders** section and select **Viewing Changes** view, the **Stakeholder Community (Based on Previous State)** section displays the stakeholders before the change

request was started.

If you modify the object hierarchy and select the **Viewing Changes** view, the **Hierarchy (Based on Previous State)** section displays the object hierarchy before the change request was started. Complete the workflow to see the updated hierarchy.

When a CR is raised automatically, then in the page of this CR, we'll have an extra section below the definition section in the summary tab called Changes to Review that is only displayed to super admins, admins , and the stakeholders of the CR (not all of the webusers) to display the changes that were made that caused the CR to be raised automatically


CHANGES TO REVIEW					
Tab	Component	Object	Operation	Author	
Summary	Glossary	Total Revenue	Updated	Mayar Kamel	Details
					1 record

If we click on details we'll get the fields that were updated with their old and new values.

Total Revenue Change Details			×
Field Name	Old Value	New Value	
Format Type	Number	Decimal	
Security Classification	Confidential	Internal	
Confidentiality		2	
KDE	True	False	
			4 records
			<button>Close</button>

Note: if we wanted to edit the impact, then in the impact let's say we have 2 columns relationship type, and object

name, then updating a row will result in 2 rows in the changes to review section as such

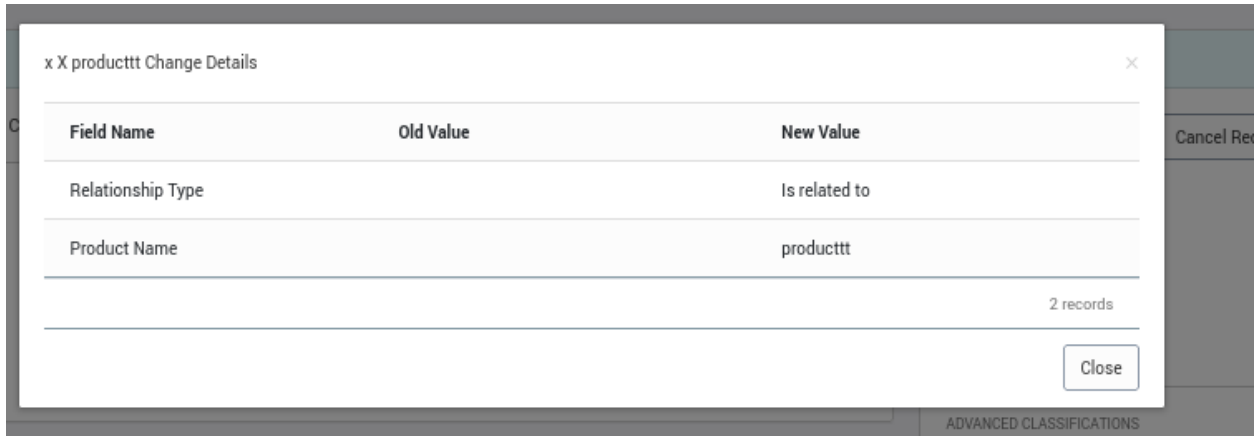

The screenshot shows a dialog box titled 'x X producttt Change Details' with a close button (X) in the top right corner. Inside the dialog is a table with three columns: 'Field Name', 'Old Value', and 'New Value'. The table contains two rows of data. Below the table, it says '2 records' and there is a 'Close' button in the bottom right corner. The background of the application is visible, showing a 'Cancel Rev' button and a section labeled 'ADVANCED CLASSIFICATIONS'.

Field Name	Old Value	New Value
Relationship Type		Is related to
Product Name		producttt

Note: The **Changes to Review** section is displayed for change requests that are in progress. If a stakeholder completes or cancels a change request, the **Changes to Review** section does not appear.

- Also we'll have to click on start workflow but this happens only if the stakeholders weren't specified. then each and every stakeholder will be notified either to accept or reject the CR.

- The WF will only start automatically if a stakeholder starts the edit. If a non-stakeholder user starts it, the stakeholder should see it in their activity and start the workflow.
- Only the "Create" object workflow will start automatically when a non-stakeholder user is raising the change request for it.

Remember the Unlock and the commit changes features in the workflow diagram section in the default workflows tab in the admin panel

When an automatic CR is raised upon an object, the object should be locked which means it can't be edited by any user (even a super admin) till the CR is either completed or cancelled unless we've chosen for a step to unlock the object, then this means that AT THIS STEP ONLY, the object can be edited and after this step it will return again to be locked. (note if it's unchecked and then an automatic CR was raised upon an object where the first step is responsible by a user called X then if anyone wanted to edit this object, he'll get a message saying that the object is locked by user X (by the user who has turn in the WF)).

Objects which have default CRs raised upon them, will appear in the admin panel > manage locks > but we can't remove the lock from them unless the CR is completed or cancelled.

While the Commit changes feature, its job is if the user for example edited the description of an object which caused an automatic CR to be raised, then if he didn't check the commit changes, the Description won't be updated (even if

the whole process was approved). While if he checked it then the description will be updated after the end of the workflow.

Note let's say we had a WF like this one, then if we checked the commit changes at the end point after the rejection , then the description will be updated too.

- When we set it for creating objects, the status and lifecycle fields will be disabled and will have the values that were specified during the creation of the default CR in the admin panel > default change requests tab. the status and lifecycle values will stay as they are even after the completion of the workflow.

BASIC CLASSIFICATIONS

Axon Status ^{*}

Pending Review

Lifecycle ^{*}

Being validated

Axon Viewing ^{*}

Public

Type ^{*}

Domain

Security Classification ^{*}

Public

OTHER INFORMATION

Note:

The details of the edit (automatic CR) that were made are going to be added to the delta column in the change request table.

If I make another edit (on the same object but after the completion of the previous CR due to the lock feature) then another CR will be raised, appending these changes to the delta column .

If user A has made some changes to an object then these changes will be reflected in the delta column of CR lets say X, then if user B has made any changes on the same object, then we won't have a new CR, the changes will be added to the delta column of the same CR X.

بس متكنش اول cr كانت بسبب ال creation
يعني لو انا الاول كان عندي cr بسبب creation يبقي دي row لوحدها بعد كدة
بقي اي cr هتبقي raised بسبب update هيقوا كلهم تبع نفس ال row ونفس
ال delta

This is the delta column of the Automatic CR that was raised because of creation and that's why the type is create

```
1 v {  
2   "_objectid": "55",  
3   "_objecttype": "CatItemCategory",  
4   "_type": "create",  
5   "_crtype": null,  
6 v  "_changes": {  
7     "_data": {}  
8   },  
9   "_metadata": []  
10 }
```

And this is the delta column of the same object but different row because this was update not creation, here the type will be edit, and for each raised CR, we'll have a new key-value pair in the data dictionary and a new dictionary in the metadata's value showing when that update / CR happened.

```
"_objecttype": "CatItemCategory",
"_type": "edit",
"_crtype": null,
"_changes": {
  "_data": {
    "1764164704083": "
      {\"tab\": \"summary\", \"tabformdata\":
      {\"SecurityClassification\": \"3\", \"CICCategoryCatItemCategoryAliasName\": []}}",
    "1764164892944": "
      {\"tab\": \"summary\", \"tabformdata\":
      {\"SecurityClassification\": \"3\", \"CICCategoryCatItemCategoryAliasName\": [], \"Type\": \"4\"}}"
  },
  "_metadata": [
    {
      "_time": "26/11/2025, 15:45:04",
      "_changedby": 1,
      "_timestampid": 1764164704083
    },
    {
      "_time": "26/11/2025, 15:48:12",
      "_changedby": 1,
      "_timestampid": 1764164892944
    }
  ]
}
```

Column: 6

Editing stakeholders don't raise a CR automatically, thus they won't be added to the delta column.

- We can't disable the workflow approval for a facet unless all of the default CR requests that were raised are completed or cancelled.

- Enabling workflow for facet types (only for glossary . dataset, system) : allows you to specify different or the same workflows for the different types of the facet.

CONFIGURE WORKFLOW APPROVAL SETTINGS				
Settings for Facet		Settings for Facet Types		
		Restore Defaults		
Facet Type	Default Change Request System	Default Workflow for Creating Obj	Default Workflow for Editing Objec	Default Change Request Type
Domain	Inherited from Facet	Inherited from Facet	Inherited from Facet	Inherited from Facet
Subdomain	Inherited from Facet	Inherited from Facet	Inherited from Facet	Inherited from Facet
Metric	Inherited from Facet	Inherited from Facet	Inherited from Facet	Inherited from Facet
Term	Inherited from Facet	Inherited from Facet	Inherited from Facet	Inherited from Facet

-
- To enable the workflow for facet types we should enable workflow approval

In Admin panel > Customize and configure > System settings > Change Requests:

Group				
Change Requests				
Change Requests				
Display Name	Customizable	Value Type	Default Value	Value
Auto-complete change requests	✓	boolean	false	true
Default Change Request Systems	✓	dropdown	None	None
Enable automatic deletion of change requests	✓	boolean	false	false
Days to automatically delete change requests	✓	int	0	0

Group Save Cancel

Auto-complete change requests ☒ Default Change Request Systems

Enable automatic deletion of change requests ☐ Days to automatically delete change requests

- **Auto-complete change requests** : Automatically complete CR when WF is complete
- **Enable automatic deletion of change requests** : automatically delete associated CR when objects are deleted
- **Days to automatically delete change requests** : Specify the number of days to delete the associated CR when an object is deleted. Enter 0 to delete immediately or enter a positive integer to denote the days
- **Add a checkbox call it Type of change requests to be deleted** where its choices are whether he wants to delete just the cancelled CRs only , or the completed only or both of them

- Active Tasks Facet:

Verify Validity of the Request	shittt	Glossary	glossaryCR	25-Nov-2025	Overdue by 1	Mayar Kamel
Verify Validity of the Request	shiiittt	Glossary	glossaryCR	25-Nov-2025	Overdue by 1	Mayar Kamel
Validate the dataset details	cr_ds5	Data Sets	Lab Results	27-Nov-2025	1	John Admin
Validate the dataset details	cr_test	Data Sets	Lab Results	27-Nov-2025	1	Mayar Kamel
Approval	CR_client	Client	client trial	01-Dec-2025	5	Mayar Kamel
VALIDATE	cr_child	Project	Regulatory Audit Preparation 2025		Not specified	Segment Admin

You can view the active tasks that are defined within the workflow of a change request. Once a task starts, it appears under the Active Tasks facet. After the task is completed, it disappears from the Active Tasks facet.

يعني في كل CR (pending start or running) بيشوف انه تاسك عليها الدور في ال WF ويحطها في ال active tasks بالمعلومات بتاعة التاسك دة.

You can view the following task information on the Unison grid:

Name: Name of the active task.

Object Type: The type of the object in which the active task is present.

Object: The object that contains the active task.

Due Date: The date by which the active task needs to be completed.

Due Days: The number of days by which the active task is due.

Owner: The owner of the active task within the object.

Assign Date: is the date when the CR was raised

Note:

If a due date is not specified for a task in a workflow then it won't have a value, and the Due Days column of the Active Tasks facet displays the value as "Not Specified." (if it's overdue, color it in red)

System_interface_abdelrahman

System > interface

في ال

System > interface > system interfaces section

الرقم بتاع ال Data attributes المفروض لما ادوس عليه ياخدنا لل data tab
بتاعة ال interface اللي مذكور اسمها في ال row دة

والرقم دة بيتأثر لما اعمل اي relationship between attributes بس
بشرط اني اكون مستخدمة ال interface مش سايباها فاضية

بمعني اني مثلا لو عندي interface اسمها 1 int

From system A to system B

يبقي لو جيت في اي dataset in system B وعملت لها inbound
relationship بحيث ان ال

source system = system A

واخترت ال interface تكون 1 int

ساعتها لو رجعت لل interface tab سواء في system A or System B
هلاقي في system interfaces section

ال row بتاع 1 int الرقم في ال 1 = data attributes

لما ادوس علي 1 هروح لل 1 data tab of

ال tab دي فيها 2 subtabs

1) Data within interface

ال relationship اللي لسة عاملاها فوق هتظهر هنا

2) Data outside interface

لكن هنا بيظهر اي relationships عملتها من غير ما احدد interface معينة بشرط ان احنا عشان قولنا ال interface دي طالعة من system a to system b

ف لازم ال source of the inbound relationship يكون system B

يعني المفروض يظهر اي relationships اتعملت بين

Dataset in system A to Dataset in System B

Example:

SYSTEM INTERFACES					
From	To	Name	Data Attributes	Automation	Frequency
QWR	QWR2	QWR_To_QWR2	2	Unknown	
QWR	QWR2	testttt	0	Unknown	

لما ادوس علي ال 2

SYSINT-17 - QWR_To_QWR2								
Interface QWR → QWR2								
SUMMARY STAKEHOLDERS IMPACT DATA HISTORY CHANGE								
Data Within Interface Data Outside Interface								
DATA FLOW IN INTERFACES								
Source Ref	Source Data Set	Source Attribute	Source Origination	Relationship Type	Target Ref	Target Data Set	Target Attribute	Target Origination
DS-37	SysTrial	Att3		Unenforced Lookup	DS-33	dataset1	QWR_At3	
DS-37	SysTrial	Att1		Unenforced Lookup	DS-33	dataset1	QWR_At1	
2 records								

هنا ال source dataset لازم تكون جوا ال system بتاع ال source system of the interface

لو جينا بقي ودوسنا علي ال data attributes في ال data outside interface section ده هيوديننا لل data flow والداتا المعروضة هناك هي اللي هتتعرض في ال Interface > data tab > data outside interface subtab

DATA FLOW OUTSIDE INTERFACES		
From	To	Data Attributes
 QWR	 QWR2	2
 QWR2	 QWR	2

لو دوسنا علي ال 2 بتاع اول row بس هو ده اللي هياخدنا لل interface اللي موجودة في ال screenshot اللي فاتت عشان ليهم نفس ال source ونفس ال target

DATA FLOW OUTSIDE INTERFACES								
Source Ref.	Source Data Set	Source Attribute	Source Origination	Relationship Type	Target Ref.	Target Data Set	Target Attribute	Target Origination
DS-37	SysTrial	 Att1		Enforced Lookup	DS-33	dataset1	 QWR_Attr3	
DS-37	SysTrial	 Att2		Unenforced Lookup	DS-33	dataset1	 QWR_Attr2	

2 records

SYSINF17 - QWR_To_QWR2

Interface | QWR1 • QWR2

Edit

SUMMARY

STAKEHOLDERS

IMPACT

DATA

HISTORY

CHANGE

FOLLOW

Data Within Interface

Data Outside Interface

DATA FLOW OUTSIDE INTERFACES

Source Ref.	Source Data Set	Source Attribute	Source Origination	Relationship Type	Target Ref.	Target Data Set	Target Attribute	Target Origination
DS-37	SysTrial	Att1		Enforced Lookup	DS-33	dataset1	QWR_Attr3	
DS-37	SysTrial	Att2		Unenforced Lookup	DS-33	dataset1	QWR_Attr2	

2 records

Note:

لو جيت بعد كدة عملت اي interface ليها نفس ال source and target زي بتوع ال interface اللي فانت...يبقي ال data outside interface tab of ال interface tab لازم بردو تكون زي ال data outside interface the previous interface

Delegate Of

دلوقتي say مثلا اننا عندنا شخصين ليهم نفس ال role

Alice

Bob

Both have glossary definition owner role

دلوقتي بقي لو انا روجت لاي glossary وزودت alice بس
لو جيت ادوس علي ال delegate of المفروض bob ميظهرش عشان لسة
مزودتش bob as a stakeholder

لما ازود bob ساعتها اقدر اختار alice as a delegate of Bob
Or Bob as a delegate of Alice.

Dashboards

Note: Add the Dashboards table , and the dashboard_X_user tables in your database (they're added to the data model)


1)Dashboard for each facet except for Geography and Regulator:

In the unison search of each facet, next to the list title (table) we have an option to see the dashboard, which shows the count of object values across the whole facet **for the Dropdown Fields.**

Pie chart per each

Example:

Across the whole number of created glossary objects, we can see how many objects had type = domain / subdomain / metric / term. And so on with the rest of the dropdown fields.

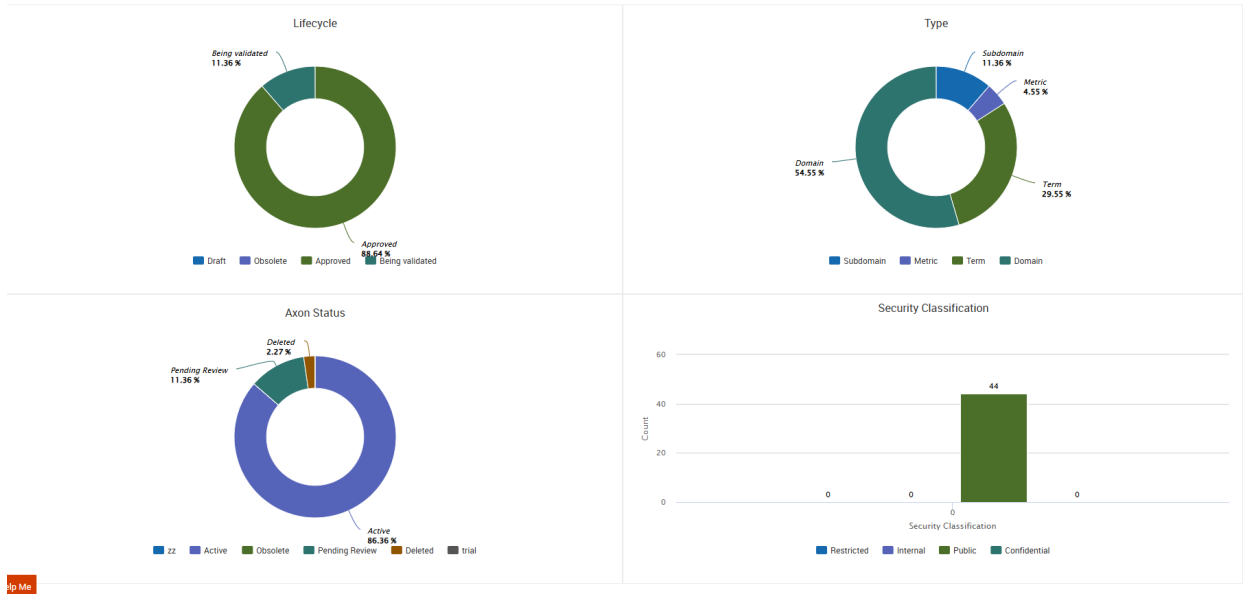

2) Dashboards in the home page.

Users need to be logged in to view the dashboards. And it must be enabled first from the admin panel as it is false by default

Admin panel > Customize and Configure > System settings > Dashboard

Group	Dashboard				Edit
Display Name	Customizable	Value Type	Default Value	Value	
Enable My Dashboard	✓	boolean	false	true	

Group

Dashboard

Enable My Dashboard

☒


By default, there are widgets that are created, these widgets are:

1) Object Counts:

This shows the number of objects created by facet type. The facets that has separate bars are **the facets that have the most number of objects**

Let's say we click on the bar of the glossary, then the page of the glossary facet in the unison search should be opened.

(clicking on others doesn't render anything)

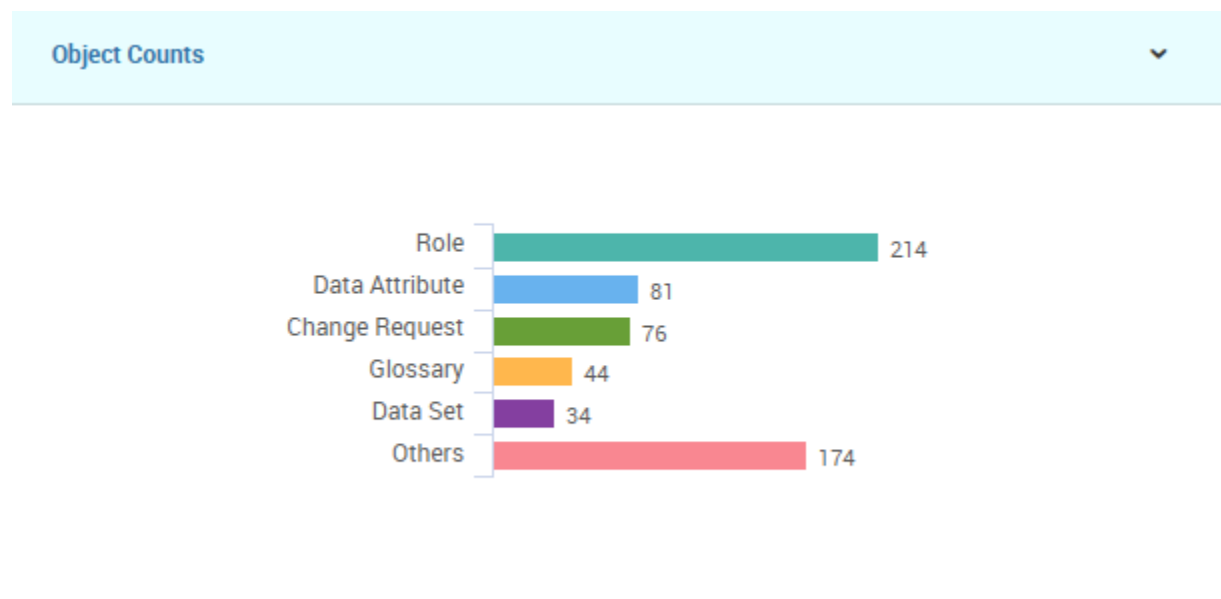

Note if the logged in user is web user then he will see the count of objects of the facets he has the write to create.

Example if User A has the write to create datasets and glossaries only then he will see 3 bars one for the datasets, one for the glossary and the third will be for others with the same number.

2) Roles Not Accepted:


Displays a pie chart for all the roles that **you (logged in user)** have not accepted for each facet. The roles are categorized based on the facet type. **You can view the top five facets that contain more number of roles that are not accepted.** يعني مش شرط عشان عند اول يوزر ظاهر له separate bars for specific facets

يبقي نفس ال bars هتظهر لبقية ال users.
كل واحد بيشوف separate bars لاعلي 5 facets والباقي بيتحط في ال others. الكلام دة بيطبق علي كل ال widgets.

When you click the **Roles Not Accepted** link, Axon displays the **Responsibilites | All** view of your **My Account** page.

Click a colored section in the pie chart or facet name with the count in the legend to navigate to the facet in the

Responsibilities tab of your **My Account** page. So if you clicked on the facet of process then the process subtab in the responsibilities tab of my account will be displayed. Having a filter on the role accepted column = No

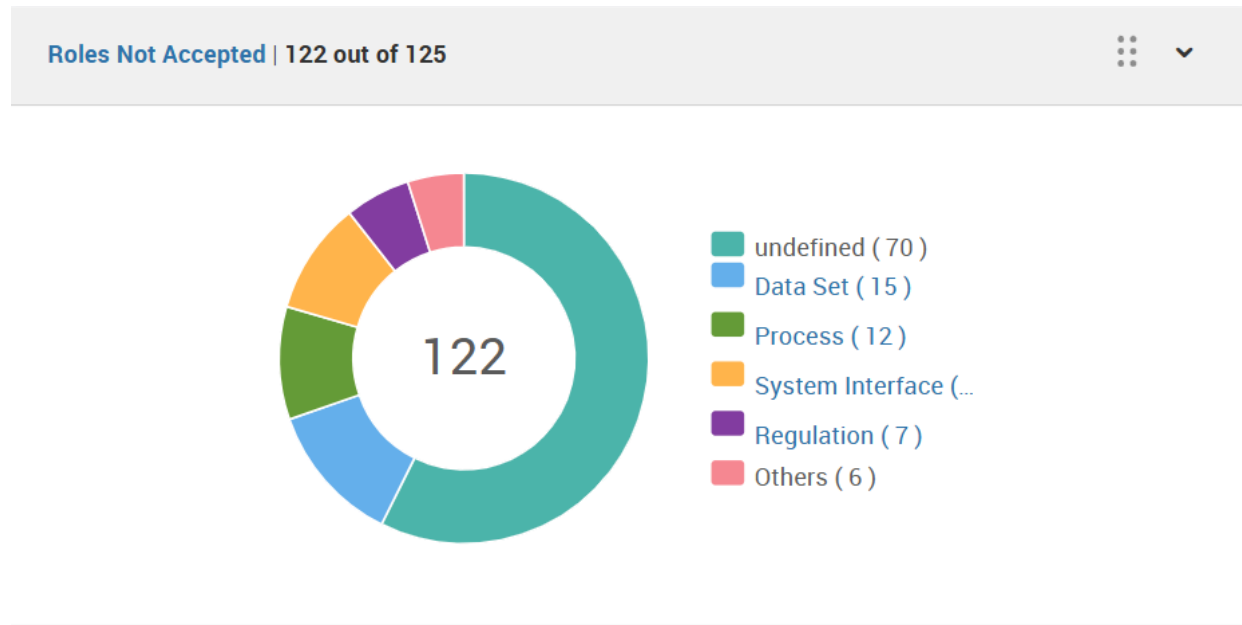

3) **Stakeholdership**

Displays a graph of facets for which **you (the logged in user)** are a stakeholder or owner. You can view the top five facet names and the count of facet objects for which you are a stakeholder or owner. The rest of the facets belong to the **Others** category. When you click the **Stakeholdership** link, Axon displays the **Responsibilities | All** view on your **My Account**

page. Click a colored segment on the graph to navigate to the roles and responsibilities for each facet in the **Responsibilities** tab of the **My Account** page (here we have no filter).

4) Saved Searches:

Lists the top five recent searches and most viewed searches. Recent search list is based on the searches that you opened recently (differs from a user to another) . Most viewed search list is based on the number of hits (column in the user_search table) of the saved search (same results for all of the users).

You can switch between **Recent** and **Most Viewed** tabs on the widget. When you click a search link, Axon opens the Unison search results page for the search. When you click the **Saved Searches** link, you can view the **Manage Searches** page that displays the saved and shared searches.

Saved Searches ▼	
Recent	Most Viewed
Name	Description
Datasets without stakeholder	datasets that don\'t have stakeholders
peopleSearch	test
process with glossary	test

Saved Searches ▼	
Recent	Most Viewed
Name	Description
process with glossary	test
Datasets without stakeholder	datasets that don\'t have stakeholders
peopleSearch	test





Note: If a shared dashboard contains widgets that are based on saved searches, Axon adds the saved searches to the **Searches Shared With Me** tab of your **Manage Searches** page (Abdelrahman)

5) Changed Requests:

Displays a pie chart of change requests that are assigned to you and the change requests that you have raised. You can view the change requests that are open for less than 7 days, 7 to 30 days, and more than 30 days. You can switch between **Contributing (I'm a stakeholder)** and **Raised by Me (created by me)** tabs on the widget. When you click the **Change Requests** link (or any of the bars) , you can view the **My Account | Change Requests** page that shows the current status of all your change requests.

This query can be used to get the number of CR the user is contributing to

```
5 SELECT COUNT(DISTINCT (crs.User_ID, crs.CR_ID))
6 FROM ChangeRequests crs
7 JOIN ChangeRequest cr
8 ON crs.CR_ID = cr.ID
9 WHERE crs.User_ID = ?
10 AND cr.CR_StatusID = 2;
11 |
12
```

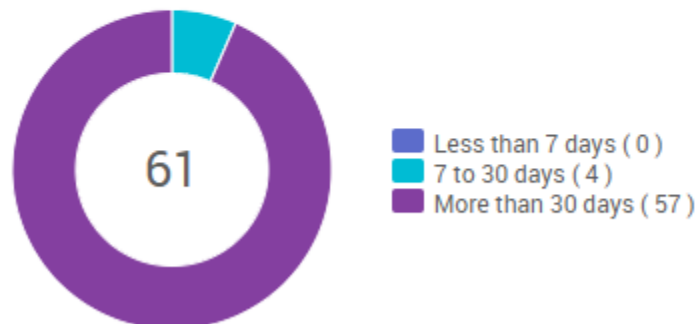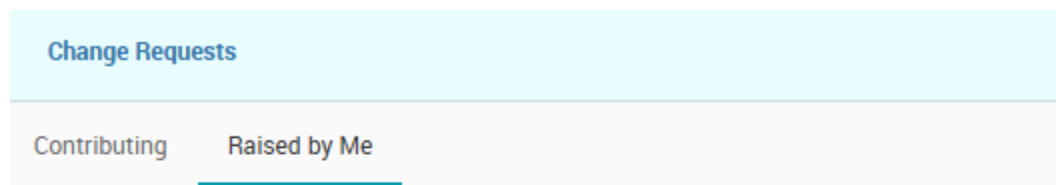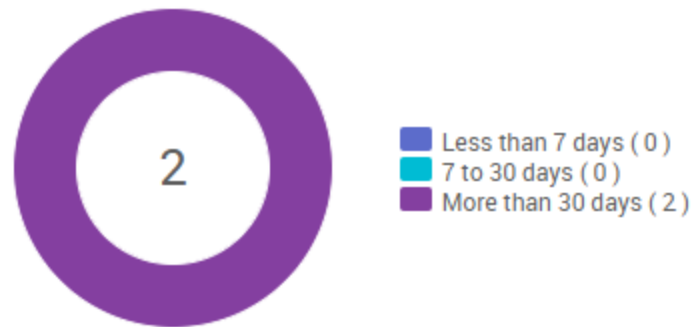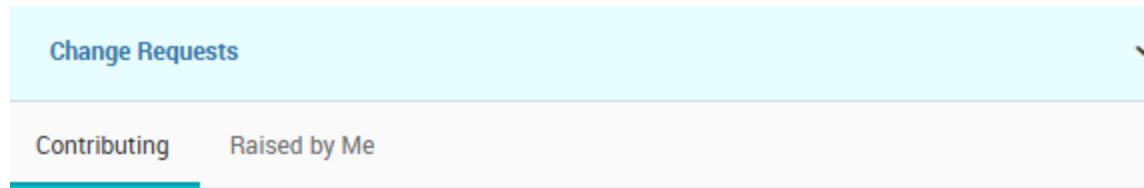6) Pending Tasks


7) Team:

Displays the reporting structure of your team.

You can view the following details:

- Management.** Displays the list of the managers that you report to.
- Peers.** Displays the list of other employees who report to the same line managers.
- Reportees.** Displays the list of employees who report to you.

When you click the **Team** link, Axon displays the **Team tab** on your **My Account page**. To view information about the **team members, you can click each name.**

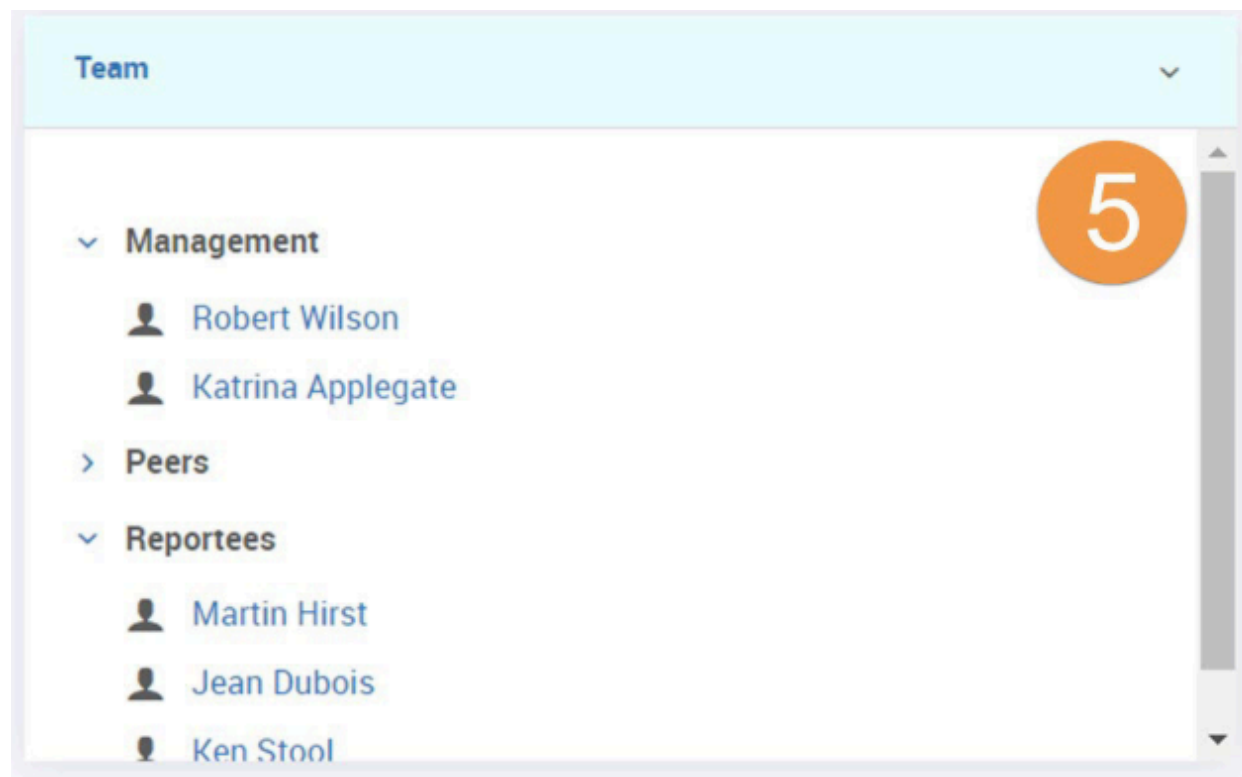

For any of the above mentioned widgets, if the logged in user doesn't have either roles or team or objects , etc... then we show him something like this:

Roles Not Acce...▼

You do not have any role that is not accepted.

Stakeholdership▼

You are not a stakeholder for any object.

- Actions Button:


a) New Widget:

You can add widgets to a dashboard to display the results of saved Unison searches. Instead of running a saved Unison search every time, you can add the search as a widget to quickly look at the search results in the dashboard. You can also add a text widget that you can use as a note or reminder

This is what appears when you choose add a new widget:

The screenshot shows the 'New Widget' configuration window. It is divided into two main sections. The left section, titled 'Select the source for the widget and visualization', contains a 'Widget Source' section with two radio buttons: 'Saved Search' (selected) and 'Text'. Below this are four input fields: 'Source' (a dropdown menu with 'Select a saved search'), 'Focus' (a dropdown menu with 'Select a facet'), 'Title' (a text input with placeholder 'Enter a title for the widget'), and 'Description' (a text input with placeholder 'Enter a description for the widget'). The right section, titled 'Visualize As', shows four icons: 'Doughnut Chart', 'Bar Chart', 'Count' (with the value '123'), and 'Table'. Below these icons is a 'Visualize By' section with a dropdown menu labeled 'Select a column'. At the bottom right of the right section is a 'Preview' button. At the very bottom right of the window is an 'OK' button.

- 1) Source reads from the user search table and beside each one we'll have a view search hyperlink to take us to the result of that saved search (in the unison search page)

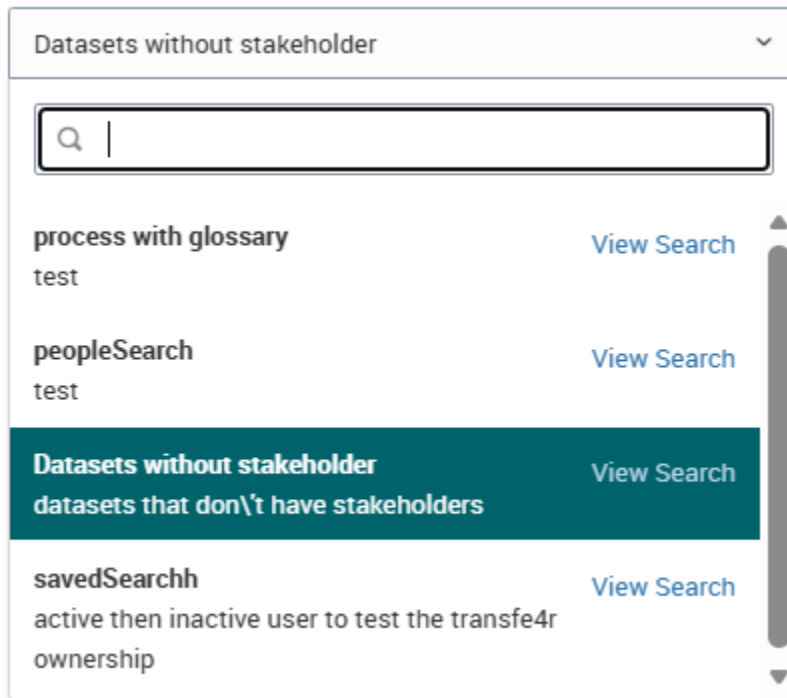

- 2) Focus > Facet Names (Module table)
- 3) Title > title of the newly created dashboard
- 4) Description > desc. Of the newly created dashboard
- 5) Visualize As:
 - a) If you choose Table: then the result of the selected saved search will displayed in a form of table. Example: here the field will be called Display: its values will be the column names of the previously selected Facet / Module

Visualize As *


Doughnut Chart


Bar Chart

123
Count


Table

Display *

Name ×

Description ×

Name	Description
No - Record client preference	No - Record client preference
No - Escalation	No - Escalationnn
ProcessTest	testing DB
nredprocessor	testing nredprocessor

b) Doughnut Chart: & Bar chart

The visualize By field will show the name of the columns that are dropdown

Visualize As*


Doughnut Chart



Bar Chart

123
Count


Table

Visualize By*

Lifecycle

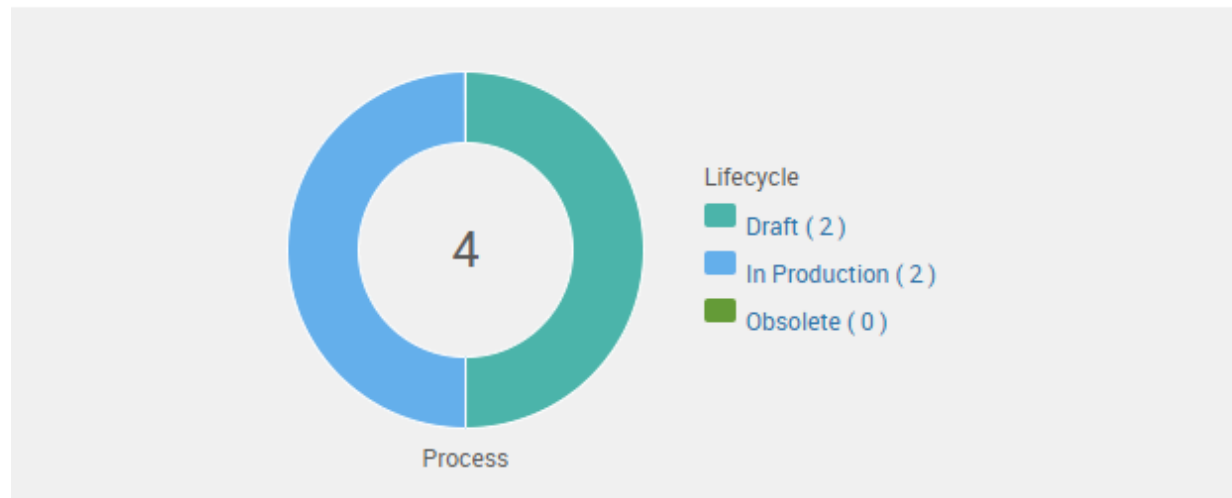

c) Count :

It just shows the number of objects resulted from that saved search

Visualize As*



Doughnut Chart




Bar Chart

123

Count



Table

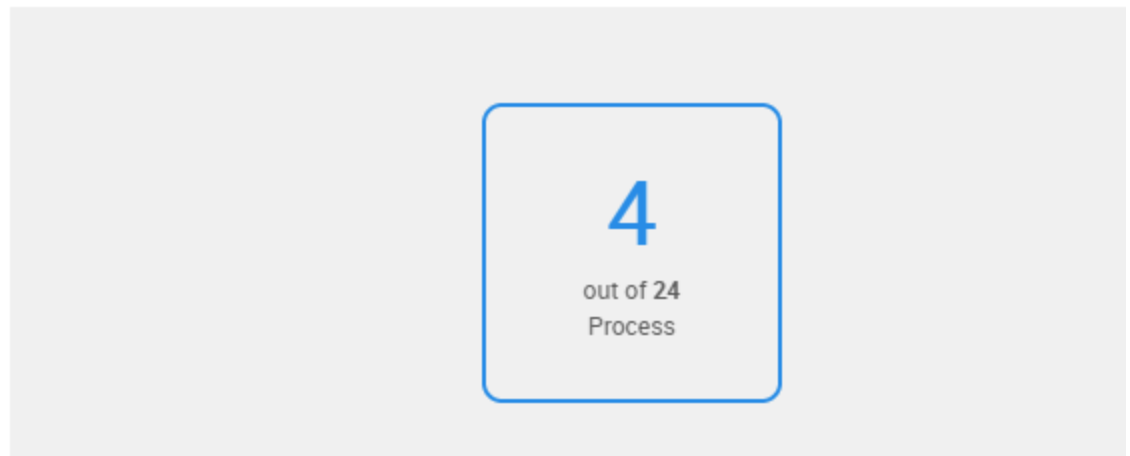

(note the selected saved search was process related thus when we selected process in the focus field we got the count = 4 but if we had chosen another unrelated facet , we would have got 0 count)

- If you chose from the beginning to create a text widget instead of saved search

new widget

Select the source for the widget and visualization


Widget Source ☐ Saved Search ☒ Text

Title*

Description*

test|

Let the user has the ability to change color ,
font, size, highlight, etcc

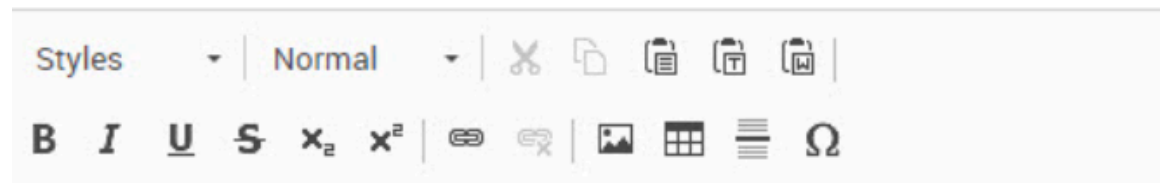

Teams:

Operations, Finance, Marketing|

b) Choose Widgets:

You can choose the widgets that you want to display or hide in each dashboard. You can also reorder the widgets in a dashboard if you want to arrange them by categories.

Note:

The widgets can be re-ordered as the user prefers

- ☒ Test
- ☒ Stakeholdership *(Default)*
- ☒ Saved Searches *(Default)*
- ☒ Roles Not Accepted *(Default)*
- ☒ Object Counts *(Default)*
- ☒ Change Requests *(Default)*
- ☒ Pending Tasks *(Default)*

c) New Dashboard:

New Dashboard ×

Name *

Enter a title for the dashboard

Description *

Enter a description for the dashboard

☐ Set as Default

OK


Cancel

Set as default: Optional > choosing to displaying the dashboard as the default one when you log in to axon

d) Clone Dashboard:

Only for the created dashboards not the default one.
Copying a whole dashboard and creating a new one
It will take the same name of the original dashboard
and then append - copy at the end of it and will take also
the same description (these 2 can be changed)

But if the original dashboard was shared with some
users, the cloned dashboard won't have these users, we
should modify the sharing of it manually.

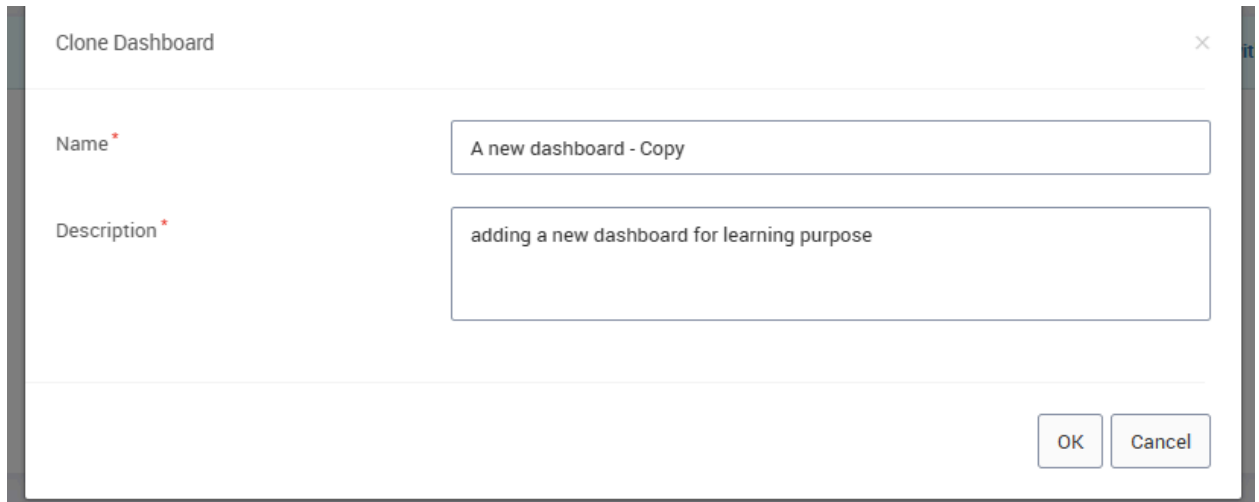A screenshot of a 'Clone Dashboard' dialog box. The dialog has a title bar with 'Clone Dashboard' and a close button (X). It contains two input fields: 'Name' with a red asterisk, containing the text 'A new dashboard - Copy', and 'Description' with a red asterisk, containing the text 'adding a new dashboard for learning purpose'. At the bottom right, there are 'OK' and 'Cancel' buttons.

Clone Dashboard

Name * A new dashboard - Copy

Description * adding a new dashboard for learning purpose

OK Cancel

e) Edit Dashboard:


Let us edit either the name / description or the option of set as default of the dashboard.

f) Delete Dashboard

g) Choose Dashboards:

Dropdown showing all of the names + description of each dashboard + whether it is the default dashboard (the one already exists from the beginning) or that is shared with x users where x is the number of users, or whether it is not shared with anyone.

This feature Allows us whether to show all of the dashboards or not at the top of the screen. Multiple dashboards can be selected.

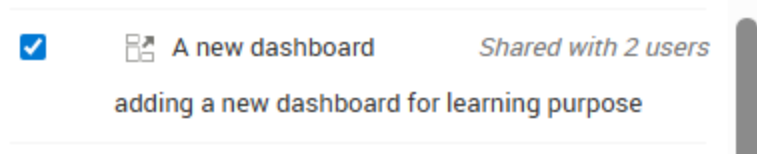


After choosing the dashboards, they'll be displayed at the top as follows




Note that when we hover over any of the above dashboards, we should see a tooltip for its name, description, who has created it, and whether it's shared with users (with their count) or not

Example:

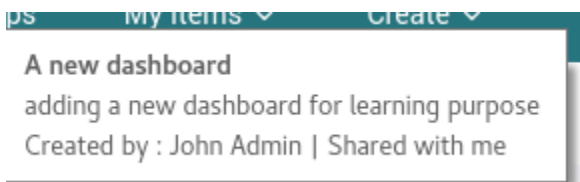

(note the default dashboard will have created by : You for all of the users, Shared with : None)

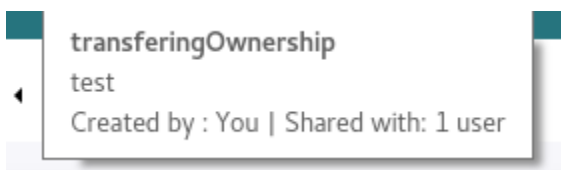

Here in this dashboard, i logged in using Sally's Account who created this dashboard, thus for sally she will see that

it is created by You but for the shared users , they're gonna see the name of Sally

And they're gonna have shared with me instead of the seeing the number of users.

h) Modify Sharing:

Sharing is only possible for the created dashboards (not the default one)

The screenshot shows a 'Modify Sharing' dialog box with a close button (X) in the top right corner. It contains two radio button options: 'Share with public' (unselected) and 'Share with selected users' (selected). Below the selected option is a text input field with a dropdown arrow, currently showing 'Upload User File'. To its right is the word 'and' followed by another dropdown menu showing 'Append'. Below these is a file selection area with a button labeled 'Choose File' and two buttons labeled 'Download Template' and 'Export Data'. A checkbox labeled 'Share searches used in the dashboard widgets.' is checked. Below this is a link 'Show shared list'. At the bottom, there is an 'Stop sharing' radio button option. At the very bottom right are 'Save' and 'Cancel' buttons.

Modify Sharing

☐ Share with public
Share the dashboard with all users in your organization.

☒ Share with selected users
Share the dashboard with specific users.

Upload User File and Append

No file selected Choose File Download Template Export Data

☒ Share searches used in the dashboard widgets.

[Show shared list](#)

☐ Stop sharing
Do not share. If the dashboard is already shared with some users, it will be removed from their view, but the shared searches will remain in their 'Searches Shared With Me' page.

Save Cancel

Share with public : sharing the dashboard will all of the users.

Stop Sharing: if we already shared the dashboard with users then we can stop this share by choosing the last option

Share with selected users: this can happen using one of two ways:

- 1) Bulk Uploading a set of users at the same time (this one will be assigned to abdelrahman).

As seen in the previous screen shot we can choose either to append or overwrite the users.

Download template: provides us with the template of the users

A	B	C	D	E
User ID	First Name	Last Name	Email	

Export data: is used to show us which users is this dashboard shared with (if there's any)

User ID	First Name	Last Name	Email				
5	Sally	Ghozal	sally@informatica.com				
12	Segment	Admin	segmentsadmin@informatica.com				

2) Select Users Manually: where one or multiple users can be selected

☒ Share with selected users

Share the dashboard with specific users.

Select Users Manually ▼

admin user × Liam Johnson ×

☐

admin two

☒

admin user

☐

Jadara Trial

☐

John Admin

☒

Liam Johnson

☐

Liamm Johnsonn

Note: if the dashboard is not shared with anyone or shared with specific people only then the column is Public in the dashboards table is False.

i) Export Dashboard

Export Dashboard

Set as Default

Hide Description

PDF

PNG

JPEG


j) set as default:

Note only one dashboard can be set as default.

k) Show Description


And if it's already shown then that option will be hide description

Showing it, will display the description, and who has created it , shared with whom. under the names of the dashboards as follows



Note:

If we set a dashboard as the default one, then under the description we'll have a sentence saying that this is the default dashboard.




Note that if i'm previewing a dashboard that is shared with me (i'm not the one who created it) then only these actions will be enabled for me:

- New Dashboard
- Clone Dashboard
- Export Dashboard
- Set As Default
- Show / Hide Description

Note

Home page also has actions but only these ones

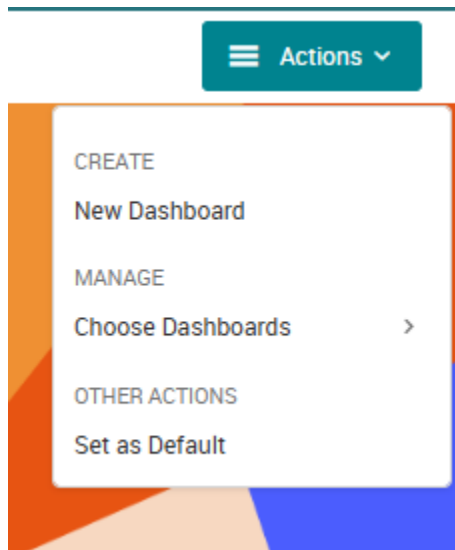

Also setting this home page as default will remove the default from the other dashboards.

Setting a dashboard as default, means that when we go to the landing page, we'll see that default dashboard whether it was the home page or one of the created dashboards.

Deletion

Objects are just deleted from the UI, without being deleted from the database.

In the row of that object, we're going to set the deleted date to system's (now's) date.

Conditions for deletion:

- The status for that object must be Deleted.

Note

- The condition to change the Axon Status of an object to Deleted does not apply to the Geography and Regulator objects because they do not contain the Axon Status field.
 - When you configure the object status to Deleted, Axon hides the object for the WebUsers (**thus admins and super admins can see it same as when the object is set to be non public**) from the Unison search.
 - After you delete an object, the object is permanently removed from Axon. You cannot view the object in the Unison and Quick searches.
- The object shouldn't have anything in the impact tab.
 - If the object still has stakeholders, and the user attempts to delete that object, we are going to display a warning saying that the object has stakeholders do you want to proceed or not.
 - The object does not have any child object. If it has then we can display a message asking the user whether he wants to unlink all of the dependencies and then delete the object, if he's

chosen Yes then that child will have no parent, and the object itself will be deleted.

Let's assume this hierarchy: $A > B > C$

If we want to delete B then we should get the previous warning and if we clicked on Yes then B will be deleted, and C will have no parent.

Note: if we want to delete a system that has datasets inside then we should get 2 warnings, First the one in red, and then the previous warning which asks the user whether he wants to unlink the dependencies, if he clicked on yes, then that dataset will be deleted first and then the system will be deleted.

This system is linked to one or more data sets for which the Axon Status might not be set to Deleted.

CHECK THIS LINK STARTING FROM THE PBF TILL BEFORE THE ADDITIONAL INFORMATION

[HOW TO: Delete an object in Axon](#)

Note:

1) Regarding the geography points written in the previous link

A Geography object must not have links to Regulator and Legal Entity objects. (impact)

- A Geography object must not have links to any regulation through a regulator.

(Regulation_X_Regulator_X_Geography table)

 This Geography object has linked regulators.
 This Geography object is linked to regulations through a regulator.
 Unlink the objects and try again.

Rest of Admin Panel

Note: Admins can see and edit all of the tabs in the admin panel except for some tabs that he can't see at all as Role Permissions in the DG operating model, the dropdown configurations tab in the meta model tab ,in the customize and configure tab he can only see the app systems which will display glossary rollup, quick links and data quality subtabs ONLY

For the following tabs, he can see them but get permission denied when he tries to edit :

- Default WF in the DG operating model**
- Roles and responsibilities (sees it but can't edit it).**
- Ownership Transfer in the operational management tab.**
- For the locked users tab, he can see the tab from outside but he can't either see the users being locked or edit it.**
- He can see the segments made but can't add a new one.**

1) **Licensed Users:**

By default any user who has the User Profile as Admin or Super Admin, will be considered as **Licensed Users**. Additionally, the users who have Roles assigned to them which have the permissions to edit or create the objects for a respective Facet, will also be considered as the Licensed User.

If the Axon Status field for a user is "**Inactive**" or "**Deleted**," you cannot view them in the list of licensed users.

2) Locked Users:

Users who have tried to log in 5 times but they failed in these 5 Successive trials.

You could unlock Axon users that have been locked out of their accounts. To unlock the user accounts through Axon Admin Panel, you must have the SuperAdmin profile.


Locked Users Super Admin can edit Axon objects			
LOCKED USERS			
Email	User Name	Role	Last Attempt Date
dataowner@informatica.com	Data Owner	WebUser	2024-10-31 16:44:08
1 record			

3) Transfer Ownership of Dashboards and Shared Searches

The SuperAdmin user can transfer the ownership of dashboards and shared searches from one Axon user to another. The ownership transfer is possible only if the owner of the dashboard or the shared search is an inactive user (status = inactive). Axon does not permit transfer of ownership between two active users.

Let's say user A has made a dashboard containing several widgets, one of them included a saved search that was also created by him. Then if this user has become inactive then, nothing will appear in the admin panel > Operational Management > Ownership Transfer **Unless** the dashboard / saved search was shared with users.

If they were shared with users (any user not just the super admin) then they will appear in the dashboard / search tabs

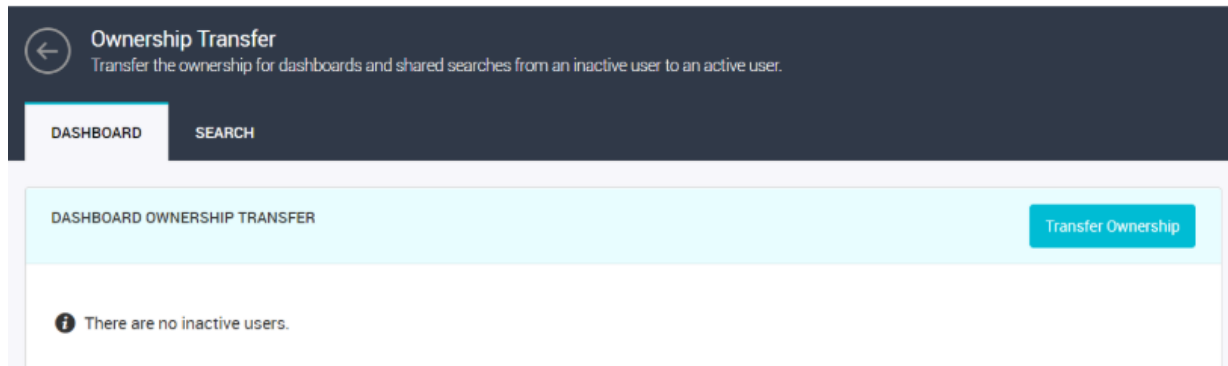

Lets say the user segment admin made a dashboard called tt and shared it with Liam, then if the status of segment admin became inactive then the dashboard will appear in the tab as it is shown.

DASHBOARD

SEARCH

DASHBOARD OWNERSHIP TRANSFER

Transfer Ownership

Previous Owner	User Inactive From	Dashboard Name	Description	Sharing
Segment Admin	29-Oct-2025	tt	tt	Limited

Then select the row, and click on the transfer ownership button

Transfer Dashboard Ownership

New Owner

Select a user

☒ Transfer the ownership of searches within the selected dashboards

i

The ownership of shared searches will be transferred only if they are owned by inactive users.

OK

Cancel

Transfer the ownership of searches within the selected dashboards means that if any of the widgets included a saved search then its ownership will be transferred as well to the selected user (if he was the owner of the included saved search).

If a user is an owner of a dashboard and 3 saved searches (one is public, one is shared with specific people , and the third is private). If this user's status has become = inactive, then the ownership transfer tab will only show the dashboards / saved searches that are shared with specific people (limited sharing) without displaying the public one as it is already shared with all of the other users (thus it will appear to them in the **searches saved with me** tab in the manage searches page and it will appear to its owner (who is an inactive one now) in **saved searches** tab in the manage searches page.

The transfer can be to any user even if the inactive user didn't share the dashboard / saved search with.

(even if the inactive user became an active one , then he won't be the owner of the saved search / dashboard whose ownerships were transferred before)

Note: make sure the dashboard / saved search can't be shared with the owner. (if the user selected to share them

and he typed his username then output a message telling him to choose another user)

- Let's say that while sharing the dashboard, we didn't check the share searches used in the dashboard widgets,

☒ Share with selected users
Share the dashboard with specific users.

Select Users Manually ▾

Select users

☐
Share searches used in the dashboard widgets.


[Show shared list](#)

☐ Stop sharing
Do not share. If the dashboard is already shared with some users, it will be removed from their view, but the shared searches will remain in their 'Searches Shared With Me' page.

Save Cancel

then this means that any widget inside the dashboard that included saved search, this saved search itself won't be shared with users but the dashboard itself will appear.


What if we transferred the ownership of this dashboard to another user, then in the widget of saved search he will see something like this only in the widget of the saved search while for the other widgets he'll see them.

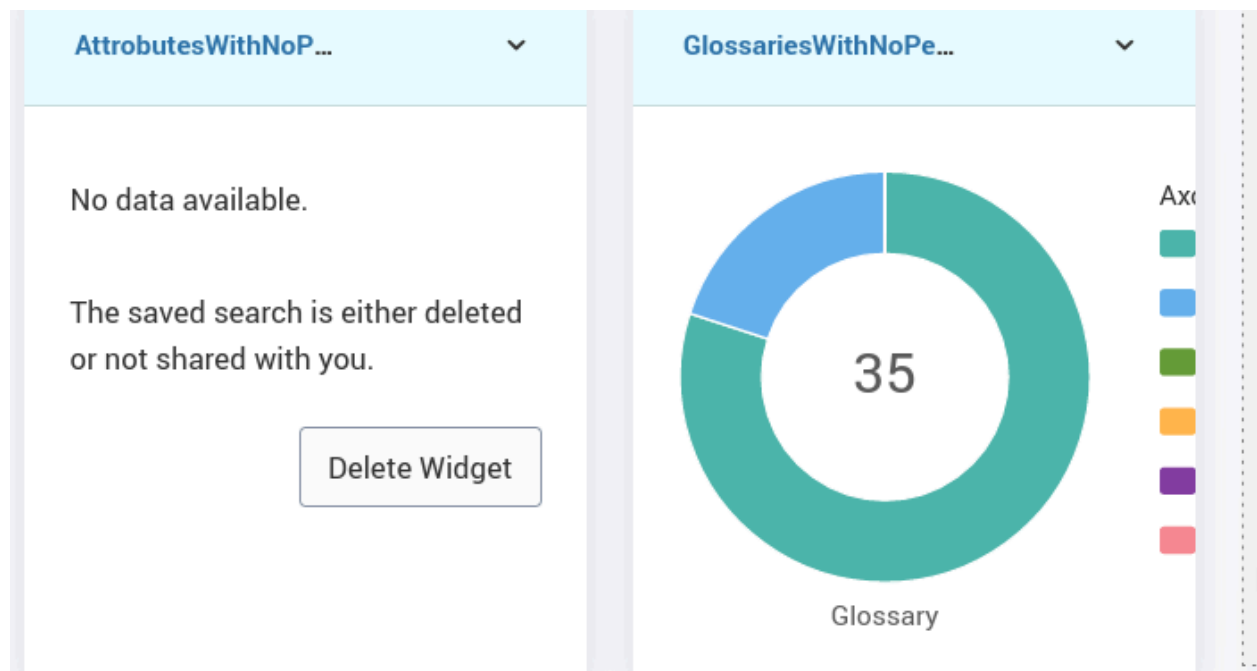

If he clicks on the delete widget , it will be deleted.

Let's say we had a saved search / dashboard that were made by user X and shared them with users A and B , if we transferred the ownership to any user (let's say C) then it will still be shared with A and B.

And if we have chosen to Transfer the ownership of searches within the selected dashboards, then these saved searches will be shared with A,B, and C

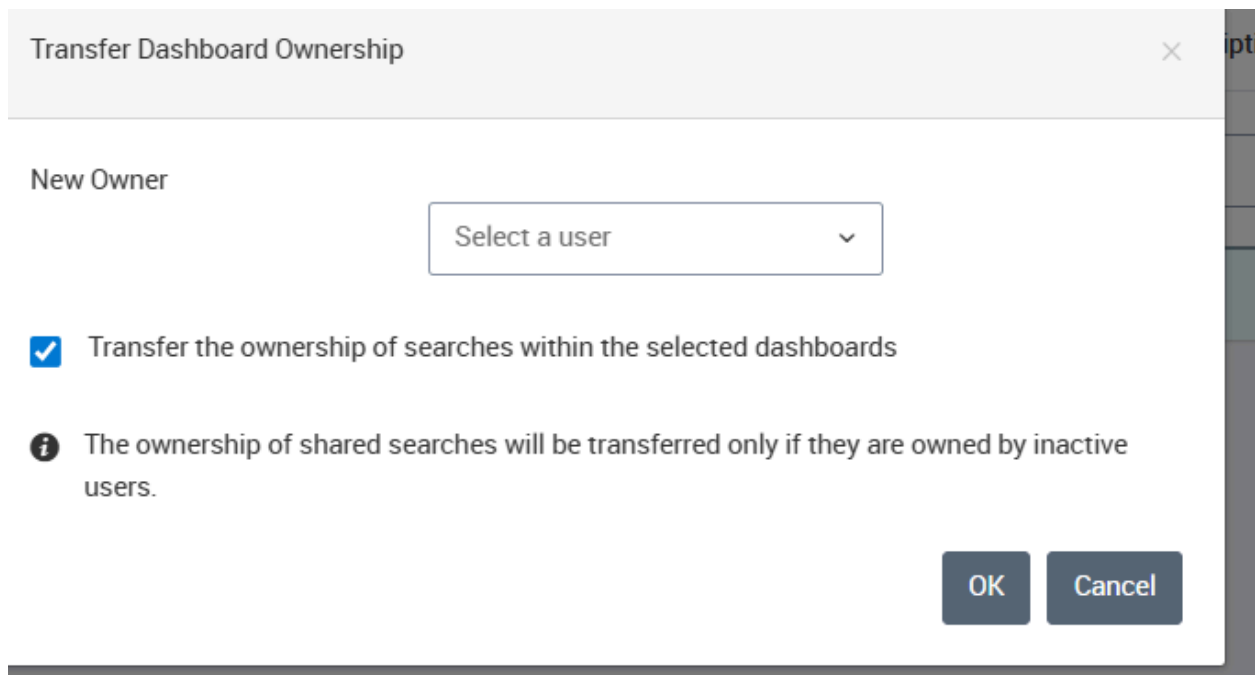


The screenshot shows a dialog box titled "Transfer Dashboard Ownership" with a close button (X) in the top right corner. Below the title bar, there is a section labeled "New Owner" followed by a dropdown menu with the text "Select a user" and a downward arrow. Below this, there is a checked checkbox with the text "Transfer the ownership of searches within the selected dashboards". Underneath the checkbox is an information icon (i) followed by the text "The ownership of shared searches will be transferred only if they are owned by inactive users." At the bottom right of the dialog box, there are two buttons: "OK" and "Cancel".

- Same thing for the saved search tab (either saved searches that were included in a dashboard, or not included but they were defined before)

4) Glossary RollUp:

Admin Panel > Customize and configure > App settings > Glossary RollUp:


From here you start to choose the type of the glossary that you want to display in the impact and data tab of the glossary objects.

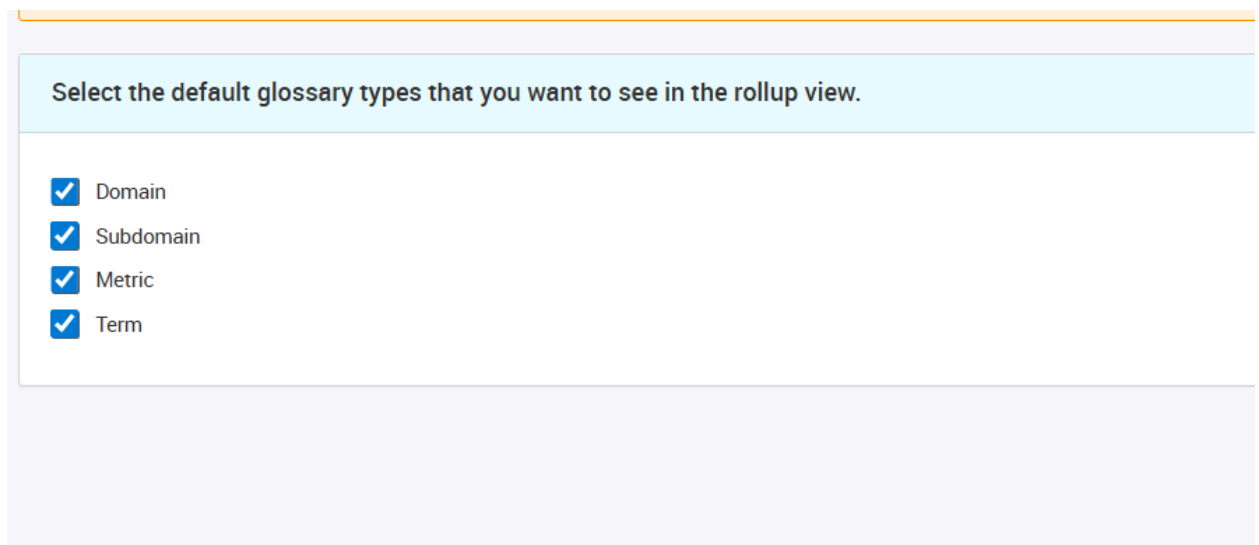

Select the default glossary types that you want to see in the rollup view.


- ☒ Domain
- ☒ Subdomain
- ☒ Metric
- ☒ Term

Then in the view page of a glossary > arrow next to the edit button, you can either choose to show rollup view or to hide it

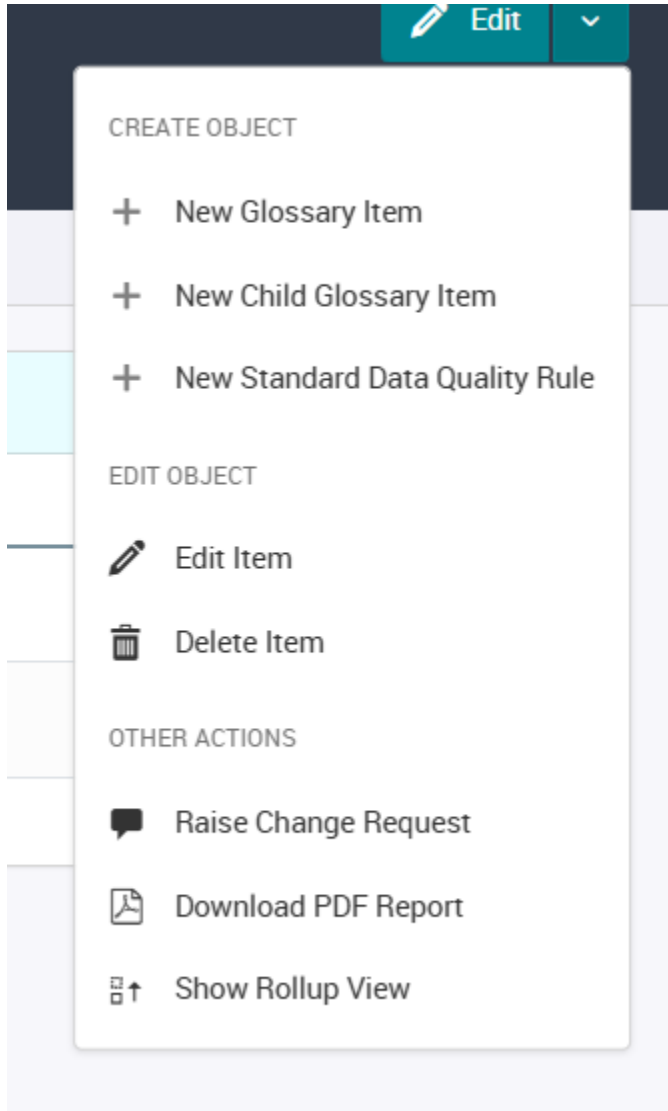

(if you choose Show Rollup view then, the option in the list will be Hide Rollup view and vice versa)

Note: if you choose to show the rollup view then under the object name, write that you're showing it



Show Rollup view is responsible for displaying other objects that are linked to the children of the opened glossary in the impact / data tabs.

For example, let's say we've opened Glossary X that has children glossX, and Products (that has a child called products child). Then, if we're showing the rollup view, we'll also see the objects linked to these children (the orange rows). If in the admin panel we choose not to display the subdomain, then we won't see the glossX row (last row) because the type of this glossary is subdomain and so on.

SUMMARYRELATIONSHIPS DATA QUALITYSTAKEHOLDERSIMPACT DATA ENTERPRISE CATALOGHISTORYCHANGE							
Process	Project	Policy	Product	Client	Capability	Business Area	
POLICY							
Relationship Type	Name	Ref.	Policy Type	Policy Owner	Child Policy	Child Glossary	Child Glossary Type
Glossary item is regulated by Policy	 policyyy	POL-12	Conduct Standards				
Glossary item is regulated by Policy	 Data Retention Policy	POL-1	Conduct Standards	Liam Johnson			
Glossary item is regulated by Policy	 policyyy	POL-12	Conduct Standards		Products	 Products	DOMAIN
Glossary item is regulated by Policy	 Data Retention Policy	POL-1	Conduct Standards	Liam Johnson	product child	 product child	DOMAIN
Glossary item is regulated by Policy	 Data Retention Policy	POL-4	Conduct Standards		product child	 product child	DOMAIN
Glossary item is regulated by Policy	 AML Policy - 2025	POL-3	Conduct Standards		glossX	 glossX	SUBDOMAIN

If we choose to hide the rollup view then we won't see the objects linked to the children of the opened glossary (we won't see the orange rows)

draft

- 1) After creating the object, i will have all of the non null fields mentioned in the history tab
- 2) If a change happened in the summary tab, the update type will be Update (in number 1 it is Added), and the object will be system
- 3) If a change happened in the stakeholders the object will be stakeholder (----- _X_objectXpeople)
- 4) Note: Update type > Added, Update, Status Change (this is for one of the fields as lifecycle, classification, etc..)
- 5) Process X System
- 6) Interface only when the opened system is the target system
- 7) System X client
- 8) Any — X System

Glossary > relationship > relationship > Glossary_x_Glossary,
object_X_ip, objectRole, People

Draft2

```
select * from attribute_x_attribute
where sourceAttributeID = 63
and targetAttributeID = 8
```

```
SELECT * FROM ATTRIBUTE WHERE ID = 63
SELECT * FROM ATTRIBUTE WHERE ID = 8
```

```
SELECT * FROM DATASET WHERE ID = 1
SELECT * FROM DATASET WHERE ID = 2
```

```
SELECT * FROM SYSTEM WHERE ID = 1
SELECT * FROM SYSTEM WHERE ID = 2
```

```
SELECT * From system_X_system where sourceSystemID= 1 AND targetSystemID = 2
SELECT * From system_X_system where sourceSystemID= 2 AND targetSystemID = 1
SELECT
    axa.sourceAttributeID,
    axa.targetAttributeID,
    sxs.name AS interface_name      -- or sxs."PrimaryName" if that's your exact column
FROM attribute_x_attribute axa
JOIN attribute a_src ON a_src.id = axa.sourceAttributeID
JOIN attribute a_tgt ON a_tgt.id = axa.targetAttributeID
JOIN dataset d_src  ON d_src.id = a_src.datasetID
JOIN dataset d_tgt  ON d_tgt.id = a_tgt.datasetID
JOIN system s_src   ON s_src.id = d_src.systemID      -- not masterSource (adjust if needed)
JOIN system s_tgt   ON s_tgt.id = d_tgt.systemID
JOIN system_x_system sxs
    ON sxs.sourceSystemID = s_src.id
    AND sxs.targetSystemID = s_tgt.id
WHERE (axa.sourceAttributeID, axa.targetAttributeID) IN ((63,8),(1,6),(3,7));
```

```
select * from public.sysxsys_x_glossary
```

Notifications

Check the following link:

https://onlinehelp.informatica.com/axon/7.2.1/en/index.htm#page/axon-data-governance-administrator-guide/Configure_Email_Notifications.html

There are two types of email notifications:

- Instant Emails
- Non-instant Emails (Daily Emails, Weekly, and Monthly Emails)

The users receive emails based on the type of action/trigger. Instant Emails are triggered for cases such as:

- If a workflow task is assigned to the user.
- If a dashboard is shared with the user
- If the dashboard is stopped from sharing.
- If the shared dashboard has been removed.
- Users will receive emails instantly when he has been tagged in workflow discussion.
- cancelled/completed CRs are considered as instant email.

The rest of the things categorize as Daily Emails. Things such as the following:

- Role acceptances awaiting approval.

- Pending workflow actions. Includes discussions that the users are part of and users have not yet contributed to.
- A summary of changes that a user has made to an object where you are either the stakeholder or a follower. If you are part of a change request where you have been assigned a role, the content of the notification email can vary based on whether the role is included in the underlying workflow.
- If an Axon user shares a search, the other user will automatically be informed of the shared search by email.

Note:

- To know the value set for the frequency of the email , you can find it either in the email options in system settings of the admin panel , or in the profile of the logged in user > Activity stream

- In application settings in the admin panel, you can find configure notifications , where you either enable or disable the notifications for the CRs and the WFs

So for example if you disabled the notifications for the WF then, any trigger such as a task assigned to a user

or tagging a user in the workflow discussion would not receive any email notification.

And disabling it for the CRs, then they won't be notified when a CR is raised / cancelled / completed.

Segmentation's Updates

First: Custom Field in Bulk Upload

Any added custom field in any facet should appear in the template of the bulk upload

❖ Validation for the type of the added custom field:

The type of value that the user can enter in the custom field.

-Text: The user must enter a text string.

-Number: The user must enter a numeric integer value.

-Decimal: The user must enter a numeric integer value or decimal value.

Note: If the user enters a decimal value, the integer part of a decimal value cannot exceed 13 digits.

-Date: The user must select a date. **You cannot select the Date type for the Data Attributes facet.**

-Check Box: The field is a check box that the user can either select or clear. (in the template treat it as a dropdown with 2 values true and false)

-Time: The user must select a time. **You cannot select the Time type for the Data Attributes facet.**

-Percentage: The user must enter a percentage value.

-Dropdown: The user must select a value from a list of dropdown values.

Note:

1) There are two dropdown types: single selection (only one value can be chosen) , multiple selection (which allows the user to choose 1 or more than one value).

2) If there's a default value specified for a field, then display this value by default.

3) The custom field can be specified as mandatory or optional. Thus, if it's mandatory then display an error message if the user didn't enter the value of it.

4) If there was a description specified for the custom field, then it should appear in the note attached with the custom field.

test2	t Optional.
1,3	
	desc

Second: Segmentation in Bulk Upload:

- 1) If Information Segmentation has been activated, upload templates will automatically add a column to facilitate segment allocation.

The Segment field is shown as Optional in templates. There is a new Segment selection menu in the upload menu – the choice you make in here determines whether the template's Segment field needs to be populated:

The values in this field are: Multiple , Enterprise (public segment) and all of the other segments that he has access upon.

**(super admins can see all of the segments,
Admins can see segments that he's an admin upon
and segments that he has access for,
Web users can only see the segments that they have
access upon)**

- o If you wish to load all content in file to one segment, the field isn't strictly needed...although you may wish to complete it for good practice.

- o The Segment column of the template should be treated as mandatory if you choose to add content to Multiple segments.

Note:

If the user has chosen a specific segment , and then in the template he's chosen another segment then he should get an error.

2)Add the templates of things related to segments as Segments X Objects.

Third: Deletion in Segmentation:

Validate the deletion processes made upon objects.

Admin Logs

Include all of the operations made by Super admins and Admins:

The activity logs display the following information :-

Id

The serial number for the activity log.

Setting

Settings that were changed by the Admin or SuperAdmin user. Examples include Role Permissions, Default Workflows, and Dropdown Configuration.

Component

The component within a setting that the Admin or SuperAdmin user has changed. For example, in the System Settings setting, Dashboard is a component.

User

The name and email address of the Admin or SuperAdmin user who made the changes (in the dropdown menu of it , you can see all of the user names of all of the admins and super admins.

Change Type

The type of change that an Admin or SuperAdmin user has made. The values include Create, Update, Delete, and Other Actions. The Other Actions type includes downloading logs, and running the LDAP synchronization.

Timestamp

The date and time at which an Admin or SuperAdmin user made the changes.

Details

The details of the change made by an Admin or SuperAdmin user. For example, if an Admin or SuperAdmin user changes a user permission from "View" to "Edit," you can view the previous and changed values when you click the Details link.

Note:

You can export the logs to a CSV format through the grid icon in the upper right corner of the screen. Where

you cannot view the previous values for workflow diagrams, styles, and logos.

Filters

You make use of the filters provided to get the relevant information .

Search Details:

By writing any word that is included in any log (in any column), this log will be returned

Things to consider:

1) Let's say we're in the Create case:

Then it's a must to see a row for each mandatory field where the old value is empty and the new value has the value specified during creation.

And if any of the optional fields were specified, each one will have a separate row too.

2) Update Case:

We record any field that has been updated. Thus we have values in the old value and in the new value columns.

3) **Delete Case:** we only have values in the Old Value column

A) Segments:

Here the components will be the segment name.

- Creation:

Change Details				
Field Name	Old Value	New Value		
Segment Name		Logs		
Segment Description		desccc		
Admin User(s) Assigned		aDMIN Two		
			3 records	
			Close	

- Update:

- Any update that happens to at least one of the previous fields will result in 1 row per each change.

- Delete:

Change Details				
Field Name	Old Value	New Value		
Segment Deleted	Logs			
Segment to which Objects are moved to		seg		
			2 records	
			Close	

Note:

Role permissions > for each role, 1 row for each permission. example: if at one point someone added 2

permissions for a specific role , view and new then we'll have 2 rows one for each.

B) Role Permissions:

Components are the column names as Module, Role and Permission (in the 3 cases)

C) Default Workflows:

Components here are: Facet Name where the WF was made + WF name.


- Create:

All of the mandatory fields + any specified optional fields + WF

Change Details

Field Name	Old Value	New Value
Name		Sys_WF
Description		creating a new wf for understanding purpose (DE)
Type		Request For Change

Workflow Diagram:



```
graph LR
    start((start)) --> verify[verify]
    verify --> validate{validate}
    validate -- validated --> end((end))
    validate -- not validated --> rejected((rejected))
```

The diagram shows a workflow for the '12-System Business Owner' role. It starts with a 'start' node, followed by a 'verify' task. After 'verify', there is a decision node labeled 'validate'. If the validation is 'validated', the flow goes to an 'end' node. If it is 'not validated', the flow goes to a 'rejected' node. The roles '12-System Business Owner' and '25-System Steward' are listed on the left side of the diagram.

- **Update:**

Any Updated field and / or diagram. In the case of diagram update, show the diagram before update in the old value and the new one in the new value.

Note:

If we export the Default Workflows to CSV, then in the row of the diagram , we'll see view value in admin activity logs page.

D) Default CRs:

We just have the Update case here.

Components > 1 of the 4 facets of it.

Record, any info either in main page of the default CRs or in the page of the enable WF for facet types

Example for an update:

Change Details			✕	
Field Name	Old Value	New Value		
Enable Workflow for Facet Types	false	true		
Settings for Facet Types - Data Set - Default Workflow for Creating Object	Inherited from Facet	DefaultWorkflow-2-DataSet		
			2 records	
			Close	

E) Roles & Responsibilities:

Components here is the role name

No delete case here.

F) Custom Fields:

Components here is the facet name where the custom field was created.

In the create case:

We'll have at least 3 rows: Name, Is Mandatory and Type. if any of the other mandatory fields is specified then we'll have a row for it too.

Update and delete cases as explained in previous settings.

G) Dropdown Configurations:

Components here is the name of the facet field where I have added a new value.

Create: Let's say in the glossary X system relationship type I've added value X, then

for the component: glossary X system relationship type, we'll see in the details for the Primary Name row , the old value will be empty and the new one will be X , and if we specified the description then we'll see a row for it too

Update and Delete are the same.

H) Download Logs >

Only the case of Other Actions: a row for every time the logs have been downloaded through "Download Logs". No details columns for this one.

I) Administrator's Panel >

is for the LDAP Synchronization. Its case is Other Actions too.

J) Ownership Transfer >

Components here is either Dashboard Ownership Transfer or Saved Search Ownership Transfer

We just have the Update case for this one.

Where the field name will be:

Type of transfer + name of the object.

For example: Dashboard Ownership Transfer - Report Dashboard

Old value: Name of the previous owner.

New value: Name of the new (current) owner.

K) Deleted Objects:

Delete Case Only.

Components here is the facet name from which the object was deleted.

It has just 2 columns: Field Name, Value (which is the value of the corresponding field of the deleted object). The table is just 3 rows, one for the id, one for the name, and other for the description.

Change Details	
Field Name	Value
Id	11
Primary Name	Fname
Definition	Customer's first name

L) Roles Assignment:

Components here are the facet name.

Just 3 rows: One for the facet name, one for the role name and the other for the members that were assigned to this role.

M) App Settings:

Update case only.

Components > settings configured in this tab as quick links, etc...

If component = “Quick Link” > info of the chosen saved search

Field Name	Old Value	New Value
Name		Datasets without stakeholder
Description		datasets that don't have stakeholders
Created On		Fri May 09 2025 20:02:51 GMT+0200 (Eastern Eur...
Created By		John Admin
Is Public		false

5 records

If component = “ Display Settings”

Field Name	Old Value	New Value
Active Facets for Unison	DataSet Attribute System Glossary Data Quality People Role	Policy DataSet Attribute System Glossary Data Quality Process Project

If component = “ Search Settings”

Field Name	Old Value	New Value
Enable fuzzy search	false	true
Hide non-public objects	false	true

If component = “ Glossary RollUp”

Field Name	Old Value	New Value
Default Rollup Glossaries	Domain,Metric,Term	Domain,Subdomain,Term

N) System Settings:

Update case only.

The components > configurations found in this tab as Environment, etc...

Any changes made in any configuration page will reflect here.

For example:

Here in the environment, multiple of fields were updated thus, this table contain all of these updated fields as the following:

Field Name	Old Value	New Value
Map System Threshold	300	400
Map Dataset Threshold	1000	1300
Map Attribute Threshold	5000	6000
Default History Duration	6	9
Data Migration	false	true
Clear Notifications	0	30
Hide Fields	false	true

While in this one, only one field was updated thus the table here is much smaller:

Field Name	Old Value	New Value
Data Migration	false	true

M) Manage Locks:

Used to track the locks removed from objects.

Components here is “Object Lock”

Delete Case Only with 2 columns one for the field name and the other for the value of it.

Field Name	Value
Id	3
Object Name	Total Revenue
Object Description	Total revenue generated from sales.
Object Type	Glossary
Permanent	true
Locked By	Sally Ghozal

N) Locked Users:

Tracks all of the times a super admin removed a user from the locked users. For each user, you'll display 6 rows

Change Details



Field Name	Value
Id	4
Name	Mayar Kamel
Email ID	mayar@informatica.com
Function	
Org Unit	Group
Profile	WebUser

1 record

Close

O) User Preference:

Only the Update Case.

This is used to track the changes made to the layout of the unison grid / each facet.

Components here is the
Facet Name + Unison Grid.

Searching for related obejcts

For all of the facets, these are general things to display :

impact, roles, people having these roles, org unit of its stakeholders (avoid duplications), CRs raised upon it, its active tasks +

Datasets:

Show its system, its attributes, glossaries directly linked to it or to its attributes, interfaces that include its system either as a target system / desired system, Impact of its system

Systems:

Datasets in this system, attributes in these datasets, glossaries linked to these datasets / attributes

Glossary:

Datasets directly attached to it, attributes directly attached to it, systems of these dataset.

People:

His Org unit, objects where he is a direct stakeholder, his roles, the CRs he's raised, active tasks where he's the owner.

Project / Process / Policy:

Let's say a project is linked to a glossary, then this glossary is going to be displayed, datasets directly linked to this glossary, or one of the attributes of a dataset is linked to this glossary, systems of these datasets, + show other facets' objects that are linked to the project directly through the impact tab.

Change Requests:

If a CR was raised upon a process, then you'll see this process object only, if it was raised upon a dataset then you'll see this dataset only and so on.

Also if there's any active task related to it, then it'll be displayed as well.

Stakeholders of this CR (same as its object stakeholders) in the People facet, their roles in the Roles facet.

Capability:

When it's linked with a glossary, then this glossary as long as the dataset and the attributes linked to this glossary will be displayed.

Interface:

Systems that are specified as either source system or target system.

Org Unit:

People belonging to the searched org unit.

For the other facets, show any object that has a stakeholder belonging to the searched org unit.

Geography:

Legal entity that's directly linked to it through the impact, regulators linked to it directly through the regulator facet (Regulator_X_Geography table), regulations that are directly linked to it through the regulation object (regulation_X_Regulator_X_geography table),

Regulatory theme that is linked to the regulation linked to this geography.

Regulation / Regulator / Regulatory Theme:

Geo linked to it

(regulation_X_Regulator_X_geography table),

Regulator linked to it (Regulator_X_Geography table),

+ impact

For these facets:

Business Area:

Product:

Committee:

Legal entity:

They have no special objects to display , just the general ones.

Note:

- 1)if there's any object linked to an attribute, then the dataset of this attribute, the system of this dataset, and glossaries linked to that attribute (only) should be displayed as well.**

- 2) If there's an object linked directly with a system, then this system and its datasets are going to be displayed searching for this object.
- 3) If there's an object linked to a glossary, then display this glossary, datasets linked to this glossary (and their systems), attributes linked to this glossary (along with its dataset) (and their systems) searching for this object.

Documents Upload

Below are the supported document types that you can upload under facet objects:

.JPG, .GIF, .PNG .TXT, .DOC, .DOCX, .RTF, .PDF, .XLS, .XLSX, .PPT, and .PPTX

If you try to attach any unsupported document an error should be displayed

Who can upload a document?

Any user who can edit the object who are any super admin / admin / stakeholder with an edit permission.

Who can see the uploaded document?

Any user who can see the object

It's implemented in all of the facets even the CR facet EXCEPT:

Policy , committee, business area, product, client, legal entity, org unit, regulator, regulation, regulatory theme , client, geography

When a document is uploaded we only see its hyperlink and when we click on it, the document is downloaded, if the name of the document we want to upload is X then in the file column we'll have X. its extension.

DOCUMENTS			
Name	Description	File	Type
ttttt	tttttt	enhancement.pdf	Process Documentation
			1 record

All of the columns are mandatory
Name and description should be ≥ 3 letters

I've added a table for the type column, where it reads its values from called document