01. Code used in Pipeline: pl_stg_processing_nyctaxi

Overall Pipeline

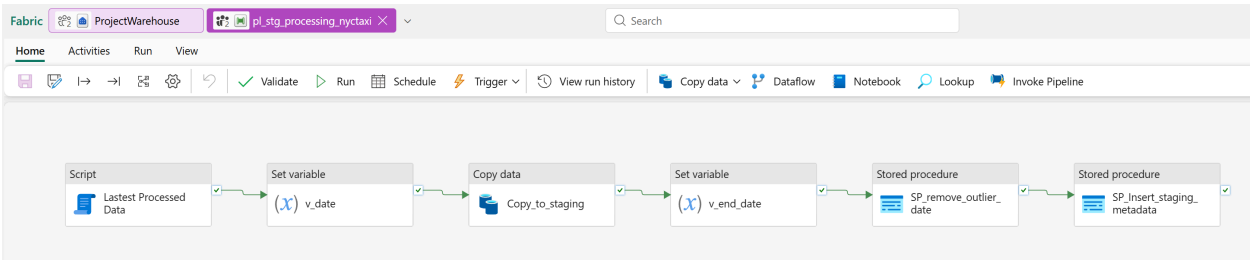

Latest Processed Data

For the Script Activity **"Latest Processed Data"**

```
SELECT TOP 1
latest_processed_pickup
FROM metadata.processing_log
WHERE table_processed = 'staging_nyctaxi_yellow'
ORDER BY latest_processed_pickup desc;
```

---

v_date

Pipeline expression for **v_date** Set Variable activity

```
@formatDateTime(addToTime(activity('Latest Processed Date').output.resultSets[0].rows[0].
latest_processed_pickup, 1, 'Month'), 'yyyy-MM')
```

Copy to Staging

Pre Copy Script

Copy command settings

Default values	+ New
Pre-copy script ⓘ	delete from stg.nyctaxi_yellow

---

v_end_date

Pipeline expression for **v_end_date** Set Variable activity

```
@addToTime(concat(variables('v_date'), '-01'),1,'Month')
```

SP Removing Outlier Dates

For the Stored Procedure Activity **"SP Removing Outlier Dates".**

Create the Stored Procedure **stg.data_cleaning_stg** in the Data Warehouse using the code below.

```
CREATE PROCEDURE stg.data_cleaning_stg
@end_date datetime2,
@start_date datetime2
AS
delete from stg.nyctaxi_yellow where tpep_pickup_datetime < @start_date or tpep_pickup_da
tetime > @end_date;
```

Stored procedure parameters ⓘ

Import + New | Delete

Name	Type *	Value
end_date	DateTime	@variables('v_end_date')
start_date	DateTime	@concat(variables('v_date'), '-01')

SP Loading Staging Metadata

For the Stored Procedure Activity **“SP Loading Staging Metadata”.**

Code to create the **metadata.processing_log** table.

```
create schema metadata;

create table metadata.processing_log
(
  pipeline_run_id varchar(255),
  table_processed varchar(255),
  rows_processed INT,
  latest_processed_pickup datetime2(6),
  processed_datetime datetime2(6)
);
```

Created the Stored Procedure **metadata.insert_staging_metadata** in the Data Warehouse using the code below.

```
CREATE PROCEDURE metadata.insert_staging_metadata
    @pipeline_run_id VARCHAR(255),
    @table_name VARCHAR(255),
    @processed_date DATETIME2
AS
    INSERT INTO metadata.processing_log (pipeline_run_id, table_processed, rows_processe
d, latest_processed_pickup, processed_datetime)
    SELECT
        @pipeline_run_id AS pipeline_id,
        @table_name AS table_processed,
        COUNT(*) AS rows_processed,
        MAX(tpep_pickup_datetime) AS latest_processed_pickup,
        @processed_date AS processed_datetime
    FROM stg.nyctaxi_yellow;
```

Stored procedure parameters

Import | New | Delete

Name	Type *	Value
pipeline_run_id	String	@pipeline().RunId
processed_date	DateTime	@pipeline().TriggerTime
table_name	String	stg.nyctaxi_yellow ☐ Treat as null