

Capture the Flag 6: Active or Inactive?

Goal: Make your Student Directory respond to student data by conditionally showing, hiding, and changing UI elements based on each student's state.

Instructor Note

These activities require your own problem-solving and research skills.

DO NOT use AI to generate the code for you.

You may use AI to:

- Research what a Dart/Flutter feature does
- Understand syntax
- Explain an error (not fix your error)
- Clarify documentation

You may **NOT** ask AI to generate the solution/code for a flag.

🚩 Flag 0 — Create Your Feature Branch

Objective: Create a new feature branch before adding conditional UI.

Create:

`feature/conditional-ui`

Screenshot:

- Terminal showing your current branch

```

PS C:\Android Projects\IT314AB\my_first_flutter_app> git branch
feature/data-ui
feature/exam
feature/exam_2
* feature/student-interactions
feature/student-list
feature/widgets
main
PS C:\Android Projects\IT314AB\my_first_flutter_app> git checkout -b feature/conditional-ui
Switched to a new branch 'feature/conditional-ui'
PS C:\Android Projects\IT314AB\my_first_flutter_app> git branch
* feature/conditional-ui
feature/data-ui
feature/exam
feature/exam_2
feature/student-interactions
feature/student-list
feature/widgets
main

```

🚩 Flag 1 — Show Active or Inactive

Objective: Change the Student Card based on whether a student is active or inactive.

Add an **active** status to your student data.

Research how Flutter uses **conditional expressions** to display different widgets.

Example states:

- Active
- Inactive

Test

Active students should display an Active indicator.

Inactive students should display an Inactive indicator.

Screenshot:

- Active Student Card
- Inactive Student Card
- Conditional logic in your code

```

    SizedBox(width: 10),
    if (profile.studentStatus == true)
      const Icon(Icons.circle,
        size: 25,
        color: Colors.green) // Icon
    else
      const Icon(Icons.circle,
        size: 25,
        color: Colors.red), // Icon
    SizedBox(width: 10)

```



Flag 2 — Show or Hide

Objective: Display certain UI elements only when a condition is true.

Add a conditional element to the Student Card.

Examples:

- Favorite badge appears only when favorited
- Warning appears only when inactive
- Delete action appears only if active

Research ways to conditionally include or exclude widgets from the widget tree.

Test

When the condition is true, the element appears.

When the condition is false, the element disappears.

Screenshot:

- UI with the element visible
- UI with the element hidden
- Conditional widget code

```
const SizedBox(height: 20),
if (profile.studentStatus == false)
const Center(
  child:
    Text(
      'WARNING: STUDENT IS NOT ENROLLED',
      textAlign: TextAlign.center,
      style: TextStyle(
        fontSize: 12,
        fontWeight: FontWeight.w500,
        fontStyle: FontStyle.italic,
        fontFamily: 'Helvetica',
        color: Colors.white,
      ), // TextStyle
    ), // Text
  ), // Center
const SizedBox(height: 12),
```



🚩 Flag 3 — The Empty Directory

Objective: Handle situations where there are no students to display.

Modify your Student Directory so it detects when the student list is empty.

Create an **empty state**.

Examples:

- "No students found"
- Empty-state icon
- Button to add a student

Test


Delete all students in your application (not the code)

Instead of showing a blank screen, your application should display your empty state.

Screenshot:

- Empty student list
- Empty-state UI
- Condition checking for an empty list

```
body: profiles.isEmpty ?
const Center(
  child: Column(
    mainAxisAlignment: MainAxisAlignment.center,
    crossAxisAlignment: CrossAxisAlignment.center,
    children: [
      Text('No Student Found.',
        style: TextStyle(
          fontSize: 30,
          fontWeight: FontWeight.bold,
          fontFamily: 'Helvetica',
          color: Colors.white,)), // TextStyle // Text
      SizedBox(height: 5),
      Text('Your student profile is currently empty.',
        style: TextStyle(
          fontSize: 20,
          fontWeight: FontWeight.bold,
          fontFamily: 'Helvetica',
          color: Colors.white70,)), // TextStyle // Text
      SizedBox(height: 20)
    ]
  ) // Column
) // Center
```

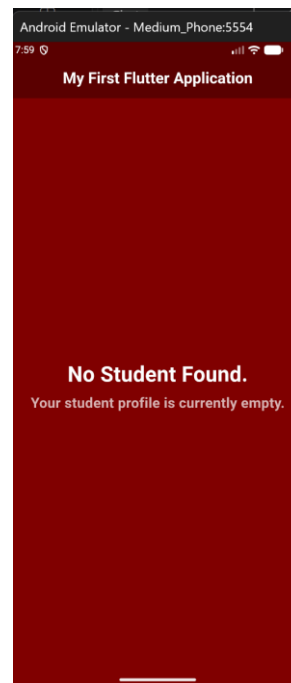

🚩 Flag 4 — Loading the Directory

Objective: Display different UI while student data is being loaded.

Create a loading state for your Student Directory.

Research how Flutter can conditionally display a loading indicator.

Examples:

- `CircularProgressIndicator`
- Loading message
- Loading placeholder


Test

When the application is in a loading state, the student list should not be displayed as the main content.

Once loading is complete, the Student Directory should appear.

Screenshot:

- Loading state
- Loaded state
- Conditional loading logic

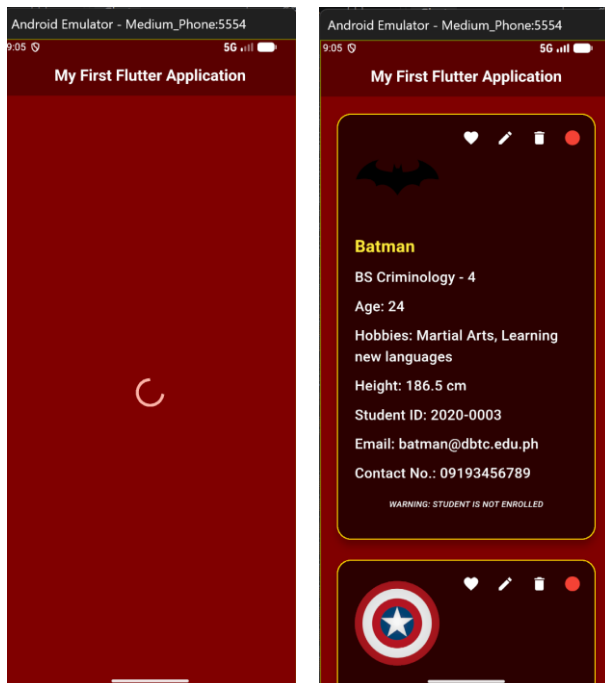

```
class _MyHomePageState extends State<MyHomePage> {
  bool isLoading = true;

  @override
  void initState() {
    super.initState();
    Future.delayed(const Duration(seconds: 3), () {
      setState(() {
        isLoading = false;
      });
    }); // Future.delayed
  }
}
```

```
// // Appbar
body: isLoading ?
  const Center(
    child: CircularProgressIndicator()
  ) // Center
```

🚩 Flag 5 — Multiple States

Objective: Make your Student Directory handle multiple UI states correctly.

Your application should now be able to display:

1. Loading
2. Students available
3. No students available

Determine which state should be displayed based on your data.

Test

Verify each state:

Loading

→ Loading UI

Students available

→ Student List


Empty list

→ Empty State

Only the appropriate UI should appear at a time.

Screenshot:

- Loading state
- Student list state
- Empty state

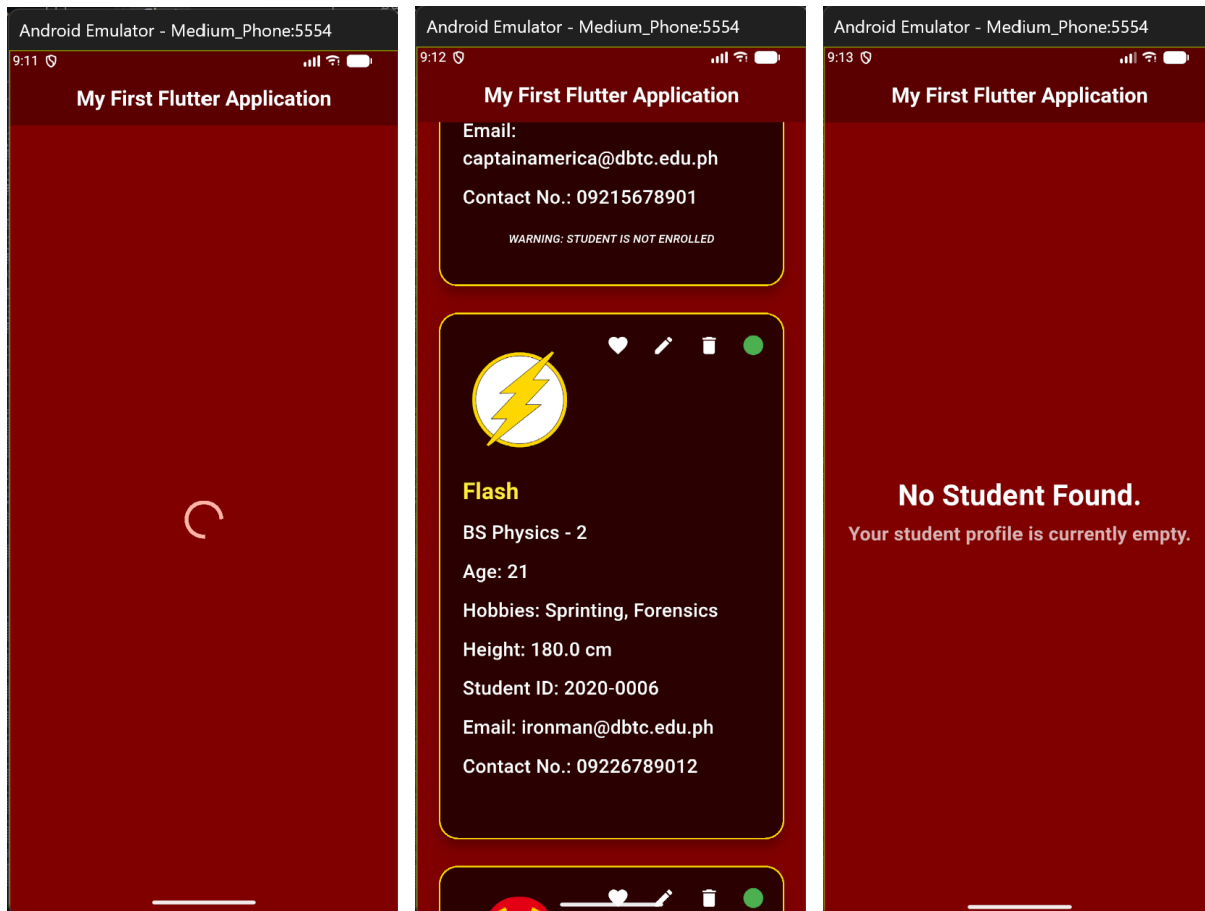

🚩 Flag 6 — States Work Together

Objective: Make sure conditional UI does not break your existing interactions.

Test the combination of:

- Favorite
- Delete
- Edit
- Active/Inactive
- Show/Hide
- Empty state
- Loading state


Test Scenario


1. Favorite a student.
2. Change or display their Active/Inactive state.
3. Delete students until the directory becomes empty.

The application should continue functioning correctly as its state changes.

Screenshot:

- Multiple conditional states working
- Interactive Student Card
- Empty State
- Application functioning normally

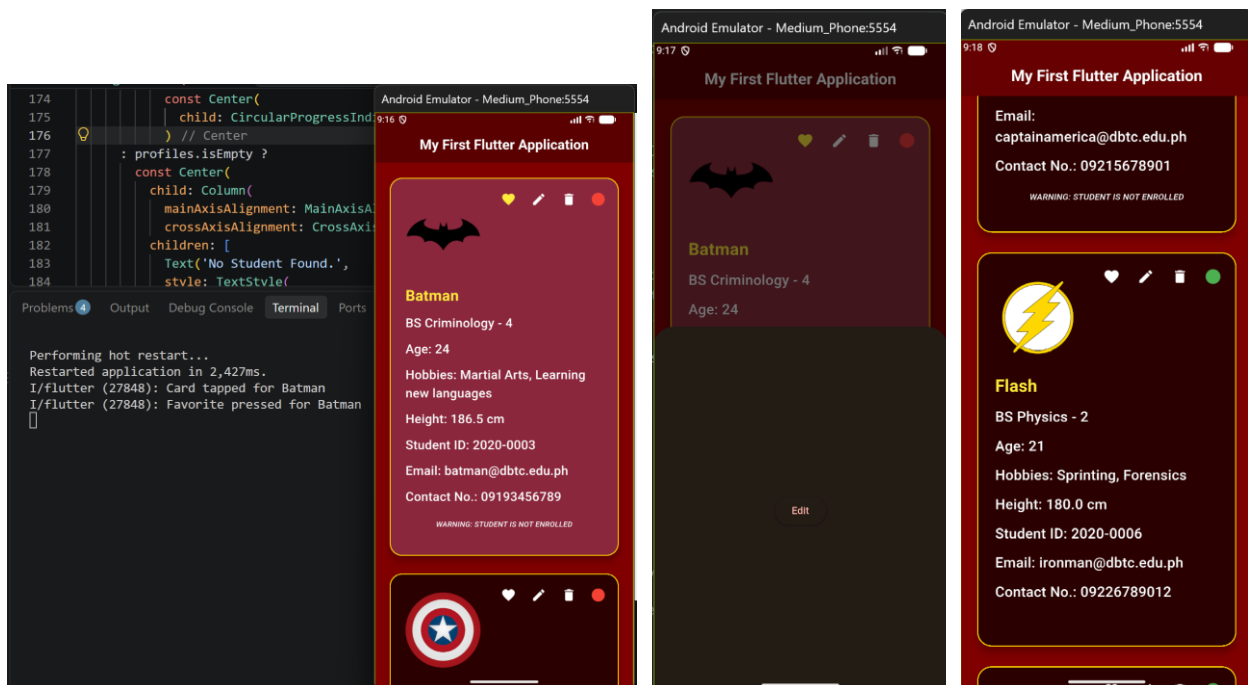

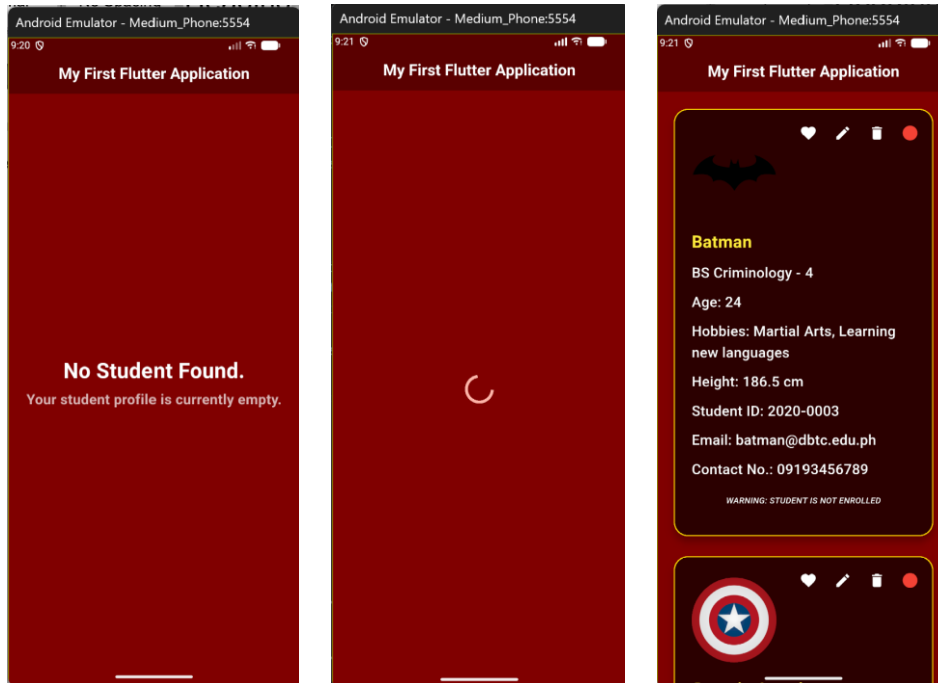

🚩 Flag 7 — Save Your Progress

Objective: Commit and push your completed Conditional UI Student Directory.

Use a proper Git commit message.

Branch:

`feature/conditional-ui`

Screenshot:

- Successful commit
- Current branch
- Terminal showing the commit

```

MJ ARANZADO@LAPTOP-U8N5E77G MINGW64 /c/Android Projects/IT314AB (feature/conditional-ui)
$ git commit -m "feat: added conditional statements for active and inactive as well as a loading screen"
[feature/conditional-ui 2a8b8f6] feat: added conditional statements for active and inactive as well as a loading screen
7 files changed, 44 insertions(+), 10 deletions(-)
delete mode 100644 IT314AB-CaptureTheFlag2_Aranzado.pdf
delete mode 100644 IT314AB-CaptureTheFlag3_Aranzado.pdf
delete mode 100644 IT314AB-CaptureTheFlag4_Aranzado.pdf
delete mode 100644 IT314AB-CaptureTheFlag5_Aranzado.pdf
delete mode 100644 IT314AB-CaptureTheFlag_Aranzado.pdf
delete mode 100644 IT314AB_Aranzado.pdf

MJ ARANZADO@LAPTOP-U8N5E77G MINGW64 /c/Android Projects/IT314AB (feature/conditional-ui)
$ git push origin -u feature/conditional-ui
Enumerating objects: 9, done.
Counting objects: 100% (9/9), done.
Delta compression using up to 18 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (5/5), 948 bytes | 948.00 KiB/s, done.
Total 5 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
remote:
remote: Create a pull request for 'feature/conditional-ui' on GitHub by visiting
:
remote:   https://github.com/EmJayAA/IT314AB_Aranzado/pull/new/feature/conditional-ui
remote:
To https://github.com/EmJayAA/IT314AB_Aranzado.git
 * [new branch]      feature/conditional-ui -> feature/conditional-ui
branch 'feature/conditional-ui' set up to track 'origin/feature/conditional-ui'.

MJ ARANZADO@LAPTOP-U8N5E77G MINGW64 /c/Android Projects/IT314AB (feature/conditional-ui)

```

 feature/conditional-ui
  8 Branches
  0 Tags

Add file
Code

This branch is 9 commits ahead of `main`.
 Contribute


EmJayAA
 feat: added conditional statements for active and inactive as well a...
 2a8b8f6 · 1 minute ago
12 Commits

 my_first_flutter_app
 feat: added conditional statements for active and inactive as ...
 1 minute ago