

Bootstrap



Prof. Wallace Rodrigues

Introdução

- Biblioteca para frontend;
- Otimizada para dispositivos móveis;
- OpenSource;
- Emprega HTML, CSS, JS e jQuery;
- Baseada em design de tipografia;
- Busca melhorar a UX.

Como começar?

- Inclua os links CDN do JS e do CSS:

CDN links

As reference, here are our primary CDN links.

Description	URL
CSS	https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/css/bootstrap.min.css
JS	https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/js/bootstrap.bundle.min.js



```
1 <!DOCTYPE html>~
2 <html lang="en">~
3 ~
4 <head>~
5   <meta charset="UTF-8">~
6   <meta name="viewport" content="width=device-width, initial-scale=1.0">~
7   <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/css/bootstrap.min.css" rel="stylesheet"~
8     integrity="sha384-gH2yIJqKdNHPEq0n4Mqa/HGKIhSkIHeL5AyhkYV8i59U5AR6csBvApHHNl/vI1Bx" crossorigin="anonymous">~
9   <script src="https://cdn.jsdelivr.net/npm/bootstrap@5.2.0/dist/js/bootstrap.bundle.min.js"~
10     integrity="sha384-A3rJD856KowSb7dwlZdYEk039Gagi7vIsF0jrRAoQmDCKtQBHUuLZ9AsSv4jdD4Xa"~
11     crossorigin="anonymous"></script>~
12   <link rel="stylesheet" href="mystyle.css">~
13 ~
14   <title>Document</title>~
15 </head>~
16 ~
17 <body>~
18   <p>Hello Bootstrap!</p>~
19 </body>~
20 ~
21 </html>
```



127.0.0.1:5500/index.htm



Hello Bootstrap!

Como funciona?

- CSS aprimorado:
 - Ao incluir bootstrap no seu site, toda formatação padrão é incorporada.
- Uso das classes próprias:
 - As *class* do bootstrap vão complementar o visual e incluir os efeitos visuais da biblioteca.

container



- Elemento básico para organização do layout;

```
17 <body>~
18   <div class="container">~
19     <div class="row">~
20       <h1>Hello Bootstrap!</h1>~
21       <p>Lorem ipsum dolor, sit amet co
22         aliquid~
23         iste~
24         quae iusto maiores sint non c
25         maxime.~
26     </p>~
27   </div>~
28 </div>~
29 </body>~
```



container-fluid

- Utiliza a largura total da viewport;
- `class="container"`:
- `class="container-fluid"`:

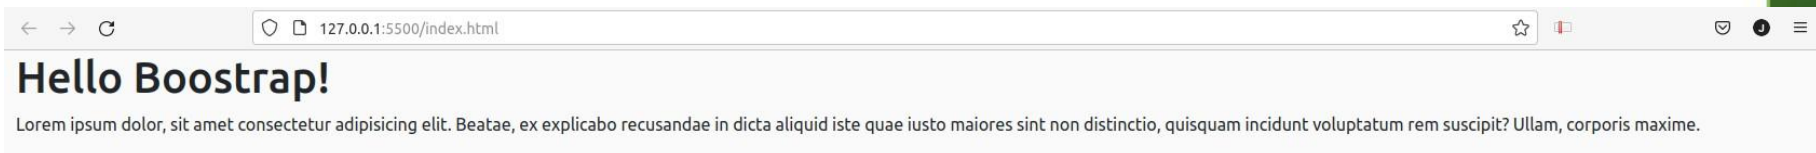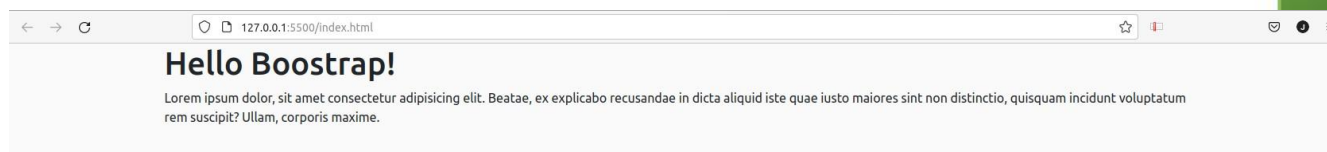

Variações de container



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

	Extra small <576px	Small ≥576px	Medium ≥768px	Large ≥992px	X-Large ≥1200px	XX-Large ≥1400px
<code>.container</code>	100%	540px	720px	960px	1140px	1320px
<code>.container-sm</code>	100%	540px	720px	960px	1140px	1320px
<code>.container-md</code>	100%	100%	720px	960px	1140px	1320px
<code>.container-lg</code>	100%	100%	100%	960px	1140px	1320px
<code>.container-xl</code>	100%	100%	100%	100%	1140px	1320px
<code>.container-xxl</code>	100%	100%	100%	100%	100%	1320px
<code>.container-fluid</code>	100%	100%	100%	100%	100%	100%

Tipografia

- Arte ou processo de criação, composição e impressão de textos;
- Aprimora a estrutura do documento escrito.

Heading

Example



AL

`<h1></h1>`

h1. Bootstrap heading

`<h2></h2>`

h2. Bootstrap heading

`<h3></h3>`

h3. Bootstrap heading

`<h4></h4>`

h4. Bootstrap heading

`<h5></h5>`

h5. Bootstrap heading

`<h6></h6>`

h6. Bootstrap heading

```
<h1>h1. Bootstrap heading</h1>
<h2>h2. Bootstrap heading</h2>
<h3>h3. Bootstrap heading</h3>
<h4>h4. Bootstrap heading</h4>
<h5>h5. Bootstrap heading</h5>
<h6>h6. Bootstrap heading</h6>
```





h1. Bootstrap heading

h2. Bootstrap heading

h3. Bootstrap heading

h4. Bootstrap heading

h5. Bootstrap heading

h6. Bootstrap heading

HTML



```
<p class="h1">h1. Bootstrap heading</p>
<p class="h2">h2. Bootstrap heading</p>
<p class="h3">h3. Bootstrap heading</p>
<p class="h4">h4. Bootstrap heading</p>
<p class="h5">h5. Bootstrap heading</p>
<p class="h6">h6. Bootstrap heading</p>
```



Display 1

Display 2

Display 3

Display 4

Display 5

Display 6

```
<h1 class="display-1">Display 1</h1>  
<h1 class="display-2">Display 2</h1>  
<h1 class="display-3">Display 3</h1>  
<h1 class="display-4">Display 4</h1>  
<h1 class="display-5">Display 5</h1>  
<h1 class="display-6">Display 6</h1>
```



lead

- Parágrafo destacado:

```
<div class="container-md">~  
  <div class="row">~  
    <h1>Hello Bootstrap!</h1>~  
    <p>Lorem ipsum dolor, sit  
      dicta~  
      aliquid~  
      iste~  
      quae iusto maiores sin  
      maxime.~  
    </p>~  
    <p class="lead">Lorem ipsu  
      dicta~  
      aliquid~  
      iste~  
      quae iusto maiores sin  
      maxime.~  
    </p>~  
  </div>~  
</div>~
```

← → ↻ 🛡️ 📄 127.0.0.1:5500/index.html 📖 ☆ >> ≡

Hello Bootstrap!

Lorem ipsum dolor, sit amet consectetur adipisicing elit. Beatae, ex explicabo recusandae in dicta aliquid iste quae iusto maiores sint non distinctio, quisquam incidunt voluptatum rem suscipit? Ullam, corporis maxime.

Lorem ipsum dolor, sit amet consectetur adipisicing elit. Beatae, ex explicabo recusandae in dicta aliquid iste quae iusto maiores sint non distinctio, quisquam incidunt voluptatum rem suscipit? Ullam, corporis maxime.

You can use the mark tag to highlight text.

~~This line of text is meant to be treated as deleted text.~~

~~This line of text is meant to be treated as no longer accurate.~~

This line of text is meant to be treated as an addition to the document.

This line of text will render as underlined.

This line of text is meant to be treated as fine print.

This line rendered as bold text.

This line rendered as italicized text.

HTML



```
<p>You can use the mark tag to <mark>highlight</mark> text.</p>
<p><del>This line of text is meant to be treated as deleted text.</del></p>
<p><s>This line of text is meant to be treated as no longer accurate.</s></p>
<p><ins>This line of text is meant to be treated as an addition to the document.</ins></p>
<p><u>This line of text will render as underlined.</u></p>
<p><small>This line of text is meant to be treated as fine print.</small></p>
<p><strong>This line rendered as bold text.</strong></p>
<p><em>This line rendered as italicized text.</em></p>
```

Bloco de citação

A well-known quote, contained in a blockquote element.

— Someone famous in *Source Title*

HTML



```
<figure>
  <blockquote class="blockquote">
    <p>A well-known quote, contained in a blockquote element.</p>
  </blockquote>
  <figcaption class="blockquote-footer">
    Someone famous in <cite title="Source Title">Source Title</cite>
  </figcaption>
</figure>
```

Bloco de citação centralizado



INSTITUTO FEDERAL
São Paulo
Campus Sorocaba

A well-known quote, contained in a blockquote element.

— Someone famous in *Source Title*

HTML



```
<figure class="text-center">
  <blockquote class="blockquote">
    <p>A well-known quote, contained in a blockquote element.</p>
  </blockquote>
  <figcaption class="blockquote-footer">
    Someone famous in <cite title="Source Title">Source Title</cite>
  </figcaption>
</figure>
```



... à direita

A well-known quote, contained in a blockquote element.

— Someone famous in *Source Title*

HTML



```
<figure class="text-end">
  <blockquote class="blockquote">
    <p>A well-known quote, contained in a blockquote element.</p>
  </blockquote>
  <figcaption class="blockquote-footer">
    Someone famous in <cite title="Source Title">Source Title</cite>
  </figcaption>
</figure>
```

This is a list.

It appears completely unstyled.

Structurally, it's still a list.

However, this style only applies to immediate child elements.

Nested lists:

- are unaffected by this style
- will still show a bullet
- and have appropriate left margin

This may still come in handy in some situations.

HTML



```
<ul class="list-unstyled">
  <li>This is a list.</li>
  <li>It appears completely unstyled.</li>
  <li>Structurally, it's still a list.</li>
  <li>However, this style only applies to immediate child elements.</li>
  <li>Nested lists:
    <ul>
      <li>are unaffected by this style</li>
      <li>will still show a bullet</li>
      <li>and have appropriate left margin</li>
    </ul>
  </li>
  <li>This may still come in handy in some situations.</li>
</ul>
```

Lista inline

- Mantém as características de lista:

This is a list item. And another one. But they're displayed inline.

HTML



```
<ul class="list-inline">
  <li class="list-inline-item">This is a list item.</li>
  <li class="list-inline-item">And another one.</li>
  <li class="list-inline-item">But they're displayed inline.</li>
</ul>
```



Description lists

A description list is perfect for defining terms.

Term

Definition for the term.

And some more placeholder definition text.

Another term

This definition is short, so no extra paragraphs or anything.

Truncated term is tr...

This can be useful when space is tight. Adds an ellipsis at the end.

Nesting

Nested definition list

I heard you like definition lists. Let me put a definition list inside your definition list.

HTML



```
<dl class="row">
  <dt class="col-sm-3">Description lists</dt>
  <dd class="col-sm-9">A description list is perfect for defining terms.</dd>

  <dt class="col-sm-3">Term</dt>
  <dd class="col-sm-9">
    <p>Definition for the term.</p>
    <p>And some more placeholder definition text.</p>
  </dd>

  <dt class="col-sm-3">Another term</dt>
  <dd class="col-sm-9">This definition is short, so no extra paragraphs or anything.</dd>

  <dt class="col-sm-3 text-truncate">Truncated term is truncated</dt>
  <dd class="col-sm-9">This can be useful when space is tight. Adds an ellipsis at the end.</dd>

  <dt class="col-sm-3">Nesting</dt>
  <dd class="col-sm-9">
    <dl class="row">
      <dt class="col-sm-4">Nested definition list</dt>
      <dd class="col-sm-8">I heard you like definition lists. Let me put a definition list inside y
    </dl>
  </dd>
</dl>
```

Imagens



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Responsive image

HTML



```

```

Miniatura (thumbnail)

- Adiciona uma borda na imagem;
- Pode ser necessário definir largura e altura;



button



HTML



```
<button type="button" class="btn btn-primary">Primary</button>
<button type="button" class="btn btn-secondary">Secondary</button>
<button type="button" class="btn btn-success">Success</button>
<button type="button" class="btn btn-danger">Danger</button>
<button type="button" class="btn btn-warning">Warning</button>
<button type="button" class="btn btn-info">Info</button>
<button type="button" class="btn btn-light">Light</button>
<button type="button" class="btn btn-dark">Dark</button>

<button type="button" class="btn btn-link">Link</button>
```

Uso de links e inputs



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

Link

Button

Input

Submit

Reset

HTML



```
<a class="btn btn-primary" href="#" role="button">Link</a>  
<button class="btn btn-primary" type="submit">Button</button>  
<input class="btn btn-primary" type="button" value="Input">  
<input class="btn btn-primary" type="submit" value="Submit">  
<input class="btn btn-primary" type="reset" value="Reset">
```

Button contornado



INSTITUTO FEDERAL
São Paulo
Campus Barretos



HTML



```
<button type="button" class="btn btn-outline-primary">Primary</button>  
<button type="button" class="btn btn-outline-secondary">Secondary</button>  
<button type="button" class="btn btn-outline-success">Success</button>  
<button type="button" class="btn btn-outline-danger">Danger</button>  
<button type="button" class="btn btn-outline-warning">Warning</button>  
<button type="button" class="btn btn-outline-info">Info</button>  
<button type="button" class="btn btn-outline-light">Light</button>  
<button type="button" class="btn btn-outline-dark">Dark</button>
```

Tamanhos

Large button

Large button

HTML



```
<button type="button" class="btn btn-primary btn-lg">Large button</button>  
<button type="button" class="btn btn-secondary btn-lg">Large button</button>
```

Small button

Small button

HTML



```
<button type="button" class="btn btn-primary btn-sm">Small button</button>  
<button type="button" class="btn btn-secondary btn-sm">Small button</button>
```

disabled



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Primary button

Button

Primary button

Button

HTML



```
<button type="button" class="btn btn-primary" disabled>Primary button</button>  
<button type="button" class="btn btn-secondary" disabled>Button</button>  
<button type="button" class="btn btn-outline-primary" disabled>Primary button</button>  
<button type="button" class="btn btn-outline-secondary" disabled>Button</button>
```

disabled em links

- Links não aceitam atributo *disabled*, então...
 - Incluir a classe 'disabled';
 - Não devem ter o atributo *href*;

Primary link

Link

HTML

```
<a class="btn btn-primary disabled" role="button" aria-disabled="true">Primary link</a>  
<a class="btn btn-secondary disabled" role="button" aria-disabled="true">Link</a>
```

Tabelas

- A biblioteca provê diferentes formatos de tabelas:
 - Exemplo: recurso de autoformatação de tabelas do Excel;
 - Formatação de linhas, colunas, animações.



INSTITUTO FEDERAL

São Paulo

Câmpus Barretos

#	First	Last	Handle
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry the Bird		@twitter

```
<table class="table">
  <thead>
    <tr>
      <th scope="col">#</th>
      <th scope="col">First</th>
      <th scope="col">Last</th>
      <th scope="col">Handle</th>
    </tr>
  </thead>
  <tbody>
    <tr>
      <th scope="row">1</th>
      <td>Mark</td>
      <td>Otto</td>
      <td>@mdo</td>
    </tr>
    <tr>
      <th scope="row">2</th>
      <td>Jacob</td>
      <td>Thornton</td>
      <td>@fat</td>
    </tr>
    <tr>
      <th scope="row">3</th>
      <td colspan="2">Larry the Bird</td>
      <td>@twitter</td>
    </tr>
  </tbody>
</table>
```

[?]



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

Class	Heading	Heading
Default	Cell	Cell
Primary	Cell	Cell
Secondary	Cell	Cell
Success	Cell	Cell
Danger	Cell	Cell
Warning	Cell	Cell
Info	Cell	Cell
Light	Cell	Cell
Dark	Cell	Cell

```
<!-- On tables -->
<table class="table-primary">...</table>
<table class="table-secondary">...</table>
<table class="table-success">...</table>
<table class="table-danger">...</table>
<table class="table-warning">...</table>
<table class="table-info">...</table>
<table class="table-light">...</table>
<table class="table-dark">...</table>
```

```
<!-- On rows -->
<tr class="table-primary">...</tr>
<tr class="table-secondary">...</tr>
<tr class="table-success">...</tr>
<tr class="table-danger">...</tr>
<tr class="table-warning">...</tr>
<tr class="table-info">...</tr>
<tr class="table-light">...</tr>
<tr class="table-dark">...</tr>
```

```
<!-- On cells (`td` or `th`) -->
<tr>
  <td class="table-primary">...</td>
  <td class="table-secondary">...</td>
  <td class="table-success">...</td>
  <td class="table-danger">...</td>
  <td class="table-warning">...</td>
  <td class="table-info">...</td>
  <td class="table-light">...</td>
  <td class="table-dark">...</td>
</tr>
```

table-striped

- Linhas ímpares destacadas das pares:

#	First	Last	Handle
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry the Bird		@twitter

```
<table class="table table-striped">  
  ...  
</table>
```



table-striped-columns

#	First	Last	Handle
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry the Bird		@twitter

```
<table class="table table-striped-columns">  
  ...  
</table>
```



#	First	Last	Handle
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry the Bird		@twitter

```
<table class="table table-dark table-striped">  
  ...  
</table>
```



#	First	Last	Handle
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry the Bird		@twitter

```
<table class="table table-dark table-striped-columns">  
  ...  
</table>
```



TO FEDERAL

retos

table-hover

- Efeito de destaque ao passar o mouse:

#	First	Last	Handle
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry the Bird		@twitter

```
<table class="table table-hover">  
  ...  
</table>
```






#	First	Last	Handle
1	Mark	Otto	@mdo
2	Jacob	Thornton	@fat
3	Larry the Bird		@twitter

HTML



```
<table class="table">
  <thead>
    <tr>
      <th scope="col">#</th>
      <th scope="col">First</th>
      <th scope="col">Last</th>
      <th scope="col">Handle</th>
    </tr>
  </thead>
  <tbody class="table-group-divider">
    <tr>
      <th scope="row">1</th>
      <td>Mark</td>
      <td>Otto</td>
      <td>@mdo</td>
    </tr>
    <tr>
      <th scope="row">2</th>
      <td>Jacob</td>
      <td>Thornton</td>
      <td>@fat</td>
    </tr>
    <tr>
      <th scope="row">3</th>
      <td colspan="2">Larry the Bird</td>
      <td>@twitter</td>
    </tr>
  </tbody>
</table>
```

figure

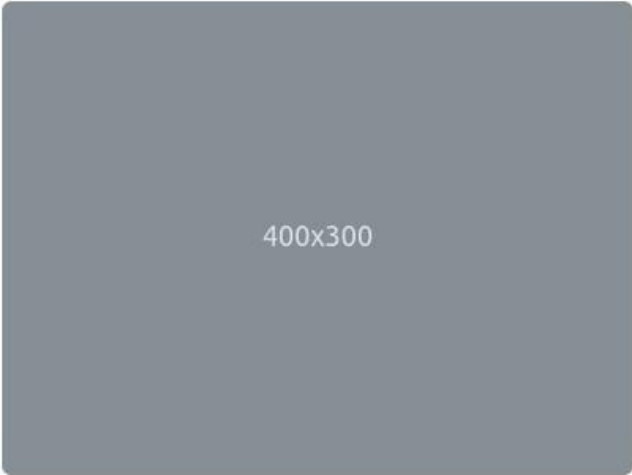

400x300

A caption for the above image.

HTML



```
<figure class="figure">
  
  <figcaption class="figure-caption">A caption for the above image.</figcaption>
</figure>
```

form



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

Email address

We'll never share your email with anyone else.

Password

☐ Check me out

Submit

HTML



```
<form>
  <div class="mb-3">
    <label for="exampleInputEmail1" class="form-label">Email address</label>
    <input type="email" class="form-control" id="exampleInputEmail1" aria-describedby="emailHelp">
    <div id="emailHelp" class="form-text">We'll never share your email with anyone else.</div>
  </div>
  <div class="mb-3">
    <label for="exampleInputPassword1" class="form-label">Password</label>
    <input type="password" class="form-control" id="exampleInputPassword1">
  </div>
  <div class="mb-3 form-check">
    <input type="checkbox" class="form-check-input" id="exampleCheck1">
    <label class="form-check-label" for="exampleCheck1">Check me out</label>
  </div>
  <button type="submit" class="btn btn-primary">Submit</button>
</form>
```

form-text



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Password

Your password must be 8-20 characters long, contain letters and numbers, and must not contain spaces, special characters, or emoji.

HTML



```
<label for="inputPassword5" class="form-label">Password</label>
<input type="password" id="inputPassword5" class="form-control" aria-describedby="passwordHelpBlock"
<div id="passwordHelpBlock" class="form-text">
  Your password must be 8-20 characters long, contain letters and numbers, and must not contain spa
</div>
```

- Desabilita todos os componentes internos.

Disabled fieldset example

Disabled input

Disabled input

Disabled select menu

Disabled select

☐ Can't check this

Submit

HTML

```
<form>
  <fieldset disabled>
    <legend>Disabled fieldset example</legend>
    <div class="mb-3">
      <label for="disabledTextInput" class="form-label">Disabled input</label>
      <input type="text" id="disabledTextInput" class="form-control" placeholder="Disabled input">
    </div>
    <div class="mb-3">
      <label for="disabledSelect" class="form-label">Disabled select menu</label>
      <select id="disabledSelect" class="form-select">
        <option>Disabled select</option>
      </select>
    </div>
    <div class="mb-3">
      <div class="form-check">
        <input class="form-check-input" type="checkbox" id="disabledFieldsetCheck" disabled>
        <label class="form-check-label" for="disabledFieldsetCheck">
          Can't check this
        </label>
      </div>
    </div>
    <button type="submit" class="btn btn-primary">Submit</button>
  </fieldset>
</form>
```

form-control

- Formata o formulário automaticamente:

Email address

name@example.com

Example textarea

HTML

```
<div class="mb-3">
  <label for="exampleFormControlInput1" class="form-label">Email address</label>
  <input type="email" class="form-control" id="exampleFormControlInput1" placeholder="name@example.com">
</div>
<div class="mb-3">
  <label for="exampleFormControlTextarea1" class="form-label">Example textarea</label>
  <textarea class="form-control" id="exampleFormControlTextarea1" rows="3"></textarea>
</div>
```

Tamanho: lg (large)/sm(small)

HTML  

```
<input class="form-control form-control-lg" type="text" placeholder=".form-control-lg" aria-label="
<input class="form-control" type="text" placeholder="Default input" aria-label="default input examp
<input class="form-control form-control-sm" type="text" placeholder=".form-control-sm" aria-label="
```

readonly


- O conteúdo pode ser selecionado, mas não permite alteração:

HTML

```
<input class="form-control" type="text" value="Readonly input here..." aria-label="readonly input e
```

form-control-plaintext

- Mantém a formatação do formulário:

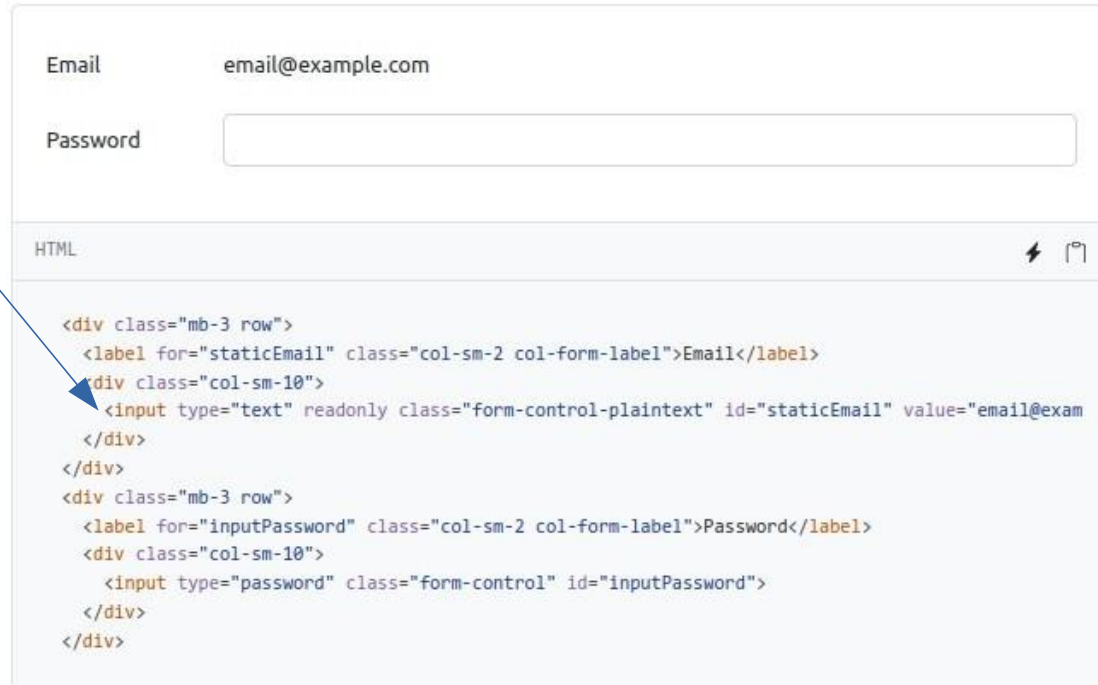

Email email@example.com

Password

HTML

```
<div class="mb-3 row">
  <label for="staticEmail" class="col-sm-2 col-form-label">Email</label>
  <div class="col-sm-10">
    <input type="text" readonly class="form-control-plaintext" id="staticEmail" value="email@exam
  </div>
</div>
<div class="mb-3 row">
  <label for="inputPassword" class="col-sm-2 col-form-label">Password</label>
  <div class="col-sm-10">
    <input type="password" class="form-control" id="inputPassword">
  </div>
</div>
```

file

Default file input example

Procurar... Nenhum arquivo selecionado.

Multiple files input example

Procurar... Nenhum arquivo selecionado.

Disabled file input example

Procurar... Nenhum arquivo selecionado.

Small file input example

Procurar... Nenhum arquivo selecionado.

Large file input example

Procurar... Nenhum arquivo selecionado.

HTML



```
<div class="mb-3">
  <label for="formFile" class="form-label">Default file input example</label>
  <input class="form-control" type="file" id="formFile">
</div>
<div class="mb-3">
  <label for="formFileMultiple" class="form-label">Multiple files input example</label>
  <input class="form-control" type="file" id="formFileMultiple" multiple>
</div>
<div class="mb-3">
  <label for="formFileDisabled" class="form-label">Disabled file input example</label>
  <input class="form-control" type="file" id="formFileDisabled" disabled>
</div>
<div class="mb-3">
  <label for="formFileSm" class="form-label">Small file input example</label>
  <input class="form-control form-control-sm" id="formFileSm" type="file">
</div>
<div>
  <label for="formFileLg" class="form-label">Large file input example</label>
  <input class="form-control form-control-lg" id="formFileLg" type="file">
</div>
```

form-control-color

- Valor em formato RGB é enviado ao destinatário do formulário:

Color picker



HTML

```
<label for="exampleColorInput" class="form-label">Color picker</label>
<input type="color" class="form-control form-control-color" id="exampleColorInput" value="#563d7c">
```

form-select



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Open this select menu



HTML



```
<select class="form-select" aria-label="Default select example">
  <option selected>Open this select menu</option>
  <option value="1">One</option>
  <option value="2">Two</option>
  <option value="3">Three</option>
</select>
```

Form-select-lg ou -sm



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

Open this select menu



Open this select menu



HTML



```
<select class="form-select form-select-lg mb-3" aria-label=".form-select-lg example">
  <option selected>Open this select menu</option>
  <option value="1">One</option>
  <option value="2">Two</option>
  <option value="3">Three</option>
</select>

<select class="form-select form-select-sm" aria-label=".form-select-sm example">
  <option selected>Open this select menu</option>
  <option value="1">One</option>
  <option value="2">Two</option>
  <option value="3">Three</option>
</select>
```

multiple



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Open this select menu

One

Two

Three

HTML



```
<select class="form-select" multiple aria-label="multiple select example">  
  <option selected>Open this select menu</option>  
  <option value="1">One</option>  
  <option value="2">Two</option>  
  <option value="3">Three</option>  
</select>
```

size

Open this select menu

One

Two

HTML



```
<select class="form-select" size="3" aria-label="size 3 select example">  
  <option selected>Open this select menu</option>  
  <option value="1">One</option>  
  <option value="2">Two</option>  
  <option value="3">Three</option>  
</select>
```

disabled



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Open this select menu



HTML



```
<select class="form-select" aria-label="Disabled select example" disabled>
  <option selected>Open this select menu</option>
  <option value="1">One</option>
  <option value="2">Two</option>
  <option value="3">Three</option>
</select>
```

datalist

- Semelhante ao componente *select*:

Datalist example

Type to search...

HTML



```
<label for="exampleDataList" class="form-label">Datalist example</label>
<input class="form-control" list="datalistOptions" id="exampleDataList" placeholder="Type to search"
<datalist id="datalistOptions">
  <option value="San Francisco">
  <option value="New York">
  <option value="Seattle">
  <option value="Los Angeles">
  <option value="Chicago">
</datalist>
```

form-check

- ☐ Default checkbox
☒ Checked checkbox

HTML



```
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="flexCheckDefault">
  <label class="form-check-label" for="flexCheckDefault">
    Default checkbox
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="flexCheckChecked" checked>
  <label class="form-check-label" for="flexCheckChecked">
    Checked checkbox
  </label>
</div>
```

indeterminate

- Força o usuário a ativar/desativar a caixa:

☐ Indeterminate checkbox

HTML

```
<div class="form-check">  
  <input class="form-check-input" type="checkbox" value="" id="flexCheckIndeterminate">  
  <label class="form-check-label" for="flexCheckIndeterminate">  
    Indeterminate checkbox  
  </label>  
</div>
```



☒ Disabled indeterminate checkbox

☐ Disabled checkbox

☒ Disabled checked checkbox

HTML



```
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="flexCheckIndeterminateDisabled" disa
  <label class="form-check-label" for="flexCheckIndeterminateDisabled">
    Disabled indeterminate checkbox
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="flexCheckDisabled" disabled>
  <label class="form-check-label" for="flexCheckDisabled">
    Disabled checkbox
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="flexCheckCheckedDisabled" checked di
  <label class="form-check-label" for="flexCheckCheckedDisabled">
    Disabled checked checkbox
  </label>
</div>
```

radio



INSTITUTO FEDERAL
São Paulo
Campus Barretos

- ☐ Default radio
☒ Default checked radio

HTML



```
<div class="form-check">
  <input class="form-check-input" type="radio" name="flexRadioDefault" id="flexRadioDefault1">
  <label class="form-check-label" for="flexRadioDefault1">
    Default radio
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="radio" name="flexRadioDefault" id="flexRadioDefault2" checked="">
  <label class="form-check-label" for="flexRadioDefault2">
    Default checked radio
  </label>
</div>
```

form-switch



INSTITUTO FEDERAL
São Paulo
Campus Barretos

- ☐ Default switch checkbox input
- ☒ Checked switch checkbox input
- ☐ Disabled switch checkbox input
- ☒ Disabled checked switch checkbox input

HTML

```
<div class="form-check form-switch">  
  <input class="form-check-input" type="checkbox" role="switch" id="flexSwitchCheckDefault">  
  <label class="form-check-label" for="flexSwitchCheckDefault">Default switch checkbox input</label>  
</div>  
<div class="form-check form-switch">  
  <input class="form-check-input" type="checkbox" role="switch" id="flexSwitchCheckChecked" checked="">  
  <label class="form-check-label" for="flexSwitchCheckChecked">Checked switch checkbox input</label>  
</div>  
<div class="form-check form-switch">  
  <input class="form-check-input" type="checkbox" role="switch" id="flexSwitchCheckDisabled" disabled="">  
  <label class="form-check-label" for="flexSwitchCheckDisabled">Disabled switch checkbox input</label>  
</div>  
<div class="form-check form-switch">  
  <input class="form-check-input" type="checkbox" role="switch" id="flexSwitchCheckCheckedDisabled" checked="" disabled="">  
  <label class="form-check-label" for="flexSwitchCheckCheckedDisabled">Disabled checked switch checkbox input</label>  
</div>
```

Empilhamento

- Por padrão os radios e checkboxes são empilhados no formulário:

☒ Default checkbox
☐ Disabled checkbox

HTML

```
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="defaultCheck1">
  <label class="form-check-label" for="defaultCheck1">
    Default checkbox
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="checkbox" value="" id="defaultCheck2" disabled>
  <label class="form-check-label" for="defaultCheck2">
    Disabled checkbox
  </label>
</div>
```

☒ Default radio
☐ Second default radio
☐ Disabled radio

HTML

```
<div class="form-check">
  <input class="form-check-input" type="radio" name="exampleRadios" id="exampleRadios1" value="opti">
  <label class="form-check-label" for="exampleRadios1">
    Default radio
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="radio" name="exampleRadios" id="exampleRadios2" value="opti">
  <label class="form-check-label" for="exampleRadios2">
    Second default radio
  </label>
</div>
<div class="form-check">
  <input class="form-check-input" type="radio" name="exampleRadios" id="exampleRadios3" value="opti">
  <label class="form-check-label" for="exampleRadios3">
    Disabled radio
  </label>
</div>
```

form-check-inline

- Organizam-se na mesma linha.

☐ 1 ☐ 2 ☐ 3 (disabled)

HTML

```
<div class="form-check form-check-inline">
  <input class="form-check-input" type="checkbox" id="inlineCheckbox1" value="option1">
  <label class="form-check-label" for="inlineCheckbox1">1</label>
</div>
<div class="form-check form-check-inline">
  <input class="form-check-input" type="checkbox" id="inlineCheckbox2" value="option2">
  <label class="form-check-label" for="inlineCheckbox2">2</label>
</div>
<div class="form-check form-check-inline">
  <input class="form-check-input" type="checkbox" id="inlineCheckbox3" value="option3" disabled>
  <label class="form-check-label" for="inlineCheckbox3">3 (disabled)</label>
</div>
```

☐ 1 ☐ 2 ☐ 3 (disabled)

HTML

```
<div class="form-check form-check-inline">
  <input class="form-check-input" type="radio" name="inlineRadioOptions" id="inlineRadio1" value="o">
  <label class="form-check-label" for="inlineRadio1">1</label>
</div>
<div class="form-check form-check-inline">
  <input class="form-check-input" type="radio" name="inlineRadioOptions" id="inlineRadio2" value="o">
  <label class="form-check-label" for="inlineRadio2">2</label>
</div>
<div class="form-check form-check-inline">
  <input class="form-check-input" type="radio" name="inlineRadioOptions" id="inlineRadio3" value="o">
  <label class="form-check-label" for="inlineRadio3">3 (disabled)</label>
</div>
```

form-check-reverse

Reverse checkbox ☐
Disabled reverse checkbox ☐
Reverse switch checkbox input ☐

HTML



```
<div class="form-check form-check-reverse">
  <input class="form-check-input" type="checkbox" value="" id="reverseCheck1">
  <label class="form-check-label" for="reverseCheck1">
    Reverse checkbox
  </label>
</div>
<div class="form-check form-check-reverse">
  <input class="form-check-input" type="checkbox" value="" id="reverseCheck2" disabled>
  <label class="form-check-label" for="reverseCheck2">
    Disabled reverse checkbox
  </label>
</div>
<div class="form-check form-switch form-check-reverse">
  <input class="form-check-input" type="checkbox" id="flexSwitchCheckReverse">
  <label class="form-check-label" for="flexSwitchCheckReverse">Reverse switch checkbox input</label>
</div>
```

form-range



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Example range



Example range



HTML



```
<label for="customRange1" class="form-label">Example range</label>  
<input type="range" class="form-range" id="customRange1">
```

Variações de range



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

Disabled range



HTML



```
<label for="disabledRange" class="form-label">Disabled range</label>  
<input type="range" class="form-range" id="disabledRange" disabled>
```

Example range



HTML



```
<label for="customRange2" class="form-label">Example range</label>  
<input type="range" class="form-range" min="0" max="5" id="customRange2">
```

Example range



HTML



```
<label for="customRange3" class="form-label">Example range</label>  
<input type="range" class="form-range" min="0" max="5" step="0.5" id="customRange3">
```

input-group

@

Username

Recipient's username

@example.com

Your vanity URL

https://example.com/users/

\$

.00

Username

@

Server

With textarea

```
<div class="input-group mb-3">
  <span class="input-group-text" id="basic-addon1">@</span>
  <input type="text" class="form-control" placeholder="Username" aria-label="Username" aria-describedby="basic-addon1">
</div>

<div class="input-group mb-3">
  <input type="text" class="form-control" placeholder="Recipient's username" aria-label="Recipient's username" id="basic-textinput">
  <span class="input-group-text" id="basic-addon2">@example.com</span>
</div>

<label for="basic-url" class="form-label">Your vanity URL</label>
<div class="input-group mb-3">
  <span class="input-group-text" id="basic-addon3">https://example.com/users/</span>
  <input type="text" class="form-control" id="basic-url" aria-describedby="basic-addon3">
</div>

<div class="input-group mb-3">
  <span class="input-group-text">$</span>
  <input type="text" class="form-control" aria-label="Amount (to the nearest dollar)">
  <span class="input-group-text">.<input type="text" class="form-control" id="basic-addon4">00</span>
</div>

<div class="input-group mb-3">
  <input type="text" class="form-control" placeholder="Username" aria-label="Username">
  <span class="input-group-text">@</span>
  <input type="text" class="form-control" placeholder="Server" aria-label="Server">
</div>

<div class="input-group">
  <span class="input-group-text">With textarea</span>
  <textarea class="form-control" aria-label="With textarea"></textarea>
</div>
```

input-group-sm/mb/lg



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Small

Default

Large

HTML



```
<div class="input-group input-group-sm mb-3">
  <span class="input-group-text" id="inputGroup-sizing-sm">Small</span>
  <input type="text" class="form-control" aria-label="Sizing example input" aria-describedby="input
</div>

<div class="input-group mb-3">
  <span class="input-group-text" id="inputGroup-sizing-default">Default</span>
  <input type="text" class="form-control" aria-label="Sizing example input" aria-describedby="input
</div>

<div class="input-group input-group-lg">
  <span class="input-group-text" id="inputGroup-sizing-lg">Large</span>
  <input type="text" class="form-control" aria-label="Sizing example input" aria-describedby="input
</div>
```

Múltiplas entradas



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

First and last name

HTML



```
<div class="input-group">
  <span class="input-group-text">First and last name</span>
  <input type="text" aria-label="First name" class="form-control">
  <input type="text" aria-label="Last name" class="form-control">
</div>
```

Button

Button

Button

Button

Button

Button

HTML



```
<div class="input-group mb-3">
  <button class="btn btn-outline-secondary" type="button" id="button-addon1">Button</button>
  <input type="text" class="form-control" placeholder="" aria-label="Example text with button addon"
</div>

<div class="input-group mb-3">
  <input type="text" class="form-control" placeholder="Recipient's username" aria-label="Recipient"
  <button class="btn btn-outline-secondary" type="button" id="button-addon2">Button</button>
</div>

<div class="input-group mb-3">
  <button class="btn btn-outline-secondary" type="button">Button</button>
  <button class="btn btn-outline-secondary" type="button">Button</button>
  <input type="text" class="form-control" placeholder="" aria-label="Example text with two button a
</div>

<div class="input-group">
  <input type="text" class="form-control" placeholder="Recipient's username" aria-label="Recipient"
  <button class="btn btn-outline-secondary" type="button">Button</button>
  <button class="btn btn-outline-secondary" type="button">Button</button>
</div>
```



Dropdown ▾

Dropdown ▾

Dropdown ▾

Dropdown ▾

```
<div class="input-group mb-3">
  <button class="btn btn-outline-secondary dropdown-toggle" type="button" data-bs-toggle="dropdown">
  <ul class="dropdown-menu">
    <li><a class="dropdown-item" href="#">Action</a></li>
    <li><a class="dropdown-item" href="#">Another action</a></li>
    <li><a class="dropdown-item" href="#">Something else here</a></li>
    <li><hr class="dropdown-divider"></li>
    <li><a class="dropdown-item" href="#">Separated link</a></li>
  </ul>
  <input type="text" class="form-control" aria-label="Text input with dropdown button">
</div>

<div class="input-group mb-3">
  <input type="text" class="form-control" aria-label="Text input with dropdown button">
  <button class="btn btn-outline-secondary dropdown-toggle" type="button" data-bs-toggle="dropdown">
  <ul class="dropdown-menu dropdown-menu-end">
    <li><a class="dropdown-item" href="#">Action</a></li>
    <li><a class="dropdown-item" href="#">Another action</a></li>
    <li><a class="dropdown-item" href="#">Something else here</a></li>
    <li><hr class="dropdown-divider"></li>
    <li><a class="dropdown-item" href="#">Separated link</a></li>
  </ul>
</div>
```

```
<div class="input-group">
  <button class="btn btn-outline-secondary dropdown-toggle" type="button" data-bs-toggle="dropdown">
  <ul class="dropdown-menu">
    <li><a class="dropdown-item" href="#">Action before</a></li>
    <li><a class="dropdown-item" href="#">Another action before</a></li>
    <li><a class="dropdown-item" href="#">Something else here</a></li>
    <li><hr class="dropdown-divider"></li>
    <li><a class="dropdown-item" href="#">Separated link</a></li>
  </ul>
  <input type="text" class="form-control" aria-label="Text input with 2 dropdown buttons">
  <button class="btn btn-outline-secondary dropdown-toggle" type="button" data-bs-toggle="dropdown">
  <ul class="dropdown-menu dropdown-menu-end">
    <li><a class="dropdown-item" href="#">Action</a></li>
    <li><a class="dropdown-item" href="#">Another action</a></li>
    <li><a class="dropdown-item" href="#">Something else here</a></li>
    <li><hr class="dropdown-divider"></li>
    <li><a class="dropdown-item" href="#">Separated link</a></li>
  </ul>
</div>
```



Action

Action

HTML



```
<div class="input-group mb-3">
  <button type="button" class="btn btn-outline-secondary">Action</button>
  <button type="button" class="btn btn-outline-secondary dropdown-toggle dropdown-toggle-split" data-
    <span class="visually-hidden">Toggle Dropdown</span>
  </button>
  <ul class="dropdown-menu">
    <li><a class="dropdown-item" href="#">Action</a></li>
    <li><a class="dropdown-item" href="#">Another action</a></li>
    <li><a class="dropdown-item" href="#">Something else here</a></li>
    <li><hr class="dropdown-divider"></li>
    <li><a class="dropdown-item" href="#">Separated link</a></li>
  </ul>
  <input type="text" class="form-control" aria-label="Text input with segmented dropdown button">
</div>

<div class="input-group">
  <input type="text" class="form-control" aria-label="Text input with segmented dropdown button">
  <button type="button" class="btn btn-outline-secondary">Action</button>
  <button type="button" class="btn btn-outline-secondary dropdown-toggle dropdown-toggle-split" data-
    <span class="visually-hidden">Toggle Dropdown</span>
  </button>
  <ul class="dropdown-menu dropdown-menu-end">
    <li><a class="dropdown-item" href="#">Action</a></li>
    <li><a class="dropdown-item" href="#">Another action</a></li>
    <li><a class="dropdown-item" href="#">Something else here</a></li>
    <li><hr class="dropdown-divider"></li>
    <li><a class="dropdown-item" href="#">Separated link</a></li>
  </ul>
</div>
```



Options Three



Two



Options

Button

One



Choose...



Button

```
<div class="input-group mb-3">
  <label class="input-group-text" for="inputGroupSelect01">Options</label>
  <select class="form-select" id="inputGroupSelect01">
    <option selected>Choose...</option>
    <option value="1">One</option>
    <option value="2">Two</option>
    <option value="3">Three</option>
  </select>
</div>
```

```
<div class="input-group mb-3">
  <select class="form-select" id="inputGroupSelect02">
    <option selected>Choose...</option>
    <option value="1">One</option>
    <option value="2">Two</option>
    <option value="3">Three</option>
  </select>
  <label class="input-group-text" for="inputGroupSelect02">Options</label>
</div>
```

```
<div class="input-group mb-3">
  <button class="btn btn-outline-secondary" type="button">Button</button>
  <select class="form-select" id="inputGroupSelect03" aria-label="Example select with button addon">
    <option selected>Choose...</option>
    <option value="1">One</option>
    <option value="2">Two</option>
    <option value="3">Three</option>
  </select>
</div>
```

```
<div class="input-group">
  <select class="form-select" id="inputGroupSelect04" aria-label="Example select with button addon">
    <option selected>Choose...</option>
    <option value="1">One</option>
    <option value="2">Two</option>
    <option value="3">Three</option>
  </select>
  <button class="btn btn-outline-secondary" type="button">Button</button>
</div>
```

Upload Procurar... Nenhum arquivo selecionado.

Procurar... Nenhum arquivo selecionado.

Upload

Button Procurar... Nenhum arquivo selecionado.

Procurar... Nenhum arquivo selecionado.

Button

HTML



```
<div class="input-group mb-3">
  <label class="input-group-text" for="inputGroupFile01">Upload</label>
  <input type="file" class="form-control" id="inputGroupFile01">
</div>

<div class="input-group mb-3">
  <input type="file" class="form-control" id="inputGroupFile02">
  <label class="input-group-text" for="inputGroupFile02">Upload</label>
</div>

<div class="input-group mb-3">
  <button class="btn btn-outline-secondary" type="button" id="inputGroupFileAddon03">Button</button>
  <input type="file" class="form-control" id="inputGroupFile03" aria-describedby="inputGroupFileAdd
</div>

<div class="input-group">
  <input type="file" class="form-control" id="inputGroupFile04" aria-describedby="inputGroupFileAdd
  <button class="btn btn-outline-secondary" type="button" id="inputGroupFileAddon04">Button</button>
</div>
```

STITUTO FEDERAL

Paulo
Ipus Barretos

form-floating

- O rótulo move para o canto superior direito ao clicar:

HTML

```
<div class="form-floating mb-3">  
  <input type="email" class="form-control" id="floatingInput" placeholder="name@example.com">  
  <label for="floatingInput">Email address</label>  
</div>  
<div class="form-floating">  
  <input type="password" class="form-control" id="floatingPassword" placeholder="Password">  
  <label for="floatingPassword">Password</label>  
</div>
```

HTML

```
<form class="form-floating">  
  <input type="email" class="form-control" id="floatingInputValue" placeholder="name@example.com" v  
  <label for="floatingInputValue">Input with value</label>  
</form>
```

Validação do formulário



INSTITUTO FEDERAL
São Paulo
Campus Barretos



Invalid input
test@example.com

HTML

```
<form class="form-floating">  
  <input type="email" class="form-control is-invalid" id="floatingInputInvalid" placeholder="name@">  
  <label for="floatingInputInvalid">Invalid input</label>  
</form>
```

Validação de formulário



INSTITUTO FEDERAL
São Paulo
Campus Barretos

First name Last name Username

Mark Otto @

Looks good! Looks good! Please choose a username.

City State Zip

Please provide a valid city. Please select a valid state. Please provide a valid zip.

☐ Agree to terms and conditions
You must agree before submitting.

Submit form

```
<form class="row g-3 needs-validation" novalidate>
  <div class="col-md-4">
    <label for="validationCustom01" class="form-label">First name</label>
    <input type="text" class="form-control" id="validationCustom01" value="Mark" required>
    <div class="valid-feedback">
      Looks good!
    </div>
  </div>
  <div class="col-md-4">
    <label for="validationCustom02" class="form-label">Last name</label>
    <input type="text" class="form-control" id="validationCustom02" value="Otto" required>
    <div class="valid-feedback">
      Looks good!
    </div>
  </div>
  <div class="col-md-4">
    <label for="validationCustomUsername" class="form-label">Username</label>
    <div class="input-group has-validation">
      <span class="input-group-text" id="inputGroupPrepend">@</span>
      <input type="text" class="form-control" id="validationCustomUsername" aria-describedby="input
      <div class="invalid-feedback">
        Please choose a username.
      </div>
    </div>
  </div>
  <div class="col-md-6">
    <label for="validationCustom03" class="form-label">City</label>
    <input type="text" class="form-control" id="validationCustom03" required>
    <div class="invalid-feedback">
      Please provide a valid city.
    </div>
  </div>
</form>
```



First name Last name Username

Mark Otto @

Looks good! Looks good! Please choose a username.

City State Zip

Please provide a valid city. Please select a valid state. Please provide a valid zip.

☐ Agree to terms and conditions
You must agree before submitting.

Submit form

```
<div class="col-md-3">
  <label for="validationCustom04" class="form-label">State</label>
  <select class="form-select" id="validationCustom04" required>
    <option selected disabled value="">Choose...</option>
    <option>...</option>
  </select>
  <div class="invalid-feedback">
    Please select a valid state.
  </div>
</div>
<div class="col-md-3">
  <label for="validationCustom05" class="form-label">Zip</label>
  <input type="text" class="form-control" id="validationCustom05" required>
  <div class="invalid-feedback">
    Please provide a valid zip.
  </div>
</div>
<div class="col-12">
  <div class="form-check">
    <input class="form-check-input" type="checkbox" value="" id="invalidCheck" required>
    <label class="form-check-label" for="invalidCheck">
      Agree to terms and conditions
    </label>
    <div class="invalid-feedback">
      You must agree before submitting.
    </div>
  </div>
</div>
<div class="col-12">
  <button class="btn btn-primary" type="submit">Submit form</button>
</div>
</form>
```

is-invalid

- Além da validação no navegador, é possível validar no servidor;
- Podemos definir o campo como inválido após retorno do servidor:

```
<div class="col-md-4">
  <label for="validationServerUsername" class="form-label">Username</label>
  <div class="input-group has-validation">
    <span class="input-group-text" id="inputGroupPrepend3">@</span>
    <input type="text" class="form-control is-invalid" id="validationServerUsername" aria-describedby="validationServerUsernameFeedback">
    <div id="validationServerUsernameFeedback" class="invalid-feedback">
      Please choose a username.
    </div>
  </div>
</div>
</div>
```



tooltips

First name Last name Username

Mark Otto @

Looks good! Looks good!

City State

Please provide a valid city. Please select a valid state. Please choose a unique and valid username.

Submit form

HTML

```
<form class="row g-3 needs-validation" novalidate>
  <div class="col-md-4 position-relative">
    <label for="validationTooltip01" class="form-label">First name</label>
    <input type="text" class="form-control" id="validationTooltip01" value="Mark" required>
    <div class="valid-tooltip">
      Looks good!
    </div>
  </div>
  <div class="col-md-4 position-relative">
    <label for="validationTooltip02" class="form-label">Last name</label>
    <input type="text" class="form-control" id="validationTooltip02" value="Otto" required>
    <div class="valid-tooltip">
      Looks good!
    </div>
  </div>
  <div class="col-md-4 position-relative">
    <label for="validationTooltipUsername" class="form-label">Username</label>
    <div class="input-group has-validation">
      <span class="input-group-text" id="validationTooltipUsernamePrepend">@</span>
      <input type="text" class="form-control" id="validationTooltipUsername" aria-describedby="vali
      <div class="invalid-tooltip">
        Please choose a unique and valid username.
      </div>
    </div>
  </div>
```

RAL

accordion

- Efeito sanfona;
- Expande e contrai ao clicar.

Accordion Item #1

This is the first item's accordion body. It is shown by default, until the collapse plugin adds the appropriate classes that we use to style each element. These classes control the overall appearance, as well as the showing and hiding via CSS transitions. You can modify any of this with custom CSS or overriding our default variables. It's also worth noting that just about any HTML can go within the `.accordion-body`, though the transition does limit overflow.

Accordion Item #2

Accordion Item #3

HTML

```
<div class="accordion" id="accordionExample">
  <div class="accordion-item">
    <h2 class="accordion-header" id="headingOne">
      <button class="accordion-button" type="button" data-bs-toggle="collapse" data-bs-target="#col
        Accordion Item #1
      </button>
    </h2>
    <div id="collapseOne" class="accordion-collapse collapse show" aria-labelledby="headingOne" dat
      <div class="accordion-body">
        <strong>This is the first item's accordion body.</strong> It is shown by default, until the
      </div>
    </div>
  </div>
  <div class="accordion-item">
    <h2 class="accordion-header" id="headingTwo">
```

alert

Nice, you triggered this alert message!



Show live alert

HTML



```
<div id="liveAlertPlaceholder"></div>  
<button type="button" class="btn btn-primary" id="liveAlertBtn">Show live alert</button>
```



A simple primary alert with [an example link](#). Give it a click if you like.

A simple secondary alert with [an example link](#). Give it a click if you like.

A simple success alert with [an example link](#). Give it a click if you like.

A simple danger alert with [an example link](#). Give it a click if you like.

A simple warning alert with [an example link](#). Give it a click if you like.

A simple info alert with [an example link](#). Give it a click if you like.

A simple light alert with [an example link](#). Give it a click if you like.

A simple dark alert with [an example link](#). Give it a click if you like.

HTML



```
<div class="alert alert-primary" role="alert">
  A simple primary alert with <a href="#" class="alert-link">an example link</a>. Give it a click i
</div>
<div class="alert alert-secondary" role="alert">
  A simple secondary alert with <a href="#" class="alert-link">an example link</a>. Give it a click
</div>
```

dismiss

- Adicionando um botão de fechar:



Holy guacamole! You should check in on some of those fields below. ×

HTML

```
<div class="alert alert-warning alert-dismissible fade show" role="alert">  
  <strong>Holy guacamole!</strong> You should check in on some of those fields below.  
  <button type="button" class="btn-close" data-bs-dismiss="alert" aria-label="Close"></button>  
</div>
```

badge



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Example heading New

Example heading New

Example heading New

Example heading New

Example heading New

Example heading New

HTML



```
<h1>Example heading <span class="badge bg-secondary">New</span></h1>  
<h2>Example heading <span class="badge bg-secondary">New</span></h2>  
<h3>Example heading <span class="badge bg-secondary">New</span></h3>  
<h4>Example heading <span class="badge bg-secondary">New</span></h4>  
<h5>Example heading <span class="badge bg-secondary">New</span></h5>  
<h6>Example heading <span class="badge bg-secondary">New</span></h6>
```

Button com badge interno

- Servindo como um contador:

Notifications 4

HTML

```
<button type="button" class="btn btn-primary">
  Notifications <span class="badge text-bg-secondary">4</span>
</button>
```


translate, start, top

- Alterando sua posição:



text-bg-*

- Cor do texto é ajustada automaticamente:

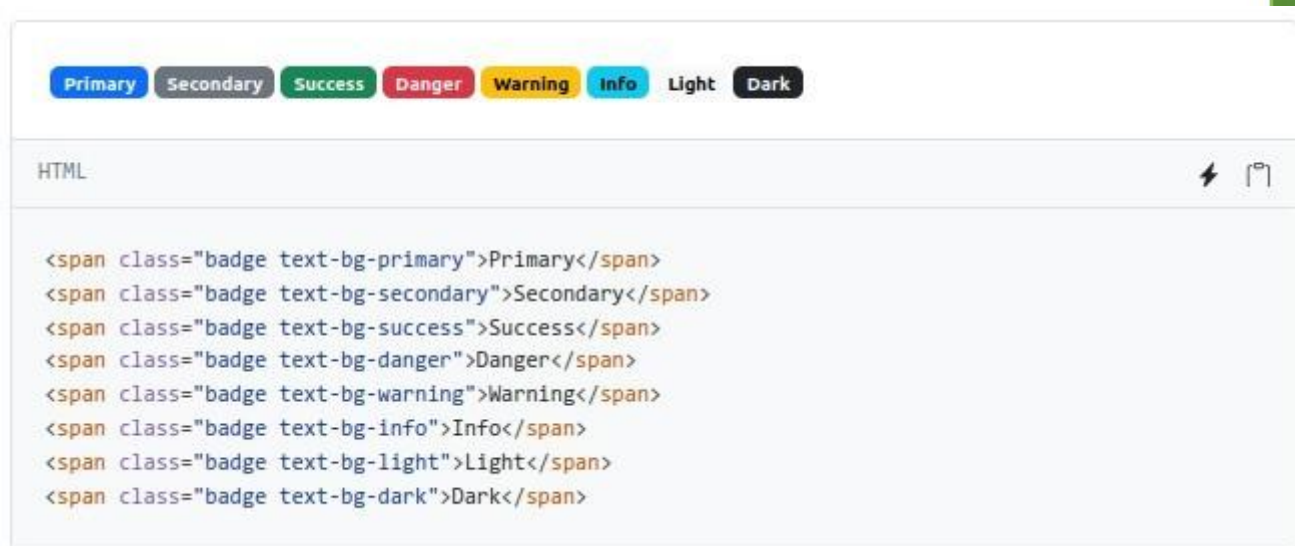

```
<span class="badge text-bg-primary">Primary</span>
<span class="badge text-bg-secondary">Secondary</span>
<span class="badge text-bg-success">Success</span>
<span class="badge text-bg-danger">Danger</span>
<span class="badge text-bg-warning">Warning</span>
<span class="badge text-bg-info">Info</span>
<span class="badge text-bg-light">Light</span>
<span class="badge text-bg-dark">Dark</span>
```

rounded-pill



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Primary Secondary Success Danger Warning Info Light Dark

HTML



```
<span class="badge rounded-pill text-bg-primary">Primary</span>
<span class="badge rounded-pill text-bg-secondary">Secondary</span>
<span class="badge rounded-pill text-bg-success">Success</span>
<span class="badge rounded-pill text-bg-danger">Danger</span>
<span class="badge rounded-pill text-bg-warning">Warning</span>
<span class="badge rounded-pill text-bg-info">Info</span>
<span class="badge rounded-pill text-bg-light">Light</span>
<span class="badge rounded-pill text-bg-dark">Dark</span>
```

breadcrumb



INSTITUTO FEDERAL
São Paulo
Campus Barretos

Home

[Home](#) / Library

[Home](#) / [Library](#) / Data

HTML



```
<nav aria-label="breadcrumb">
  <ol class="breadcrumb">
    <li class="breadcrumb-item active" aria-current="page">Home</li>
  </ol>
</nav>

<nav aria-label="breadcrumb">
  <ol class="breadcrumb">
    <li class="breadcrumb-item"><a href="#">Home</a></li>
    <li class="breadcrumb-item active" aria-current="page">Library</li>
  </ol>
</nav>

<nav aria-label="breadcrumb">
  <ol class="breadcrumb">
    <li class="breadcrumb-item"><a href="#">Home</a></li>
    <li class="breadcrumb-item"><a href="#">Library</a></li>
    <li class="breadcrumb-item active" aria-current="page">Data</li>
  </ol>
</nav>
```

btn-group



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

Left Middle Right

HTML



```
<div class="btn-group" role="group" aria-label="Basic example">  
  <button type="button" class="btn btn-primary">Left</button>  
  <button type="button" class="btn btn-primary">Middle</button>  
  <button type="button" class="btn btn-primary">Right</button>  
</div>
```

Left	Middle	Right
------	--------	-------

Left	Middle	Right
------	--------	-------

Left	Middle	Right
------	--------	-------

HTML



```
<div class="btn-group btn-group-lg" role="group" aria-label="Large button group">
  <button type="button" class="btn btn-outline-dark">Left</button>
  <button type="button" class="btn btn-outline-dark">Middle</button>
  <button type="button" class="btn btn-outline-dark">Right</button>
</div>
<br>
<div class="btn-group" role="group" aria-label="Default button group">
  <button type="button" class="btn btn-outline-dark">Left</button>
  <button type="button" class="btn btn-outline-dark">Middle</button>
  <button type="button" class="btn btn-outline-dark">Right</button>
</div>
<br>
<div class="btn-group btn-group-sm" role="group" aria-label="Small button group">
  <button type="button" class="btn btn-outline-dark">Left</button>
  <button type="button" class="btn btn-outline-dark">Middle</button>
  <button type="button" class="btn btn-outline-dark">Right</button>
</div>
```

 INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

Button

[illegible]

card



INSTITUTO FEDERAL
São Paulo
Campus Barretos



HTML



```
<div class="card" style="width: 18rem;">
  
  <div class="card-body">
    <h5 class="card-title">Card title</h5>
    <p class="card-text">Some quick example text to build on the card title and make up the bulk of
    <a href="#" class="btn btn-primary">Go somewhere</a>
  </div>
</div>
```

Image

Card title

This is a wider card with supporting text below as a natural lead-in to additional content. This content is a little bit longer.

Last updated 3 mins ago

HTML



```
<div class="card mb-3" style="max-width: 540px;">
  <div class="row g-0">
    <div class="col-md-4">
      
    </div>
    <div class="col-md-8">
      <div class="card-body">
        <h5 class="card-title">Card title</h5>
        <p class="card-text">This is a wider card with supporting text below as a natural lead-in t
        <p class="card-text"><small class="text-muted">Last updated 3 mins ago</small></p>
      </div>
    </div>
  </div>
</div>
```



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

Image cap	Image cap	Image cap
Card title This is a wider card with supporting text below as a natural lead-in to additional content. This content is a little bit longer. Last updated 3 mins ago	Card title This card has supporting text below as a natural lead-in to additional content. Last updated 3 mins ago	Card title This is a wider card with supporting text below as a natural lead-in to additional content. This card has even longer content than the first to show that equal height action. Last updated 3 mins ago

HTML



```
<div class="card-group">
  <div class="card">
    
    <div class="card-body">
      <h5 class="card-title">Card title</h5>
      <p class="card-text">This is a wider card with supporting text below as a natural lead-in to
      <p class="card-text"><small class="text-muted">Last updated 3 mins ago</small></p>
    </div>
  </div>
  <div class="card">
    
    <div class="card-body">
      <h5 class="card-title">Card title</h5>
      <p class="card-text">This card has supporting text below as a natural lead-in to additional c
      <p class="card-text"><small class="text-muted">Last updated 3 mins ago</small></p>
    </div>
  </div>
  <div class="card">
    
    <div class="card-body">
      <h5 class="card-title">Card title</h5>
      <p class="card-text">This is a wider card with supporting text below as a natural lead-in to
      <p class="card-text"><small class="text-muted">Last updated 3 mins ago</small></p>
    </div>
  </div>
</div>
```

carousel

- Alterna imagens ou blocos de texto como um carrossel.



HTML

```
<div id="carouselExampleControls" class="carousel slide" data-bs-ride="carousel">
  <div class="carousel-inner">
    <div class="carousel-item active">
      
    </div>
    <div class="carousel-item">
      
    </div>
    <div class="carousel-item">
      
    </div>
  </div>
  <button class="carousel-control-prev" type="button" data-bs-target="#carouselExampleControls" data-
    <span class="carousel-control-prev-icon" aria-hidden="true"></span>
    <span class="visually-hidden">Previous</span>
  </button>
  <button class="carousel-control-next" type="button" data-bs-target="#carouselExampleControls" dat
    <span class="carousel-control-next-icon" aria-hidden="true"></span>
    <span class="visually-hidden">Next</span>
  </button>
</div>
```

list-group

An item

A second item

A third item

A fourth item

And a fifth one

HTML



```
<ul class="list-group">
  <li class="list-group-item">An item</li>
  <li class="list-group-item">A second item</li>
  <li class="list-group-item">A third item</li>
  <li class="list-group-item">A fourth item</li>
  <li class="list-group-item">And a fifth one</li>
</ul>
```

1. **Subheading**
Content for list item

14

2. **Subheading**
Content for list item

14

3. **Subheading**
Content for list item

14

HTML




```
<ol class="list-group list-group-numbered">
  <li class="list-group-item d-flex justify-content-between align-items-start">
    <div class="ms-2 me-auto">
      <div class="fw-bold">Subheading</div>
      Content for list item
    </div>
    <span class="badge bg-primary rounded-pill">14</span>
  </li>
  <li class="list-group-item d-flex justify-content-between align-items-start">
    <div class="ms-2 me-auto">
      <div class="fw-bold">Subheading</div>
      Content for list item
    </div>
    <span class="badge bg-primary rounded-pill">14</span>
  </li>
  <li class="list-group-item d-flex justify-content-between align-items-start">
    <div class="ms-2 me-auto">
      <div class="fw-bold">Subheading</div>
      Content for list item
    </div>
    <span class="badge bg-primary rounded-pill">14</span>
  </li>
</ol>
```

modal



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

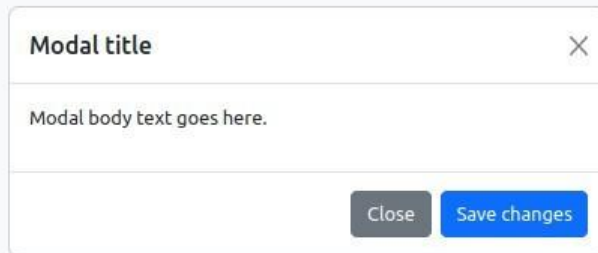

```
<div class="modal" tabindex="-1">  
  <div class="modal-dialog">  
    <div class="modal-content">  
      <div class="modal-header">  
        <h5 class="modal-title">Modal title</h5>  
        <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></but<br>      </div>  
      <div class="modal-body">  
        <p>Modal body text goes here.</p>  
      </div>  
      <div class="modal-footer">  
        <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>  
        <button type="button" class="btn btn-primary">Save changes</button>  
      </div>  
    </div>  
  </div>  
</div>
```

Open modal for @mdo

Open modal for @fat

Open modal for @getbootstrap

HTML

```
<button type="button" class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#exampleModal">
<button type="button" class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#exampleModal">
<button type="button" class="btn btn-primary" data-bs-toggle="modal" data-bs-target="#exampleModal">

<div class="modal fade" id="exampleModal" tabindex="-1" aria-labelledby="exampleModallabel" aria-hi
  <div class="modal-dialog">
    <div class="modal-content">
      <div class="modal-header">
        <h5 class="modal-title" id="exampleModallabel">New message</h5>
        <button type="button" class="btn-close" data-bs-dismiss="modal" aria-label="Close"></button>
      </div>
      <div class="modal-body">
        <form>
          <div class="mb-3">
            <label for="recipient-name" class="col-form-label">Recipient:</label>
            <input type="text" class="form-control" id="recipient-name">
          </div>
          <div class="mb-3">
            <label for="message-text" class="col-form-label">Message:</label>
            <textarea class="form-control" id="message-text"></textarea>
          </div>
        </form>
      </div>
      <div class="modal-footer">
        <button type="button" class="btn btn-secondary" data-bs-dismiss="modal">Close</button>
        <button type="button" class="btn btn-primary">Send message</button>
      </div>
    </div>
  </div>
</div>
```



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

New message to @fat

Recipient:

Message:

Close

Send message

no followed by example HTML and JavaScript. For more information, rea

navbar

• Barra de menus:



```
<nav class="navbar navbar-dark bg-dark">
  <!-- Navbar content -->
</nav>

<nav class="navbar navbar-dark bg-primary">
  <!-- Navbar content -->
</nav>

<nav class="navbar" style="background-color: #e3f2fd;">
  <!-- Navbar content -->
</nav>
```

```
Navbar Home Link Dropdown ▾ Disabled Search Search

HTML

<nav class="navbar navbar-expand-lg bg-light">
  <div class="container-fluid">
    <a class="navbar-brand" href="#">Navbar</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbars"
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="collapse navbar-collapse" id="navbars">
      <ul class="navbar-nav me-auto mb-2 mb-lg-0">
        <li class="nav-item">
          <a class="nav-link active" aria-current="page" href="#">Home</a>
        </li>
        <li class="nav-item">
          <a class="nav-link" href="#">Link</a>
        </li>
        <li class="nav-item dropdown">
          <a class="nav-link dropdown-toggle" href="#" role="button" data-bs-toggle="dropdown" aria
            Dropdown
          </a>
          <ul class="dropdown-menu">
            <li><a class="dropdown-item" href="#">Action</a></li>
            <li><a class="dropdown-item" href="#">Another action</a></li>
            <li><hr class="dropdown-divider"></li>
            <li><a class="dropdown-item" href="#">Something else here</a></li>
          </ul>
        </li>
        <li class="nav-item">
          <a class="nav-link disabled">Disabled</a>
        </li>
      </ul>
      <form class="d-flex" role="search">
        <input class="form-control me-2" type="search" placeholder="Search" aria-label="Search">
        <button class="btn btn-outline-success" type="submit">Search</button>
      </form>
    </div>
  </div>
</nav>
```



HTML



```
<nav class="navbar bg-light fixed-top">
  <div class="container-fluid">
    <a class="navbar-brand" href="#">Offcanvas navbar</a>
    <button class="navbar-toggler" type="button" data-bs-toggle="offcanvas" data-bs-target="#offcan
      <span class="navbar-toggler-icon"></span>
    </button>
    <div class="offcanvas offcanvas-end" tabindex="-1" id="offcanvasNavbar" aria-labelledby="offcan
      <div class="offcanvas-header">
        <h5 class="offcanvas-title" id="offcanvasNavbarLabel">Offcanvas</h5>
        <button type="button" class="btn-close" data-bs-dismiss="offcanvas" aria-label="close"></bu
      </div>
      <div class="offcanvas-body">
        <ul class="navbar-nav justify-content-end flex-grow-1 pe-3">
          <li class="nav-item">
            <a class="nav-link active" aria-current="page" href="#">Home</a>
          </li>
          <li class="nav-item">
            <a class="nav-link" href="#">Link</a>
          </li>
          <li class="nav-item dropdown">
            <a class="nav-link dropdown-toggle" href="#" role="button" data-bs-toggle="dropdown" ar
              Dropdown
            </a>
            <ul class="dropdown-menu">
              <li><a class="dropdown-item" href="#">Action</a></li>
              <li><a class="dropdown-item" href="#">Another action</a></li>
              <li>
                <hr class="dropdown-divider">
              </li>
              <li><a class="dropdown-item" href="#">Something else here</a></li>
            </ul>
          </li>
        </ul>
        <form class="d-flex" role="search">
          <input class="form-control me-2" type="search" placeholder="Search" aria-label="Search">
          <button class="btn btn-outline-success" type="submit">Search</button>
        </form>
      </div>
    </div>
  </div>
</nav>
```

Offcanvas



Home


Link

Dropdown ▾

nav-tabs



INSTITUTO FEDERAL
São Paulo
Campus Barretos

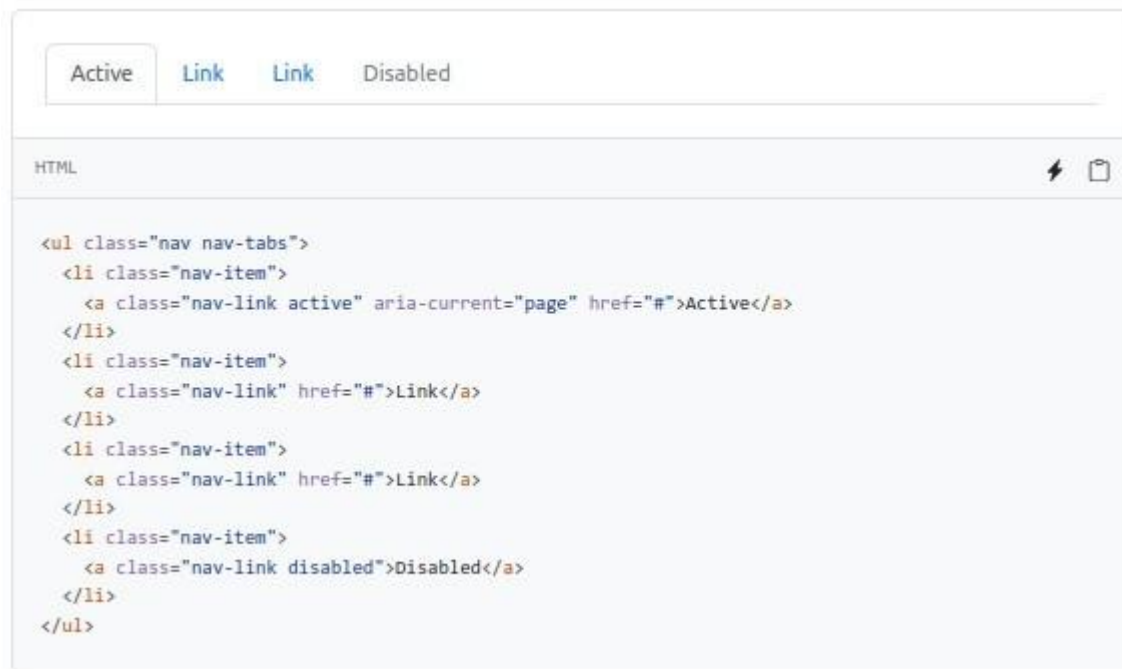

```
<ul class="nav nav-tabs">
  <li class="nav-item">
    <a class="nav-link active" aria-current="page" href="#">Active</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link" href="#">Link</a>
  </li>
  <li class="nav-item">
    <a class="nav-link disabled">Disabled</a>
  </li>
</ul>
```

offcanvas

- Configurado para surgir de baixo:

Toggle bottom offcanvas

HTML

```
<button class="btn btn-primary" type="button" data-bs-toggle="offcanvas" data-bs-target="#offcanvas<br><div class="offcanvas offcanvas-bottom" tabindex="-1" id="offcanvasBottom" aria-labelledby="offcanv<br>  <div class="offcanvas-header"><br>    <h5 class="offcanvas-title" id="offcanvasBottomLabel">Offcanvas bottom</h5><br>    <button type="button" class="btn-close" data-bs-dismiss="offcanvas" aria-label="Close"></button<br>  </div><br>  <div class="offcanvas-body small"><br>    ...<br>  </div><br></div>
```

pagination



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

Previous 1 2 3 Next


HTML



```
<nav aria-label="Page navigation example">
  <ul class="pagination">
    <li class="page-item"><a class="page-link" href="#">Previous</a></li>
    <li class="page-item"><a class="page-link" href="#">1</a></li>
    <li class="page-item"><a class="page-link" href="#">2</a></li>
    <li class="page-item"><a class="page-link" href="#">3</a></li>
    <li class="page-item"><a class="page-link" href="#">Next</a></li>
  </ul>
</nav>
```

placeholders

- Indicam que o conteúdo está sendo carregado.

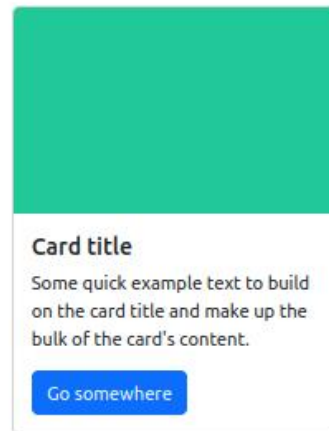

```
<div class="card">  
    
  
  <div class="card-body">  
    <h5 class="card-title">Card title</h5>  
    <p class="card-text">Some quick example text to build on the card title and make up the bulk  
    <a href="#" class="btn btn-primary">Go somewhere</a>  
  </div>  
</div>  
  
<div class="card" aria-hidden="true">  
    
  <div class="card-body">  
    <h5 class="card-title placeholder-glow">  
      <span class="placeholder col-6"></span>  
    </h5>  
    <p class="card-text placeholder-glow">  
      <span class="placeholder col-7"></span>  
      <span class="placeholder col-4"></span>  
      <span class="placeholder col-4"></span>  
      <span class="placeholder col-6"></span>  
      <span class="placeholder col-8"></span>  
    </p>  
    <a href="#" tabindex="-1" class="btn btn-primary disabled placeholder col-6"></a>  
  </div>  
</div>
```

glow e wave

- Efeitos de animação do placeholder.



HTML



```
<p class="placeholder-glow">  
  <span class="placeholder col-12"></span>  
</p>  
  
<p class="placeholder-wave">  
  <span class="placeholder col-12"></span>  
</p>
```

popover

Popover on top

Popover on right

Popover on bottom

Popover on left

Bottom popover

HTML

```
<button type="button" class="btn btn-secondary" data-bs-container="body" data-bs-toggle="popover" d
  Popover on top
</button>
<button type="button" class="btn btn-secondary" data-bs-container="body" data-bs-toggle="popover" d
  Popover on right
</button>
<button type="button" class="btn btn-secondary" data-bs-container="body" data-bs-toggle="popover" d
  Popover on bottom
</button>
<button type="button" class="btn btn-secondary" data-bs-container="body" data-bs-toggle="popover" d
  Popover on left
</button>
```



progress



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

25%

HTML

```
<div class="progress">  
  <div class="progress-bar" role="progressbar" aria-label="Example with label" style="width: 25%;">  
</div>
```

striped



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos



HTML



```
<div class="progress">
  <div class="progress-bar progress-bar-striped" role="progressbar" aria-label="Default striped exa
</div>
<div class="progress">
  <div class="progress-bar progress-bar-striped bg-success" role="progressbar" aria-label="Success
</div>
<div class="progress">
  <div class="progress-bar progress-bar-striped bg-info" role="progressbar" aria-label="Info stripe
</div>
<div class="progress">
  <div class="progress-bar progress-bar-striped bg-warning" role="progressbar" aria-label="Warning
</div>
<div class="progress">
  <div class="progress-bar progress-bar-striped bg-danger" role="progressbar" aria-label="Danger st
</div>
```

animated



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos



HTML



```
<div class="progress">  
  <div class="progress-bar progress-bar-striped progress-bar-animated" role="progressbar" aria-label="Progress bar" data-bbox="250 558 750 578">  
</div>
```

spinner



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos



HTML



```
<div class="spinner-border text-primary" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-border text-secondary" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-border text-success" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-border text-danger" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-border text-warning" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-border text-info" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-border text-light" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-border text-dark" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
```



HTML



```
<div class="spinner-grow text-primary" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-grow text-secondary" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-grow text-success" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-grow text-danger" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-grow text-warning" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-grow text-info" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-grow text-light" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
<div class="spinner-grow text-dark" role="status">
  <span class="visually-hidden">Loading...</span>
</div>
```

button com spinner



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos



HTML



```
<button class="btn btn-primary" type="button" disabled>
  <span class="spinner-border spinner-border-sm" role="status" aria-hidden="true"></span>
  <span class="visually-hidden">Loading...</span>
</button>
<button class="btn btn-primary" type="button" disabled>
  <span class="spinner-border spinner-border-sm" role="status" aria-hidden="true"></span>
  Loading...
</button>
```

toast



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos



Bootstrap

11 mins ago X

Hello, world! This is a toast message.

HTML



```
<div class="toast" role="alert" aria-live="assertive" aria-atomic="true">
  <div class="toast-header">
    
    <strong class="me-auto">Bootstrap</strong>
    <small>11 mins ago</small>
    <button type="button" class="btn-close" data-bs-dismiss="toast" aria-label="Close"></button>
  </div>
  <div class="toast-body">
    Hello, world! This is a toast message.
  </div>
</div>
```

tooltip



INSTITUTO FEDERAL
São Paulo
Câmpus Barretos

Tooltip on top

Tooltip on right

Tooltip on bottom

Tooltip on left

Tooltip with HTML

```
<button type="button" class="btn btn-secondary" data-bs-toggle="tooltip" data-bs-placement="top" >  
  Tooltip on top  
</button>  
<button type="button" class="btn btn-secondary" data-bs-toggle="tooltip" data-bs-placement="right" >  
  Tooltip on right  
</button>  
<button type="button" class="btn btn-secondary" data-bs-toggle="tooltip" data-bs-placement="bottom" >  
  Tooltip on bottom  
</button>  
<button type="button" class="btn btn-secondary" data-bs-toggle="tooltip" data-bs-placement="left" >  
  Tooltip on left  
</button>
```

Tarefa 5

- Incluir o uso da biblioteca Bootstrap no projeto utilizado nas tarefas anteriores;

Referências



INSTITUTO FEDERAL
São Paulo
Campus Barretos

- getbootstrap.com