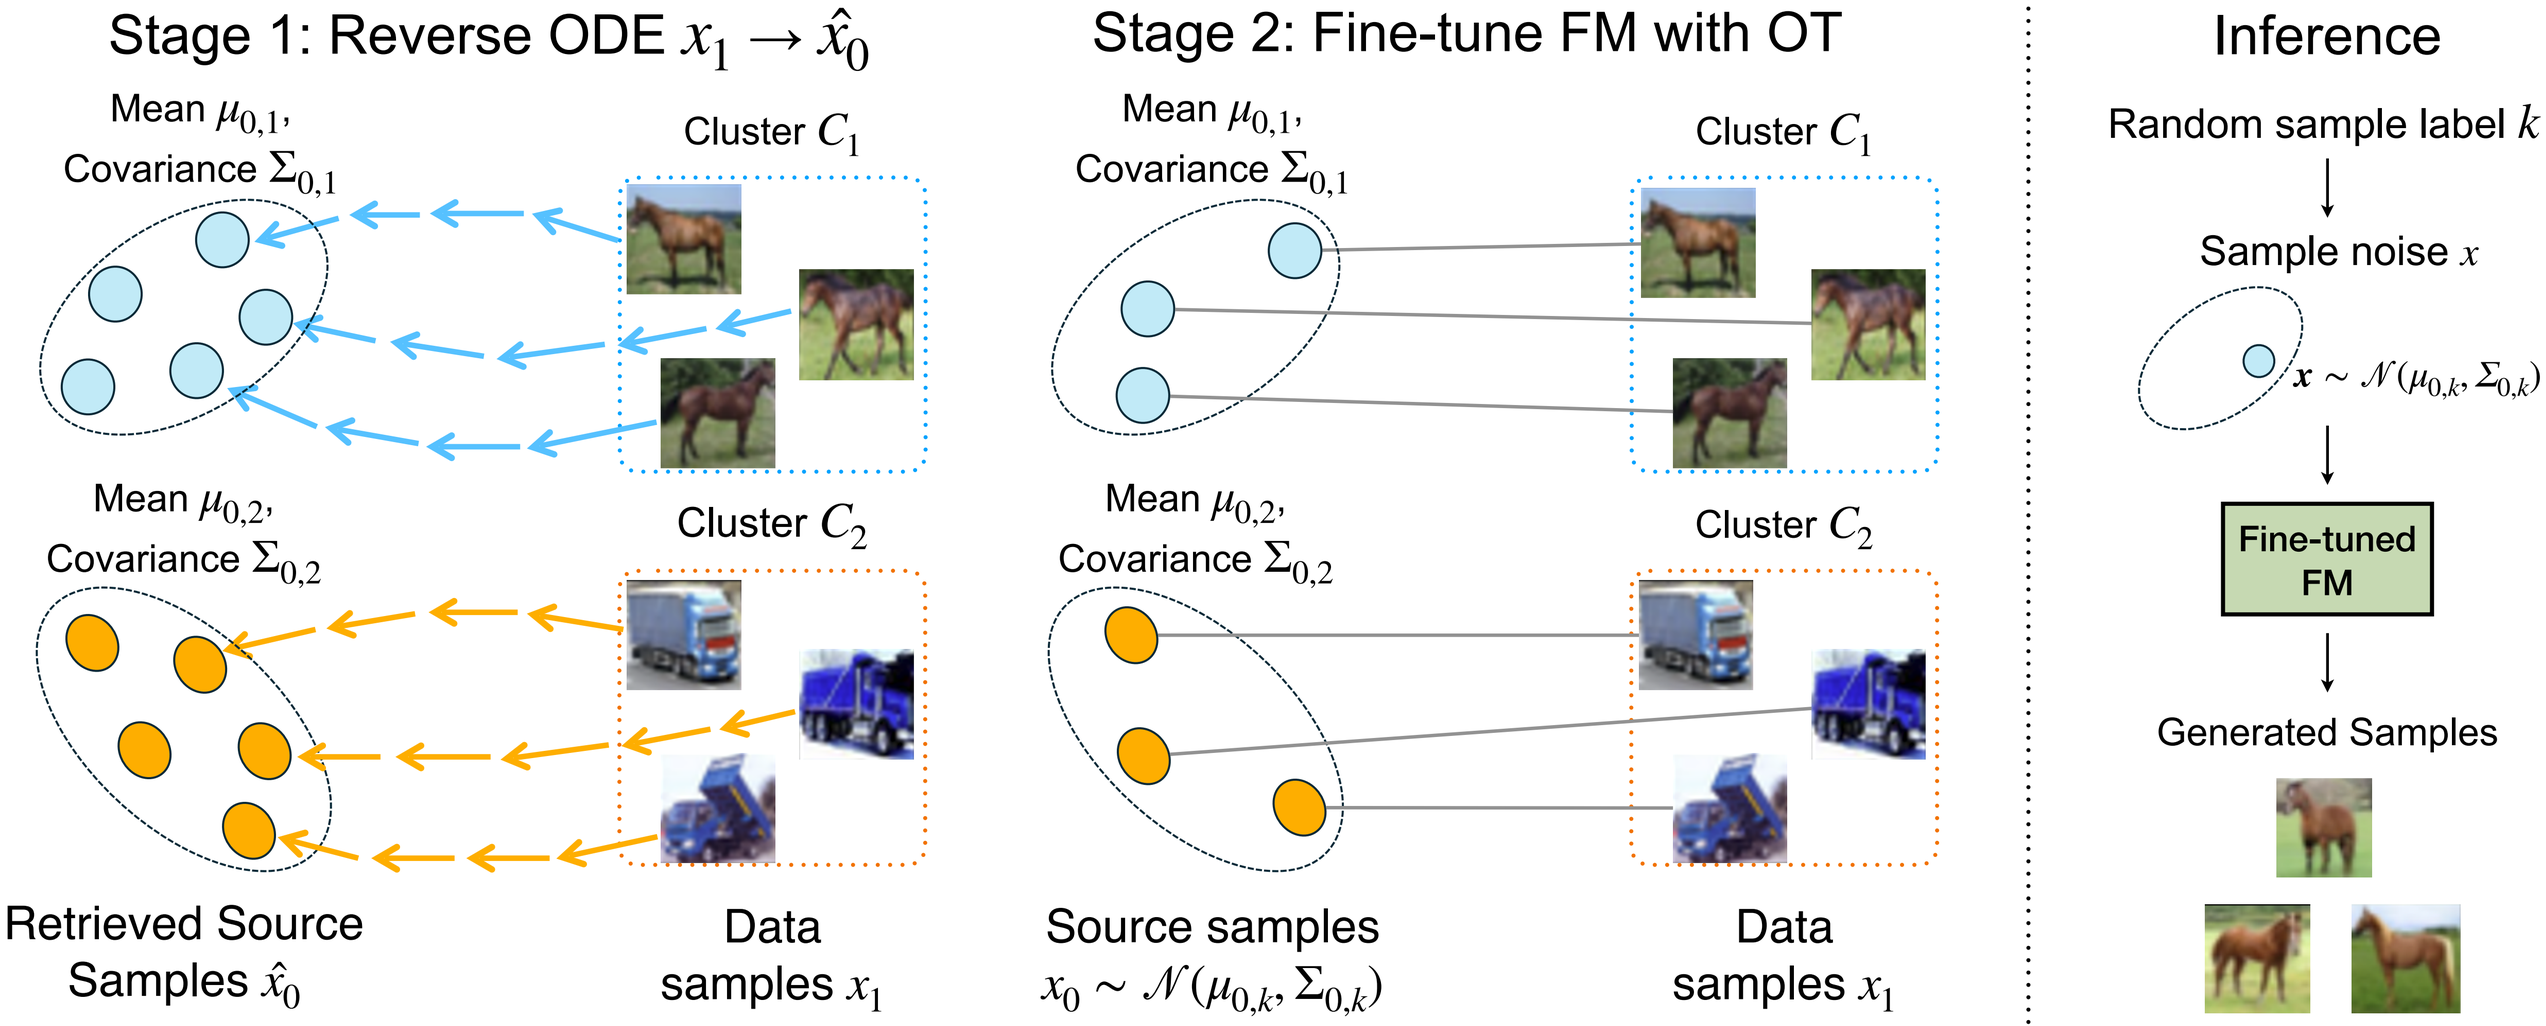
Stage 1: Reverse ODE $x_1 \rightarrow \hat{x}_0$
Mean $\mu_{0,1}$,
Covariance $\Sigma_{0,1}$
Cluster C_1
Mean $\mu_{0,2}$,
Covariance $\Sigma_{0,2}$
Cluster C_2
Retrieved Source Samples $\hat{x}_0$
Data samples x_1
Stage 2: Fine-tune FM with OT
Mean $\mu_{0,1}$,
Covariance $\Sigma_{0,1}$
Cluster C_1
Mean $\mu_{0,2}$,
Covariance $\Sigma_{0,2}$
Cluster C_2
Source samples $x_0 \sim \mathcal{N}(\mu_{0,k}, \Sigma_{0,k})$
Data samples x_1
Inference
Random sample label k
Sample noise x
$x \sim \mathcal{N}(\mu_{0,k}, \Sigma_{0,k})$
Fine-tuned FM
Generated Samples