PARTS LIST

Item	Qty	REFERENCE DESIGNATOR	PART NUMBER	DESCRIPTION	MANUFACTURER
1	1		S1101EFF3215	BARE BOARD	ZIN TECHNOLOGIES
2	4	C1, C2, C3, C4	C0805C104K1RACTU	CAPACITOR 0.1uF 100V CERAMIC 10% 0805 SMD	KEMET
3	1	J1	70553-0112	CONNECTOR HEADER 8POS 1X8 2.54MM PITCH R/A GOLD	MOLEX
4	2	J2, J3	BCS-107-L-D-TE	CONNECTOR HEADER 2X7 PIN FEMALE .100X.100 PITCH	SAMTEC
5	1	U1	MAX3221	IC SMD SINGLE-CHANNEL RS232 DRIVER/RECEIVER SSOP-16	MAXIM
6	A/R		TZ-211	LABEL, 1/4"BLK LETTERS WHT BACKROUND	BROTHER
7	A/R		3140	RTV FOR CONFORMAL COATING	DOW CORNING
8	A/R		PR-1204	PRIMER FOR CONFORMAL COATING	DOW CORNING
9	A/R		SN63PB37/RMA	SOLDER	

8. CONFORMAL COATING, STAKING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.1 AND THE FOLLOWING NOTES:
   A. PERFORM CLEANLINESS TEST.
   B. BAKE PWA AT 93°C ±5.5°C (200°F ±10°F) FOR 4 HOURS PRIOR TO CONFORMAL COATING.
   △C MASK OFF ALL DESIGNATED AREAS USING KAPTON TAPE. ALL MASKING OPERATIONS SHALL BE PERFORMED UNDER AN AIR IONIZER.
   △D MEASURE CONFORMAL COATING THICKNESS AT DESIGNATED AREAS.
   E. CONFORMAL COAT THE COMPLETE ASSEMBLY USING ITEM 7 AND ITEM 8.
9. PLACE THE COMPLETED ASSEMBLY IN CLEAN, STATIC DISSIPATIVE PACKAGING. IDENTIFY PART BY TAGGING WITH PART NUMBER AND SERIAL/LOT NUMBER AS SPECIFIED IN WORK ORDER PER SAE AS478, METHOD 35. STORE IN A PROJECT APPROVED STORAGE AREA.
10. TEST COMPLETED ASSEMBLY PER ACME-TST-023.
11. REFERENCE SCHEMATIC: S1101EFS3215
12. EXPEDITION CONTROL FILES: S1101EFA3215_REV_B.ZIP

NOTES: UNLESS OTHERWISE SPECIFIED

1. CERTIFICATE OF CONFORMANCE REQUIRED FOR ALL COMMERCIAL PARTS.
2. ESD HANDLING AND CONTROL PER ESTABLISHED PROCEDURES.
3. HANDLE ALL PARTS AND ASSEMBLIES WITH CLEAN, LINT-FREE, ANTI-STATIC GLOVES OR FINGER COTS.
4. DEMOISTURIZE (BAKE OUT) PWB (ITEM 1) FOR A MINIMUM OF 2 HOURS AT 93°C ±5.5°C (200°F ±10°F.) PERFORM SOLDERING IMMEDIATELY AFTER BAKING, OR STORE IN A CLEAN, DRY, SEALED STATIC DISSIPATIVE BAG OR CONTAINER.

△5 MARK THE ASSEMBLY WITH REV AND S/N USING ITEM 6.

6. ASSEMBLY, SOLDERING AND INSPECTION SHALL BE IN ACCORDANCE WITH NASA-STD-8739.2, NASA-STD-8739.3, AND THE FOLLOWING NOTES:
   A. INSTALL AND SOLDER ALL SURFACE MOUNT (SMT) PART BEFORE THROUGH HOLE PARTS USING SOLDER (ITEM 9.)
   B. FOR THROUGH HOLE PARTS, LEAD TERMINATIONS SHALL BE STRAIGHT THROUGH (NOT LAPPED OR CLINCHED.)
7. FUNCTIONALLY TEST THE COMPLETED ASSEMBLY PRIOR TO CONFORMAL COATING PER TEST PLAN ACME_TST_023.

REV	DESCRIPTION	APPROVED
B	REVISED PER ACME-ECO-314 AND ACME-ECO-327	DAS 10/17/14 TAG 10/20/14 RJP 10/16/14
A	REVISED PER ACME-ECO-149	MH 12/17/13 TG 12/18/13 RP 12/20/13

REVISION HISTORY

.
S1101MFA3200
NEXT ASSEMBLY

UNLESS OTHERWISE SPECIFIED:
1. DIMENSIONS ARE IN INCHES
2. BREAK EDGES .010-.020
3. INSIDE CORNERS R.02 MAX
4. LINEAR TOLERANCES:
   .X ± 0.03
   .XX ± 0.01
   .XXX ± 0.005
5. ANGULAR TOLERANCES: ± 0.5°

THIRD ANGLE PROJECTION

THIS DRAWING IS UNDER CONFIGURATION CONTROL: DO NOT REVISE WITHOUT AN APPROVED ECO.

APPROVED: E. McCLOSKEY 10/21/14

PRIOR TO USE, CHECK WITH CONFIGURATION MANAGEMENT FOR ANY OUTSTANDING ECOS.

DESIGNER	R. PFEIFFER 1/2/13	QUALITY	D. CHOVAN 1/2/13
REVIEWER	M. HOMKO 1/2/13	MATERIALS	M. WILKINSON 1/2/13
MECHANICAL	A. DRAKE 1/3/13	PROJ LEAD	B. BOROWSKI 1/3/13
ELECTRICAL	T. GOBELI 1/3/13	-	-
STRUCTURAL	W. DIAL 1/3/13	-	-
SAFETY	W. BORRELLI 1/2/13	-	-

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994

CONTRACT NUMBER: NNC09BA02B
DELIVERY CODE: SPACE110

ZIN TECHNOLOGIES
6745 ENGLE ROAD
AIRPORT EXECUTIVE PARK
CLEVELAND, OHIO 44130
(440) 625-2200
WWW.ZIN-TECH.COM

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION
JOHN H. GLENN RESEARCH CENTER
LEWIS FIELD
CLEVELAND, OHIO

TITLE
ACME
MOTION CONTROL BOARD INTERFACE ASSEMBLY DRAWING


SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101EFA3215	B

SCALE: NONE | INITIAL REL DATE 1/3/13 | SHEET 1 OF 2


RELEASE LEVEL: .
MODEL NAME: S1101EFA3215_REV_B.bpd

BLUEPRINT
VERSION 3.0

DWG NO S1101EFA3215 REV B SH 1

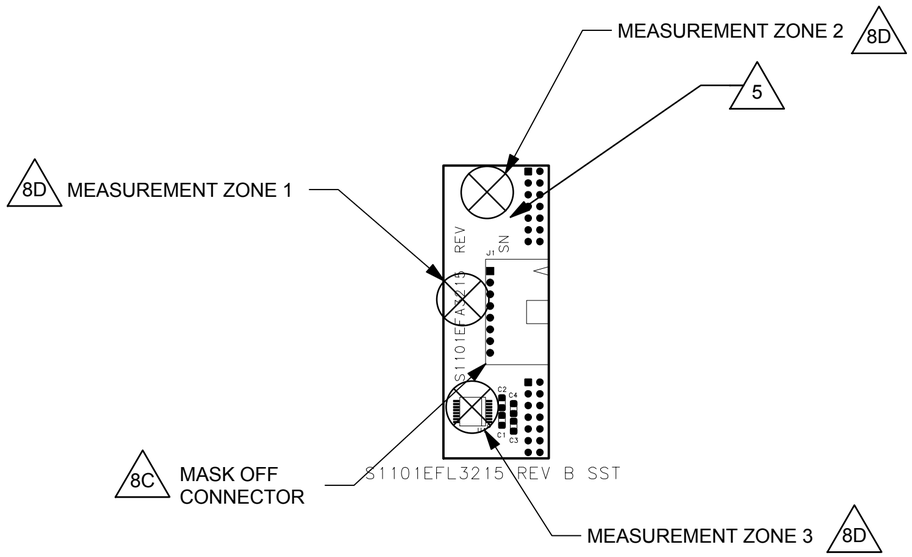

PRIMARY SIDE VIEW

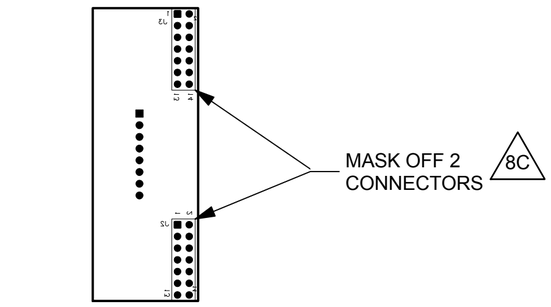

SECONDARY SIDE VIEW

SIZE	CAGE CODE	DWG NO	REV
C	0SG68	S1101EFA3215	B
SCALE: NONE	INITIAL REL DATE 1/3/13	SHEET 2 OF 2	

BLUEPRINT
VERSION 3.0

REV B
SH 2
DWG NO S1101EFA3215