

Player positions in the NBA

732A61 Data Mining
Clustering and Association Analysis

Emil Klasson Svensson
IDA, Statistics and Data Mining
Linköping University
emisv463@student.liu.se

June 2017

1 Introduction

Basketball is one of the largest and most popular sport in the world. It is a team sport where two teams fielding five players each trying to put the ball through the opponents' basket with the team scoring most points being the winning side. One team usually fields different types of players according to their given position, this is a position given arbitrary given the players physical appearance.[5] The goal is to find new positions using clustering algorithms given data rather than the traditional approach. The project will focus on analyzing data collected from the National Basket Association (NBA) which is today regarded as the league with has the highest level of professional basketball.

This project is loosely based around an paper written by Dwight Lutz called *A Cluster Analysis of NBA Players* [3] which revolves around finding clusters of NBA-players (basketball players) and giving them a new class-labeled for basketball players positions on court.

1.1 Positions in Basketball

Traditionally players are labeled according to the respective task on the court, called positions. In this standard there are five different positions

1. Center
2. Power Forward
3. Small Forward
4. Shooting Guard
5. Point Guard

Small and fast players are often referred to as guards (point guard/shooting guard) with main focus on handling, distributing and scoring. Tall and strong players are labeled (power/small-) forward or center. The small forward task i mainly scoring and grabbing rebounds while Power forward and Center have a bigger role in setting screens for smaller players and grabbing rebounds, there is no formal way of determining what position a player should be according to these five current positions and it is up to coaches to decide this and this affects the way the player on the position play and acts.

In the modern NBA something that is called "positionless basketball" have gained popularity with many coaches moving away from defining their players according to the classic positions and playing different line ups with players which traditionally would play on the same position.[2] This trend has led to journalists inventing more labels to describe players in order to find some structure.

1.2 Objective

The goal with this project will be to via multivariate cluster analysis identify new and more appropriate labels for players defined by their performance on the court rather than traditional perceptions. A qualitative and quantitative analysis of the clusters and members of the different clusters will be done to evaluate and discuss the quality of the result along with comparison to the result in Dwight Lutz called "A Cluster Analysis of NBA Players".

2 Variables

The data collected are from NBAs webpage nba.com using web scraping tools and some pre-processing. The set in total contains 33 different variables from 271 players during the season of 2015-2016 where all variables were aggregated by average per game. Players playing under 40 games were excluded from the data set since only frequently used player are of interest to find belongings to. The decision to only use data from one year instead of over consecutive years was determined by the context of the project. Seeing how the trend of so called positionless basketball is a relatively new phenomena having data spanning over multiple years might wash away characteristics of averages for players that have been in the league during multiple years. The down side of this is the problem of having to few observations may lead to clusters being hard to define since a lower amount of observations. In the table below all variables used in the clustering are presented.

	Abbrivations	Explanation
1	MIN	Minutes played
2	FGA	Field Goals Attempted
3	FG_PCT	Field Goal Percentage
4	FG3A	3-Point Field Goals Attempted
5	FG3_PCT	3-Point Field Goal Percentage
6	FTA	Free Throws Attempted
7	FT_PCT	Free Throw Percentage
8	OREB	Offensive rebound
9	DREB	Defensive Rebound
10	AST	Assist
11	STL	Steals
12	BLK	Blocked shot
13	TOV	Turnovers
14	PTS	Points Made
15	DistFeet	Distance coverd in feet
16	AvgSpeed	Average Speed

Table 1: *Variables used in clustering and visualisation*

In the original collected dataset each player had 31 different variables (excluding player names and player ID) available in Appendix A. All of these variables are aggregated as the average of games played. Many of the original variables are naturally connected and correlated as for example Field Goal - Percentage (FG_PCT) is a function of the variables Field Goals Made, Field Goals Attempted. So in order to try to reduce the number of dimensions in the dataset but still keep information variables that describes Made - Fields Goals, 3 Point Field Goals and Free Throws were removed since they are described in their respective percentages, although this is true for the number of attempts it is an interesting variable since that players taking shots indicates some sort of action on court compared to the act of making a shot which is just one of two consequences of shooting the ball. The variable EFF was also removed since it is a function of several of the other variables and doesn't describe any action on the court. Other than that all variables removed were removed because they are a superset or subset of each other.

All variables were standardized before clustering in the following manner to give each variable the same weight.

$$z_{ij} = \frac{x_{ij} - \mu_j}{\sigma_j}$$

Later in the report the unstandardized variables are presented along with the cluster labels in order to help the readers get a more interpretable result.

3 Method

3.1 t-SNE

t distributed Stochastic Neighborhood Embedding (t-SNE) is a dimensionality reduction technique that aim to take a data set with k dimension and project them on to a 2 dimensional or 3 dimensional plane with the goal to display similar objects from the high dimensional data set close to each other in the lower dimensional plane.

It uses conditional probabilities $p_{i|j}$ to model the high dimensional probability of observation x_i picking x_j as its neighbor under a t-distributed kernel. This is then compared to the probability which is the same but in the low dimensional space where it tries to project these observations. These distributions are then compared with the Kullback Leibler divergence, this is the algorithms cost function where the high and low dimensions' match with the same probability reaches its minimum.

$$C = KL(P||Q) = \sum_i \sum_j p_{ij} \log\left(\frac{p_{ij}}{q_{ij}}\right)$$

The minimization technique used is gradient decent which iteratively walks through the space in order to find a local minimum with a selected step size in proportion to the first derivative of the cost function also known as the gradient.

The variance in the kernels are set by the parameter perplexity which is a tunable hyperparameter that tries to catch the relationship between the local and the global structure of the data in order to preserve it in the low dimensional space. According to the authors of the paper the algorithm provides stable results for values between 5 and 50, in this project different perplexity values will be explored and evaluated.[4]

The implementation used is implemented in R and is from the package "tsne".

3.2 EM-algorithm

Expectation-maximization algorithm (EM Algorithm) is a technique that uses the observed data and a latent variable that is the unobserved data and tries to find the maximum likelihood estimation (MLE). It is a general method with many applications in the area of data mining where clustering is one of them.

In this project a mixture of Gaussians will be used due to the fact that it is the only available implementation in R. The package name is mclust. This leads to

an assumption that all observations are independently identically normal distributed. This assumption is in this project questionable since there every player on court impacts each other in significant way. But previous result has shown that the normality assumption is fairly robust and are therefore accepted.

All of the observed data points are denoted X and the unobserved (Also called latent variables) points are denoted Z . These two variables are assumed to each have some sort of probability distribution given a unknown parameter θ . In the case of clustering the cluster-group is considered to be unknown and is denoted as the latent variable in this case. Combining these two distributions will give us our joint distribution. From here the algorithm starts iterating through the two steps, the Expectation-step and the second one being the maximization - step.

In the E-step we calculate the probability for each observation in Z belonging too the different cluster labels given the data and a current estimate of this parameter θ that we are updating. Since this project uses gaussian kernels this θ is actually two parameters, μ_k and Σ_k that we are using and updating.

$$\gamma(z_{nk}) = \frac{\pi_k N(x_n | \mu_k, \Sigma_k)}{\sum_{j=1}^K \pi_j N(x_n | \mu_j, \Sigma_j)}$$

With this information we then move on to the M-step where the probabilities from the E-step are used to compute the weighted averages between the probabilities Z_{ij} for belonging to each cluster multiplied with the observed value X_{ij} to get the cluster centroids.

$$\begin{aligned} \mu_k^{new} &= \frac{1}{N_k} \sum_{n=1}^N \gamma(z_{nk}) x_n \\ \Sigma_k^{new} &= \frac{1}{N_k} \sum_{n=1}^N \gamma(z_{nk}) (x_n - \mu_k^{new})(x_n - \mu_k^{new})^T \\ \pi_k^{new} &= \frac{N_k}{N} \end{aligned}$$

where

$$N_k = \sum_{n=1}^N \gamma(z_{nk})$$

With the new parameters we evaluate the log of likelihood with these newly updated parameters and check if we have found a stable result, if not, these two steps are repeated back and forth until an stable is found or the max number

of iterations is reached. Since the joint likelihood function is almost always multimodal the algorithm is only guaranteed to find a local optimum.

This updating procedure means that the observations are not hard-assigned to one cluster until convergence (via argmax) but instead given a probability to be in each cluster allowing for more dynamical clustering approach to the data in the way that it is able to find different density regions in the data.[1]

The cluster size was set to 10 to be able to compare the result with the previously mentioned paper *A Cluster Analysis of NBA Players*[3]

4 Results and analysis

4.1 Visualization with t-SNE

The process of finding a good visualization for t-SNE for this project started out with a sequence of 5 different values from 10 to 50 to try to get a feeling for how the algorithm handled the data. On all levels of perplexity the algorithm seemed to not any noticeable changes in minimizing the cost function after around 1500 iterations. For the perplexity number the lower values of perplexity seem to yield better separation between visually identified clusters. The projections placement in relationship to each other were often time close to each other independent of the perplexity setting. Of the five initial runs values a perplexity of 10 was determined to be the best and values 5 and 15 for perplexity were explored to try to see the general trend of how the projections behaved. When trying a perplexity above 10 the separation seemed to be washing away a bit. For values in the lower range with a perplexity of 5 the separation seems to be increasing but observations were in very small clusters of two to ten players in each cluster. To try to find a good balance between the local and global structure in the projection the final perplexity was set to 10 which is presented here.

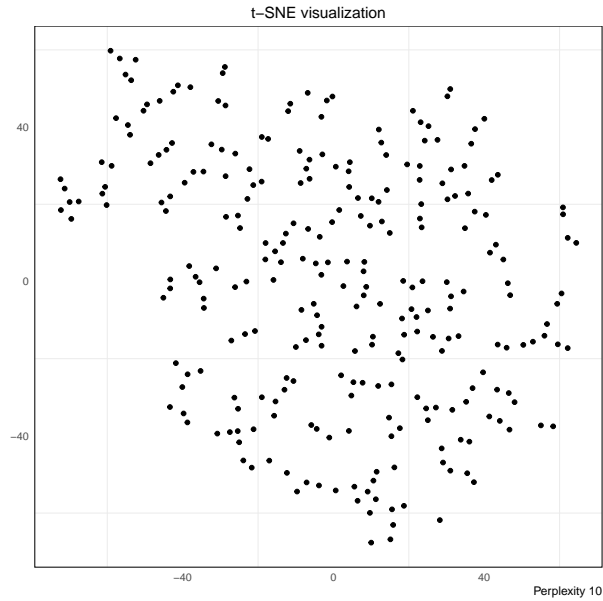


Figure 1: t-SNE visualization with perplexity 10

In the graph above a fairly large group consisting of around 30-40 observations that are located in the right corner of the graph. In the middle of the graph a

larger amount of observations seems to be scattered around with some observations being closer together and might even be considered clusters. In general observations tend to be smaller sub clusters closer to each other although the large cluster is separated from the other observations. In the bottom right there also seems to be a cluster of points separated from the middle. From the bottom middle leaning towards top left is a oblong shaped point spread that is fairly separated from the middle as well. The following graph is zoomed in on the cluster in the bottom right frame of the scatterplot to be able to present which players the points represent. Overall the observations in the different clusters look somewhat similar although there are some players that seems to be out of place compared to their neighbors.

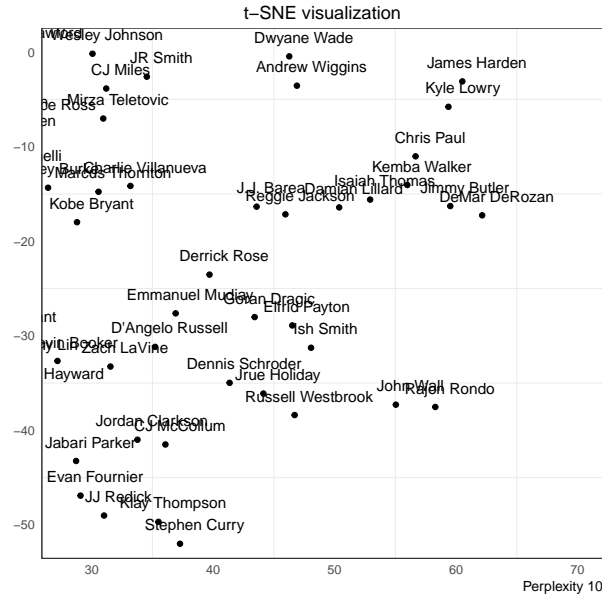


Figure 2: t-SNE visualization with perplexity 10 zoomed in

In this part of the graph we can see some of the player and their respective name. This cluster seems to contain players that are normally in the point or shooting guard position. The top part has some player separated from the other that seem together on a horizontally flipped "Y". These players are known for high scoring, lots of assists and holding a fast pace.

4.2 Clustering

The EM algorithm with 10 clusters converged and below is the unstandardized averages for each cluster presented. In Appendix B the result for all players are presented.

Cluster	n_k	FGA	FG_PCT	FG3A	FG3_PCT	FTA	FT_PCT
1	22	12.91	0.44	4.29	0.33	3.00	0.81
2	37	4.85	0.46	1.41	0.37	1.14	0.72
3	35	9.93	0.43	3.91	0.35	2.45	0.78
4	24	11.55	0.53	0.89	0.21	4.25	0.70
5	19	6.26	0.48	1.90	0.26	1.53	0.69
6	24	16.63	0.45	4.90	0.35	5.92	0.82
7	18	5.68	0.39	2.97	0.33	0.78	0.83
8	30	5.18	0.52	0.10	0.07	1.72	0.69
9	41	9.02	0.44	2.80	0.34	2.09	0.78
10	21	6.50	0.44	2.31	0.34	1.65	0.74

Table 2: EM algorithm 10 cluster result: average shooting stats

Cluster	n_k	MIN	OREB	DREB	AST	STL	BLK	TOV	PTS	DistFeet	AvgSpeed
1	22	31.59	1.26	4.60	2.12	1.01	0.43	1.59	15.41	11513.27	4.13
2	37	16.58	0.87	2.51	0.93	0.44	0.31	0.76	5.79	6193.00	4.26
3	35	28.68	0.82	3.32	2.56	1.03	0.33	1.50	11.81	10394.37	4.11
4	24	31.20	2.65	6.84	2.10	0.92	1.63	1.91	15.15	10924.22	3.98
5	19	23.28	1.20	3.06	1.07	0.65	0.55	0.83	7.62	9045.08	4.41
6	24	34.97	0.98	4.58	5.93	1.42	0.47	2.98	21.60	12438.65	4.03
7	18	17.60	0.41	1.91	1.17	0.53	0.21	0.71	6.04	6391.10	4.13
8	30	18.52	1.80	3.59	0.95	0.45	0.82	0.99	6.59	6635.47	4.08
9	41	26.24	0.59	2.61	3.40	0.90	0.29	1.64	10.50	10096.41	4.37
10	21	20.81	0.62	2.36	2.13	0.87	0.26	1.18	7.77	7658.41	4.18

Table 3: EM algorithm 10 cluster result: averages for non-shooting stats

Due to limitations of the report not all clusters will be presented or discussed in the report, all player's cluster belonging is presented in Appendix B.

Cluster 1 and 3 are quite similar with distinctions in that player from cluster 1 takes more field goal attempts and makes them at a similar percentage in just a bit longer time on the court. Another difference between them seems to be the distance they run, players from cluster 1 run about 1500 feet longer than the players from cluster 3, this is probably mostly attributed by the fact that they play for extended minutes compared to cluster 3. When inspecting the players in the clusters the only difference noticeable is what roles the players have in their respective teams, where most players from cluster 1 have an more offensive role in general and the other ones are more of defensive-minded players and playmakers. Cluster two consists of players that on average perform less in all categories than the previously named clusters but also play less minutes.

Cluster lables	Cluster	Typical players		
Shooting Froward	1	Klay Thompson	Kawhi Leonard	CJ McCollum
Back Up Forward	2	Jonas Jerebko	Leandro Barbosa	Derrick Williams
Versatile Forward	3	Jeff Teague	Lou Williams	Jae Crowder
Elite Bigs	4	Anthony Davis	Brook Lopez	Karl-Anthony Towns
Mobile Bigs	5	Myles Turner	Steven Adams	Doug McDermott
Elite Scorers	6	Stephen Curry	James Harden	Kevin Durant
Veterans	7	Marcus Thornton	Gerald Green	Wayne Ellington
Defensive Bigs	8	Robin Lopez	Tim Duncan	Timofey Mozgov
Distributors	9	Jrue Holiday	Derrick Rose	JJ Redick
Stretch Big	10	Mirza Teletovic	Kelly Olynyk	Nikola Jokic

Table 4: Cluster lables and typical players

The fourth clusters consist of players on average attempting less than one shot outside the three-point line a game with low accuracy. But these players shoot frequently and with good percentage. They also grab a lot of offensive rebounds and averages the most blocked shots among the clusters. They do this while still moving a lot but at a slower pace than other clusters. The player in this cluster are the best big players of the game at the moment and the cluster is therefore called "Elite Bigs". Compared to cluster 4 cluster 5 consists of player with similar features but with less shots attempted and made. The big difference is that they move at a lot higher average speed than in cluster 4 and 8. Cluster 8 shares similar traits to the fourth and fifth clusters but almost never attempt any 3 points shots and when they do its at an low percentage, they also move on average among the least distance of the clusters. When inspecting these cluster these are players who have roles clearly defined as the traditional center position with a bigger role on defense.

The most clear cut cluster is number 6 where basically every variable is above all other cluster, these are players who score at a high rate with good accuracy and overall considered to be their respective teams best players.

The biggest cluster is cluster 9 which consists of players shooting relatively frequently at relatively good percentages, they have the highest number of assists outside cluster 6 and are also moving at a high speed for long distances on average. The players in this cluster are to be considered players distributing the ball and setting plays for other players.

4.3 EM Clustering with t-SNE visualization

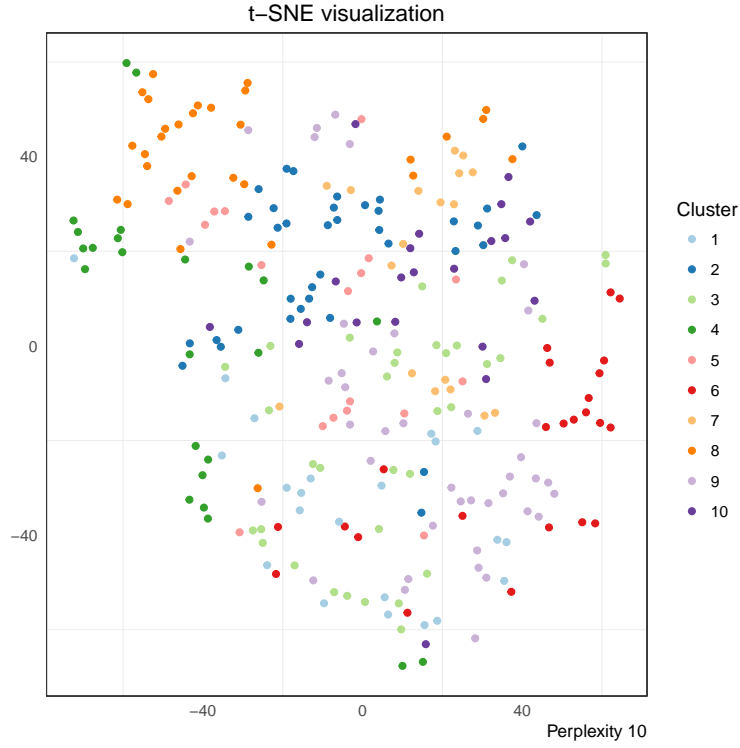


Figure 3: t-SNE visualization with clustering from EM -algorithm

In the middle region the cluster belongings from the EM-algorithm are dispersed and does not land close to each on the visualization other than small groups of 2-3 players. In the right region of the graph a couple of the players from cluster 6 are close together and below them another group of players from cluster 9 are relatively close to each other. In the top of the graph some observations from clusters 2,4 and 8 all have some observations that are close together cluster vise and in the visualization.

5 Discussion

In conclusion of this project the t-SNE visualizations did not yield a enough satisfactory visualization, in some parts of the graph players that seem similar based on empirical knowledge are close together but then the algorithm puts them close to other players that instinctively seem different to them. A need for a critical mindset is needed to use t-SNE because some of the quick confirmations gives you the indication that you have succeeded but if reviewed closely it could as well be random noise.

The EM-algorithm did in some sense give a satisfactory clustering and compared to Lutz article the clusters found are quite similar although the data material I'm using doesn't contain the same player. The tendencies seem to be similar in the clusters with some clusters with high performing players and players that are tall and big forming different clusters given their skillsets. Some players seem a bit misplaced at times and some are obviously wrongly defined by the cluster but it's hard to draw the line between what could be considered belonging to the wrong cluster and what is newly uncovered information.

One thing that I think would improve my clustering would be to combine the distance covered in feet and average speed with some of the variables that Lutz uses in his paper where the shooting percentages are divided into multiple parts and combined with the number of attempts. Overall I think much of the improvement in clustering of NBA players lies within the variables themselves and not the algorithms used, points, assists and such fail to describe parts of the game as defensive efforts like setting screens. Another example is how many times a player makes a pass, the assists recorded are only assists directly leading to a score. Many of these variables are recorded but not directly available online which makes it time consuming to get a hold of.

Another part that I haven't discussed and noticed over the time of the project is that many of the variables are dependent on how many minutes the players are playing and simple solution to it is to have the variables observed per minute instead of a per game average. While at first it seems reasonable it doesn't take in to consideration that playing 30 minutes of basketball on a high level and performing at a similar rate as someone that only plays 10 minutes on a per minute basis is a lot harder and is a key factor in the game.

For further studies on the subject it would be interesting in a larger project to compare players cluster belongings over different seasons and compare them to their starting cluster to the last cluster with aid of association analysis algorithms such as FP-growth. For further visualization comparisons between t-SNE and other dimensionality reductions techniques would be interesting and see if there are better alternatives.

References

- [1] Christopher M. Bishop. *Pattern Recognition and Machine Learning (Information Science and Statistics)*. Springer-Verlag New York, Inc., Secaucus, NJ, USA, 2006.
- [2] Chris Herring. The rise of the position-less player. The Wall Street Journal, June 2012.
- [3] Dwight Lutz. A cluster analysis of nba players. In *Proceedings of the MIT Sloan Sports Analytics Conference*, 2012.
- [4] Laurens van der Maaten and Geoffrey E. Hinton. Visualizing high-dimensional data using t-sne. *Journal of Machine Learning Research*, 9:2579–2605, 2008.
- [5] Wikipedia. Basketball Wikipedia, the free encyclopedia, 2017.

6 Appendix

6.1 Appendix A

Abbrivations	Explanation
PLAYER_ID	Identification for player
RANK	Over all rank
PLAYER	Player name
TEAM	Playing for team
GP	Games Playes
MIN	Minutes played
FGM	Field Goals Made
FGA	Field Goals Attempted
FG_PCT	Field Goal Percentage
FG3M	3-Point Field Goals Made
FG3A	3-Point Field Goals Attempted
FG3_PCT	3-Point Field Goal Percentage
FTM	Free Throws Made
FTA	Free Throws Attempted
FT_PCT	Free Throw Percentage
OREB	Offensive rebound
DREB	Defensive Rebound
REB	Rebound
AST	Assist
STL	Steals
BLK	Blocks
TOV	Turnovers
PTS	Points Made
EFF	Efficiency
W	Wins
L	Losses
DistFeet	Distance in feet
DistMiles	Distance in Miles
DistMilesOff	Distance Off Ball
DistMilesDef	Distance Miles Defended
AvgSpeed	Average Speed
AvgSpeedOff	Average Speed Off Ball
AvgSpeedDef	Average Speed On Defence

Table 5: All variables collected

6.2 Appendix B

Cluster 1	Cluster 2	Cluster 3	Cluster 4
Klay Thompson	Enes Kanter	Jeff Teague	Anthony Davis
Kawhi Leonard	Shabazz Muhammad	Lou Williams	Brook Lopez
CJ McCollum	Derrick Williams	Jae Crowder	Karl-Anthony Towns
Dirk Nowitzki	Jeremy Lamb	Jamal Crawford	Nikola Vucevic
Kobe Bryant	Luis Scola	Deron Williams	LaMarcus Aldridge
Rudy Gay	Gerald Henderson	Darren Collison	Paul Millsap
Ryan Anderson	Jon Leuer	Monta Ellis	Giannis Antetokounmpo
Kevin Love	Meyers Leonard	Chandler Parsons	Pau Gasol
Jordan Clarkson	JaMychal Green	Trevor Ariza	Derrick Favors
Zach Randolph	Bobby Portis	JR Smith	Andre Drummond
Avery Bradley	Boris Diaw	Luol Deng	Greg Monroe
Thaddeus Young	Leandro Barbosa	Gary Harris	Al Horford
Tobias Harris	Mike Scott	Joe Johnson	Kristaps Porzingis
Rodney Hood	Trey Lyles	George Hill	Hassan Whiteside
Kentavious Caldwell-Pope	Trevor Booker	Markieff Morris	Draymond Green
Will Barton	Dwight Powell	Omri Casspi	Dwight Howard
Robert Covington	Richard Jefferson	Nikola Mirotic	Marcin Gortat
Arron Afflalo	Andrew Bogut	CJ Miles	Jonas Valanciunas
Wesley Matthews	Anthony Tolliver	Jeff Green	DeAndre Jordan
Marvin Williams	Quincy Acy	Harrison Barnes	Serge Ibaka
Julius Randle	Nemanja Bjelica	Kent Bazemore	Kenneth Faried
Zaza Pachulia	JaKarr Sampson	Otto Porter	Nerlens Noel
	Sasha Vujacic	Bojan Bogdanovic	Gorgui Dieng
	Kyle Anderson	Isaiah Canaan	Rudy Gobert
	Jonas Jerebko	Evan Turner	
	Brandon Rush	Ersan Ilyasova	
	Joe Ingles	Jared Sullinger	
	Chase Budinger	Mario Chalmers	
	Kelly Oubre Jr.	Marco Belinelli	
	Noah Vonleh	Al-Farouq Aminu	
	Ian Clark	Matt Barnes	
	Kyle Singler	Dion Waiters	
	Mike Muscala	Raymond Felton	
	Luc Mbah a Moute	Marcus Smart	
	Johnny O'Bryant III	PJ Tucker	
	Chris Johnson		
	Tayshaun Prince		

Cluster 5	Cluster 6	Cluster 7	Cluster 8	Cluster 9	Cluster 10
Myles Turner	Stephen Curry	Marcus Thornton	Robin Lopez	Jrue Holiday	Mirza Teletovic
Terrence Ross	James Harden	Gerald Green	Ian Mahinmi	Derrick Rose	Kelly Olynyk
Hollis Thompson	Kevin Durant	Wayne Ellington	Alex Len	JJ Redick	Nikola Jokic
Doug McDermott	DeMarcus Cousins	Aaron Brooks	Jordan Hill	Victor Oladipo	Ramon Sessions
Aaron Gordon	LeBron James	Patrick Patterson	Taj Gibson	Evan Fournier	Mamou Ginobili
Cody Zeller	Damian Lillard	Vince Carter	Tim Duncan	Goran Dragic	Rodney Stuckey
Steven Adams	Russell Westbrook	P.J. Hairston	Joffrey Lauvergne	Jabari Parker	Austin Rivers
Tristan Thompson	DeMar DeRozan	Paul Pierce	Amir Johnson	Zach LaVine	Tony Allen
Ben McLemore	Paul George	Channing Frye	Jason Smith	Devin Booker	Lance Stephenson
E'Twaun Moore	Isaiah Thomas	Jason Terry	Brandon Bass	D'Angelo Russell	Devin Harris
Frank Kaminsky	Carmelo Anthony	Markel Brown	Tyson Chandler	Emmanuel Mudiay	D.J. Augustin
Garrett Temple	Kyle Lowry	Randy Foye	Marreese Speights	Ish Smith	Darrell Arthur
Danny Green	Jimmy Butler	Anthony Morrow	David West	Tony Parker	Corey Brewer
Willie Cauley-Stein	Kemba Walker	Tony Snell	Clint Capela	Jeremy Lin	Andre Iguodala
Maurice Harkless	Andrew Wiggins	Charlie Villanueva	Kosta Koufos	Dennis Schroder	Wesley Johnson
Dante Cunningham	John Wall	Solomon Hill	Ed Davis	J.J. Barea	Thabo Sefolosha
Larry Nance Jr.	Gordon Hayward	Rashad Vaughn	Aron Baynes	Elfrid Payton	Raul Neto
Andre Roberson	Chris Paul	Pablo Prigioni	Timofey Mozgov	Trey Burke	Ty Lawson
Alonzo Gee	Dwyane Wade		Tyler Zeller	Allen Crabbe	Jerian Grant
	Reggie Jackson		Alexis Ajinca	Ricky Rubio	Ronnie Price
	Khris Middleton		Roy Hibbert	Patrick Beverley	Steve Blake
	Nicolas Batum		Bismack Biyombo	Jerami Grant	
	Marcus Morris		Cole Aldrich	Courtney Lee	
	Rajon Rondo		Lavoy Allen	Kyle Korver	
			Miles Plumlee	Mason Plumlee	
			Kyle O'Quinn	Toney Douglas	
			Dewayne Dedmon	Patty Mills	
			Thomas Robinson	Cory Joseph	
			Omer Asik	Nik Stauskas	
			Nick Collison	Lance Thomas	
				Stanley Johnson	
				Jared Dudley	
				Langston Galloway	
				Jose Calderon	
				Matthew Dellavedova	
				Shane Larkin	
				Donald Sloan	
				Justise Winslow	
				Shaun Livingston	
				T.J. McConnell	
				Mario Hezonja	