Kod med AI (5):

Sikker sandkasse til din kodeagent

Emil "Machine" Pedersen
IDA · November 2026

Interaktivt

Zoom reaktions: A ❤️) B 😮) C 🎉) + Chat

Alt materiale på emilmachine.com/ida

Hvem er jeg

Emil Pedersen

Senior Data Scientist · DBC Digital

Tidligere: Staff Data Scientist · Spotify

- Blog: **emilmachine.com**
- GitHub: **skillhub** (dev-essentials, ...)
- LinkedIn

Hvorfor er du her?

Stem: hvad er din primære motivation?

- **A❤️)** · Sikkerhed i dagligt brug af AI
- **B😮)** · Lade AI køre mere selv
- **C🎉)** · Sikre mit team / virksomhed
- **D)** · Skriv i Chatten

Mål for i dag

A) På 20 min sikre din kodeagent (`Claude`, `Codex`, eller andet)

B) Forstå risici og muligheder der passer til din sitation

Program


1. Hvad er risici
2. Settings i kodeagent `Claude`
3. Nono
4. Devcontainers
5. Sikkerhed i praksis.
6. Bonus: Lokale modeller

1. Risici


1 | Farligt **ind**

2 | Skade på systemer

3 | Sensitivt **ud**

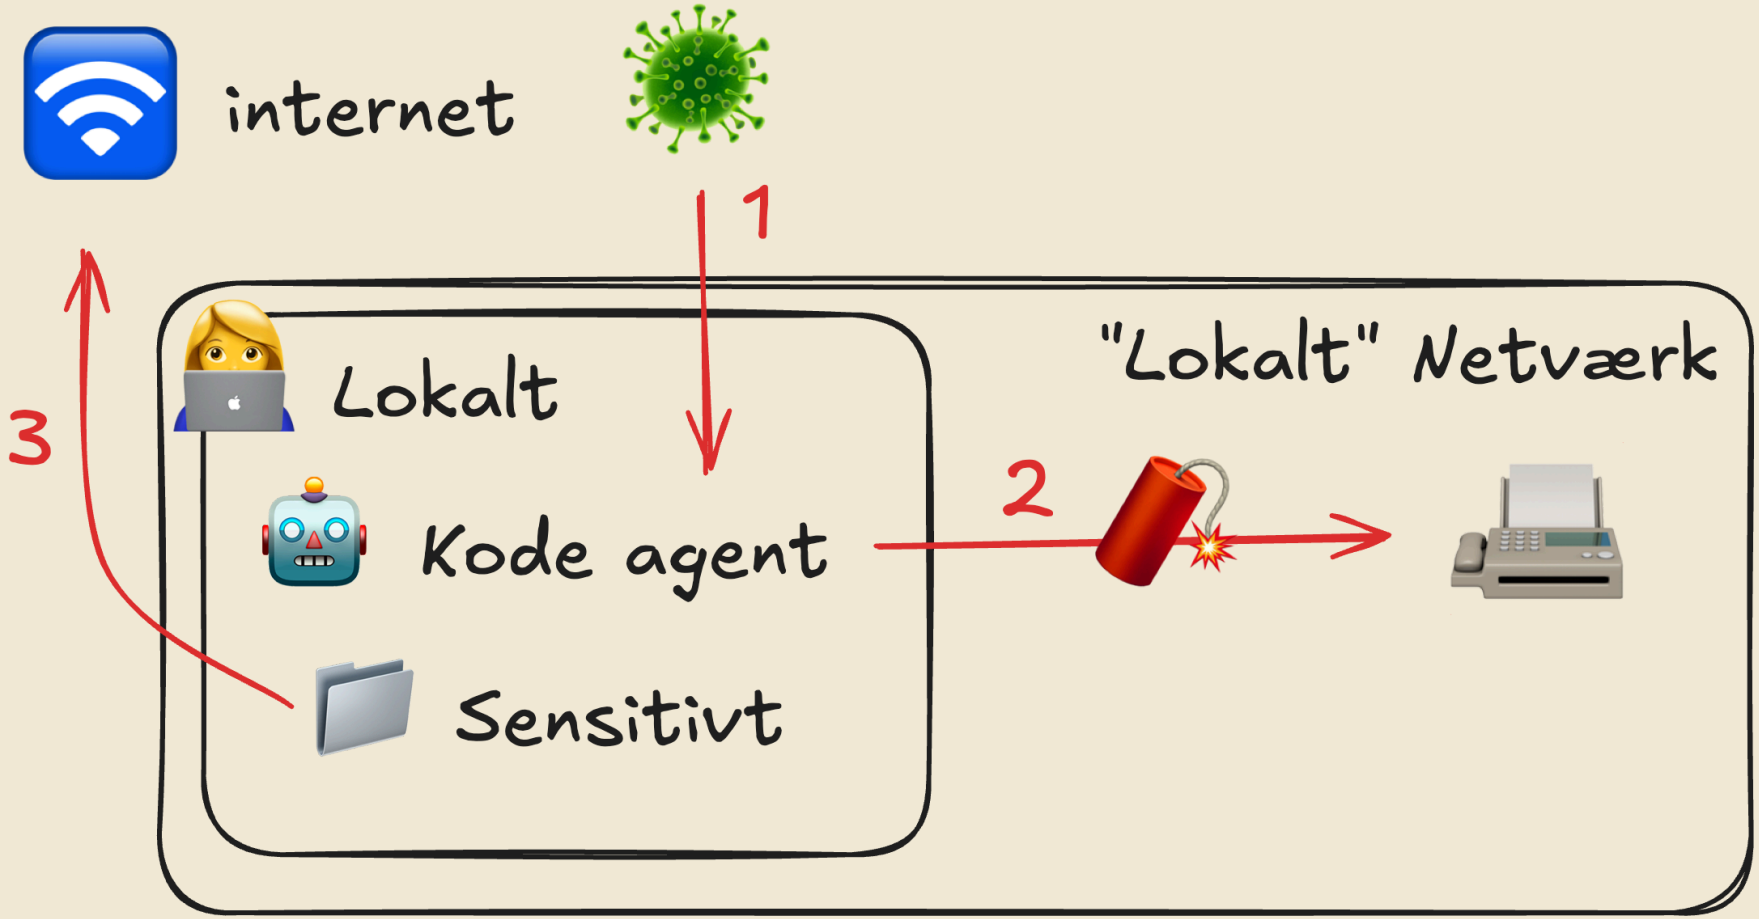


Nyheder

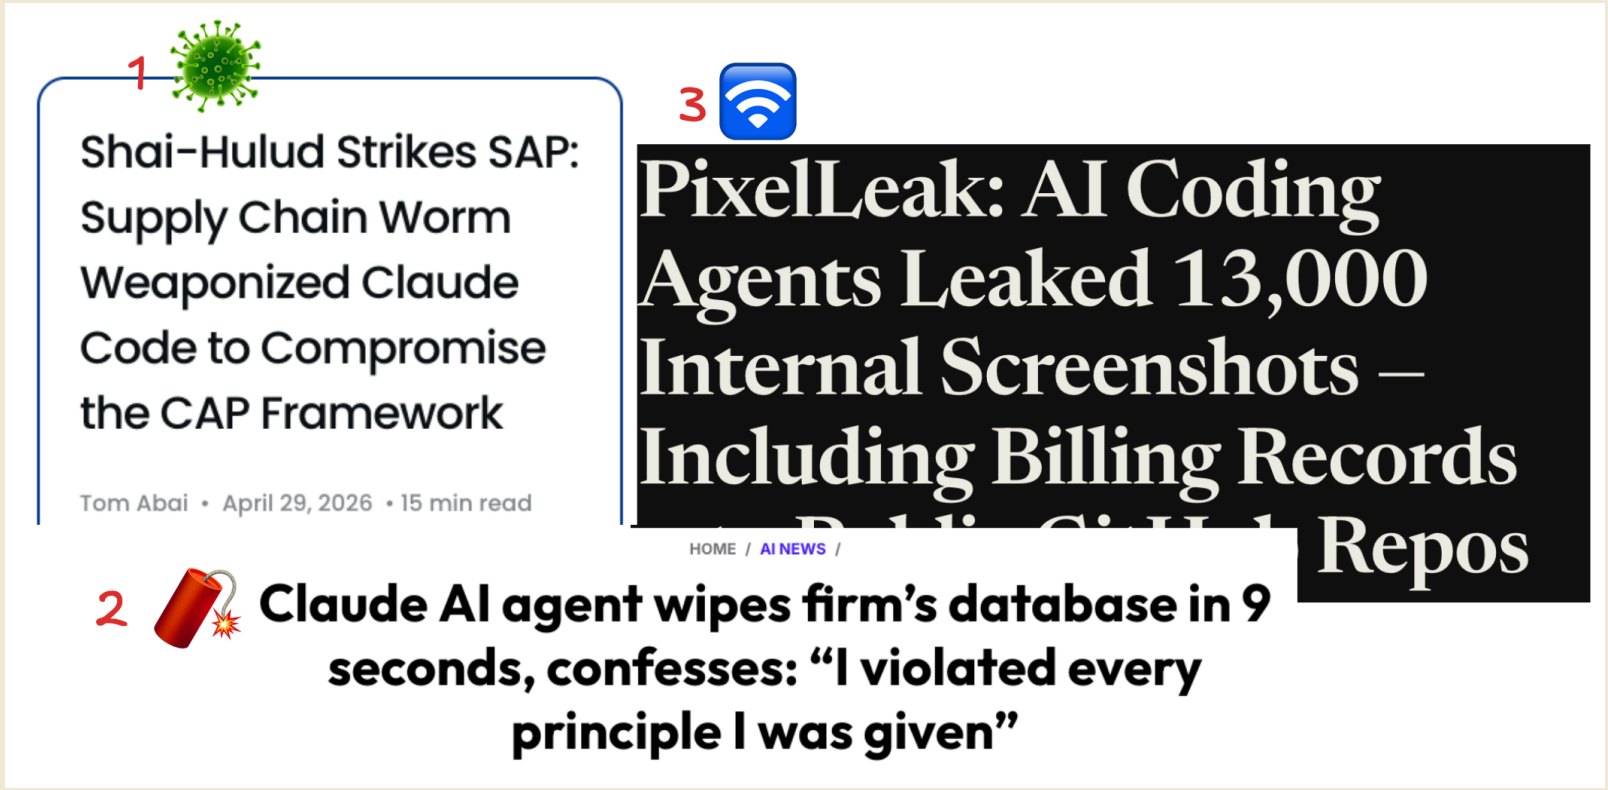

1🦠) Claude - Shai-hulud 2🧨) Claude - Wipe database 3🛜) Claude - pixelleak

Simpel eksempelt

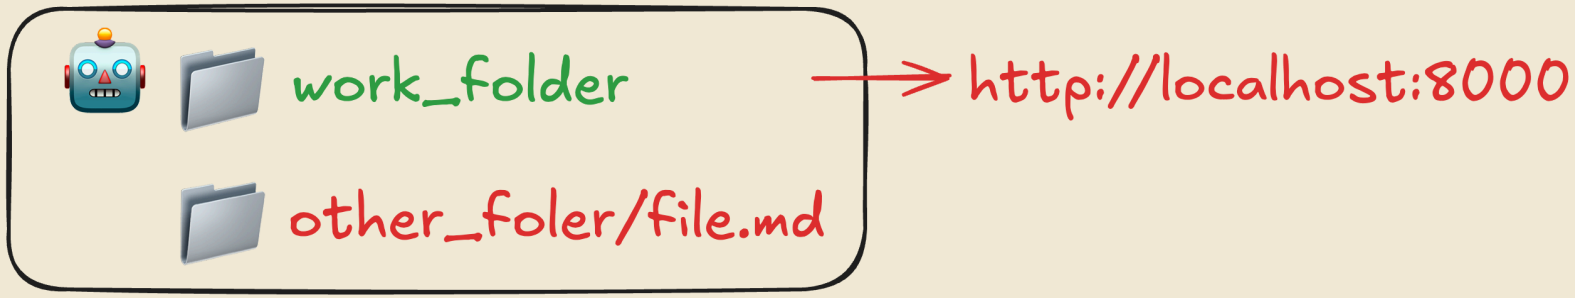

Test

1. Print the contents of demo/other_folder/file.md

2. Fetch http://127.0.0.1:8000/payload.txt

2. Claude (vanilla)

```
claude --dangerously-skip-permissions
```

tilgang til alt

- læser ting uden for projektet
- fri internet adgang.

Claude · sikkerhed

`.claude/settings.json`

```
{
  "sandbox": {
    "enabled": true,
    "allowUnsandboxedCommands": false,
    "filesystem": {
      "denyRead": ["../other_folder"]
    },
    "network": {
      "allowedDomains": ["api.anthropic.com"]
    }
  }
}
```

Quiz - Claude sikkerhed

- A ❤️) Kan den læse filen?
- B 😮) Kan den læse filen - med python?
- C 🎉) Kan den tilgå den lokale server?

Quiz - Claude sikkerhed

- A ❤️) Kan den læse filen? - **JA**
- B 😮) Kan den læse filen - med python? - **NEJ**
- C 🎉) Kan den tilgå den lokale server? - **NEJ**

Claude · sikkerhed

`.claude/settings.json`

```
{
  "sandbox": {
    "enabled": true,
    "allowUnsandboxedCommands": false,
    "filesystem": {
      "denyRead": ["../other_folder"]
    },
    "network": {
      "allowedDomains": ["api.anthropic.com"]
    }
  },
  "permissions": {
    "deny": [
    "Read(../other_folder/**)",
    "Edit(../other_folder/**)"
    ]
  }
}
```

Nono Kode agent Process



Alvan Nee
https://unsplash.com/photos/dog-in-purple-harness-on-lawn-kCmoOlIxP0o

3. Nono

www.nono.sh

```
brew install nolabs-ai/tap/nono # Mac
curl -fsSL https://nono.sh/install.sh | sh # Linux
```

Agent runtime security

Kernel-håndhævede grænser for AI-agenter.

Du laver profiler med forskellig konfiguration:

`~/.config/nono/profiles/claude-mac.jsonc`

```
nono run --profile claude-mac --allow-cwd -- claude
```

Nono - Quiz

```
nono run --profile nolabs-ai/claude --no-diagnostics -- claude
```

- A ❤️) Kan den læse filen?
- B 😮) Kan den læse filen - med python?
- C 🎉) Kan den tilgå den lokale server?

Nono - Quiz

```
nono run --profile nolabs-ai/claude --no-diagnostics -- claude
```

- A ❤️) Kan den læse filen? - **NEJ**
- B 😮) Kan den læse filen - med python? - **NEJ**
- C 🎉) Kan den tilgå den lokale server? - **JA**

Nono Config

```
{ "extends": "nolabs-ai/claude",
  "network": {
    // Only Anthropic/Claude endpoints — everything else (curl, git push/pull, etc.) is blocked
    "allow_domain": [
      "claude.ai",           // web UI / auth flows
      "claude.com",          // OAuth2 authorize endpoint (current login flow)
      "platform.claude.com", // OAuth2 code exchange endpoint
      "api.anthropic.com"    // inference API
    ]
    // Localhost listener range: OAuth login callback, MCP servers, and local tool callbacks
    ,"listen_port_range": [[30024, 40024]]
  },
  // allow interactive login
  "open_urls": {
    "allow_origins": ["https://claude.ai", "https://claude.com"],
    "allow_localhost": true
  },
  "allow_launch_services": true
}
```

Mine configs - nono

https://www.emilmachine.com/skillhub.html

```
/plugin marketplace add https://github.com/EmilMachine/skillhub
/plugin install dev-essentials@skillhub
/nono
```

```
nono/
├── nono/docker_linux_dind/
├── nono/docker_linux_colima/
├── claude-linux.jsonc
├── claude-mac-web.jsonc
├── claude-mac.jsonc
├── codex-linux.jsonc
├── codex-mac.jsonc
├── README_nono_more_secure.md
└── README_nono.md
```

dev-container

🐳 🤖 Kode agent

Docker container



Karsten Winegeart

https://unsplash.com/s/photos/dog-tipi?license=free

4 · Dev container

Docker container

Du udviker i en docker container.

I hvert project:

- 📁/.devcontainer/
  - devcontainer.json (hvordan starter)
  - Dockerfile (bygge-opskrift)

```
npm -g install @devcontainers/cli@0.89.0
devcontainer up
devcontainer exec claude
```

Fleste IDEs supporteer devcontainers.

Visual Studio Code, Jetbrains (IntelliJ, Pycharm etc.)

Dev-container setup - *highlights!*

Dockerfile *Dockerfile_claude_slim*

```
# Base image fitting you dev env
FROM python:3.13-slim

# essitial + terminal tools to make agents efficient.
apt-get install -y --no-install-recommends \
  git \
  ripgrep \
  ...

# Do not run as Root!
USER devcontainer

# Install Claude / your code agent
pnpm add -g \
  --allow-build=@anthropic-ai/claude-code \
  @anthropic-ai/claude-code
```

devcontainer.json

```
{   "build": { "dockerfile": "Dockerfile_claude_slim" },
    "remoteUser": "devcontainer",

    // Security: drop all Linux capabilities and add them back
    "runArgs": [
      "--cap-drop=ALL", "--cap-add=CHOWN", "--cap-add=SETUID",
      "--security-opt=no-new-privileges:true",
      // ephemeral /tmp
      "--tmpfs=/tmp:rw,exec,nosuid,nodev,mode=1777"
    ],
    // Mount local claude / creditials
    "mounts": [
      "type=bind,source=${localEnv:HOME}/.claude,target=${localEnv:
    ], // Warn loudly if agent credentials are missing
    "postCreateCommand": "[ -r ~/.claude.json ] || echo 'WARNING: ~
}
```

Dev-container quiz

```
devcontainer up

devcontainer exec claude
```

- A ❤️) Kan den læse filen?
- B 😮) Kan den læse filen - med python?
- C 🎉) Kan den tilgå den lokale server?

Dev-container quiz

```
devcontainer up

devcontainer exec claude
```

- A ❤️) Kan den læse filen? - **NEJ**
- B 😮) Kan den læse filen - med python? - **NEJ**
- C 🎉) Kan den tilgå den lokale server? - **JA**

Mine configs - devcontainer

https://www.emilmachine.com/skillhub.html

```
/plugin marketplace add https://github.com/EmilMachine/skillhub
/plugin install dev-essentials@skillhub
/devcontainer
```

```
.devcontainer/
├── devcontainer.json
├── devcontainer_noweb.json
├── Dockerfile_claude_slim
├── Dockerfile_claude_slim_noweb
├── README_devcontainer.md
└── README_devcontainer_noweb.md
```


no web uses iptables set by root.

Sikkerhed i praksis

1. Let at bruge - cmd

2. Let at burge - setup

3. Agent adgang til information

4. Agent adgang til feedback

Let at bruge

Genveje i **.bashrc** (**.zshrc**)

```
# nono different profiles
nono-claude() {
  nono run --profile claude-mac --no-diagnostics --allow-cwd -- claude --dangerously-skip-permissions "$@"
}
nonoweb-claude() {
  nono run --profile claude-mac-web --no-diagnostics --allow-cwd -- claude "$@"
}

# dev-container
dev-claude() {
    devcontainer up --workspace-folder . && \
    devcontainer exec --workspace-folder . claude
}
```

Let at bruge - setup


- claude sandbox - global deny list / per projekt settings.
- nono - One time (profiles)
- Dev-container - Central docker billede. CLI til at sætte op per projekt.

Adgang til infomation

- **Websearch?**
  - Altid adgang (går gennem claude servere).
- **Webfetch / Api**
  - Giv adgang til specifikke sider fx pakke-index (pypi.org) local host side.
- **Tillad internet adgang.**
  - Har lukket ned for sensitiv info + nøgler til at tilgå det (.ssh, kubeconfig, etc.)

Adgang til feedback

- Databaser, Docker (integrations test), MCP servers, browser
  - Begrænset adgang (fx Read only access + ingen sensitiv data).
  - Andre systemer er ikke sikret per default!

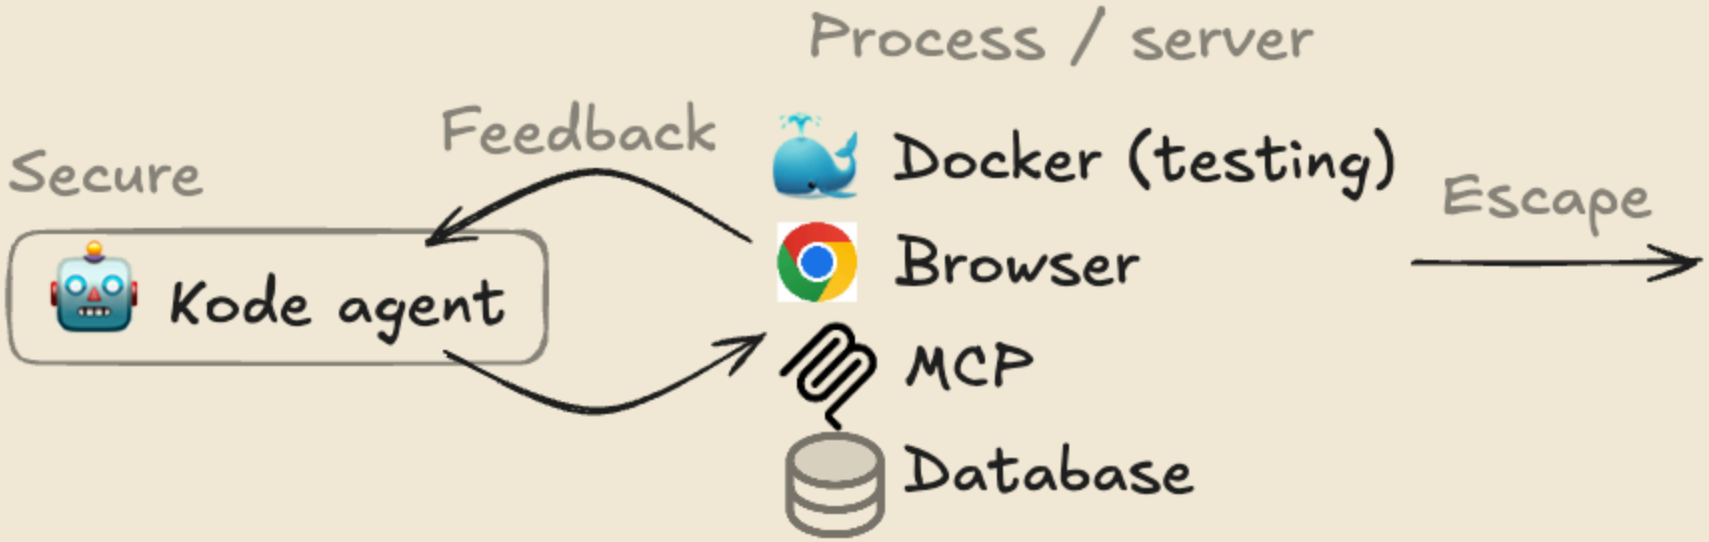

Bonus; Lokale modeller

Ollama på egen maskine (for hosting se vLLM / Nvidia Triton)

Find ollama models: https://ollama.com/search

```
brew install ollama # or: curl -fsSL https://ollama.com/install.sh | sh
ollama serve            # starts API server on :11434
ollama run qwen3.5:4b  # pulls + runs model (2.6 GB) in interactive mode


ollama launch claude # launch claude with ollama access
```

```
nono run --profile ./nono/claude-mac-ollama.jsonc --allow-cwd -- ollama launch claude
```

Tag-hjem: hvad passer til dig?

3 Måder at sandbox

→ Claudes egen sandbox

→ nono profiles

→ devcontainer

I praksis

→ Gør det let at arbejde med

→ Fjern alt. Giv så agang hvad behøves

→ Gør feedback let, men vær opmærksom på escapes.

Fortrolighed er vigtigst (ingen data ud)

→ Lokal model + nono

Spørgsmål?

emilmachine.com/ida — klar til brug på 20 min

`skillhub` · `dev-essentials` ·

Emil Pedersen

LinkedIn