CHAPTER 1

INTRODUCTION

This chapter explain about project motivation and specific details of the Centralized Web-Based System for Stress Induction Methods. This chapter start with the project background and problem statement, then followed by the aim and goals. The Centralized Web-Based System for Stress Induction Methods significance, scopes, thesis outline, and project summary are also included in this chapter.

1.1 Background of Study

Psychological stress can be explained as a kind of psychological tension or strain which is hard to cope with or sustain. In the human brain, stress can be equated as something that has an influence through emotions, negative thought, or other behaviour that can cause an effect on the physiology as well as the psychology of an individual (Allen et al., 2017). From Malaysia Youth Mental Health Index 2023, from 2022 showed that 1 in 10 youth experience high stress (UNICEF, 2024). The index giving the rising awareness of youth stress.

Several tests have been developed for this purpose. Among the most widely used standardized stress induction tests in psychological research are the Stroop Test, Montreal Imaging Stress Task (MIST), and Trier Social Stress Test (TSST) (Kirschbaum et al., 1993; Dedovic et al., 2005; Dickerson & Kemeny, 2004). The Stroop Test, also known as the colour-word naming test has been extensively used in psychological research since it was first described by Stroop (Jensen, 1965). The test has been used to assess a range of processes and characteristics in the cognitive and personality domains in more than sixty published psychological research (Jensen, 1965). Next, the Montreal Imaging Stress Task (MIST) combines computerized mental arithmetic challenges with social evaluative threat components built into the program or presented by the investigator (Dedovic et al., 2005). The three phase in MIST are experimental, control, and rest. During the rest phase, participant will be shown nothing as the

starting point of the test. The control condition involves the participant must answer the arithmetic question in easy level while experimental phase is the one that pressure the participant where it is giving the almost impossible arithmetic task. Additionally, performance feedback is shown to boost stress and social assessment (Dedovic et al., 2005). Meanwhile, the Trier Social Stress Test (TSST) is an ecologically sound technique that uses social assessment and uncertainty to create acute psychological stress. TSST is mostly dependent on stress caused by public speaking and the mental performance being observed (Allen et al., 2017).

An interview had been conducted with Mr. Muhammad Hamiz bin Mohd Radzi, a stress researcher, which specify that in practical research settings, these stress induction methods are often conducted using multiple independent tools and platforms. Based on the interview also, the Stroop Test is currently conducted using specialized experimental software such as E-Prime, while instructions for the TSST are delivered using presentation slides, and timing is sometimes controlled using manual tools such as a stopwatch. In addition, some participant responses, particularly during arithmetic tasks, are still recorded manually by observers. This fragmented setup creates difficulties in maintaining experimental flow and increases the complexity of managing research data.

Examining stress in daily life is made possible by digital technology, but majority of standardized stress induction techniques are still dispersed across multiple platform (Vikoler et al., 2025). Researchers have demanded a verified and standardized stress induction technique that can be used digitally and is not limited by laboratory conditions to overcome these difficulties (Norden et al., 2022).

1.2 Problem Statement

The following provides more detail on each of these issues:

a) Lack of centralized platform combining multiple stress tests.

According to the interview conducted, the experiment tools are disconnected as the researchers must switch between different programs during a single

experimental session. This disrupts the experimental flow and may interrupt the stress level experienced by participants, which can negatively affect the validity of the collected data. This is aligned as cited by Norden et al (2022) which stated that, the Stroop Test, TSST, and MIST are conducted in different websites, software, or manual setups.

b) The recorded reaction result for each test is not easily available.

Another major issue is the difficulty in managing and synchronizing participant data collected during stress induction experiments. Based on the interview, while some computerized tests automatically store reaction time data, other tasks such as arithmetic performance in TSST require manual recording by observers. These manual recordings are often written on paper and later transferred to digital formats such as spreadsheets. Manual recording increases the risk of transcription errors (Ab Rahman et al., 2025), inconsistent data formats, and difficulties in merging datasets from different tools (Becerra et al., 2025).

1.3 Proposed Solution

To address the problem stated in the problem statement, this project proposes the development of a Centralized Web-Based System for Stress Induction Methods which have two main approaches:

a) Centralized Integration of Stress Tests: To resolve the lack of a centralized platform, the project involves in developing centralized web-based system which combine multiple stress test, which is Stroop Test, MIST, and TSST Arithmetic Task into one accessible environment.
b) Automated Behavioural Recording: To address the difficulty in accurately capturing and accessing reaction result, the system will feature an integrated video recording function. This will automatically record participants reaction during the stress test.

1.4 Project Aim

This project aims to develop a centralized web-based system that combines multiple stress induction methods, including the Stroop Test, MIST, and TSST Arithmetic Task, on one website, offering integrated platforms for all users.

1.5 Project Objectives

The three objectives of this project are:

a) To gather and analyse requirements for Centralized Web-Based System for Stress Induction Methods.
b) To design the Web-Based System for Stress Induction Methods.
c) To develop a Centralized Web-Based System that integrates the Stroop Test, MIST, and TSST Arithmetic Task.

1.6 Project Scopes

This project focuses on developing a centralized web-based system that integrates multiple stress induction methods include Stroop Test, MIST, and TSST Arithmetic Task into a single centralized web-based platform making it able to use for researchers who need to do the test. The system features will include video recording integration for participant reaction observation and minimizing human error by using traditional way. Additionally, the system aims is to solve issue of scattered website and manual setup for stress induction methods, making it convenient for researcher to use for their research or monitor their patients.

The user for this system is for researchers and their participants; however, other users such as students can still use it for experimental purposes. This system will be developed by using PHP language and implementing MariaDB for database.

1.7 Project Significances

The project significance is the proposed system will provide a centralized platform that integrates multiple stress induction methods such as the Stroop Test, MIST, and TSST Arithmetic Task into a single web-based environment. Based on feedback obtained from the stakeholder interview, researchers currently spend significant time switching between different software tools and manually compiling experimental data. The centralized system will reduce these inefficiencies by providing automated data collection, synchronized timing, and integrated recording features. This can significantly reduce manual workload, minimize human error, and improve the consistency of experimental procedures.

1.8 Outline of the Thesis

There are five chapters in this thesis which are:

Table 1.1 Chapter in This Proposal

Chapter 2	This chapter discusses the literature review that related to The Centralized Web-Based System for Stress Induction Methods. The previous research and article are used to identify the problem and improvements needed to achieve. This chapter also show the description of three methodologies that fall under the software development life cycle (SDLC).
Chapter 3	In this chapter, the methodology planned to be used in development of The Centralized Web-Based System for Stress Induction Methods is elaborated. It includes the system development model, tools, and language used such as PHP.
Chapter 4	This chapter shows the results of work done for each phase described in the methodology chapter. Thorough analysis and discussions of each finding are described here.
Chapter 5	This chapter concludes the research with discussion of the benefits gained with the system and recommendation for future works.

1.9 Summary

This chapter has discussed the context of the study, which includes the setting, the problem statement on the project of the Centralized Web-Based System for Stress Induction Methods, the purpose, and the aim of the project. This concludes the background chapters of the study.

CHAPTER 2

LITERATURE REVIEW

This chapter will discuss the literature of Centralized Web-Based System for Stress Induction Methods. This chapter give information about the project reputable publications including journals, articles, and other materials.

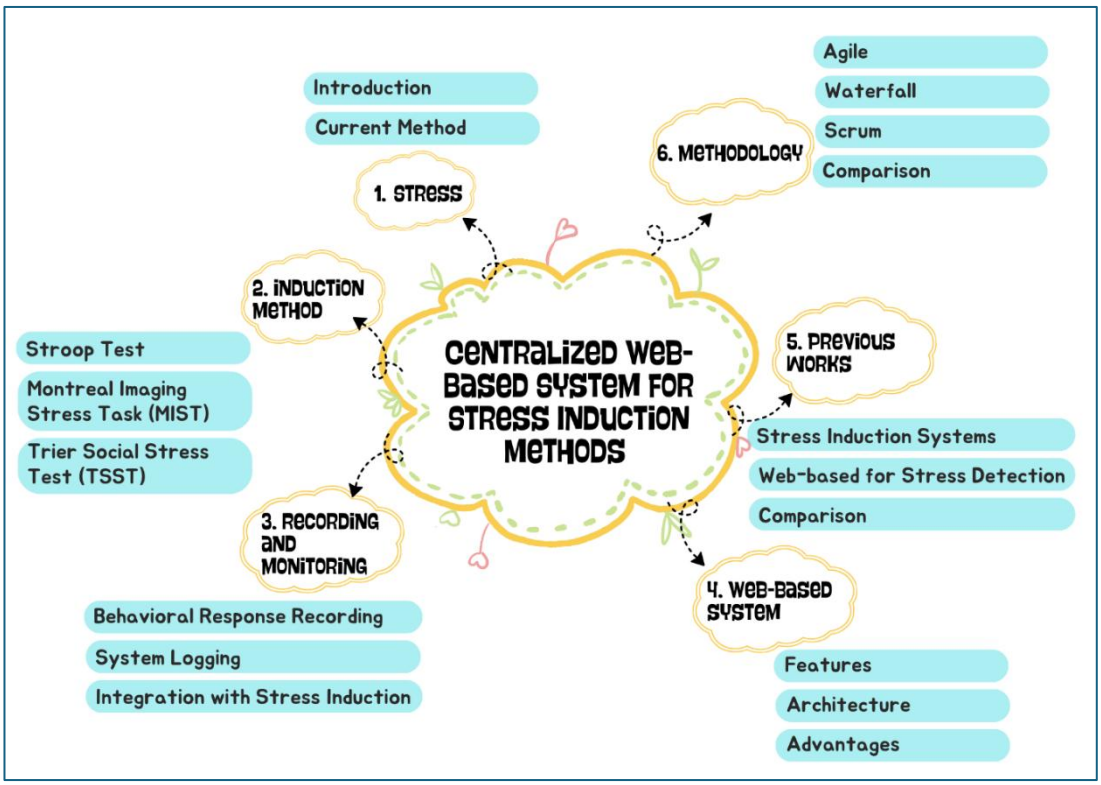


Figure 2.1 Overview of Literature Review

Figure 2.1 describes the overview of the topics that are studied in this chapter. This chapter are consisting of four different subtopic which are Induction Methods, Web-Based System, Previous Works, and Methodology for the system's development.

2.1 Stress

A type of psychological tension or strain that is challenging to control or tolerate is known as psychological stress. Stress affects a range of physiological and psychological aspects of behaviour, emotions, and mental processes (Allen et al., 2017). The Hypothalamic-Pituitary-Adrenal (HPA) Axis is best known for

its role for body's natural reaction to stress (University of New Hampshire, Psychological and Counseling Services [PACS], nd).

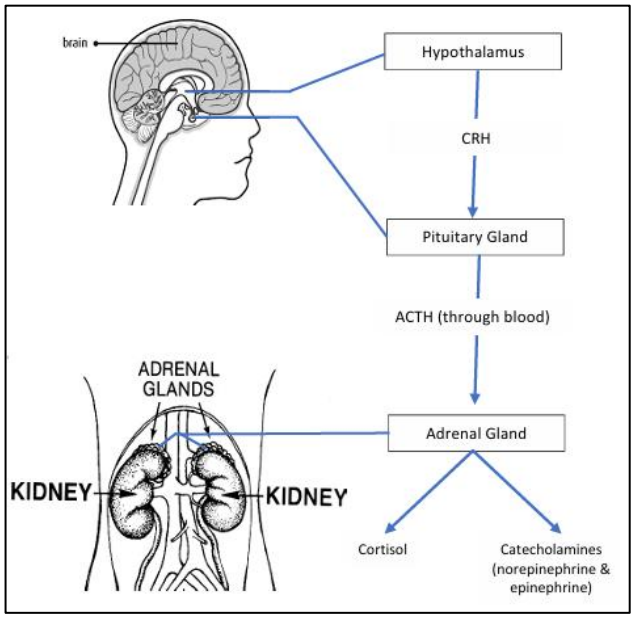


Figure 2.2 The Biological Mechanism of Stress Response through the HPA Axis (PACS, n.d.).

Figure 2.2 show the description of what occurs in one's brain and body when experiencing something stressful:

a. The hypothalamus releases a hormone called corticotropin-releasing hormone (CRH).
b. CRH signals the pituitary gland to create a hormone called adrenocorticotropic hormone (ACTH) into the bloodstream.
c. ACTH travels down to adrenal glands where it releases different hormones from different parts of the adrenal glands. It causes the secretion of a class of steroid hormones called glucocorticoids from the cortex and one of this is cortisol which become one of main role in the stress response.

The release of cortisol and catecholamines will energize the fight-or-flight response.

In Malaysia, stress is increasing concern among Malaysian youth, overall score for youth aged 15 to 30 years is 71.91 according to Malaysian Youth Mental Health Index 2023 (UNICEF, 2024) which this score indicates a moderate risk

of youth facing mental health issues. If these stresses are left untreated, it can lead to more serious mental health.

Stress can affect both physical and psychological health. Even though stress can help some people to work more productively, high stress levels can cause sleep problems, irritability, and poor concentration (Benitez-Agudelo et al., 2025). Without treating it, chronic stress can lead to health issues such as heart disease, diabetes, and week immunity (Schneiderman et al., 2005). According to McEwen and Akil (2020), brain is the central component in the body and responds to stress which include three interconnected limbic brain regions:

a. Hippocampus: This part is the key in learning, memory, and terminating the stress response. Long term stress can lead to its shrinkage which also leads to conditions like major depression and Post-Traumatic Stress Disorder (PTSD).
b. Amygdala: This area is response in emotional and affective responses.
c. Prefrontal Cortex (PFC): Found to induce adaptive structural plasticity within brain area that are linked.

Stress is important to be addressed and to be managed in any state. According to Oliveira et al. (2023), managing stress might help in improve emotional stability where it can also improve the performance and productivity. Workplace policies that reduce and assist employees in managing work-related stress can boost productivity and encouraging mental wellness which it will lowers presenteeism and absenteeism (Monroy & Michel, 2025). Addressing stress in early stage help to prevent long-term physical and psychological damage such as suppressed synaptic functions, reduced neuroplasticity, and possible neural damage (Takahashi & Shelton, 2025).

2.1.1 Current Methods to Overcome Stress

Currently, there is various clinical and non-clinical way have been developed to help manage and reduce stress (Bandyopadhyay et al., 2023). These methods made to stabilize emotional, cognitive, and physiological responses caused by stress (Córdova et al., 2023).

One of the methods is the Cognitive Behavioural Therapy (CBT), where it helps individuals identify negative thought. CBT has been proven effective for anxiety, depression, chronic stress (Hoffman et al., 2012). Other than that, Mindfulness-Based Stress Reduction (MBSR) is one of the methods that focus in psychological and behavioural approaches where it focuses the individual on being aware and accepting the current moment which reduces cortisol levels and improves emotional regulation (Kabat-Zinn, 2013).

In term of pharmacological interventions, the used of antidepressant and anxiolytics help to reduce the severe or chronic stress cases which can lead to anxiety or mood disorders (National Institute of Mental Health, 2022). However, keep depending on this drug can cause a severe withdrawal syndrome that bring back the anxiety and insomnia, agitation, and even worse, seizures (Addiction Center, 2025). Clinically, standard tests like the Trier Social Stress Test or the Perceived Stress Scale help measure how someone reacts to pressure, both physically and mentally, in set-up situations (Kirschbaum et al., 1993; Cohen et al., 1983).

2.2 Stress Induction Methods

Stress Induction is important part in psychological research where the goal is to reliably and ethically elicit a measurable acute stress response in participants under controlled conditions (Dickerson et al., 2004). Centralizing and standardizing this procedure may help for carrying out thorough scientific research.

Stress induction tasks are usually conducted in lab or computer. The process needs to be presenting time pressure or cognitive overload to the stressor to triggers their stress. Researchers need to monitor their response and ensure ethical safety toward participants (Kirschbaum et al., 1993). The mostly used in stress induction methods are, the Stroop Test, Montreal Imaging Stress Task (MIST), and Trier Social Stress Test (TSST) which are mostly recognized by psychological and physiological research (Kirschbaum et al., 1993; Dedovic et al., 2005; Premchand et al., 2024).

2.2.1 Stroop Test

The Stroop Colour and Word Test is one of the most widely used tools in psychology and neuroscience research. Often applied to assess focus, mental regulation, or reactions under strain (Stroop, 1935). The test uses a cognitive conflict known as Stroop interference, which the test will mismatch word and colour of the word. This inconsistency increases the cognitive workload while emotional tension builds at low levels which make the Stroop Test suitable to use to trigger controlled pressure situations (Scarpina et al., 2017; Katmah et al., 2021).

The Stroop Test, also known as the colour-word naming test, was first described by Stroop and has been widely used in psychological research (Jensen, 1965). Stroop Test used to assess a range of process and characteristics in cognitive and personality domain (Jensen, 1965). Stroop Test can evaluate cognitive reflect, processing speed, and selective attention by asking participant to choose the colour of ink but different in word. For example, participant must choose "red" not "green" when the word "GREEN" is displayed in red colour.



Figure 2.3 Word “GREEN” displayed in red ink

Recent studies have compared the Emotional Stroop Test (EST) in offline laboratory test with online test where they found no significant differences between both methods showed how the Stroop Test are well suited to use in web-based system (Imbir et al., 2025)

In experimental setup, Stroop Test require participant to sit in a quiet and controlled environment to minimize external distractions. The screen sits straight at eye level and participant will take their place at a standard viewing distance from the screen. Before start, they will receive brief instruction to helps them understand what to do (Premchand et al., 2011).

During the test, each part will show around 1 to 2 seconds depend on how difficult the task is. Participant must choose the colour using mouse click. The system will record reaction time, accuracy rate, number of errors, and participant behaviour toward the test (Scarpina & Tagini, 2017). Correct responses are defined as identifying the correct colour of word that have been presented accurately, and the incorrect responses are when the participants choose the wrong word instead of its colour which giving the interference effects in selective attention (Curtis et al., 2024; Forte et al., 2024).

In this study, Stroop Test will have around 30 questions which include the colour and the word of colour with a duration of 2 minutes to give task sensitivity and participant fatigue (Prieto-Sánchez, 2024). This duration is enough to induce cognitive load to get a consistent measure towards all participants (Dallaway et al., 2022).

2.2.2 Montreal Imaging Stress Task (MIST)

The Montreal Imaging Stress Task (MIST) is a computerized mental arithmetic test designed to trigger psychological stress consistently in lab settings. Originally made for functional magnetic resonance imaging (fMRI) studies, it allows tight control over cognitive load and social evaluative threat (Dedovic et al., 2005). After being introduced, this tool becomes widely use across neuroimaging, physiology, and cognitive research because it activates the HPA axis while boosting cortisol levels (Pruessner et al., 2008; Reinhardt et al., 2012).

The MIST aims to create performance pressure, time pressure, and social evaluation. Each raising mental stress while enabling researchers to track actions and brain activity instantly.

The three primary operating (Dedovic et al., 2005; Corr et al., 2021; Dong et al., 2024):

a. Rest (Baseline) Condition: This condition is shown to participant with a static screen with no tasks, allowing to get the baseline mental and physical condition.

b. Control Condition: Involves participants to solve arithmetic problems in comfortable and easy difficulty, design to match the participants capacity. Thus, the cognitive effort is isolated without causing the stress.
c. Experimental Condition: Manipulates the arithmetic challenge by adjusting the difficulty and time limitations to challenge the participants maximum capacity.

The MIST giving the real-time performance feedback shown to boost stress and social assessment. This test usually includes a countdown timer and score to give more pressure towards the participant for example “Too Slow! or Incorrect” which it will heightens the social evaluative pressure and sense of failure (Dedovic et al., 2005).

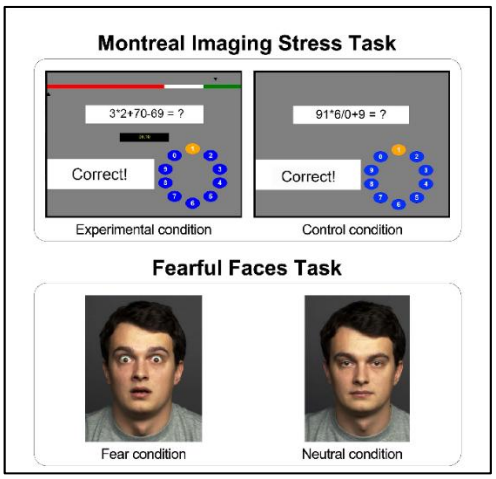


Figure 2.4 Example of Montreal Imaging Stress Task (MIST) showing arithmetic challenge with real-time feedback (Sudimac & Kuhn, 2022)

The arithmetic question used in MIST designed to vary in difficulty and complexity depend on different stages based on the phase. The question is vary, some stage uses simple equations, others mix several operations like multiplication, and division together. Researchers found this setup pushes mental effort consistently (Dedovic et al., 2005; Pruessner et al; 2008).

In the Control Condition, questions are simple and easy to solve within given time. These questions are designed to fit participant capability without triggering their stress. Example of Control Condition questions:

- 12 + 4
- 3 + 5

These simple arithmetic questions ensure that the participant respond confidently without triggering their stress levels (Malik & Amin, 2017).

In the Experimental Condition, it uses tougher questions that need several thinking steps and quick answer under strict time. The setup cuts down response time or increasing the challenge level to create more pressure (Dedovic et al., 2005). Examples of Experimental Condition questions:

- (45 / 5) x 4 – 7
- (128 / 4) + (36 / 3) – 10
- (1201 / 12) + (210 / 5) / 3

These questions require higher level of thinking which contribute to cognitive overload when time pressure and feedback are present. Research shows that forcing participants finish quickly under unrealistic time limits will increase their stress level especially when it combines with feedback message like “Too Slow!” or “Incorrect” after each try (Choi & Choi, 2024; Wriessnegger et al., 2025).

The arithmetic question format is used on purpose because it tests (Dedovic et al., 2005; Nirabi et al., 2025). The selected method is highly advantageous because it demands continuous cognitive effort across almost all educational levels, incorporates scalable timing and difficulty adjustments, yields measurable reaction times and error frequencies, and seamlessly integrates with neuroimaging tools and web-based platforms.

These characteristics make arithmetic challenges work better than word or memory-based tasks to trigger social evaluative pressure during lab or web tests (Dedovic et al., 2005; Norden et al., 2022).

In typical MIST setup, the setup takes place in controlled, quiet, and distraction-free environments to shifts in mental or bodily reactions directly to the activity rather than external disturbances (De Calheiros Velozo et al., 2024). The participants sit comfortably before a monitor positioned with their eyes level, usually 50 to 70 cm away from the screen. Once started, the screen will

show how arithmetic questions work, ways to respond, along with an outline of what happens every phase. Researchers may provide a brief practice to ensure participants understand the flow (Dedovic et al., 2005).

The task moves across three standard MIST phases, Rest (Baseline), Control, and Experimental. Each lasting from 3 to 5 minutes. During the Rest phase, the screen will show a static non-task screen, allowing to record baseline measurements like heartbeat, breathing, and mental calmness. In Control phase, basic problems show up slowly, without time pressure or scoring, help researchers to observe cognitive performance without any stress effects. Participants can work through the question in their own pace which keeps stress level low throughout this phase (Dedovic et al., 2005; Choi & Choi, 2024).

The Experimental Phase brings in key parts of MIST which to raise stress levels. As the task goes on, arithmetic questions get harder while time limits shorter which sometimes make it impossible to finish it. Adaptive algorithms may adjust problem difficulty to maintain a target error rate of around 40 to 50%, keeping stress steady between people (Pruessner et al., 2008). Feedback appears on screen, such as “Incorrect!” or “Try Again!” appear after mistakes. Earlier studies show these kinds of social evaluative component are triggering stress and HPA-axis activation (Dedovic et al., 2005; Sudimac & Kuhn, 2022).

During the session, the system gathers behavioral and psychological data, including reaction times, accuracy and error rates, the number of attempts per question, overall task completion rates, and observable facial expressions and behaviors.

In some setups, additional environmental controls like low light or chair positions are use and also restricting how much participants can move. Research shows keeping the same boosts accuracy while cutting down shifts in stress reactions (Reinhardt et al., 2012; Kirshbaum et al., 2020).

The performance of the participant in the MIST is scored according to the number of correct and incorrect responses, and the time of response in the Control and Experimental conditions, with each arithmetic question requiring a single numerical answer within a predefined time limit.

A response is considered to be correct when a participant submits the correct numerical answer before the expiration of the time limit. A response is considered to be incorrect when the participant submits an answer that is incorrect or fails to respond within the given time limit. Incorrect answers and time-out events are considered as errors since they show task difficulty and cognitive overload.

Indicators for these categories are specified, and performance scoring is computed using indicators such as the following (Pruessner et al., 2008):

1. Total Correct Responses (C): No. of correct answers to the math problems within the timely limits
2. Total wrong responses: The number of wrong responses or the items that were not responded because of the expiration of the test time.
3. Total Attempts (T): Total number of questions presented, which the system calculates by adding the correct responses and wrong responses together.

To evaluate participant performance, the system is programmed to automatically compute Accuracy Rate and Error Rate at the end of the test.

Besides response accuracy, the current system also measures reaction time which is defined as an interval between the appearance of an arithmetic task and the participant submitting their response. The average reaction time across trials is conventionally viewed as reflecting the number of operations or steps involved in information processing and the relative speed or efficiency with which they are executed under stress (Shields et al., 2016; Norden et al., 2022).

The MIST adapts its difficulty during the Experimental Condition to induce consistent amounts of stress across individuals. Task difficulty and time constraints are adjusted dynamically based on ongoing performance, maintaining an error rate of approximately 40–50%, a range shown to reliably induce psychological stress and activate the HPA axis (Wang et al., 2023; Dedovic et al., 2005).

These scoring mechanisms provide standardized quantifiable measures of performance degradation under stress and support automated implementation in laboratory-based and Web-based stress induction systems.

Overall, the MIST setups designed to provide standardized, repeatable way to trigger stress under close control. Cognitive load, social evaluative threat, and time pressure can be adjusted step by step to induce stress response. This makes the MIST an optimal tool not just in brain scans, yet also on online system meant to bring consistent stress induction remotely.

2.2.3 Trier Social Stress Test (TSST)

The Trier Social Stress Test (TSST) is an ecologically sound technique that uses social assessment and uncertainty to create acute psychological stress. Considered as "gold standard" for giving moderate stress in laboratory setting (Kirschbaum et al., 1993). TSST is mostly dependent on stress caused by public speaking and mental performance being observed (Allen et al., 2017). TSST was created to address the shortcomings of previous stress protocols, consistently activated the main psychological stress such as sympathetic-adrenal-medullary (SAM) axis and the HPA axis (Allen et al., 2017; Kirschbaum et al., 1993).

TSST usually has three organized parts meant to maximize social-evaluative threat and induce a sense of uncontrollability (Dickerson & Kemeny, 2004).

a. Preparation Phase: Before starting, participants get instructions around ten minutes to deliver a speech in front of trained and unbiased listeners who will not reach much.
b. Public Speaking Phase: Participants deliver the speech while the panel judge them silently. Panel will keep the blank face which ramps up the nerves of participants.
c. Mental Arithmetic Phase: Participants perform a surprise arithmetic task right after talking, which boosts stress and mental effort (Kirschbaum et al., 1993).

Even though the TSST works well, doing it in traditional implementations needs a few trained people playing as judge and watcher. That setup takes up

lots of effort, costly, also limits use in distant or broad settings (Norden et al., 2022).



Figure 2.5 A drawing showing how the TSST is conducted (Coetzee, 2012).

One of the TSST phases that been focused on is TSST Arithmetic Task. The TSST Arithmetic Task requires a controlled setup to ensures that the conditions face by each participant in terms of cognitive load, time pressure, and social evaluative are consistently applied. Usually done in laboratory with evaluator or researcher on site. However, digital versions can be adapted with standardized procedures.

In original TSST protocol, the arithmetic task conducted when participants gave their speech. The environment should stay plain, quiet look, bright lighting to make participants feel seen, quiet, and the assessment group prepared with two or three trained staff that keep calm and neutral (Kirschbaum et al., 1993). A digital watch or clock on the wall sits within view, so the participant sees how much time is left, reinforcing the sense of urgency.

To maintain consistency with the original TSST, the arithmetic task should use this setup:

- Starting number: Starting with any number for example, 1022 or 2043 (Kirschbaum et al., 1997).
- Subtraction gap: 13 or 17, depending on how the research was set up.
- Restart rule: If wrong, start again at the beginning, this setup amps up stress and mental effort (Kirschbaum et al., 1997).
- Duration: Between 3 and 5 minutes (Allen et al., 2017).

The researcher gives instructions clearly, to ensure each participant know exactly what is expected.

The social pressure plays a big role in making TSST stressful. When it comes to the arithmetic phase:

a. Researchers keep blank faces and stay quiet.
b. Researchers might fix mistakes in a flat tone using phrases like: “Incorrect. Please restart.” or “Continue”.
c. No words of approval, comfort, or emotional reactions are given (Dickerson, Kemeny, 2004).
d. This method increases how much participant feel of being judged, making the participant think others are sizing up their skills.

With the usage of TSST into web-based platform, the arithmetic task can be delivered online while keeping the key stress inducing component.

Digital formats usually come with:

a. A countdown timer visible on screen
b. Input field to type the answer
c. Instruction popped up before the task
d. Instant alert when mistake is made such as: “Incorrect! Restart from 1022.”
e. These prompts act like feedback and adding pressure (Norden et al., 2022).

In Trier Social Stress Test arithmetic task, performance is measured based on objective behavioural parameters such as correct responses, incorrect responses, time associated with responses, and continuity with tasks under social evaluative pressure. The arithmetic challenge in Trier Social Stress Test primarily involves subtracting serially with a time constraint under the evaluation of judges or simulation of evaluative conditions in digital versions (Kirschbaum et al., 1993; Dickerson & Kemeny, 2004).

a) Correct Response

Response is correct if participant able to subtract in sequence.

b) Incorrect Response

Response is incorrect if participant unable to subtract in sequence. They must begin from start with the first number as stated by the researchers. (Kirschbaum et al., 1993; Kirschbaum et al., 1997).

Performance scoring is based on the following metrics:

1. Total Correct Responses (C): Number of correct subtraction steps completed sequentially without error
2. Total Incorrect Responses (I): Number of incorrect subtraction steps, restarts, or prolonged response delays
3. Total Attempts (T): Total number of subtraction steps attempted, where it is calculated using same metrics and formulas as previously detailed in MIST Section.

2.3 Recording and Monitoring

Recording and monitoring are one of the most important parts in studying the stress because it provides objective data on how people react towards stress test. There is a demand for these methods because of the use of the traditional way which is self-report-based stress test can be subjective bias (Korkmaz et al., 2025). According to Shirtcliff et al. (2024), demonstrating stress induction like MIST relies on precise behavioural measure with real-time feedback. These tasks need to have a coordinated system that align the timing of the participant during the test.

Most protocols are mostly limited to traditional laboratory settings that are manually observing, labour-intensive and cannot be scaled to larger place (Norden et al., 2022). Studies show that traditional method or manual method are suffers from issues such as human error, subjective observations, and poor scalability that could burdened by researchers (Vikoler et al., 2025). With digital tools become common, stress test can be done remotely and be use in web-based system which improve consistency and reduce manual effort (Wielgopolan et al., 2025).

However, current digital a scattered in every website with different interfaces and data-logging format especially for standardized stress induction methods (Vikoler et al., 2025). According to Al Sahili et al. (2025), explicitly states that most of digital technology that existed are “fragmented data silos” and “inconsistent annotations schemes” where applications concentrate on individual modalities rather than collaborating. The fragmented platform could easily result in some incomplete or disorganized data, and because of these “fragmented data silos,” it could be hard to create trustworthy models (Al Sahili et al., 2025).

2.3.1 Behavioural Response Recording

While measuring their responses, it is important to see how people behave on stressful tasks. Speed, accuracy, errors made, or consistent responses are needed to show how much the thought process works when put under stress. Delayed or slow responses may suggest that a person's brain is overloaded the moment stress sets in (Cantelon et al., 2024). Where the question of hitting targets or avoiding errors arises, any failure to do so may become indicative of a diversion of attention under stress, as in the case of colour word tests or fast mental arithmetic, where stress increases errors (Dedovic et al., 2005). Keeping such measures helps researchers identify actual changes in brain activity while assessing the degree of disruption caused by stress in the task performance. Observational hints about human behaviour provide further insight into test scores, where overt signs of strain on the performance of various tasks can be detected with the help of sounds or visual features. These are generally recorded through video or audio recordings for researchers to measure changes in facial expressions, or the endpoints of eye gaze, posture, or overall motion patterns (Giannakakis et al., 2017).

Actions such as doing many movements from foot to foot, holding back answers for a long period, or showing irritation may reveal mental pressure increasing (Cantelon, et al., 2024). Audio recording can reveal the participant stress from the voice which sometimes the participant will stutter and pause when speaking (Norden et al., 2022).

Synchronization of body-based signals enhances the ability of researchers to track behaviour when people are under stress. Instead of looking at actions,

researchers record things like slowed reactions or obvious signs of strain with physical changes. The increased heartbeat, sweat responses, or changes in cortisol (Kirschbaum et al., 1993). Since these readings come out synchronized, it is easy to establish if a stumble in focus happens right at the point when the body shows peak stress. This linking of outward actions with inner states of the body confirms that what one gets is linked to stress and not random variation. Combining both types of data strengthens conclusions about how pressure affects cognition and mood. It can also make results easier to compare across different persons, even when situations are varied slightly.

Recording what individuals do provides good evidence about stress, and research findings become more reliable. Rather than having computer estimates of how someone might feel, it also records actual behaviour like speed or errors, which reduces the number of personal perspectives (Norden et al., 2022). Because computers record all these points every time, data points remain constant regardless of who it done on or when it happens. That is also because computers can avoid human errors from over-monitoring. In addition to that, data points from these processes correlate perfectly with heart rate trackers or video recordings, providing scientists with complete data points without clashing pieces of information. Because of accessible internet assistance, storing, examining, or analysing behaviour data on a larger scale becomes possible like they are intended to in scientific labs or browsers today (Scarpina & Tagini, 2017; Wielgopolan et al., 2025).

2.3.2 System Logging

System logging is an activity that automatically records all the activities performed by the users on the stress testing environment. Therefore, whenever participant react, doing tasks, or giving feedback on the system, all this is automatically logged along with exact timings. Since this activity is carried out without the help of humans, all the actions taken by people are also reflected accurately as they occurred, leading to an effective record of how they have conducted themselves during the testing process (Norden et al., 2022). Because all activities are not manually written down, errors decline, and all participants have an equal chance of being recorded.

System logs store information all information such as the participant's name, result, and test timing. It is important for researchers to note that system logs keep a clean and organized record of events that occurred during experiments. Therefore, the data logging will prevent the possibility of data error. By being able to refer to log statements to determine if actions went as planned using system logs also allows for recognizing possible dysfunctions or strange performances during the testing process (Scarpina et al., 2017). It is easier for others to replicate research results because research specifics can be seen clearly. In addition to that, standardized techniques are possible in separate labs.

2.3.3 Integration with Stress Induction

For a configuration to be deemed good, stress testing and tracking devices must work well together. Activities like color changes, math puzzles, and recordings of the body's reaction to various tasks are all highly relevant to real-life behavior. It is simpler to detect a direct reaction to the given stimulus if this is the case (Dedovic et al., 2005). These configurations enable the stress process to be rapidly modified based on the test taker's performance (Dedovic et al., 2005). To help maintain a constant stress level, MIST allows the test to change in the middle or display the "Too Slow!" notice (Dedovic et al., 2005). As a result, each person experiences regular levels of stress, which are crucial in triggering physiological reactions (Dedovic et al., 2005). It is simpler to deal with a variety of information sources when they are integrated into a single system, such as behavior files, movies, or even body signals. This not only makes scientists' jobs easier because they don't require separate equipment for each test, but it also makes it possible to study many stress indicators with a single setup rather of separate equipment (Norden et al., 2022). Having information in a single system prevents the loss of information through the creation of folders, as everything is organized in a neat and efficient way, making the process of analysing easier (Norden et al., 2022).

The use of monitoring software in conjunction with activities that cause stress can make approaches more homogeneous in comparison to previous trials. Additionally, machines ensure similar configurations, timings, and reactions to each individual without variabilities introduced in manual processes (Scarpina

et al., 2017). This is particularly essential in this discipline, as valid results require similar settings when repeating tasks.

Currently, the methods that the recording process has been relying on are those that use the manual method as well as external devices. Many of the stress methods that have been used are more often relying on the use of the manual method, which includes looking at the participants directly and note down all the progresses by hand, as well as the use of external devices like the stopwatch or the external camera (Norder et al., 2022). This particular method has been requiring the researcher to continuously monitor the participant in order to get the appropriate and consistent records. Many of the recording that record the participants' reaction may be difficult for the test made by the participants to be synchronized. This has been requiring the researcher to manually link the test made by the participants to the recorded reaction, which may pose the risk of the reaction time mismatch (Al Sahili et al., 2025).

Because of these limitations, a web-based integrated system is needed where it can record participants reaction, test answers, and timestamps which can reduces human error and removes fragmentation by using in one centralized platform (Wielgopolan et al., 2025).

2.4 Web-Based System

Web-based platforms are more efficient, which can be implemented on a wide scale remotely, hence gradually replacing the conventional method for the study of stress induction (Almazrouei et al., 2022). Manual method of the stress test, according to Reiser et al. (2025), involves the use of various equipment, which can take time and may entail mistakes. In this case, the issue can be solved using the web-based method for the subjects. This means that the subject can do the stress test using the web-based system without necessarily visiting different websites, which might pose variability in the level of stress (Vikoler et al., 2025).

2.4.1 Features of Web-Based System

The web-based system is developed on a web browser platform that provides one-point access, management of user interactions, and systematic data

management. A web-based system should balance security with usability and administrative convenience, especially in the online workplaces of today. User authority and authentication are integral parts of a web application. The processes adopted for establishing authority through methods such as login credentials authenticate a person's identity. However, authorities also restrict how people use web applications about the role that each play. Role-based access control ensures that a person can only perform a certain task at the levels allowed by their authority, preventing unauthorized manipulation of system configurations and shared resources (George, 2024).

a) User Profile Management

This makes it possible for the system to store user data in an organized manner. Each user has been given a distinct profile, which carries their account details. This helps in traceability, customization, and standard system usage. With the centralized content and tasks, this implies that one can access all the functionality provided by the system using the central hub. This occurs with a higher level of centralized processing that avoids redundancy and achieves consistency throughout the system through standardized process flows (Prottasha et al., 2025).

b) Automation

The automation and processing of the data will make sure the system records all inputs received from the user automatically. The automation of the system will remove manual human interaction from the data collection process, making the system highly reliable, accurate, and operationally efficient for all users (Ferreira et al., 2021).

c) Tracking

System logging and tracking record important actions that happen in a system, for example, actions carried out by a user, submissions, and transition actions. When actions that happen in a system are logged, they are timestamped and dated, which assists in tracing, debugging, ensuring high transparency, and system performance analysis (Mirza., 2026).

d) Database

Database Management and Data Storage acts as an organized repository for storing user records and system data. Its relevance lies in assisting in data persistence, integrity, and secure accessibility, ensuring that data processing remains consistent and protected for analysis (Abu-Elkheir et al., 2013).

e) Dashboard

Administrative dashboards as well as control of the system work as a common interface that gives authorized users access to handle the settings of the system, as well as access data stored within the system, in addition to monitoring the usage of the system. Interactive dashboards are helpful in boosting transparency as well as control within a system by combining multiple operational functions and reporting metrics in one interface (Knoth et al., 2023).

f) Accessibility

Browser access makes it possible for people to access the system using browsers without having to install software. This is due to the cross-platform compatibility that web systems provide, resulting in high device adaptability and ease of system maintenance (Talluri, 2025).

2.4.2 Architecture of Web-Based System

The architecture of a web-based stress induction system is build using a three-tier structure, which separates the client, application, and database. This design ensures stability, scalability, and consistent task delivery across different devices and environments.

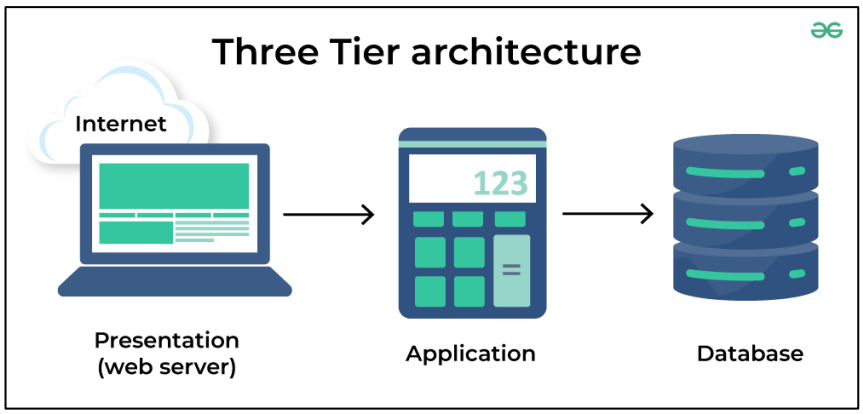


Figure 2.6 Three Tier Architecture in Distributed Server (geeks for geeks, 2025)

The first layer, known as the client layer, handles all user interactions through the web browser. At the presentation layer, the user interface handles all direct interactions during the researcher's active session, allowing participants to view test instructions, perform tasks such as the Stroop Test or MIST, and receive automated cues like “Incorrect!” or countdown timers. Because this layer operates fully online, it supports device independence, allowing tests to run without installing additional programs (Scarpina et al., 2017).

The second layer is the application layer, which manages the main logic of the stress induction tasks. It is controlling task flow, adjusting difficulty levels, generating real-time feedback, and synchronizing behavioural responses including recording. For example, in MIST, the server will determine how easy or hard the test can be based on how the participant answer first three questions (Dedovic et al., 2005). The server layer also ensures that each participant will getting the same method of test without any human bias.

The third layer, the database layer, stores recording, and participant answer data. Using the databases will help researcher to store all participants answered question and recorded reaction. It also protects data from loss or mismatched with other data to avoid any unresponsible change toward the participants data (Norden et al., 2022).

2.4.3 Advantages of Web-Based System

Web-based systems have numerous benefits that make them suitable for developing applications that are centralized, scalable, and well-managed. The benefits of web-based systems stem from their use of web browsers for access, a centralized system architecture, as well as automated system operation processes (Sposato et al., 2024; Farhan et al., 2025). The good thing about web-based system is it can be accessed using browsers and there is no need to install any software or application (Farhan et al., 2025). Centralized data management is another advantage where all data stores are in one place which avoid the risk of loss, duplication and misused by other organization (Abasi, 2025).

Finally, integration on the same platform increases the efficiency of the system and user experience. The fact that many functions are handled in one internet-based system means that the user does not have to navigate from one system to

another. Such a system is able to offer more efficiency in operation (Judijanto, 2023).

In sum, these benefits prove the mechanism of web-based systems is a very effective foundation for centralized access, automated processing, and system management.

2.5 Previous Works

Research on stress induction methods has grown rapidly because of most researchers in stress study are shifting from traditional lab method to digital (Norden et al., 2022; Reiser et al., 2025). The popular stress induction methods that have be used by many researchers in traditional lab settings are TSST, MIST, Stroop Test where most of them has a good method to increase the stress level toward participants responses across cognitive, emotional, psychological (Kirschbaum et al., 1993; Kudielka et al., 2007; Dickerson & Kemeny, 2004). These tests are consistently activating the SAM system and HPA axis which that give a change toward heart rate, cortisol release, and behavioural stress (Kirschbaum et al., 1993; Kudielka et al., 2007).

With the current stress research are shifting toward computerized, this can give a significant advantage including improved accessibility, scalability, and standardization over traditional methods (Heber et al., 2017). Research show that the use of online stress test is comparable with lab methods (Grootswagers, 2020). However, the current limitation toward online stress induction methods is lack of centralized platform where some of the existing web-based stress tests are scattered across the website and some of the test require researchers to install additional software.

2.5.1 PsyToolKit

PsyTooKit is website that provides Stroop Test experiments for research and educational purposes. The website conducted the test without needed to use any software installation and it conducted entirely in website. The Stroop Test in PsyToolKit records reaction time and response accuracy include the correct and incorrect answer which help to measure their cognitive reaction.

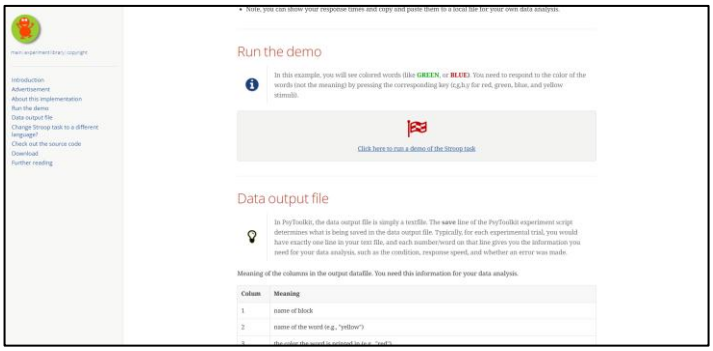


Figure 2.7 Homepage of PsyToolKit

The Stroop Test in PsyToolKit is available for single test and showing the result at the end of every test. Even though the user interface of the website is not so friendly, the website gives an easy access to everyone who wants to experiment with the cognitive testing. The result can be generated on the website but cannot be stored inside the website.

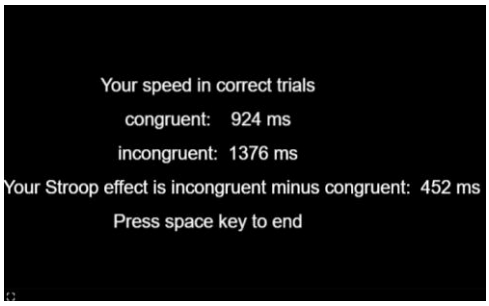


Figure 2.8 Stroop Test result in PsyToolKit

2.5.2 Milisecond

Milisecond is a website that provides MIST using Inquisit framework. MIST in Millisecond provides data analysis, response reaction, task completion. The system provides control over time and task consistency which help inducing controlled stresses in computer research. This system makes it suitable for research work.

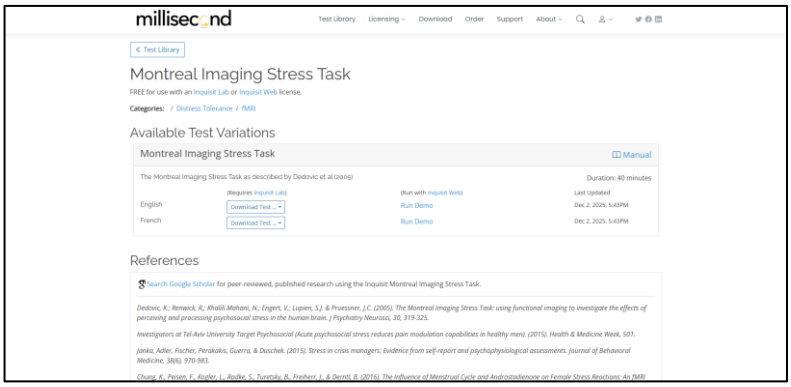


Figure 2.9 MIST in Millisecond.com

However, some requirements should be noted regarding the usage of the platform. These include the consideration that to utilize the platform, users are required to set up the Inquisit software on their computers prior to conducting any experiment. This setup may seem like an added burden compared to using fully browser-delivered models. Nonetheless, this platform can still be applicable in stress induction tasks.

2.5.3 Focusaur

Focusaur is another Stroop Test related website where can complete the Stroop Test within 60 seconds. Different from PsyToolKit, Focusaur are focus more into gamified and making user interesting on completing it. After completing the task, Focusaur will show the Quality Score and Response Speed in graph which help to analyse the level of stress based on score and speed.

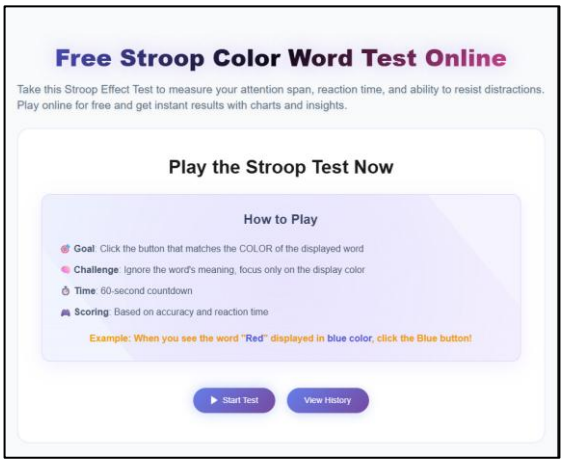


Figure 2.10 Homepage of Stroop Test in Focusaur.com

Even though the website is more polish, the website does not include the reaction recording device.

2.6 Methodology

The methodology for this project shows the process used for design and development for this project. Methodology shows the theoretical analysis and system procedures needed to ensure that the development is consistent in every phase (Hossain, 2023). In system development a step of requirements analysis, design, implementation, and evaluation is required to produce the good product and focus on solving the user problem (Abass, 2023).

2.6.1 Agile

Agile software development is focus on flexibility, incremental progress and continuous feedback. Rather than building the whole system at once, Agile will breaks the development into different process known as sprints. Every sprint involves planning, design, develop, testing, deploy and review. This way, team can regularly assess and improve the product through responses from stakeholder.

Agile encourages teamwork, transparency, with the involvement of stakeholders during development. The continuous engagement help developer the evolving requirements and adapt quickly. Agile allows fast prototyping and working functions are provided sooner for early testing and validation (Ndou et al., 2024).

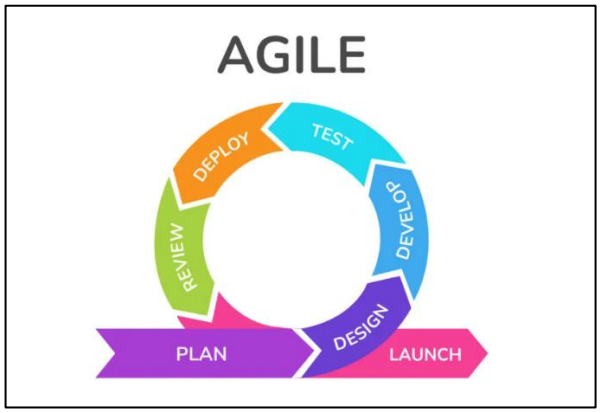


Figure 2.11 Agile Development Process (Amoros, 2025)

a) Planning Phase

The project requirements are evaluated at the planning stage and then ranked in order of importance (Pressman & Maxim, 2020). Additionally specified are the tasks that must be finished within the sprint and their deadlines. The development team will be on the same page and will know exactly what they need to deliver during the next sprint thanks to this procedure (Schwaber & Sutherland, 2020).

b) Design Phase

Both the interface layout and the system architecture are described during the design process (Sommerville, 2015). System architecture, data flow, and user interface have all developed to a degree that makes development easier. Agile design emphasizes simplicity and flexibility since it makes it simple to adjust at the very end (Fowler, 2019).

c) Develop Phase

Coding is used to implement the suggested functionalities throughout the development process (Larman, 2004). Developers can deal with individual capabilities rather than the entire system because the system's functional components are produced piece by piece. This encourages quick movement and provides useful features (Beck et al., 2001; Pressman & Maxim, 2020).

d) Testing Phase

Implemented functionalities are examined throughout the testing phase to identify flaws and functionality-related problems (Ammann & Offutt, 2016). Every sprint of software development includes testing to ensure that new features are implemented correctly and do not interfere with already-existing features (Crispin & Gregory, 2009; Myers et al., 2011).

e) Deploy Phase

Implementing the tested functionalities in the workplace is known as the deployment phase. Agile allows for frequent functional deployment so that stakeholders can test the system's freshly created features (Rubin, 2012; Humble & Farley, 2010).

f) Review Phase

The team and stakeholders evaluate the finished sprint during the evaluation phase (Schwaber & Sutherland, 2020). Feedback is gathered regarding the performance, usability, and functionality of the system. The requirements are improved for the upcoming sprint based on the input (Cohn, 2004; Highsmith, 2009).

g) Launch Phase

Since a working system is made available for use during this phase, it is known as the launch phase (Pressman & Maxim, 2020).. This is a milestone where the system has achieved its intended goal and is prepared for deployment, even though Agile encourages Continuous Releases (Beck et al., 2001; Humble & Farley, 2010).

2.6.2 Waterfall

The Waterfall model is one of the earliest and most traditional software development methodologies, known for a rigid step by step flow. This model moves through phases such as requirements, design, development, testing, deployment, and maintenance where each phase must complete before starting another (Pressman et al., 2020). This makes Waterfall highly structured because it clearly documented and defined in every phases.

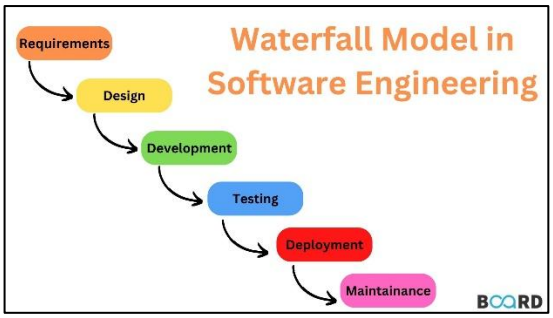


Figure 2.12 Waterfall Model in Software Engineering (Board Infinity, n.d)

Waterfall model works best when project needs are stable and clearly understood during development. The documentation helps ensure clarity which give the team understanding toward the requirements especially when stakeholders need formal approval before making progress (Pressman et al., 2020).

However, this method can lead to cost increases and can be difficult to implement since it less flexible (Sommerville, 2016).

a) Requirements Phase

To analyze possible needs, deadlines, and project parameters, a technical requirement is created. At this point, the project is planned and outlined, but no procedure has been provided (Sommerville, 2015).

b) Design Phase

The technical requirements for the design, such as the programming language, hardware, data sources, architecture, and services, are outlined in a design specification document (Bass et al., 2012; Pressman & Maxim, 2020).

c) Development Phase

The models, logic, and specifications mentioned in the earlier phases are used to create the source code. The system is typically coded in smaller components or units before it is assembled (McConnell, 2004).

d) Testing Phase

At this stage, problems that need to be solved are found through quality assurance, unit, system, and beta testing. It could be necessary to repeat the debugging phase of the development process. If the system is successfully designed and tested, the waterfall process is continued (Ammann & Offutt, 2016; Myers et al., 2011).

e) Deployment Phase

The product or application is released into a live environment when it has been demonstrated to be fully functional (Sommerville, 2015).

g) Maintenance Phase

The manufactured product and its operation can be continuously updated, improved, and enhanced through the use of corrective, adaptive, and corrective maintenance. This may entail releasing both patch updates and new versions (Sommerville, 2021; Pressman & Maxim, 2020).

2.6.3 Scrum

Scrum is an agile methodology that uses cycles to enable quick, ongoing development and flexibility throughout the planning phase. Scrum embraces the idea of cooperation, short cycles, and the capacity to adjust to change when necessary rather than relying on the use of frameworks. A small and varied team generates an incremental and useable portion of the work during sprints, which are defined time periods ranging from one to four weeks (Schwaber & Sutherland, 2020).

A Scrum team consists of three roles: Product Owner, responsible for setting priorities for items in the product backlog. Then there is the Scrum Master, who facilitates conversations while enforcing adherence to Scrum guidelines. Lastly, the Development Team handles the actual work associated with projects. All of these benefit from activities like sprint preparation, daily scrums, sprint review, or reflection. Along with prompt problem-solving and ongoing development (Schwaber, 2013).

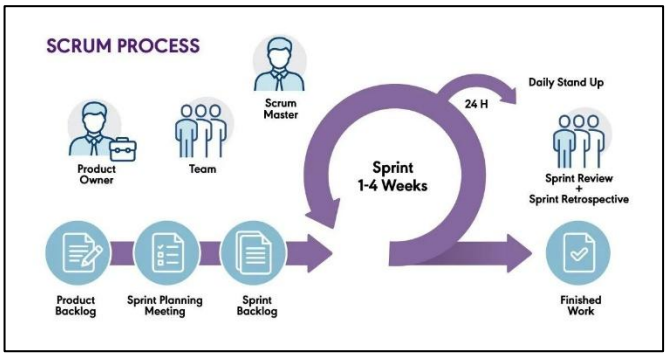


Figure 2.13 Scrum Process (Pm-Partners, 2024)

a) Initiation Phase

The crucial phases in the Scrum process are in this phase. The team will present the project's vision, including the roadmap, goals, and objectives, during the initiation phase. All stakeholders will be shown during this phase, and each role will be assigned to a team (Schwaber & Sutherland, 2020; Pressman & Maxim, 2020).

b) Planning & Estimates Phase

The Scrum team chooses which story to work on during the sprint at this phase. Sprint boards can be used with software or physically (Schwaber & Sutherland, 2020; Stellman & Greene, 2020).

c) Implementation Phase

The implementation phase is when the work is carried out and the objectives are met in order to finish the project (Sommerville, 2021).

d) Review & Retrospective Phase

This phase will be crucial for assessing what went well, identifying areas for improvement, and getting user input after each sprint (Schwaber & Sutherland, 2020; Pressman & Maxim, 2020).

e) Release Phase

The release phase is the last stage of Scrum, during which the completed product is published and distributed to the appropriate stakeholders (Sommerville, 2021; Stellman & Greene, 2020).

2.6.4 Comparison of the Methodology

Different approaches to building software offer distinct benefits based on what the project demands, how complex it is, or how much adaptability is needed. The table below summarizes the main differences among Agile, Waterfall, and Scrum.

Table 2.2 Comparison between Agile, Waterfall, and Scrum

Criteria	Waterfall	Agile	Scrum
Development Approach	Linear and sequential	Iterative and incremental	Iterative with structured sprints
Flexibility	Low – changes are difficult once phases are completed	High – requirements can evolve	High – adapts changes every sprint
Documentation Level	Heavy documentation before development	Moderate; documentation evolves	Light to moderate, focused on sprint goals

Delivery of Output	Final product delivered at end	Frequent small releases	Increment delivered every sprint (1–4 weeks)
Best Use Cases	Stable, well-defined requirements	Projects requiring adaptability	Fast-changing, experimental, and research-based systems

Source: Adapted from Sommerville (2016); Pressman & Maxim (2020); Schwaber & Sutherland (2020)

The Waterfall approach is selected for system development methodology, given the characteristics of the project. The nature of defined system requirements, project characteristics, and scope of development necessitate a structured and sequential approach to ensure that the development process is properly guided. This methodology maintains sharp divisions between phases, emphasizing comprehensive documentation and a step-by-step approach to requirements analysis, system design, implementation, testing, and evaluation. This structured process has made the Waterfall model effective in developing systems that have clearly defined objectives with fixed timeframes, especially in an academic system development context (Pressman & Maxim, 2020; Sommerville, 2016).

2.7 Discussion

This chapter explained that standardized stress induction methods such as Stroop Test, MIST, and TSST which are critical tools for reliably eliciting acute psychological stress. These methods successfully activate the HPA axis and provide measurable cognitive and behavioural data. However, the literature also highlights a significant challenge in modern psychological research: the transition from traditional, manual laboratory setups to efficient digital environments is currently incomplete and heavily fragmented.

A critical gap remains in the current landscape of digital stress testing. As analysed in the previous works section, existing platforms such as PsyToolKit, Millisecond, and Focusaur present distinct limitations. They frequently function as isolated "fragmented data silos," require the installation of third-party software (such as the Inquisit framework), or lack comprehensive, integrated behavioural recording features. Consequently, researchers are often forced to

use scattered tools and multiple websites for a single experimental session. This fragmented approach disrupts the experimental flow, introduces unwanted variability in the participants induced stress levels, and significantly increases the risk of human error during manual data transcription and synchronization.

To address these identified gaps, the development of a Centralized Web-Based System for Stress Induction Methods is highly justified. By utilizing a three-tier web architecture, the proposed system will consolidate the Stroop Test, MIST, and TSST Arithmetic Task into a single, unified platform accessible directly via standard web browsers. This centralized approach directly eliminates the need for fragmented setups and third-party software installations. Furthermore, by integrating automated system logging and response tracking, the system will ensure precise, synchronized data collection, thereby minimizing manual workload and enhancing the reliability of experimental results.

Finally, the comparative review of software development methodologies supports the selection of the Waterfall model for this project. Because the proposed system requires strict adherence to standardized psychological testing protocols and has clear, predefined system requirements, the sequential and highly documented nature of the Waterfall methodology will ensure that the centralized platform is developed systematically and accurately to meet the needs of researchers.

2.8 Summary

This chapter introduced literature on psychological stress, stress induction techniques, web-based systems, previous works, as well as system development methodologies with the aim of providing background work for the proposed work. The mechanisms, efficiency, as well as performance criteria, of leading stress induction techniques like Trier Social Stress Test (TSST), Montreal Imaging Stress Task (MIST), as well as Stroop Test, were introduced. To minimize human errors as well as increase data accuracy, there is the importance of automated recording as presented in this chapter. On the other hand, the characteristics of web-based systems, their architecture, as well as advantages, in addition to how applicable these are in stress induction on a centralized basis, were introduced. Although software development

methodologies can be compared to support the selection of the development methodology suited for the system development, the existing platforms are introduced to explore what has been done by other researchers.

CHAPTER 3

METHODOLOGY

This chapter describes about methodology used for this project. The chapter will cover overview of methodology, waterfall methodology, and phases of waterfall. The objectives are to fulfil the project requirement and follow every stage based on the chosen System Development Life Cycle (SDLC) model for system development. For this chapter, the chosen model is Waterfall Method.

3.1 Overview of Methodology

Methodology is a guideline to accomplish the task or undertake a study. In general, to completing the task, the guidelines and rules have to be obtained and follow based on the specific subject through process of learning and understanding. There are many ways to accomplish the necessary tasks. SDLC gives an outline in development process from requirement gathering to implementation where SDLC plays an important role in software development. SDLC has many lifecycles within the framework with different advantages and disadvantages which giving the uniqueness toward different projects.

3.2 Waterfall Methodology for Centralized Web-Based for Stress Induction Methods

The waterfall model is the classical model for the SDLC used to create sequential and linear systems. Therefore, such requirements are not liable to frequent change during development. Thus, the structured and documentation-driven Waterfall model gives clarity, traceability, and ensures orderly progression throughout development (Pressman, Maxim, 2020). The output of one phase serves as the input for the subsequent phases in this paradigm, which are divided into the next action. Every stage needs to be finished before the start of the subsequent phase, and the stages do not overlap. This design comprises consisting of three stages: Requirement Gathering, System Design and Implementation. The choice of the Waterfall methodology was highly appropriate for this project because the protocols for the Stroop Test, MIST, and TSST are strictly standardized. Since the psychological testing parameters were fixed from the beginning and did not require iterative changes, the Waterfall model allowed

the development to proceed efficiently without the risk of scope creep. By heavily documenting the system architecture and requirements first, the subsequent coding and database integration phases were executed smoothly.

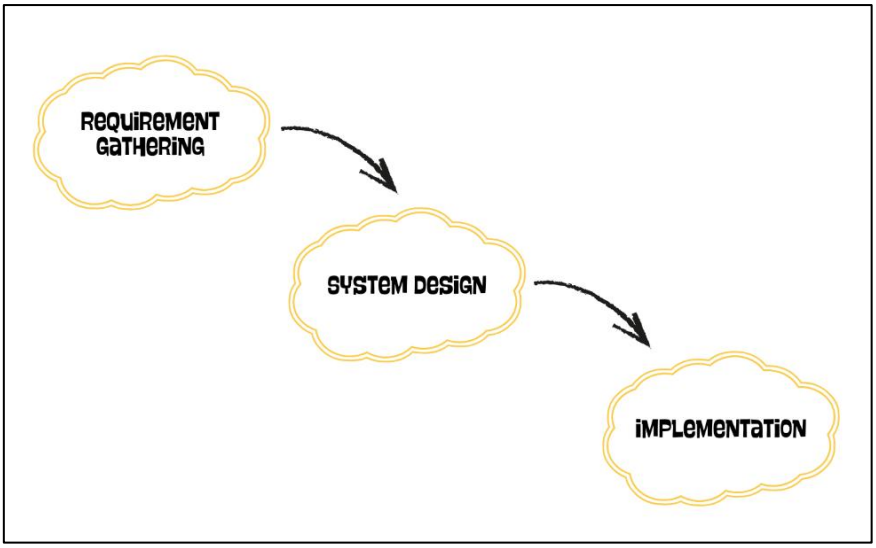


Figure 3.1 Implemented Waterfall Model for Centralized Web-Based System for Stress Induction Methods

3.3 Phases

The three phases are requirements gathering, system design, and implementation. Each one contains a set of tasks that must be finished before moving on to the next phase in order to achieve the goals.

3.3.1 Phase 1: Requirement Gathering and Analysis

The initial stage of the methodology is Requirement Analysis. This stage emphasizes analysing the requirements for the system from various literature publications. The project is analysed from different article and journal that related to web-based system and stress related.

Literature reviews are used to get all functional and non-functional requirement. The functional requirements are such the system tasks, system functionality, and how the system will work for the user. The non-functional requirements identify the usability, scalability, and reliability of the system.

After the analysis and identifying the requirement, system modelling diagram will be generating use to represent the system functionality. The system modelling such as use case diagram, activity diagram, sequence diagram, and domain class diagram.

Phase	Activities	Deliverables	Objectives
Requirement Gathering and Planning	a) Conduct research to identify user needs and system requirement b) Create required requirements schematics c) Define the project scope and goal	a) Requirements Data b) Diagram of requirements: i) Use case diagram ii) Domain class diagram iii) Activity Diagram iv) Sequence Diagram c) System Requirement Specification (SRS)	To gather and analyze the requirement of the Centralized Web-Based System for Stress Induction Methods
System Design	a) Design the user interface b) Design system architecture and database schema c) Document all the system design	a) Storyboard for the flow of the system b) Design diagram: i) Design class diagram ii) Detail Class diagram iii) Entity Relationship Diagram iv) Multi-layer Sequence Diagram c) Software Design Documentation (SDD)	To design the web-based system for Stress Induction Methods
Implementation	a) Develop the database b) Integrate front end and back-end interface and database c) Develop the modules	a) Database using MariaDB b) Functional system integration c) Complete system	To develop a web-based system for Stress Induction Methods

Table 3.1 The Project framework using SDLC approach

3.3.2 Phase 2: System Design

Second phase is design phase, where this phase will design based on the system specification and requirement. Designing Centralized Web-Based System for Stress Induction Method is this phase main objective. This stage requires designing the user interface based on the storyboard for the system flow. System interface will be

developed using Visual Studio code. Draw.io will be used to draw a diagram such as Design Class Diagram. The last step is to document full system design including the software.

3.3.3 Phase 3: Implementation

The third phase which is implementation phase is where the system is developed using a tool and programming language. It is the costliest and time-consuming development process which the goal is to build this project.

The objective of this phase is to build the system. The proposed system are build using PHP programming by using Visual Studio Code as tools for the website development. The system using MariaDB as database. The hardware and software use to develop the system are shown in Table 3.2 and 3.3.

Table 3.2 Hardware Specifications

No.	Hardware	Description
1.	**Laptop**	Brand: Asus Processor: AMD Ryzen 5 Installed Memory (RAM): 12 GB OS Name: Windows 11
2.	**Smartphone**	Brand: Google Model: Pixel 6 Pro

The laptop used on making the report and develop the system is a good piece of hardware. It has enough RAM and well-known processor to build and run the system including the latest operating system, Windows 11, which supports almost all development software. The next piece of hardware is smartphone, which used as a test for the web-based system to use in smartphone. The system is enough to use internet and other recording method.

Table 3.3 Software Specification

Software	Specification
Software Platform	Visual Studio Code
Database	MariaDB
Design Tools	Draw.io
Documentation	Microsoft Word
Presentation	Canva
Browser	Brave

All software used to create the system is described in the software specifications.

3.5 Summary

This chapter discussed how the project under development would be accomplished. The waterfall method would be used as the method for completing a project. The aim and method utilized for a project are suitable for a waterfall method. The three stages for this project, which are gathering requirements, designing, and implementation.

REFERENCES

Ab Rahman, N., Low, E. V., Kamaruddin, F., Che Ayub, A., Chong, S. C., Tumiran, N., & Idris, N. (2025). A retrospective study on prevalence, characteristics, and outcomes of transcribing error: analysis of data from the National Medication Error Reporting System in Malaysia. *Journal of Pharmaceutical Policy and Practice, 18*(1). https://doi.org/10.1080/20523211.2025.2528244

Abasi, A., Ayatollahi, H., & Motevalian, S. A. (2025). Characteristics of cohort data management systems (CDMS): a scoping review. *BMC Medical Research Methodology*, *25*(1). https://doi.org/10.1186/s12874-025-02705-z

Abass, A. (2023). An Overview of Software Development Life Cycle (SDLC). *International Journal of Science and Research (IJSR)*, *12*(5), 1782–1784. https://doi.org/10.21275/sr23520153358

Abu-Elkheir, M., Hayajneh, M., & Ali, N. A. (2013). Data management for the Internet of Things: Design primitives and solution. In *Sensors (Switzerland)* (Vol. 13, Issue 11, pp. 15582–15612). https://doi.org/10.3390/s131115582

Allen, A. P., Kennedy, P. J., Dockray, S., Cryan, J. F., Dinan, T. G., & Clarke, G. (2017). The Trier Social Stress Test: Principles and practice. In *Neurobiology of Stress* (Vol. 6, pp. 113–126). Elsevier Inc. https://doi.org/10.1016/j.ynstr.2016.11.001

Almazrouei, M. A., Morgan, R. M., & Dror, I. E. (2023). A method to induce stress in human subjects in online research environments. *Behavior Research Methods*, *55*(5), 2575–2582. https://doi.org/10.3758/s13428-022-01915-3

Bandyopadhyay, N., Bandyopadhyay, N., Das, T., Biswas, A., & Mondal, D. ". (2023). of Mindfulness-Based Stress Reduction Program on Mental Health of Non-Clinical Older Adults: A Systematic Review on Randomized Controlled Trials. In *International Journal of Aging Health and Movement* (Vol. 5, Issue 2).

Becerra, A., Villegas, P., & Cobos, R. (2025). *Real-Time Multimodal Data Collection Using Smartwatches and Its Visualization in Education*. http://arxiv.org/abs/2512.02651

Beck, K., Beedle, M., van Bennekum, A., Cockburn, A., Cunningham, W., Fowler, M., Grenning, J., Highsmith, J., Hunt, A., Jeffries, R., Kern, J., Marick, B., Martin, R. C.,

Mellor, S., Schwaber, K., Sutherland, J., & Thomas, D. (2001). *Manifesto for Agile Software Development Twelve Principles of Agile Software*. http://www.agilemanifesto.org

Benítez-Agudelo, J. C., Restrepo, D., Navarro-Jimenez, E., & Clemente-Suárez, V. J. (2025). Longitudinal effects of stress in an academic context on psychological well-being, physiological markers, health behaviors, and academic performance in university students. *BMC Psychology*, *13*(1). https://doi.org/10.1186/s40359-025-03041-z

Brasoveanu, A., Moodie, M., & Agrawal, R. (2020). Textual evidence for the perfunctoriness of independent medical reviews. *CEUR Workshop Proceedings*, *2657*, 1–9. https://doi.org/10.1145/nnnnnnn.nnnnnnn

Cantelon, J. A., Navarro, E., Brunyé, T. T., Eddy, M. D., Ward, N., Pantoja-Feliciano, I., Whitman, J., Saikia, M. J., & Giles, G. E. (2024). Emotional, physiological, biochemical, and behavioral responses to acute stress and uncertainty in military personnel. *PLoS ONE*, *19*(11 November). https://doi.org/10.1371/journal.pone.0312443

Choi, M. H., & Choi, J. S. (2024). Comparing Brain Activation Patterns in Stress-Induced and Post-Stress Recovery States of Highly and Moderately Stressed Individuals. *Applied Sciences (Switzerland)*, *14*(20). https://doi.org/10.3390/app14209261

Clemens Kirschbaum, Karl-Martin Pirke, & Dirk H. Hellhammer. (1993). *The "Trier Social Stress Test" - A Tool for Investigating Psychobiological Stress Responses in a Laboratory Setting*.

Cohen, S., Kamarck, T., & Mermelstein, R. (2004). *A Global Measure of Perceived Stress*.

Córdova, A., Caballero-García, A., Drobnic, F., Roche, E., & Noriega, D. C. (2023). Influence of Stress and Emotions in the Learning Process: The Example of COVID-19 on University Students: A Narrative Review. In *Healthcare (Switzerland)* (Vol. 11, Issue 12). MDPI. https://doi.org/10.3390/healthcare11121787

Corr, R., Pelletier-Baldelli, A., Glier, S., Bizzell, J., Campbell, A., & Belger, A. (2021). Neural mechanisms of acute stress and trait anxiety in adolescents. *NeuroImage: Clinical*, *29*. https://doi.org/10.1016/j.nicl.2020.102543

Curtis, S., de Wit, B., & Kinoshita, S. (2025). Priming the distractor can eliminate the Stroop interference effect. *Psychonomic Bulletin and Review*, *32*(3), 1328–1336. https://doi.org/10.3758/s13423-024-02610-4

Dallaway, N., Lucas, S. J. E., & Ring, C. (2022). Cognitive tasks elicit mental fatigue and impair subsequent physical task endurance: Effects of task duration and type. *Psychophysiology*, *59*(12). https://doi.org/10.1111/psyp.14126

de Calheiros Velozo, J., Vaessen, T., Claes, S., & Myin-Germeys, I. (2024). Investigating adverse daily life effects following a psychosocial laboratory stress task, and the moderating role of Psychopathology. *Stress*, *27*(1). https://doi.org/10.1080/10253890.2024.2380403

de Oliveira, C., Saka, M., Bone, L., & Jacobs, R. (2023). The Role of Mental Health on Workplace Productivity: A Critical Review of the Literature. In *Applied Health Economics and Health Policy* (Vol. 21, Issue 2, pp. 167–193). Adis. https://doi.org/10.1007/s40258-022-00761-w

Dedovic, K., Renwick, R., Khalili Mahani, N., Engert, V., Lupien, S. J., Pruessner, J. C., Mahani, K., & -Douglas, P. (2005). The Montreal Imaging Stress Task: using functional imaging to investigate the effects of perceiving and processing psychosocial stress in the human brain. In *J Psychiatry Neurosci* (Vol. 30, Issue 5).

Dickerson, S. S., & Kemeny, M. E. (2004). Acute stressors and cortisol responses: A theoretical integration and synthesis of laboratory research. In *Psychological Bulletin* (Vol. 130, Issue 3, pp. 355–391). https://doi.org/10.1037/0033-2909.130.3.355

Farhan, F., Wibowo, N. C., & Hadiwiyanti, R. (2025). Information System Development for Dental Clinic Using ReactJS and Prisma ORM. *Bit-Tech*, *8*(1), 513–522. https://doi.org/10.32877/bt.v8i1.2616

Ferreira, G. F., Quiles, M. G., Nazaré, T. S., Rezende, S. O., & Demarzo, M. (2021). Automation of article selection process in systematic reviews through artificial neural network modeling and machine learning: Protocol for an article selection model. *JMIR Research Protocols*, *10*(6). https://doi.org/10.2196/26448

Forte, G., Troisi, G., Favieri, F., & Casagrande, M. (2024). Inhibition changes across the lifespan: experimental evidence from the Stroop task. *BMC Psychology*, *12*(1). https://doi.org/10.1186/s40359-024-01844-0

George, J. (2024). *Implementing Role-Based Access Control (RBAC) in Java and AngularJS Web Applications*.

Giannakakis, G., Pediaditis, M., Manousos, D., Kazantzaki, E., Chiarugi, F., Simos, P. G., Marias, K., & Tsiknakis, M. (2017). Stress and anxiety detection using facial cues from videos. *Biomedical Signal Processing and Control*, *31*, 89–101. https://doi.org/10.1016/j.bspc.2016.06.020

Heber, E., Ebert, D. D., Lehr, D., Cuijpers, P., Berking, M., Nobis, S., & Riper, H. (2017). The benefit of web- and computer-based interventions for stress: A systematic review and meta-analysis. In *Journal of Medical Internet Research* (Vol. 19, Issue 2). JMIR Publications Inc. https://doi.org/10.2196/jmir.5774

Hofmann, S. G., Asnaani, A., Vonk, I. J. J., Sawyer, A. T., & Fang, A. (2012). The efficacy of cognitive behavioral therapy: A review of meta-analyses. In *Cognitive Therapy and Research* (Vol. 36, Issue 5, pp. 427–440). Springer New York LLC. https://doi.org/10.1007/s10608-012-9476-1

Hossain, M. I. (2023). *Software Development Life Cycle (SDLC) Methodologies for Information Systems Project Management*. www.ijfmr.com

Institute for Youth Research Malaysia (IYRES) & United Nations Children's Fund (UNICEF) Malaysia. (2024). *Malaysian Youth Mental Health Index 2023 Facts & Figures*.

Jensen, A. R. (1965). *Scoring The Stroop Test*.

Judijanto, L., Mohammad, W., Purnamasari, E., Muthmainah, H. N., Tinggi, S., Komputer, I., & Kendari, J. (2023). Analysis of Reliability, Transaction Speed, and User Experience on Information System Integration in E-commerce Business in Indonesia Article Info ABSTRACT. In *West Science Information System and Technology* (Vol. 01, Issue 02).

Katmah, R., Al-Shargie, F., Tariq, U., Babiloni, F., Al-Mughairbi, F., & Al-Nashash, H. (2021). A review on mental stress assessment methods using eeg signals. In *Sensors* (Vol. 21, Issue 15). MDPI AG. https://doi.org/10.3390/s21155043

Knoth, P., Herrmannova, D., Cancellieri, M., Anastasiou, L., Pontika, N., Pearce, S., Gyawali, B., & Pride, D. (2023). CORE: A Global Aggregation Service for Open Access Papers. *Scientific Data*, *10*(1). https://doi.org/10.1038/s41597-023-02208-w

McEwen, B. S., & Akil, H. (2020). Revisiting the stress concept: Implications for affective disorders. In *Journal of Neuroscience* (Vol. 40, Issue 1, pp. 12–21). Society for Neuroscience. https://doi.org/10.1523/JNEUROSCI.0733-19.2019

Mirza, M. M., Alsuwat, R. S., Alqurashi, Y. M., Alharthi, A. A., Alsuwat, A. M., Alasamri, O. M., & Hussain, N. A. (2026). DIGITRACKER: An Efficient Tool Leveraging Loki for Detecting, Mitigating Cyber Threats and Empowering Cyber Defense. *Journal of Cybersecurity and Privacy*, *6*(1). https://doi.org/10.3390/jcp6010025

Monroy, V., & Michel, E. (2025). MENTAL HEALTH DISORDERS AND PRODUCTIVITY: WHICH ARE THE RISK AND MITIGATING FACTORS OF ABSENTEEISM AND PRESENTEEISM? EVIDENCE FROM THE U.S. TECH SECTOR. *INVESTIGACION & DESARROLLO*, *24*(3). https://doi.org/10.23881/idupbo.024.3-5e

Ndou, V., Ingrosso, A., & di Girolamo, A. (2024). Framework for Agile Transformation: Guiding Organizations Through Cultural, Structural, and Competency Shifts in Project Management. *Administrative Sciences*, *14*(11). https://doi.org/10.3390/admsci14110301

Nirabi, A., Rahman, F. A., Habaebi, M. H., Sidek, K. A., & Yusoff, S. (2025). Cognitive load assessment through EEG: A dataset from arithmetic and Stroop tasks. *Data in Brief*, *60*. https://doi.org/10.1016/j.dib.2025.111477

Norden, M., Hofmann, A. G., Meier, M., Balzer, F., Wolf, O. T., Böttinger, E., & Drimalla, H. (2022a). Inducing and Recording Acute Stress Responses on a Large Scale With the Digital Stress Test (DST): Development and Evaluation Study. *Journal of Medical Internet Research*, *24*(7). https://doi.org/10.2196/32280

Norden, M., Hofmann, A. G., Meier, M., Balzer, F., Wolf, O. T., Böttinger, E., & Drimalla, H. (2022b). Inducing and Recording Acute Stress Responses on a Large Scale With the Digital Stress Test (DST): Development and Evaluation Study. *Journal of Medical Internet Research*, *24*(7). https://doi.org/10.2196/32280

Premchand, B., Liang, L., Phua, K. S., Zhang, Z., Wang, C., Guo, L., Ang, J., Koh, J., Yong, X., & Ang, K. K. (2024). Wearable EEG-Based Brain–Computer Interface for Stress Monitoring. *NeuroSci*, *5*(4), 407–428. https://doi.org/10.3390/neurosci5040031

Prieto-Sánchez, A., García-Ceberino, J. M., Leon-Llamas, J. L., & Villafaina, S. (2024). An Incongruent 2-Minute Stroop Task Alters the Response Time Performance in Semi-Elite Soccer Players: A Pilot Study. *Applied Sciences (Switzerland)*, *14*(22). https://doi.org/10.3390/app142210296

Prottasha, N. J., Kowsher, M., Raman, H., Anny, I. J., Bhat, P., Garibay, I., & Garibay, O. (2025). *User Profile with Large Language Models: Construction, Updating, and Benchmarking*. http://arxiv.org/abs/2502.10660

Reinhardt, T., Schmahl, C., Wüst, S., & Bohus, M. (2012). Salivary cortisol, heart rate, electrodermal activity and subjective stress responses to the Mannheim Multicomponent Stress Test (MMST). *Psychiatry Research*, *198*(1), 106–111. https://doi.org/10.1016/j.psychres.2011.12.009

Reiser, L., Diaconescu, L., & Rohleder, N. (2025). Study protocol for a systematic review with meta-analysis to compare digital stress tests regarding their psychological and physiological stress responses. *PloS One*, *20*(9), e0331963. https://doi.org/10.1371/journal.pone.0331963

Scarpina, F., & Tagini, S. (2017). The stroop color and word test. In *Frontiers in Psychology* (Vol. 8, Issue APR). Frontiers Research Foundation. https://doi.org/10.3389/fpsyg.2017.00557

Schneiderman, N., Ironson, G., & Siegel, S. D. (2005). Stress and health: Psychological, behavioral, and biological determinants. In *Annual Review of Clinical Psychology* (Vol. 1, pp. 607–628). https://doi.org/10.1146/annurev.clinpsy.1.102803.144141

Schwaber, K., & Sutherland, J. (2020). *The Scrum Guide The Definitive Guide to Scrum: The Rules of the Game*.

Sposato, M., Dittmar, E. C., & Portillo, J. P. V. (2025). *New Technologies in HR: Bridging Efficiency and Ethical Considerations*.

Stroop, J. Ri. (1935). *Studies of Interference in Serial Verbal Reactions*.

Sudimac, S., Sale, V., & Kühn, S. (2022). How nature nurtures: Amygdala activity decreases as the result of a one-hour walk in nature. *Molecular Psychiatry*, *27*(11), 4446–4452. https://doi.org/10.1038/s41380-022-01720-6

Takahashi, M., & Shelton, R. C. (2025). From trauma to depression: structural, synaptic, epigenetic, and molecular pathways linking early stress to lifelong vulnerability. In *Frontiers in Psychiatry* (Vol. 16). Frontiers Media SA. https://doi.org/10.3389/fpsyt.2025.1666599

Talluri, M. (2025). Cross-Browser Compatibility Challenges And Solutions In Enterprise Applications. In *International Journal of Environmental Sciences* (Vol. 11, Issue 20). https://theaspd.com/index.php

Vikoler, T., Ganesch, H., Dubravac, J., & Traut-Mattausch, E. (2025a). Digital Stress Induction in Daily Life Using the Salzburg Mobile Stress Induction (SMSI): Development and Ambulatory Evaluation Study. *Journal of Medical Internet Research*, *27*(1). https://doi.org/10.2196/75785

Vikoler, T., Ganesch, H., Dubravac, J., & Traut-Mattausch, E. (2025b). Digital Stress Induction in Daily Life Using the Salzburg Mobile Stress Induction (SMSI): Development and Ambulatory Evaluation Study. *Journal of Medical Internet Research*, *27*(1). https://doi.org/10.2196/75785

Wang, J., Yu, L., Ding, F., & Qi, C. (2023). Effect of Acute Psychological Stress on Speed Perception: An Event-Related Potential Study. *Brain Sciences*, *13*(3). https://doi.org/10.3390/brainsci13030423

Wielgopolan, A., Pastwa, M., Zuk, D., & Imbir, K. K. (2025). Emotional Stroop Test in online and offline experimental procedures: the comparison of two different modes of conducting studies. *Language and Cognition*, *17*. https://doi.org/10.1017/langcog.2024.77

Wriessnegger, S. C., Lorenzer, L., & Kostoglou, K. (2025). Neurocardiac signatures of acute mental stress: a sex-comparative study. *Frontiers in Neuroscience*, *19*. https://doi.org/10.3389/fnins.2025.1633295