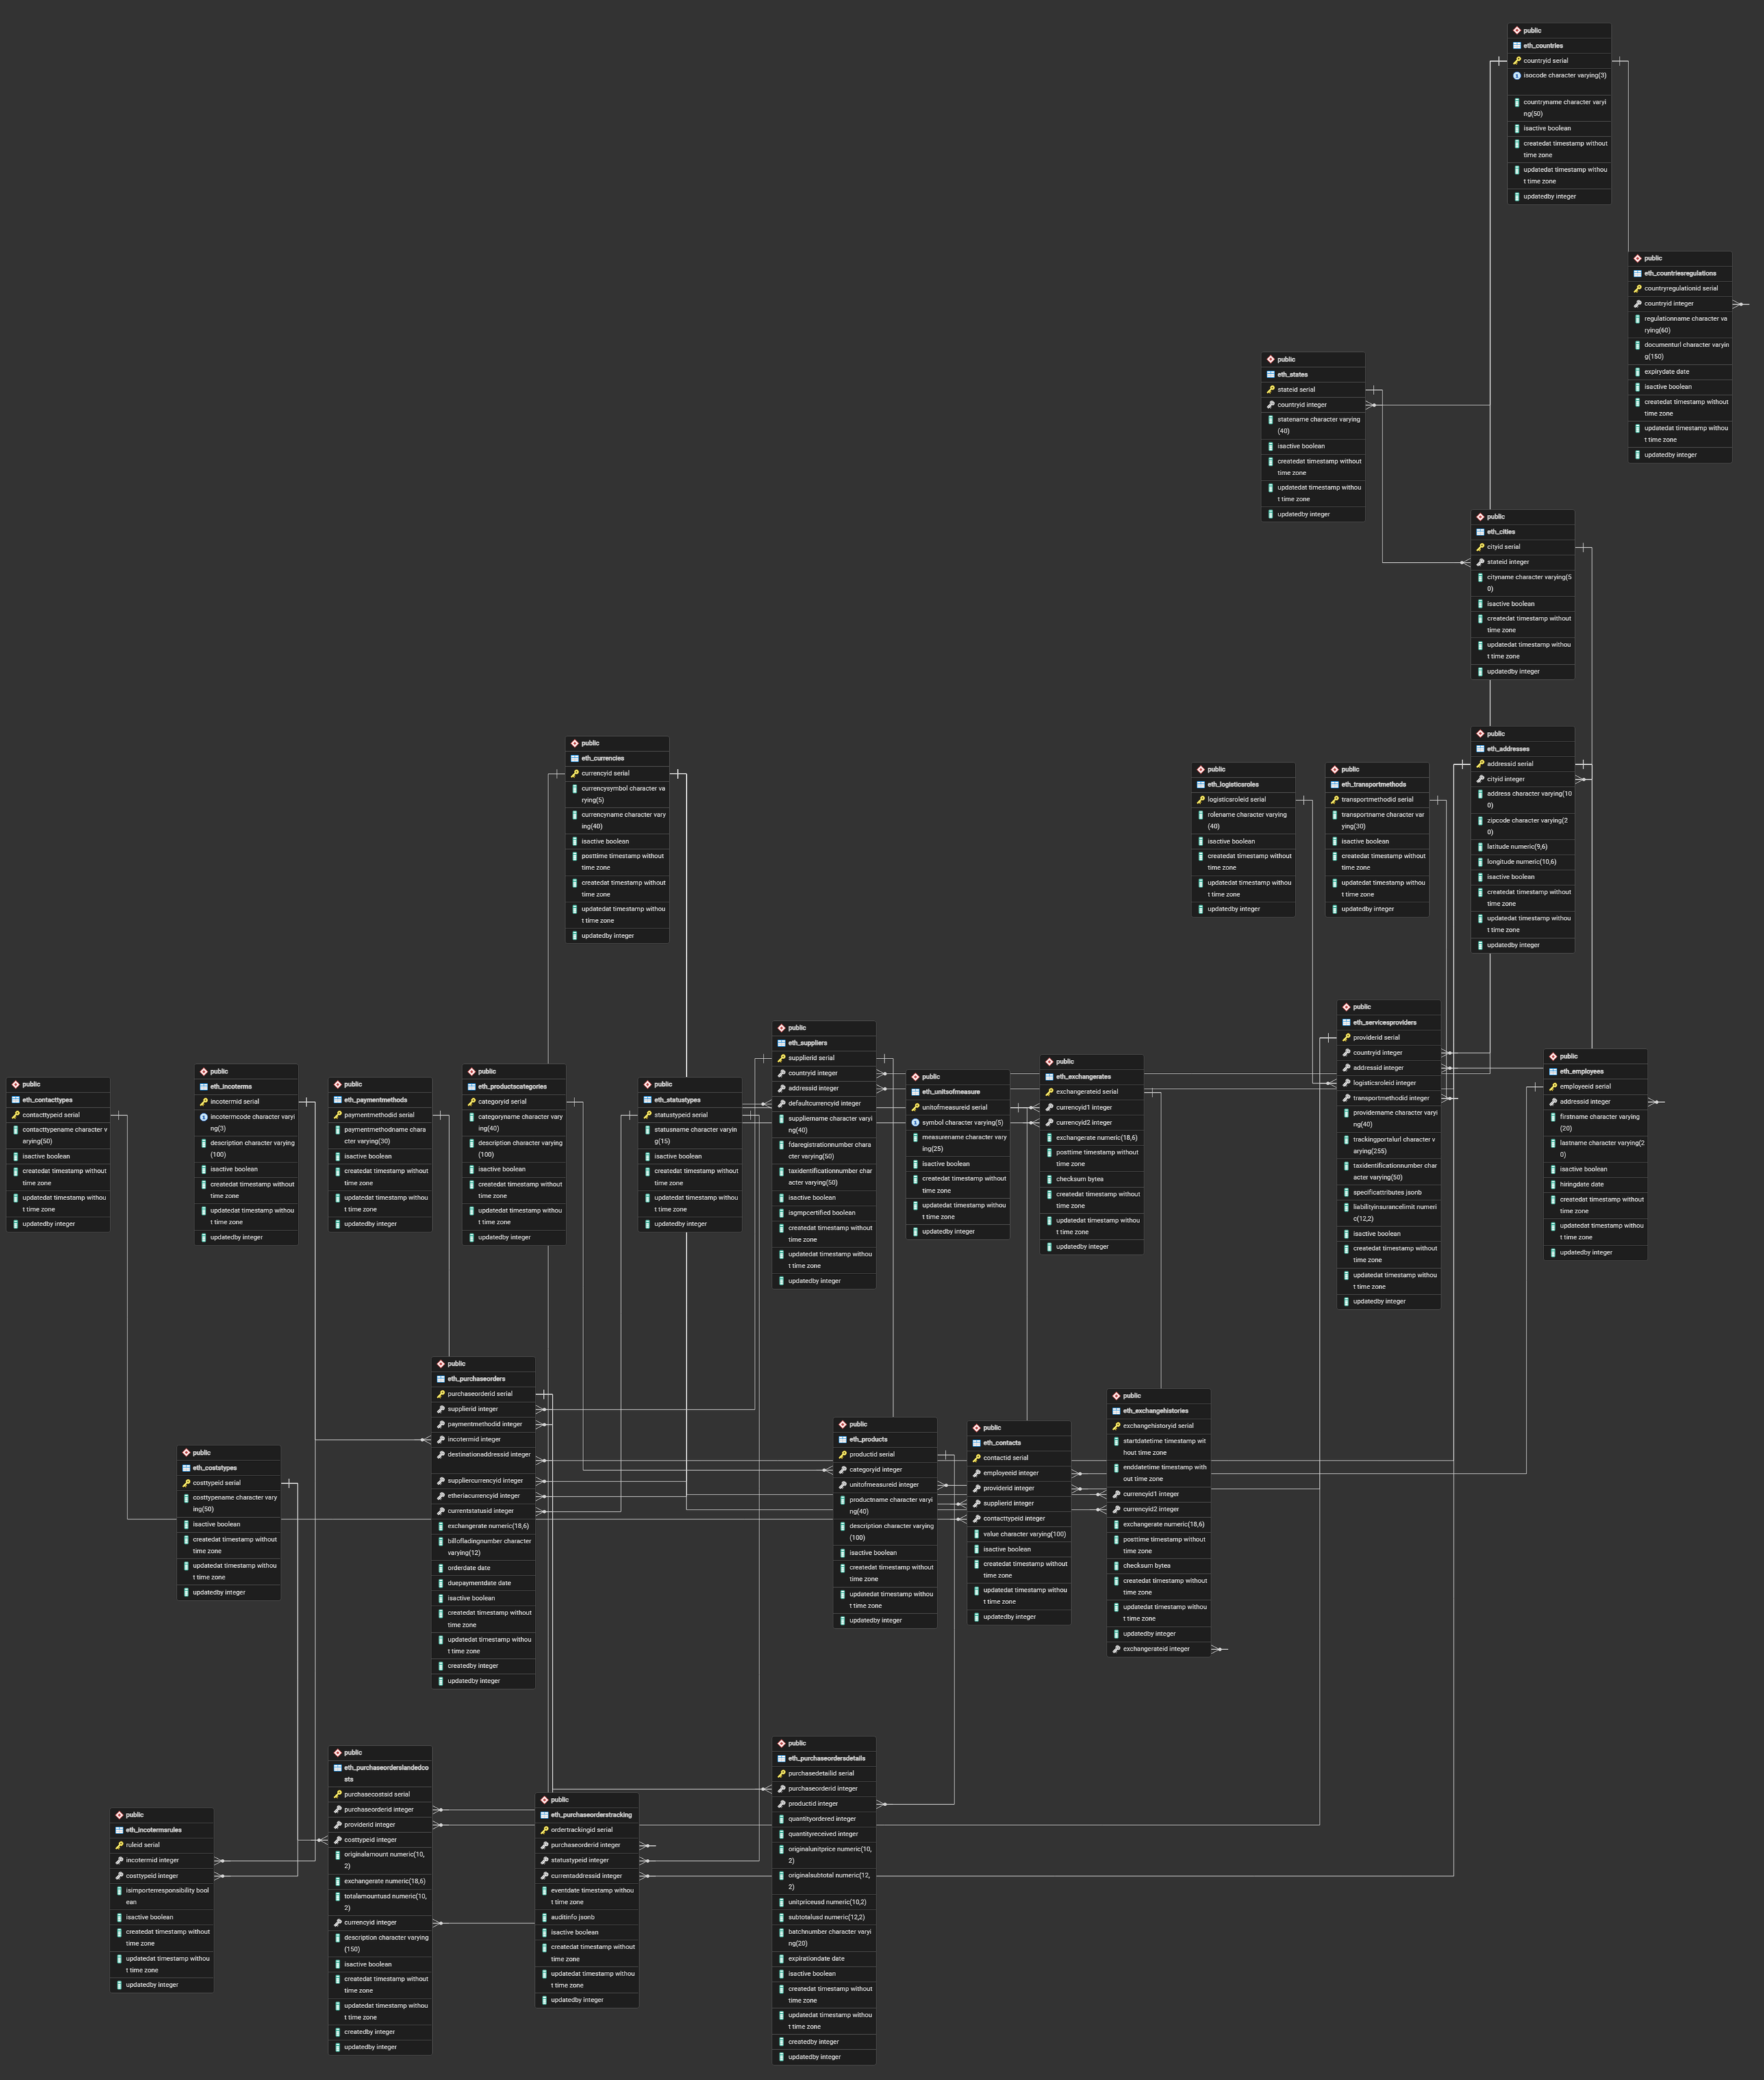
public
eth_countries
countryid serial
isocode character varying(3)
countryname character varying(50)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_countriesregulations
countryregulationid serial
countryid integer
regulationname character varying(60)
documenturl character varying(150)
expirydate date
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_states
stateid serial
countryid integer
statename character varying(40)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_cities
cityid serial
stateid integer
cityname character varying(50)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_addresses
addressid serial
cityid integer
address character varying(100)
zipcode character varying(20)
latitude numeric(9,6)
longitude numeric(10,6)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_currencies
currencyid serial
currencysymbol character varying(5)
currencyname character varying(40)
isactive boolean
posttime timestamp without time zone
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_logisticsroles
logisticsroleid serial
rolename character varying(40)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_transportmethods
transportmethodid serial
transportname character varying(30)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_contacttypes
contacttypeid serial
contacttypename character varying(50)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_incoterms
incotermid serial
incotermcode character varying(3)
description character varying(100)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_paymentmethods
paymentmethodid serial
paymentmethodname character varying(30)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_productscategories
categoryid serial
categoryname character varying(40)
description character varying(100)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_statustypes
statustypeid serial
statusname character varying(15)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_suppliers
supplierid serial
countryid integer
addressid integer
defaultcurrencyid integer
suppliername character varying(40)
fdaregistrationnumber character varying(50)
taxidentificationnumber character varying(50)
isactive boolean
isgmpcertified boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_unitsofmeasure
unitofmeasureid serial
symbol character varying(5)
measurename character varying(25)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_exchangerates
exchangerateid serial
currencyid1 integer
currencyid2 integer
exchangerate numeric(18,6)
posttime timestamp without time zone
checksum bytea
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_servicesproviders
providerid serial
countryid integer
addressid integer
logisticsroleid integer
transportmethodid integer
providername character varying(40)
trackingportalurl character varying(255)
taxidentificationnumber character varying(50)
specificattributes jsonb
liabilityinsurancelimit numeric(12,2)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_employees
employeeid serial
addressid integer
firstname character varying(20)
lastname character varying(20)
isactive boolean
hiringdate date
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_purchaseorders
purchaseorderid serial
supplierid integer
paymentmethodid integer
incotermid integer
destinationaddressid integer
suppliercurrencyid integer
etheriacurrencyid integer
currentstatusid integer
exchangerate numeric(18,6)
billofladingnumber character varying(12)
orderdate date
duepaymentdate date
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
createdby integer
updatedby integer
public
eth_costtypes
costtypeid serial
costtypename character varying(50)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_products
productid serial
categoryid integer
unitofmeasureid integer
productname character varying(40)
description character varying(100)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_contacts
contactid serial
employeeid integer
providerid integer
supplierid integer
contacttypeid integer
value character varying(100)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_exchangehistories
exchangehistoryid serial
startdatetime timestamp without time zone
enddatetime timestamp without time zone
currencyid1 integer
currencyid2 integer
exchangerate numeric(18,6)
posttime timestamp without time zone
checksum bytea
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
exchangerateid integer
public
eth_incotermsrules
ruleid serial
incotermid integer
costtypeid integer
isimporterresponsibility boolean
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_purchaseorderslandedcosts
purchasecostsid serial
purchaseorderid integer
providerid integer
costtypeid integer
originalamount numeric(10,2)
exchangerate numeric(18,6)
totalamountusd numeric(10,2)
currencyid integer
description character varying(150)
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
createdby integer
updatedby integer
public
eth_purchaseorderstracking
ordertrackingid serial
purchaseorderid integer
statustypeid integer
currentaddressid integer
eventdate timestamp without time zone
auditinfo jsonb
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
updatedby integer
public
eth_purchaseordersdetails
purchasedetailid serial
purchaseorderid integer
productid integer
quantityordered integer
quantityreceived integer
originalunitprice numeric(10,2)
originalsubtotal numeric(12,2)
unitpriceusd numeric(10,2)
subtotalusd numeric(12,2)
batchnumber character varying(20)
expirationdate date
isactive boolean
createdat timestamp without time zone
updatedat timestamp without time zone
createdby integer
updatedby integer