

WebGrader: Training LLMs for Web Development with Self-Evolving Programmatic Grader

Boshui Chen¹, Huiping Liu², Shaolei Zhang^{3*}

¹Beijing Institute of Technology, China

²Beijing Jiaotong University, China

³Renmin University of China, China
zhangshaolei98@ruc.edu.cn

Abstract

Large language models increasingly generate complete websites from natural-language descriptions, and reinforcement learning has become a central approach to closing their remaining functional gap. This training regime is bottlenecked by reward design. Hand-authored browser scripts are executable yet costly to write for open-ended requirements, while VLM and GUI-agent graders scale but may issue verdicts before observing the decisive state. We propose **WebGrader**, a self-evolving programmatic grader that autonomously derives the required interaction flows from each website request, represents each flow as an executable Flow Contract, and uses its execution outcome as an RL reward. WebGrader materializes the generated project in a live browser, grounds target actions against the source code and live DOM, and collects visual, DOM, response, and persistent-state evidence along the same browser trajectory. A residual-driven offline loop then discovers reusable verifier skills, screens them on disjoint validation pages, and freezes the promoted skill graph before policy training. By separating test planning, action grounding, evidence collection, and semantic judgment, WebGrader issues a Pass verdict only after observing the requested transition. On WebGen-Bench, WebGrader trains an 8B policy to a **52.01%** functional success rate, outperforming a matched appearance-plus-script reward by 7.88 points and surpassing o4-mini and DeepSeek-v4-flash. On WG-core-250, the policy reaches a Full Score of **44.953** and surpasses Qwen3-Coder-480B¹.

Introduction

Large language models (LLMs) have made remarkable progress in code generation, advancing from function-level completion (Chen et al. 2021; Austin et al. 2021) and repository-level program repair (Jimenez et al. 2024) toward complete application construction. Web development (Lu et al. 2025; Si et al. 2025) has accordingly emerged as a demanding testbed because a generated website is at once an executable program, a rendered interface, and an interactive product whose correctness is revealed only after use. Reinforcement learning with verifiable rewards offers a natural route to closing the remaining functional gap. Still, its success in mathematics and algorithmic code (Shao et al. 2024)

¹Code and data: <https://github.com/boneykingofnone/WebGrader>.

*Corresponding author.

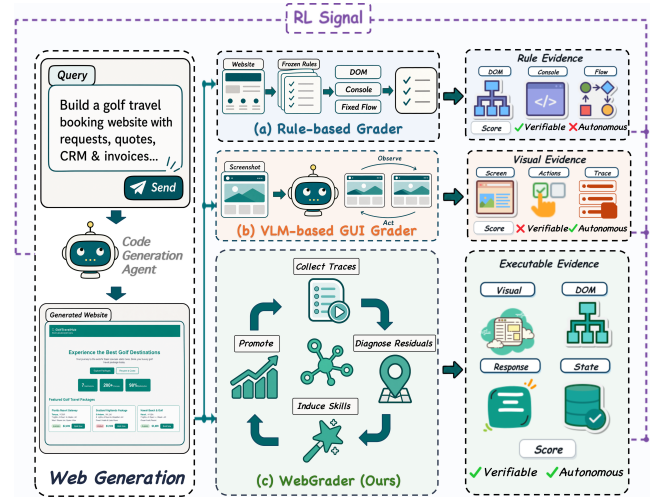


Figure 1: WebGrader constructs and self-evolves an executable reward for web-development RL. It derives required interaction flows, grounds them as browser tests for each generated website, bases verdicts on execution evidence, and then freezes the grader.

depends on an oracle that open-ended website requests rarely provide. A prompt may describe buttons, forms, navigation, or persistent state, yet it does not come with the browser actions and state assertions needed to determine whether those behaviors actually work.

Recent website-generation RL has begun to use screenshots and GUI-agent feedback as training signals, demonstrating the value of functional supervision (Lu et al. 2026; Jiang et al. 2026). Existing web-development rewards provide such supervision in two main ways. Hand-authored browser scripts, including task-specific web-agent evaluators (Zhou et al. 2024; Drouin et al. 2024) and deterministic tests for interactive HTML (Wu et al. 2026), offer precise execution checks but require substantial per-task engineering and must be rewritten or adapted for new requirements and website structures. Model-based GUI graders instead use a vision-language model to interact with the rendered website and readily scale to open-ended requests (Koh et al. 2024; He et al. 2024; Zheng et al. 2024). Thus, script-based rewards

are verifiable but not autonomous, whereas GUI graders are autonomous but not independently verifiable. WebGrader combines both properties through autonomous, replayable browser tests grounded in execution evidence.

We therefore formulate open-ended web-development RL as a problem of *executable reward construction*. We first build a requirement-conditioned verifier that turns browser interactions into inspectable rewards, evolve it beyond its initial blind spots, and freeze it for policy training. This requires grounding open-ended requirements in browser tests without accumulating a monolithic rule prompt.

To this end, we introduce **WebGrader**, a self-evolving programmatic grader for LLM-based web development. WebGrader first derives the required interaction flows from the requirement alone, then grounds their Flow Contracts against the generated project and live DOM. The resulting Playwright programs execute those flows and collect visual, DOM, response, and persistent-state evidence for per-flow judgments. To improve the verifier itself, a neural-architecture-search-inspired offline loop (Zoph and Le 2017) attributes residuals to planning, grounding, evidence, or judgment and mutates only the corresponding skills. Promoted skills are organized into a routed SkillGraph with dependency, composition, and conflict relations, then fixed before reinforcement learning. As shown in Figure 1, WebGrader turns open-ended requirements into inspectable rewards while repairing recurrent verifier blind spots.

In summary, our key contributions are three-fold.

- **Executable Reward Construction.** To the best of our knowledge, WebGrader is the first framework to autonomously turn open-ended requirements and generated code into browser-executable, evidence-grounded rewards for web-development RL.
- **Self-Evolving SkillGraph.** We develop a NAS-inspired loop that converts attributed verifier residuals into skill mutations, promotes them on disjoint validation pages, and composes them through a routed SkillGraph.
- **RL Supervision.** WebGrader trains an 8B policy that improves over a matched appearance-plus-script reward by 7.88 FSR points and surpasses o4-mini and DeepSeek-v4-flash on both WebGen-Bench and WG-core-250.

Related Work

Verifiable Reward Construction. Reinforcement learning with verifiable rewards is most direct when a test oracle already exists. Code-generation benchmarks provide input and output examples or unit tests (Chen et al. 2021; Austin et al. 2021; Hendrycks et al. 2021), expand them for stronger coverage (Liu et al. 2023a), or reuse repository tests for issue resolution (Jimenez et al. 2024). When exact tests are unavailable, learned judges and task-conditioned rubrics provide broader but less directly checkable supervision (Liu et al. 2023b; Zheng et al. 2023; Kim et al. 2024; Gunjal et al. 2026). Recent work instead constructs verification as part of the learning pipeline. VerIF combines code and model-based verification, ReSyn synthesizes reasoning environments with code verifiers, EigenData co-generates tool-use trajectories

and executable instance checkers, and EvolveCoder adversarially refines tests against candidate programs (Peng et al. 2025; He et al. 2026; Gao et al. 2026; Ruan et al. 2026). These systems motivate constructed verification, but focus on instruction following, reasoning, or code, not requirement-specific browser flows over generated websites.

Functional Web Evaluation. Evaluation of generated websites has progressed from rendered similarity to executed interaction. Design2Code measures visual fidelity (Si et al. 2025). WebGen-Bench pairs website requirements with curated operation and expectation cases executed by a navigation agent (Lu et al. 2025), providing the UI-agent evaluation protocol used in our main experiments. HTMLBench, introduced with HTMLCure, evaluates interactive HTML with deterministic browser programs (Wu et al. 2026). We use its complementary test-based protocol through WG-core-250. Related GUI testing systems evaluate repository-level playability with PlayEval and PlayTester, separate checklist construction from defect detection in WebTestBench, and diagnose exact target-state interactions in FineState-Bench (Peng et al. 2026; Kong et al. 2026; Ji et al. 2026). These benchmarks measure whether generated interfaces work, but do not themselves provide a self-evolving reward for training the website-generation policy.

Functional Rewards for Web Development. WebRenderBench optimizes layout and style consistency (Lai et al. 2025), while ReLook scores rendered screenshots with a multimodal critic and penalizes invalid renders (Li et al. 2026). Moving toward functionality, WebGen-Agent uses screenshot and GUI-agent scores as step-level rewards (Lu et al. 2026). WebGen-R1 combines structural and runtime feedback with visual supervision for end-to-end website-generation RL (Jiang et al. 2026), but does not compile open-ended requirements into programmatic tests with explicit postconditions. An adjacent system, InfiniteWeb, automatically constructs functional websites and task-specific evaluators, but uses their verifiable rewards to train GUI agents that operate the generated environments, not models that generate the websites (Zhang et al. 2026). WebGrader differs in three respects. It autonomously constructs requirement-conditioned Flow Contracts for each generated website, grounds verdicts in browser-executed evidence, and freezes a residual-evolved verifier for policy training.

Method

WebGrader is built on the principle that a grader should itself be evaluated and improved against quantified, verifiable outcomes before it is used as a reward. We first construct an executable web environment that pairs verified clean applications with controlled faults and reference outcomes, making verifier variants measurable. A base verifier is run in this environment, and its execution-grounded errors are abstracted into reusable skills and an initial SkillGraph. A residual-driven, NAS-inspired process evolves the graph over multiple rounds by localizing new residuals, mutating stage-specific skills and relations, and promoting only candidates that improve validation performance. The resulting graph and programmatic pipeline form WebGrader. We then deploy WebGrader in reinforcement learning, where it constructs Flow

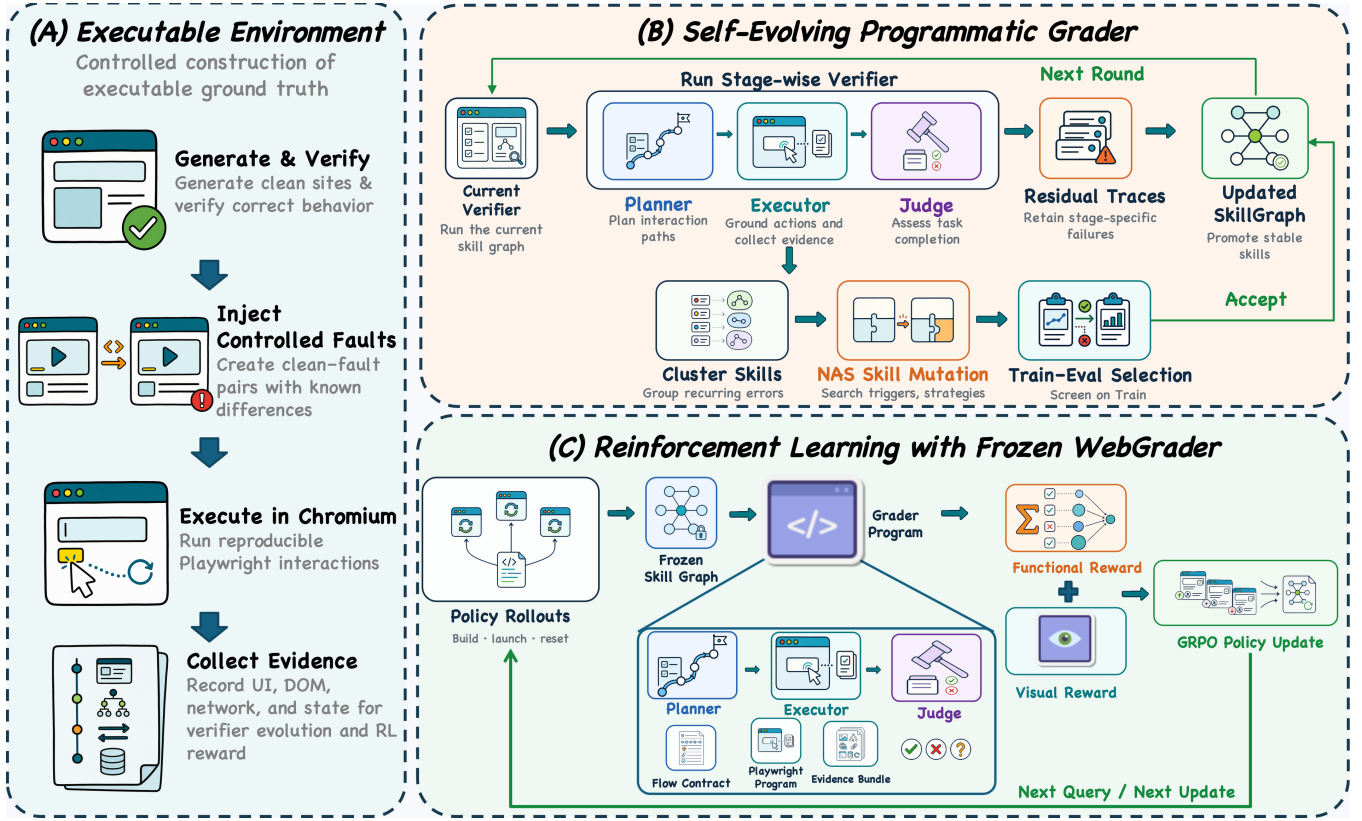


Figure 2: End-to-end WebGrader pipeline. (a) Controlled clean/fault pairs provide executable supervision for offline verifier evolution. (b) Residuals are localized, mutated into verifier skills, and promoted through training/evaluation selection. (c) The promoted skill graph is frozen and routed over policy rollouts, producing evidence-grounded functional rewards for GRPO.

Contracts, executes browser interactions, judges their evidence, and returns functional rewards for GRPO, completing the three-stage pipeline in Figure 2.

Executable Web Environment

We instantiate this environment as **WebGen-Verifier-100**, using 100 public WebGen-Instruct training queries stratified across ten application categories. Each query is paired with an accepted React/Vite application whose build, serve, render, and core requirement-level flows have been verified locally. From every clean application, we materialize eight natural source-level single-fault variants by modifying localized business logic instead of injecting runtime markers. A variant remains active only when the target flow is reachable, paired executions of clean and faulty sites expose the intended behavioral difference, the fault is isolated, and neither source contains explicit benchmark labels. This process yields 100 clean applications and 778 active variants from 800 materialized faults. We split at the page level into 60/20/20 Train/Eval/Test pages, containing 461/157/160 active faults and 282/95/93 active flows, so a clean application, all its variants, and their private references never cross splits. Train is used for residual induction and mutation, Eval for candidate promotion, and Test only for reported verifier evaluation. Test labels, fault specifications, expected transitions,

and reference evidence remain hidden from the verifier and optimization, while Test outcomes never affect mutation, promotion, routing, early stopping, or hyperparameter selection. The verifier, SFT, and RL query sets, containing 100, 600, and 600 requirements, are deliberately disjoint.

The environment provides five layers of ground truth comprising page and runtime metadata, Flow Contracts, isolated fault specifications, reference action-and-evidence traces, and scoring metadata. A reference trace specifies an execution-semantic contract without prescribing a unique Playwright script, allowing different action sequences when they establish the same preconditions, execute the required target action, and collect equivalent before-and-after evidence. The verifier observes only the requirement and normalized project. Clean/fault labels, target-flow annotations, expected transitions, and reference evidence remain private to offline evaluation. The environment rebuilds and launches every application in Chromium, resets its state, and executes interactions against the rendered interface. It records screenshots, DOM states, responses, URL and network events, storage, refresh outcomes, and target-action reach. These reference outcomes make clean acceptance, fault detection, precision, and evaluator-side uncertainty directly measurable. Running a base verifier in this environment produces execution-grounded error traces that support SkillGraph in-

duction and subsequent evolution. The environment is used only for offline verifier construction and analysis. RL rollouts are independently generated websites.

Self-Evolving Programmatic Grader

Base Programmatic Verifier. Given a requirement q , a verifier configuration V first derives the required interaction flows $\mathcal{F}_{\text{req}}(q)$ without consulting the generated website. It then uses the generated project x , its source code, and the live DOM only to instantiate and ground every required flow as a Flow Contract

$$\begin{aligned} \mathcal{C}(q, x) &= \{C_f(q, x)\}_{f \in \mathcal{F}_{\text{req}}(q)}, \\ C_f &= (P_f, A_f, a_f^*, E_f, Q_f, M_f, w_f), \end{aligned} \quad (1)$$

where P_f contains preconditions and fixtures, A_f is the interaction sequence, a_f^* is the target action, E_f contains evidence checkpoints, Q_f specifies postconditions, M_f lists mandatory observations, and w_f is the flow’s criticality weight. Grounding may add setup details, selectors, and alternative execution strategies, but it cannot remove a requirement-derived flow. A required flow therefore remains in $\mathcal{C}(q, x)$ even when its control or behavior is absent from x . It receives PASS only when the target action executes and the evidence supports Q_f . Build or render failure, a missing control, an unexecutable target action, or a violated postcondition yields FAIL. INCONCLUSIVE is reserved for evaluator-side ambiguity, infrastructure exceptions, or malformed verifier output.

Verification exposes the intermediate artifacts

$$\begin{aligned} \mathcal{F}_{\text{req}}(q) &\xrightarrow{\text{plan}(x)} \mathcal{C} \xrightarrow{\text{ground}(x)} \mathcal{S}, \\ \mathcal{S} &\xrightarrow{\text{execute}(x)} \mathcal{T} \xrightarrow{\text{judge}(q, \mathcal{C})} \mathbf{v}, \end{aligned} \quad (2)$$

where $\mathcal{S}$ contains grounded Playwright scripts, $\mathcal{T}$ contains structured browser traces, and $\mathbf{v}$ contains per-flow verdicts. Requirement analysis first derives the required flows from q alone, the planner instantiates their Flow Contracts against x , the grounding stage resolves actions against the live DOM, and the evidence stage executes the scripts and records the visual, DOM, response, and persistent-state observations required by each contract. A fixed evidence-conditioned LLM judge compares each trace with its postconditions and issues the semantic verdict. Thus, *programmatic* denotes executable tests and structured browser evidence with model-assisted planning, grounding, and judgment.

Trace-Induced SkillGraph. We run the base verifier V_0 on $\mathcal{D}_{\text{train}}$ and retain its complete execution artifacts for every incorrect verdict or evaluator-caused inconclusive outcome. An offline meta-evaluator clusters recurring error traces and abstracts them into reusable skills with activation triggers, localized stage transformations, evidence obligations, and dependency, composition, or conflict relations. Together, they initialize a routed SkillGraph.

Multi-Round Attribution and Mutation. The initial SkillGraph is then self-evolved over multiple rounds. At each round, the current verifier is replayed in the environment, and newly exposed errors become residuals. Mirroring Eq. (2), an attribution function assigns each residual to a primary failure source as follows.

$$f_{\text{attr}}(r) \in \mathcal{Z} = \{z_{\text{plan}}, z_{\text{ground}}, z_{\text{evid}}, z_{\text{judge}}\}. \quad (3)$$

Here the four sources denote an incomplete Flow Contract, failed browser-action grounding, missing evidence, and a verdict unsupported by the collected evidence, respectively. For each attributed residual cluster, the offline meta-evaluator proposes a candidate mutation $k = (\tau_k, \Delta_k, E_k, D_k)$, where τ_k specifies its trigger, Δ_k is a localized transformation of the affected stage, E_k adds evidence obligations, and D_k records dependencies, compositions, and conflicts. Inspired by mutation and selection in neural architecture search (Zoph and Le 2017), each candidate targets one attributed source and applies a small, inspectable modification to the current verifier. For example, a fixture skill creates missing prerequisites, an evidence skill adds before/after and refresh checkpoints, and a target-action skill prevents a success message from substituting for the requested interaction. These skills modify verifier artifacts while leaving model weights unchanged. The promoted skills are stage-specific and operational. For example, TARGET-ACTION GROUNDING binds planned actions to source-supported targets and required interface states, while LIVE-DOM SELECTOR GROUNDING resolves actions against the rendered page instead of assuming brittle selectors. During judgment, STEP-ALIGNED EVIDENCE associates observations with the corresponding contract steps before DECISIVE-EVIDENCE ADJUDICATION determines the verdict. The supplement lists representative skills and routing relations.

Validation-Based Promotion. Repairing the residuals that induced a skill does not guarantee that it generalizes. Each candidate is therefore first screened on its local training cases and then evaluated on a disjoint eval set $\mathcal{D}_{\text{eval}}$. It is admitted only when

$$\begin{aligned} f_{\text{promote}}(k \mid V, \mathcal{D}_{\text{eval}}) &= [\text{obj}(V \oplus k) > \text{obj}(V)] \\ &\cdot [\text{regress}(V \oplus k) = 0] = 1, \end{aligned} \quad (4)$$

where $\text{obj}(\cdot)$ combines fault recall, clean-page specificity, and evaluator-caused inconclusive rate on $\mathcal{D}_{\text{eval}}$, and the no-regression constraint protects cases already handled correctly. Only validation gains admit a skill.

SkillGraph and Routing. Promoted skills accumulate into a directed graph $\mathcal{K}$ whose edges encode prerequisites, compatible compositions, and conflicts. Given a requirement q and website x , a router activates only the relevant subgraph according to

$$V(q, x) = V_0 \oplus \rho(q, x, \mathcal{K}), \quad \rho(q, x, \mathcal{K}) \subseteq \mathcal{K}. \quad (5)$$

At each stage, the router matches the current Flow Contract and execution artifacts against explicit skill trigger and avoidance predicates, closes prerequisite dependencies, removes incompatible activations through conflict edges, and composes the remaining skills into the stage-specific verifier. Evolution proceeds through three staged rounds targeting complementary failure sources. Round 1 on $\{z_{\text{plan}}, z_{\text{ground}}\}$ improves Flow Contract construction, dependency-independent setup, and target-action grounding. Round 2 on $\{z_{\text{ground}}, z_{\text{evid}}\}$ improves executable fixtures, live-DOM interaction, and evidence coverage. Round 3 on $\{z_{\text{judge}}\}$ improves evidence-grounded decisions for persistent and cross-view outcomes. The graph and router are then frozen. Algorithm 1 summarizes evolution.

Algorithm 1 Residual-driven grader evolution.

Input: Base verifier V_0 , splits $\mathcal{D}_{\text{train}}$, $\mathcal{D}_{\text{eval}}$, and per-round cause subsets $\mathcal{Z}^{(1)}, \mathcal{Z}^{(2)}, \mathcal{Z}^{(3)} \subseteq \mathcal{Z}$.

Output: Frozen SkillGraph $\mathcal{K}$ and router ρ .

```
1:  $\mathcal{R}_0 \leftarrow f_{\text{run}}(V_0, \mathcal{D}_{\text{train}})$ 
2:  $\mathcal{K} \leftarrow f_{\text{induce}}(\mathcal{R}_0)$ ,  $V \leftarrow V_0 \oplus \mathcal{K}$ 
3: for  $s = 1$  to 3 do
4:   Run the current verifier  $V$  on  $\mathcal{D}_{\text{train}}$  and collect residuals  $\mathcal{R}_s$ 
5:    $\mathcal{R}_s^{(s)} \leftarrow \{r \in \mathcal{R}_s \mid f_{\text{attr}}(r) \in \mathcal{Z}^{(s)}\}$ 
6:    $\mathcal{K}_s^{\text{cand}} \leftarrow f_{\text{mutate}}(\mathcal{R}_s^{(s)}, V)$ 
7:   for  $k \in \mathcal{K}_s^{\text{cand}}$  do
8:     if  $f_{\text{screen}}(k, V) = 1$  and  $f_{\text{promote}}(k \mid V, \mathcal{D}_{\text{eval}}) = 1$  then
9:        $\mathcal{K} \leftarrow f_{\text{insert}}(\mathcal{K}, k, f_{\text{edge}}(k, \mathcal{K}))$ 
10:       $V \leftarrow V \oplus k$ 
11:     end if
12:   end for
13: end for
14:  $\rho \leftarrow f_{\text{route}}(\mathcal{K})$ 
15: return  $\mathcal{K}, \rho$ 
```

Reinforcement Learning with Frozen WebGrader

After offline evolution, the programmatic verification pipeline, SkillGraph $\mathcal{K}$, and router ρ are frozen as WebGrader. Given a requirement q and policy-generated website x , WebGrader first derives $\mathcal{F}_{\text{req}}(q)$, then routes the relevant skill subgraph, grounds every required contract against x , and executes it in a live browser. A required flow is marked FAIL when it is absent, cannot be grounded or executed, or violates its postconditions. INCONCLUSIVE is reserved for evaluator-side ambiguity, exceptions, or malformed verifier output. These evidence-grounded verdicts form the functional component of the RL reward.

Programmatic Functional Reward. Let the determinate flow set be

$$\mathcal{D}(q, x) = \{f \in \mathcal{F}_{\text{req}}(q) \mid v_f \in \{\text{PASS}, \text{FAIL}\}\}. \quad (6)$$

WebGrader computes the weighted interaction score

$$I(q, x) = \frac{\sum_{f \in \mathcal{D}(q, x)} w_f \mathbf{1}[v_f = \text{PASS}]}{\sum_{f \in \mathcal{D}(q, x)} w_f}. \quad (7)$$

Missing or unexecutable functionality remains in $\mathcal{D}(q, x)$ as a determinate failure and contributes zero to the numerator. Evaluator- or infrastructure-caused inconclusive flows do not enter the functional average. Build or render failures make all required flows fail and yield $I(q, x) = 0$.

To encourage both functionality and visual usability, we combine $I(q, x)$ with a frozen appearance score $A(x) \in [0, 5]$ as follows.

$$R(q, x) = 0.7 \cdot 5I(q, x) + 0.3A(x). \quad (8)$$

Both components are placed on the same $[0, 5]$ scale. The 70/30 mixture prioritizes functional correctness while retaining appearance as a secondary optimization signal. Across

the 12,124 flow verdicts produced during training, 3.09% remain evaluator-side INCONCLUSIVE after website-caused target non-reach is counted as FAIL. The supplement reports the verdict audit and sensitivity results.

Group-Relative Optimization. For each requirement q , the old policy $\pi_{\theta_{\text{old}}}$ samples G websites $\{x_1, \dots, x_G\}$. Frozen WebGrader assigns rewards $R_g = R(q, x_g)$ and computes the group-relative advantage

$$\hat{A}_g = \frac{R_g - \text{mean}(R_1, \dots, R_G)}{\text{std}(R_1, \dots, R_G) + \epsilon}. \quad (9)$$

GRPO (Shao et al. 2024) updates π_θ through the standard clipped surrogate objective with a KL penalty toward a reference policy. With WebGrader frozen, rollout rewards differ only through executable outcomes and require no critic.

Experiments

Benchmarks and Metrics

WebGen-Bench. The public test set contains 101 website requirements and 647 manually curated functional cases (Lu et al. 2025). We report valid render rate (VRR), average appearance score (AAS, from 1 to 5), and functional success rate with 0.5 credit for PARTIAL outcomes

$$\text{FSR} = \frac{N_{\text{yes}} + 0.5 N_{\text{partial}}}{647}. \quad (10)$$

WG-core-250. We further use a fixed 250-task subset of HTMLBench-400 (Wu et al. 2026) and report its Full Score, which combines rendering, GPT-5.4 visual quality, functionality, interactivity, and code quality, together with deterministic browser test-case pass rate (TC%). Thus WebGen-Bench and WG-core-250 probe the policy with a UI agent and deterministic browser cases, respectively. Composition and scoring details are in the supplement.

WebGen-Verifier-100 has ten construction categories versus six overlapping WebGen-Bench categories.

Verifier Analysis. We analyze the frozen verifier on the WebGen-Verifier-100 Test split defined in Method. Detailed construction, per-stage metrics, and qualification protocols are provided in the supplement.

Experimental Setup

We initialize WebGrader-RL from a Qwen3-8B checkpoint obtained after one epoch of full-parameter SFT on 600 rebuilt silver examples (Yang et al. 2025). The SFT queries are stratified samples from the public WebGen-Instruct train split, and Claude Sonnet 4.6 supplies browser-executable React/Vite targets in the WebGen-R1 artifact format. For RL, we use a different set of 600 queries independently sampled from the same training split and optimize for 100 effective VERL/GRPO updates (Lu et al. 2025; Sheng et al. 2025; Shao et al. 2024). All 101 WebGen-Bench test queries remain held out, and each update samples four RL queries with eight completions each. DeepSeek-v4-flash implements the four-stage verifier and GPT-5.4-mini supplies the appearance reward, both through public APIs. Controlled baselines share the initialization, data, rollout budget, sampling,

Method	WebGen-Bench			WG-core-250	
	VRR $\uparrow$	AAS $\uparrow$	FSR $\uparrow$	Score $\uparrow$	TC% $\uparrow$
<i>External generator context</i>					
o4-mini	89.11	2.49	40.65	39.068	31.668
DeepSeek-v4-flash	93.07	2.95	47.91	43.684	36.103
Qwen3-Coder-480B	94.06	3.32	53.25	42.504	36.328
GPT-5.4-mini	89.11	3.27	52.32	49.636	42.277
Claude Opus 4.8	100.00	3.96	68.20	50.460	45.653
GPT-5.5	90.10	3.78	62.44	52.280	47.783
<i>Controlled training comparison</i>					
Qwen3-8B base	90.10	1.51	14.92	31.160	27.418
WebGen SFT	62.38	2.19	33.62	32.388	25.640
GUI-RL	96.04	3.15	41.96	38.120	33.861
VLM+GUI-RL	100.00	3.43	42.66	37.746	29.345
VLM+Base-Script-RL	100.00	3.46	44.13	38.372	33.525
WebGrader-RL (8B)	100.00	3.48	52.01	44.953	39.931

Table 1: Main results on WebGen-Bench and WG-core-250. **Bold** marks the best controlled result.

and optimization while differing only in reward construction. GUI-RL uses model-based interaction, VLM+GUI-RL adds appearance, and VLM+Base-Script-RL uses the un-evolved script, isolating verifier evolution. Every reported generator is re-evaluated from scratch under the same frozen benchmark pipelines. For WebGen-Bench, the GPT-5.4 evaluator version, prompts, configuration, and browser settings are fixed across systems, with content hashes retained.

Main Results

Relative to the matched VLM+Base-Script-RL baseline, WebGrader-RL improves FSR by 7.88 points while changing AAS by only 0.02, indicating that the gain is primarily functional. On WG-core-250 it adds 6.58 Full Score and 6.41 TC points over the same baseline, supporting transfer to an independently designed evaluator. The 8B policy also exceeds o4-mini and DeepSeek-v4-flash under both protocols, while remaining behind the strongest closed-source generators.

Analysis

Residual-driven evolution discovers localized verifier repairs, routing composes them where needed, and broader browser coverage produces more reliable functional rewards. The following analyses connect verifier structure and execution behavior to downstream transfer.

Routed Evolution Produces Reusable Repairs

A flat-rule control separates structured evolution from simply adding more instructions. On the same WebGen-Verifier-100 Test cases, we compare the base verifier V_0 , a flat prompt containing every discovered rule, the routed SkillGraph, and the graph with conflict handling. As shown in Table 2, the flat rule set increases token usage from 99.5K to 128.5K but improves macro-F1 only from 0.7813 to 0.7896. Under a similar token budget, routing raises F1 to 0.9037. Conflict handling further increases it to 0.9248 while reducing inconclusive outcomes to 4%. On the matched-budget cases,

Structure	F1	Recall	Specificity	Inconclusive	Tokens
V_0	0.7813	0.76	0.80	0.18	99.5K
Flat rules	0.7896	0.76	0.80	0.16	128.5K
SkillGraph	0.9037	0.88	0.92	0.06	126.1K
Graph + conflicts	0.9248	0.92	0.92	0.04	126.7K

Table 2: Verifier structures on the WebGen-Verifier-100 Test split. Token counts are totals over the same cases, and Test outcomes are used only for reporting.

Stage	Hits	Recall	Fault target cov.	Clean spec.
V_0	104	0.650	0.635	0.80
Planning/grounding	119	0.744	0.748	0.85
Grounding/evidence	128	0.800	0.817	0.90
Judgment	136	0.850	0.878	0.95

Table 3: Cumulative Test performance across evolution. Fault target coverage is measured over injected fault variants at each saved stage.

conflict handling retains 1.25 skills per example instead of applying all four candidates. Across the broader routing audit, the router activates an average of 1.46 skills with 84.2% activation precision and 88.6% recall. Macro-F1 averages fault- and clean-class F1, counting an evaluator-side inconclusive verdict as an error for its ground-truth class. These results suggest that selecting and composing relevant skills contributes more than prompt length alone.

The improvement also accumulates across the three evolution rounds. Planning and grounding first raise fault recall from 0.650 to 0.744 and recover 15 additional faults. Executable fixtures and evidence collection raise recall to 0.800 and recover another nine faults. Evidence-grounded judgment produces the final increase to 0.850 and recovers eight additional faults. Clean-page specificity rises simultaneously from 0.80 to 0.95. Together with validation-based promotion, these localized repairs progressively improve verifier quality before the SkillGraph is frozen.

Two residual-derived patterns make these repairs operational. EXECUTABLE FIXTURE creates missing prerequisites or persistent state, while STEP-ALIGNED EVIDENCE binds DOM, response, or persistent-state observations to the responsible step without page-specific selectors. They also transfer beyond their source pages. The former activates 121 times across 18 pages and repairs 13 cases. The latter spans seven categories and eight flow families, repairs 11 cases, and yields the largest local lift of 0.128.

Leave-one-skill-out interventions test whether the routed modules materially affect verdicts. Disabling a measured skill changes 8 to 14 Test verdicts, compared with two changes under an unchanged repeat control. All six measured skills have positive net correctness, and five interventions exceed repeat drift. Evidence checkpoints produce the largest net contribution (+7), followed by target-action grounding and executable fixtures (+6 each). This ties the graph’s gain to operational repairs.

Verifier	Specificity	Recall	Precision	Inconclusive
Rule grader	90.0	20.0	94.1	5.0
GUI grader	80.0	60.0	96.0	15.0
V_0 (base script)	80.0	65.0	96.3	13.3
WebGrader	95.0	85.0	99.3	3.9

Table 4: Verifier performance (%) on the WebGen-Verifier-100 Test split.

Execution diagnostic	Original	Evolved	Δ
Executor success	90.0	98.9	+8.9
Post-action state reached	74.2	88.6	+14.4
Target action executed	78.1	91.7	+13.6
Strong evidence collected	71.6	87.2	+15.6
Must-collect coverage	75.4	90.3	+14.9

Table 5: Execution diagnostics (%) on Test. The denominator comprises planned requirement-level flows. Target action means successful dispatch. Post-action state additionally requires the intended result to be observed.

Evolution Improves Execution Before Judgment

The Test split shows where these routed repairs change verification. On the WebGen-Verifier-100 Test split, WebGrader detects 136 of 160 faults and accepts 19 of 20 clean pages. Compared with V_0 , it raises fault recall from 65% to 85% and clean-page specificity from 80% to 95%. It also reduces evaluator-caused inconclusive outcomes from 13.3% to 3.9%, resulting in 99.3% precision. WebGrader consequently provides a substantially more accurate verification signal than the original script, rule grader, and GUI grader.

Stage-level diagnostics locate this improvement before the final verdict. The largest gains occur in strong-evidence collection (+15.6), mandatory-observation coverage (+14.9), post-action state reach (+14.4), and target-action execution (+13.6). The stage-level gains show that WebGrader improves verification by reaching the decisive state and observing its consequences before semantic judgment. Executor success also rises by 8.9 points, consistent with improved evidence being paired with more reliable action grounding.

Gains increase with interaction complexity. Recall improves by 20.0 points over all faults, by 24.3 points on multi-action stateful faults, and by 28.1 points when this subset is restricted to medium- and high-severity cases. These are the cases in which correctness depends most strongly on prerequisite setup, target-action execution, and postcondition inspection. Further decompositions appear in the supplement.

Slice-level results sharpen this picture. Recall rises by 20.6 points on latent faults, 21.3 on stateful faults, and 25.0 on depth-2-to-3 flows. The remaining errors concentrate in depth-4+ flows (0.789 recall), data binding (0.789), and search/filter/sort (0.810). WebGrader repairs failures requiring hidden state changes, while long trajectories and diffuse data dependencies remain hardest.

Category	Base script	WebGrader	Δ
Content presentation	54.31	63.80	+9.49
User interaction	41.69	48.20	+6.51
Data management	41.88	46.61	+4.73
Functional testing	30.68	36.00	+5.32
Data display	55.11	61.60	+6.49
Design validation	66.80	82.00	+15.20

Table 6: Category-wise FSR (%) on WebGen-Bench for matched VLM+Base-Script-RL and WebGrader-RL.

Better Verification Transfers to Policy Learning

The stronger verifier also produces broader policy gains. Table 1 shows that WebGrader-RL improves WebGen-Bench FSR by 7.88 points over the matched VLM+Base-Script-RL baseline while changing AAS by only 0.02, indicating that the gain is primarily functional. Table 6 further shows gains across all six categories, ranging from 4.73 points on data management to 15.20 on design validation. The evolved reward therefore improves a broad range of website behaviors. Because category labels are not used for routing or reward aggregation, this spread also indicates that reusable execution skills transfer across task semantics.

The improvement persists under an independently designed evaluation protocol. On WG-core-250, WebGrader-RL raises deterministic browser test pass rate by 6.41 points and aggregate score by 6.58 over the matched base-script reward. The gains transfer beyond WebGrader’s evaluator.

Paired analyses confirm that this transfer is not driven by a small number of tasks. On WebGen-Bench, query-macro FSR improves by 5.7 points with a 95% paired-bootstrap interval of $[+1.9, +9.5]$ and permutation $p = .004$. On WG-core-250, task-macro Full Score and test-case ratio improve by 11.2 and 8.8 points, their intervals exclude zero, and the exact McNemar test gives $p = 7.3 \times 10^{-5}$. The gains are therefore consistent across paired queries and tasks as well as across evaluator designs.

Conclusion

WebGrader turns open-ended requirements into functional rewards grounded in observed browser state transitions. Its requirement-first verifier derives the necessary flows, grounds them against each generated website, and judges post-action evidence. A residual-driven loop promotes localized repairs into a routed SkillGraph that is fixed before policy training. Across UI-agent and deterministic browser evaluations, WebGrader-RL improves an 8B policy beyond matched script-based supervision. Analysis attributes these gains to better prerequisite setup, target-action execution, and post-action evidence collection while preserving clean-page specificity. These results suggest a broader principle for agentic RL. When task success is revealed through interaction, reward construction should make the required trajectory and its observable consequences explicit before optimization. Together, executable reward construction connects open-ended generation to policy optimization, translating verifier improvements into more reliable functional behavior.

References

- Austin, J.; Odena, A.; Nye, M.; Bosma, M.; Michalewski, H.; Dohan, D.; Jiang, E.; Cai, C.; Terry, M.; Le, Q.; and Sutton, C. 2021. Program Synthesis with Large Language Models. *arXiv preprint arXiv:2108.07732*.
- Chen, M.; Tworek, J.; Jun, H.; Yuan, Q.; Pinto, H. P. d. O.; Kaplan, J.; Edwards, H.; Burda, Y.; Joseph, N.; Brockman, G.; et al. 2021. Evaluating Large Language Models Trained on Code. *arXiv preprint arXiv:2107.03374*.
- Drouin, A.; Gasse, M.; Caccia, M.; Laradji, I. H.; Del Verme, M.; Marty, T.; Vazquez, D.; Chapados, N.; and Lacoste, A. 2024. WorkArena: How Capable Are Web Agents at Solving Common Knowledge Work Tasks? In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, 11642–11662. PMLR.
- Gao, J.; Chen, J.; He, C.; Wang, W.-C.; Xu, S.; Wang, H.; Jin, D.; and Wu, Y. 2026. From Self-Evolving Synthetic Data to Verifiable-Reward RL: Post-Training Multi-Turn Interactive Tool-Using Agents. *arXiv preprint arXiv:2601.22607*.
- Gunjal, A.; Wang, A.; Lau, E.; Nath, V.; He, Y.; Liu, B.; and Hendryx, S. 2026. Rubrics as Rewards: Reinforcement Learning Beyond Verifiable Domains. In *The Fourteenth International Conference on Learning Representations*.
- He, A.; Weir, N.; Bostrom, K.; Nie, A.; Cassel, D.; Bayless, S.; and Rangwala, H. 2026. ReSyn: Autonomously Scaling Synthetic Environments for Reasoning Models. *arXiv preprint arXiv:2602.20117*.
- He, H.; Yao, W.; Ma, K.; Yu, W.; Dai, Y.; Zhang, H.; Lan, Z.; and Yu, D. 2024. WebVoyager: Building an End-to-End Web Agent with Large Multimodal Models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 6864–6890. Bangkok, Thailand: Association for Computational Linguistics.
- Hendrycks, D.; Basart, S.; Kadavath, S.; Mazeika, M.; Arora, A.; Guo, E.; Burns, C.; Puranik, S.; He, H.; Song, D.; and Steinhardt, J. 2021. Measuring Coding Challenge Competence with APPS. In *Proceedings of the Neural Information Processing Systems Track on Datasets and Benchmarks*, volume 1.
- Ji, F.; Yang, J.; Song, Z.; Wang, Y.; Cui, Z.; Li, Y.; Jiang, Q.; and Chen, X. 2026. FineState-Bench: Benchmarking State-Conditioned Grounding for Fine-Grained GUI State Setting. In *Findings of the Association for Computational Linguistics: ACL 2026*, 43073–43088. San Diego, California, United States: Association for Computational Linguistics.
- Jiang, J.; Cai, C.; Park, C.; Shen, J.; Kim, S.; Li, J.; and Wang, Y. 2026. WebGen-R1: Incentivizing Large Language Models to Generate Functional and Aesthetic Websites with Reinforcement Learning. *arXiv preprint arXiv:2604.20398*.
- Jimenez, C. E.; Yang, J.; Wettig, A.; Yao, S.; Pei, K.; Press, O.; and Narasimhan, K. 2024. SWE-bench: Can Language Models Resolve Real-World GitHub Issues? In *The Twelfth International Conference on Learning Representations*.
- Kim, S.; Shin, J.; Cho, Y.; Jang, J.; Longpre, S.; Lee, H.; Yun, S.; Shin, S.; Kim, S.; Thorne, J.; and Seo, M. 2024. Prometheus: Inducing Fine-Grained Evaluation Capability in Language Models. In *The Twelfth International Conference on Learning Representations*.
- Koh, J. Y.; Lo, R.; Jang, L.; Duvvur, V.; Lim, M.; Huang, P.-Y.; Neubig, G.; Zhou, S.; Salakhutdinov, R.; and Fried, D. 2024. VisualWebArena: Evaluating Multimodal Agents on Realistic Visual Web Tasks. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 881–905. Bangkok, Thailand: Association for Computational Linguistics.
- Kong, F.; Zhang, J.; Yue, Y.; Sun, C.; Tian, Y.; Feng, S.; Yang, X.; Wang, D.; Tian, Y.; Du, J.; Zeng, W.; Li, H.; and Gai, K. 2026. WebTestBench: Evaluating Computer-Use Agents towards End-to-End Automated Web Testing. *arXiv preprint arXiv:2603.25226*.
- Lai, P.; Zhuang, J.; Zhang, K.; Xiong, N.; Wang, S.; Xu, Y.; Chen, C.; Wang, Y.; and Cui, B. 2025. WebRenderBench: Enhancing Web Interface Generation through Layout-Style Consistency and Reinforcement Learning. *arXiv preprint arXiv:2510.04097*.
- Li, Y.; Zhang, C.; Lv, R.; Liu, A.; Deng, K.; Zhang, Y.; Liu, J.; and Zhou, B. 2026. ReLook: Vision-Grounded RL with a Multimodal LLM Critic for Agentic Web Coding. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 25471–25485. San Diego, California, United States: Association for Computational Linguistics.
- Liu, J.; Xia, C. S.; Wang, Y.; and Zhang, L. 2023a. Is Your Code Generated by ChatGPT Really Correct? Rigorous Evaluation of Large Language Models for Code Generation. In *Advances in Neural Information Processing Systems*, volume 36, 21558–21572. Curran Associates, Inc.
- Liu, Y.; Iter, D.; Xu, Y.; Wang, S.; Xu, R.; and Zhu, C. 2023b. G-Eval: NLG Evaluation Using GPT-4 with Better Human Alignment. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, 2511–2522. Singapore: Association for Computational Linguistics.
- Lu, Z.; Ren, H.; Yang, Y.; Wang, K.; Zong, Z.; Pan, J.; Zhan, M.; and Li, H. 2026. WebGen-Agent: Enhancing Interactive Website Generation with Multi-Level Feedback and Step-Level Reinforcement Learning. In *The Fourteenth International Conference on Learning Representations*.
- Lu, Z.; Yang, Y.; Ren, H.; Hou, H.; Xiao, H.; Wang, K.; Shi, W.; Zhou, A.; Zhan, M.; and Li, H. 2025. WebGen-Bench: Evaluating LLMs on Generating Interactive and Functional Websites from Scratch. In *Advances in Neural Information Processing Systems*, volume 38. Curran Associates, Inc.
- Peng, H.; Qi, Y.; Wang, X.; Xu, B.; Hou, L.; and Li, J. 2025. VerIF: Verification Engineering for Reinforcement Learning in Instruction Following. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, 30324–30339. Suzhou, China: Association for Computational Linguistics.
- Peng, Z.; Tao, W.; Yin, X.; Ying, C.; Luo, Y.; and Guo, Y. 2026. PlayCoder: Making LLM-Generated GUI Code Playable. *Proceedings of the ACM on Software Engineering*, 3(FSE): 2003–2026.

- Ruan, C.; Jiang, D.; Zeng, H.; Nie, P.; and Chen, W. 2026. EvolveCoder: Evolving Test Cases via Adversarial Verification for Code Reinforcement Learning. *arXiv preprint arXiv:2603.12698*.
- Shao, Z.; Wang, P.; Zhu, Q.; Xu, R.; Song, J.; Bi, X.; Zhang, H.; Zhang, M.; Li, Y. K.; Wu, Y.; and Guo, D. 2024. DeepSeekMath: Pushing the Limits of Mathematical Reasoning in Open Language Models. *arXiv preprint arXiv:2402.03300*.
- Sheng, G.; Zhang, C.; Ye, Z.; Wu, X.; Zhang, W.; Zhang, R.; Peng, Y.; Lin, H.; and Wu, C. 2025. HybridFlow: A Flexible and Efficient RLHF Framework. In *Proceedings of the Twentieth European Conference on Computer Systems, EuroSys '25*, 1279–1297. Association for Computing Machinery.
- Si, C.; Zhang, Y.; Li, R.; Yang, Z.; Liu, R.; and Yang, D. 2025. Design2Code: Benchmarking Multimodal Code Generation for Automated Front-End Engineering. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, 3956–3974. Albuquerque, New Mexico: Association for Computational Linguistics.
- Wu, J.; Yang, J.; Zheng, T.; Zhang, W.; Wang, H.; Lou, Y.; and Liu, X. 2026. HTMLCure: Turning Browser Experience into State Guided Repair for Interactive HTML. *arXiv preprint arXiv:2605.26807*.
- Yang, A.; Li, A.; Yang, B.; Zhang, B.; Hui, B.; Zheng, B.; Yu, B.; Gao, C.; Huang, C.; Lv, C.; Zheng, C.; Liu, D.; Zhou, F.; Huang, F.; Hu, F.; Ge, H.; Wei, H.; Lin, H.; Tang, J.; Yang, J.; Tu, J.; Zhang, J.; Yang, J.; Yang, J.; Zhou, J.; Zhou, J.; Lin, J.; Dang, K.; Bao, K.; Yang, K.; Yu, L.; Deng, L.; Li, M.; Xue, M.; Li, M.; Zhang, P.; Wang, P.; Zhu, Q.; Men, R.; Gao, R.; Liu, S.; Luo, S.; Li, T.; Tang, T.; Yin, W.; Ren, X.; Wang, X.; Zhang, X.; Ren, X.; Fan, Y.; Su, Y.; Zhang, Y.; Zhang, Y.; Wan, Y.; Liu, Y.; Wang, Z.; Cui, Z.; Zhang, Z.; Zhou, Z.; and Qiu, Z. 2025. Qwen3 Technical Report. *arXiv preprint arXiv:2505.09388*.
- Zhang, Z.; Wang, Z.; Zhang, X.; Guo, Z.; Li, J.; Li, B.; and Lu, Y. 2026. InfiniteWeb: Scalable Web Environment Synthesis for GUI Agent Training. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 28465–28492. San Diego, California, United States: Association for Computational Linguistics.
- Zheng, B.; Gou, B.; Kil, J.; Sun, H.; and Su, Y. 2024. GPT-4V(ision) Is a Generalist Web Agent, If Grounded. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, 61349–61385. PMLR.
- Zheng, L.; Chiang, W.-L.; Sheng, Y.; Zhuang, S.; Wu, Z.; Zhuang, Y.; Lin, Z.; Li, Z.; Li, D.; Xing, E. P.; Zhang, H.; Gonzalez, J. E.; and Stoica, I. 2023. Judging LLM-as-a-Judge with MT-Bench and Chatbot Arena. In *Advances in Neural Information Processing Systems*, volume 36, 46595–46623. Curran Associates, Inc.
- Zhou, S.; Xu, F. F.; Zhu, H.; Zhou, X.; Lo, R.; Sridhar, A.; Cheng, X.; Ou, T.; Bisk, Y.; Fried, D.; Alon, U.; and Neubig, G. 2024. WebArena: A Realistic Web Environment for Building Autonomous Agents. In *The Twelfth International Conference on Learning Representations*.
- Zoph, B.; and Le, Q. V. 2017. Neural Architecture Search with Reinforcement Learning. In *International Conference on Learning Representations*.

Supplementary Material

Reproducible Verifier Specification

Artifacts and Stage Interfaces

WebGrader first derives required interaction flows from the requirement alone. For each required flow, it then materializes a Flow Contract and scores the website from its execution evidence. The contract exposes the intended preconditions, action sequence, target action, evidence checkpoints, post-conditions, mandatory observations, and criticality weight. The planner produces these contracts. The grounding stage compiles them into Playwright programs against the generated project’s source and live DOM. The evidence stage executes the programs and records structured browser traces. The frozen evidence-conditioned judge then returns one semantic verdict per flow.

Artifact	Core contents
Flow Contract	Preconditions, fixtures, action sequence, target action, evidence checkpoints, post-conditions, mandatory observations, and criticality weight
Executable script	Grounded Playwright selectors and actions, state-reset operations, and evidence-capture hooks
Evidence bundle	Screenshots, DOM snapshots, responses, URL changes, console/network events, storage state, refresh outcomes, and assertion traces
Flow verdict	PASS, FAIL, or INCONCLUSIVE, with evidence pointers and a stage-specific residual when applicable

Table 7: Verifier artifacts passed across the four stages.

Runtime and Verdict Contract

The browser harness records state reset, navigation, action attempts and resolution strategy, target-action reach, screenshots, DOM state, response messages, URL changes, console and network events, local/session storage, refresh outcomes, and final assertions. The judge receives the requirement, Flow Contract, and execution trace, but never the benchmark’s private clean/fault label.

Operation	Timeout
Render navigation	15 s, network idle
Interactive navigation	30 s, DOM content loaded
Playwright action	7 s
Single flow	20 s
Flow process	25 s
Completion/case	120 s
Verifier API main/fallback	60 s / 15 s
Appearance VLM main/fallback	10 s / 10 s
Appearance VLM total	22 s

Table 8: Frozen runtime timeouts for distinguishing site failures from evaluator uncertainty and bounding per-completion cost.

PASS requires successful target-action execution and sufficient evidence that the requested postcondition holds. FAIL

covers executed evidence of a semantic violation and model-caused inability to build, render, expose a required control, reach the required flow, or execute the target action. A missing control or unexecutable target action is therefore a determinate website failure. INCONCLUSIVE is reserved for evaluator-side uncertainty, including unresolved selector ambiguity, browser or infrastructure exceptions, timeouts not attributable to the generated website, and malformed verifier output.

Representative Skills and Routing

The concrete stage-specific registries contain 6 planning skills, 8 execution/evidence skills, and 7 judgment skills. We show representative entries that expose their activation signals, localized operations, guards, and routing relations.

Stage	Skill	Activation signal	Local operation and guard
Plan	COVERAGE INVENTORY	Multiple functional obligations	Separates independently checkable flows without repeatedly testing the same target
Plan	TARGET-ACTION GROUNDING	Target must be recovered from source or UI state	Binds the action to a source-supported target get and prerequisite state without inventing a control or selector
Exec.	LIVE-DOM SELECTOR GROUNDING	A preset selector is absent, unstable, or ambiguous	Enumerates the live DOM and grounds by semantics, role, and attributes without converting evaluator ambiguity into site failure
Exec.	FLOW-ISOLATED RESET	Flows may share mutable state	Restores page and persistent state between flows while preserving required fixtures
Judge	STEP-ALIGNED EVIDENCE	Evidence spans multiple actions or snapshots	Associates each observation with the contract step that produced it to prevent cross-step attribution
Judge	DECISIVE-EVIDENCE ADJUDICATION	Evidence sources differ in diagnostic strength	Uses the most discriminative direct evidence so weak visual cues cannot override explicit state evidence
Judge	EVIDENCE-SUFFICIENCY CHECK	Neither pass nor fail has decisive support	Preserves INCONCLUSIVE when evaluator evidence is missing

Table 9: Representative promoted skills. Names summarize the operational behavior, and internal registry identifiers are omitted.

Routing follows the executable dependency chain

COVERAGE INVENTORY → TARGET-ACTION GROUNDING
 → LIVE-DOM SELECTOR GROUNDING
 → STEP-ALIGNED EVIDENCE
 → DECISIVE-EVIDENCE ADJUDICATION.

FLOW-ISOLATED RESET composes with execution skills when flows share state. EVIDENCE-SUFFICIENCY CHECK conflicts with an unsupported determinate verdict and takes precedence when the decisive observation is missing because of evaluator-side uncertainty. The complete registries additionally encode prerequisites, compatible compositions, conflict edges, negative constraints, and validation-promotion provenance.

WebGen-Verifier-100 Protocol

Benchmark Construction

WebGen-Verifier-100 is constructed from 100 public WebGen-Instruct training queries stratified across ten application categories. For each query, a React/Vite implementation is accepted only when it can be installed, built, served, and rendered locally. Its core requirement-level flows must expose reachable target actions and observable outcomes, and it must contain no blocking runtime error. Eight source-level single-fault variants are then materialized from naturally occurring WebDev failure patterns. The normalized families cover validation and authentication, search/filter/sort, state persistence, cross-view synchronization, binding and routing, calculation and aggregation, CRUD workflows, and feedback visibility. A variant is active only after matched execution of the clean and faulty versions confirms that its target flow remains reachable and the intended behavioral difference is observable, isolated, and free of explicit markers. Twenty-two ambiguous, unstable, or out-of-scope variants are excluded or quarantined, leaving 778 active faults.

The split is performed at the page level. A clean page, all its faults, its Flow Contracts, and its private references remain in one split. The ten application categories are analytics/dashboard, CRM, e-commerce, ERP, job search, learning, productivity, project management, social media, and travel. Each category contributes ten pages, split 6/2/2 across Train/Eval/Test.

Item	Train	Eval	Test	Total
Clean pages	60	20	20	100
Active single-fault pages	461	157	160	778
Active flows	282	95	93	470
Easy construction	172	59	60	291
Medium construction	173	59	60	292
Hard construction	116	39	40	195

Table 10: Page-level composition of WebGen-Verifier-100. Easy, medium, and hard denote construction difficulty. The Test benchmark contains 20 clean and 160 active single-fault pages.

Train60 is used to induce residuals and construct candidate mutations, while Eval20 serves as the disjoint validation

set for candidate promotion. Test20 is reserved exclusively for reporting verifier performance. Its private labels, fault specifications, expected transitions, and reference evidence remain inaccessible to the verifier and optimization process. Test outcomes are never used for skill induction, mutation, promotion, routing design, early stopping, or hyperparameter selection. Reported intermediate and final verifier measurements on Test20 are evaluation-only checkpoints and are never fed back into development.

Ground truth has five layers comprising page metadata and the natural-language requirement, Flow Contracts, isolated fault specifications, reference action/evidence traces, and scoring metadata. A reference trace defines an execution-semantic contract without prescribing a unique Playwright program. Alternative action sequences are valid when they establish the required preconditions, execute the target action, cover the mandatory evidence, and expose the same clean invariant or fault differential. Public artifacts contain only the requirement and generated project. Private artifacts contain the clean/fault label, flow identifiers, target-action obligations, and reference evidence. This separation prevents the deployed verifier from reading its answer while preserving a complete audit trail for offline evolution and evaluation.

Construction difficulty describes how difficult a controlled fault is to materialize and validate. Separately, behavioral severity describes its effect on the requested behavior. The Test split contains 29 low-, 76 medium-, and 55 high-severity faults. Of the 470 active flows, 438 have criticality weight 2 and 32 have weight 3. All Test flows have weight 2. A clean application is accepted only when its core flows execute without a critical semantic failure. A fault variant is retained only when the corresponding target behavior differs from the clean reference.

Qualitative Execution Trace

The case in Figure 3 is taken directly from the benchmark’s real browser trace. Its action and evidence record appears below.

Evidence field	Recorded value
Target action done	true
Rows before / after	4 / 4
Success response	Record “Test Record” added successfully
Requested record in table	false
Row delta	0

Table 11: Evidence supporting the FAIL verdict in the qualitative trace.

Evolution Mechanism and Diagnostics

Candidate Mutation and Promotion

The initial verifier V_0 uses DeepSeek-v4-flash for the four-stage pipeline. An offline ground-truth-aware Claude Opus 4.8 meta-evaluator attributes residuals, clusters recurring failures, and proposes skill mutations. It can access private annotations only during offline verifier evolution and is not part of blind verification or the RL reward. The base

(a) Before submission: 4 table rows

Name	Category	Value	Status	Action
Sales Q1	Sales	\$42,000	Active	⊞
Marketing Q1	Marketing	\$18,500	Active	⊞
Support Q1	Support	\$9,200	Archived	⊞
Sales Q2	Sales	\$53,000	Active	⊞

(b) After submission: success toast, still 4 rows

Name	Category	Value	Status	Action
Sales Q1	Sales	\$42,000	Active	⊞
Marketing Q1	Marketing	\$18,500	Active	⊞
Support Q1	Support	\$9,200	Archived	⊞
Sales Q2	Sales	\$53,000	Active	⊞

Executed Add • success toast observed • row delta = 0 • "Test Record" absent

Recorded browser trace: verifier_test_0092_b05

Flow Contract verdict: FAIL

Figure 3: Frozen replay for fault verifier_test_0092_b05. This neutral public identifier replaces the internal construction identifier. The target action completes and the page displays a success toast, but the required table update does not occur.

model weights are unchanged. Candidate skills modify structured verifier artifacts covering planner evidence obligations, target-action constraints, fixtures, DOM-grounding strategies, and semantic judgment rules.

Candidate	Flow F1	Recall
R03	.9214	.9182
M01	.9278	.9235
M02	.9341	.9306
M03	.9432	.9378
M04	.9397	.9415
M05	.9316	.9289

Candidate	Evidence	Grounding	Over-gen.
R03	.8675	.9268	.0251
M01	.8742	.9310	.0228
M02	.8819	.9364	.0207
M03	.8894	.9412	.0193
M04	.9018	.9481	.0146
M05	.8837	.9345	.0215

Table 12: Candidate mutation screening on Train60 for the final promotion step. M04 trades a small amount of Flow F1 for the best recall, evidence, grounding, and over-generation profile.

Eval variant	F1	Rec.	Evid.	Ground.	Over.
Base	.8425	.8516	.7784	.9012	.0385
Base-skill	.8917	.8978	.8426	.9285	.0241
M03	.9286	.9164	.8861	.9428	.0197
M04 / evolved	.9479	.9442	.9085	.9516	.0138

Table 13: Validation-set promotion on Eval20. M04 is selected without using Test20 outcomes.

Stage-Wise Accumulation

Stage	Hits	Recall	Fault target cov.
V_0	104	.650	.635
Planning/grounding	119	.744	.748
Grounding/evidence	128	.800	.817
Judgment	136	.850	.878

Stage	Clean spec.	Clean FPR	AUROC
V_0	.80	.15	.760
Planning/grounding	.85	.10	.810
Grounding/evidence	.90	.05	.854
Judgment	.95	.05	.890

Table 14: Evaluation-only Test20 performance of saved verifier checkpoints across the three evolution rounds. Fault target coverage is measured over injected fault variants at each saved stage. The end-to-end execution diagnostics instead use planned requirement-level flows. Test outcomes are not fed back into development.

Transition	Recovered	Regressed	Net	Paired acc.
$V_0 \rightarrow$ planning	18	3	+15	+.061
Planning $\rightarrow$ evidence	11	2	+9	+.055
Evidence $\rightarrow$ judgment	10	2	+8	+.048
$V_0 \rightarrow$ final	39	7	+32	+.164

Table 15: Recovered and regressed Test faults across evolution stages.

Target scope	n	Original	Evolved
All faults	160	.650	.850
Multi-action + stateful	115	.635	.878
Multi-action + stateful + med/high	96	.625	.906

Table 16: Recall on progressively more interaction-intensive Test scopes.

Graph Structure at Matched Budget

Structure	F1	Recall	Spec.	Inc.
V_0	.7813	.76	.80	.18
Flat rules	.7896	.76	.80	.16
Skill graph	.9037	.88	.92	.06
Graph + conflicts	.9248	.92	.92	.04

Structure	Tokens	Overhead
V_0	99,480	0.0%
Flat rules	128,530	29.2%
Skill graph	126,140	26.8%
Graph + conflicts	126,720	27.4%

Table 17: Matched-budget analysis on the full WebGen-Verifier-100 Test split. Test outcomes are used only for reporting. A flat prompt spends slightly more tokens than the graph while yielding little improvement over V_0 . Selective routing and conflict handling produce the gain.

Flat rules apply all four candidates to every Test case, for a mean of 4.0 active rules. The graph retrieves the same four candidates but activates 1.42 skills per case on average. Conflict handling lowers this to 1.25. Thus its advantage is conditional composition, not additional inference.

Leave-One-Skill-Out Interventions

Disabled skill	Active	Changes	Nec./harm.	Net
Evidence checkpoints	82	14	9 / 2	+7
Dependency setup	76	11	7 / 2	+5
Target-action grounding	58	10	7 / 1	+6
Executable fixtures	91	13	8 / 2	+6
Decisive evidence	69	8	5 / 1	+4
Step-aligned evidence	61	7	4 / 1	+3

Table 18: Leave-one-skill-out interventions on the WebGen-Verifier-100 Test split. “Necessary” counts correct evolved verdicts lost when the skill is disabled. “Harmful” counts errors repaired by disabling it. The unchanged repeat control changes only two verdicts.

The skill-off runs change between 8 and 14 verdicts, compared with two under repeat execution. Five of six interventions exceed this drift. Every measured skill has positive net correctness, with the largest contribution from explicit evidence checkpoints.

Transfer and Routing

Skill	Pages	Active	Cats.	Flows
Evidence	12	86	7	8
Dependency	11	79	7	7
Target action	9	62	6	7
Fixtures	18	121	10	8
Live DOM	17	108	9	8
Persistent state	13	59	8	6
Decisive evidence	14	73	8	7
Step-aligned evidence	12	64	7	6

Skill	Local lift	Repairs
Evidence	+0.128	+11
Dependency	+0.089	+7
Target action	+0.097	+6
Fixtures	+0.107	+13
Live DOM	+0.065	+7
Persistent state	+0.034	+2
Decisive evidence	+0.055	+4
Step-aligned evidence	+0.047	+3

Table 19: Skill transfer across pages, application categories, and flow families. Improvements are not confined to the pages that originally induced each skill.

The router has 84.2% activation precision, 88.6% recall, a 1.1% invalid-activation rate, and 1.46 active skills per case. Conflict resolution suppresses 7.2% of candidate activations,

while 6.8% of retained activations are judged unnecessary. Together with Table 17, these results show that the graph is both selective and broadly reusable.

Blind-Spot Decomposition

Slice (n)	Orig.	Evol.	Gain
All (160)	.650	.850	+.200
Immediately visible (19)	.789	.947	+.158
Latent (141)	.631	.837	+.206
Single-action (15)	.800	.933	+.133
Multi-action (145)	.634	.841	+.207
Stateless (38)	.737	.895	+.158
Stateful (122)	.623	.836	+.213
Depth 1 (15)	.800	.933	+.133
Depth 2 to 3 (88)	.625	.875	+.250
Depth 4+ (57)	.649	.789	+.140

Table 20: Recall by observability, state dependence, and interaction depth on the 160 Test faults.

Fault family	n	Original	Evolved	Gain
Validation/auth	24	.583	.875	+.292
State/persistence	50	.620	.860	+.240
CRUD	7	.571	.857	+.286
Calculation	16	.625	.813	+.188
Search/filter/sort	21	.714	.810	+.096
Data binding	19	.684	.789	+.105
Cross-view	23	.739	.913	+.174

Table 21: Fault recall by semantic family on Test.

The strongest improvements occur in validation/authentication, CRUD, state persistence, and cross-view consistency, where correctness depends on a specific transition and its consequences. Search and data binding start from a stronger base and consequently have smaller absolute gains. Residual errors are most pronounced for depth-4+ flows and for data-binding and search interactions, whose final recall remains between 0.789 and 0.810.

RL Protocol and Reward Audit

Optimization and Runtime

SFT initialization. The RL warm start is checkpoint-7, the final checkpoint obtained after one epoch of full-parameter SFT on 600 rebuilt silver examples. The queries are stratified samples from the public WebGen-Instruct train split. Claude Sonnet 4.6 generates browser-executable Vite, React, and TypeScript targets in the WebGen-R1 artifact format. Training packs the tokenized records into 210 fixed-length blocks and uses one epoch, a global batch size of 32, and a maximum sequence length of 16,384. The optimizer is fused AdamW with learning rate 4×10^{-5} , $\beta_1 = .9$, $\beta_2 = .999$, $\epsilon = 10^{-8}$, no weight decay, gradient clipping at 1.0, cosine decay, and 10% warmup. Training uses bf16 precision, gradient checkpointing, and ZeRO-3 without parameter or optimizer offload across eight GPUs. The SFT seed is 3407. The 101 WebGen-Bench test queries are excluded.

Item	Frozen configuration
Initialization	Qwen3-8B SFT checkpoint-7 (one epoch)
Training data	A different set of 600 queries independently sampled from the WebGen-Instruct train split
Framework	VERL + GRPO + vLLM rollout
Hardware	Single node, 8 × NVIDIA A100-SXM4 80GB
Effective updates	100
Train batch	4 queries per update
Group size	8 completions per query (32 websites/update)
Learning rate	2×10^{-6}
Prompt / response limit	4,096 / 16,384 tokens
Rollout sampling	temperature .7, top- p .95, top- k 20
KL / entropy coefficient	.01 / 0
Checkpoint interval	25 effective updates
Random seed	20260707

Table 22: Final WebGrader-RL hyperparameters.

All WebGrader-RL training statistics use the frozen run with seed 20260707, and evaluation tables use their fixed protocols and evaluator configurations. GRPO uses AdamW with $\beta_1 = .9$, $\beta_2 = .999$, weight decay .01, a constant schedule without warmup, gradient clipping at 1.0, one PPO epoch, and clipping ratios .2/.2. Advantages are normalized by the group standard deviation, and token-mean loss aggregation is used. The actor and reference policies use FSDP in bf16 with parameter and optimizer offload, gradient checkpointing, SDPA attention, and a maximum of 24,576 tokens per GPU.

Item	Reproduced environment
Host	Ubuntu 20.04.5, Linux 5.4.250, x86-64
CPU / memory	2 × Intel Xeon Platinum 8336C, 1.8 TiB host-visible RAM
GPU / driver	8 × NVIDIA A100-SXM4 80GB, driver 535.129.03
CUDA	Toolkit 11.8 (V11.8.89)
RL stack	Python 3.12.13, PyTorch 2.10.0, Transformers 5.5.4, VERL 0.8.0.dev0, vLLM 0.19.1
SFT stack	Python 3.11.4, PyTorch 2.10.0, Transformers 5.2.0, DeepSpeed 0.18.8, Accelerate 1.11.0
Browser stack	Chromium 148.0.7729.0, Node.js 20.19.5, Playwright 1.55.0

Table 23: Hardware and software environment. RAM is the host-visible amount because the container quota is not recoverable from the archived runtime.

Render and interaction viewports are 1280×800 and 1280×900. The frozen WebGrader verifier requests DeepSeek-v4-flash with temperature 0 and thinking disabled. Its Stage 1, Stage 2 router, Stage 2 program, Stage 3 base, and Stage 3 residual limits are 4,096, 3,000, 12,000, 1,200, and 1,800 output tokens. The appearance model is GPT-5.4-mini with temperature 0 and a 512-token output limit. Unspecified API parameters, including top- p and seed, use

provider defaults and are not retrospectively inferred. For every completed rollout, the recorded scalar reward uses the same weighted sum as the main paper,

$$R(q, x) = 0.7 \cdot 5I(q, x) + 0.3A(x),$$

where $I(q, x) \in [0, 1]$ is the weighted functional score over determinate requirement-level flows and $A(x) \in [0, 5]$ is the frozen appearance score. No additional appearance gate or determinate-weight mask is applied.

Training Data, Component Parity, and Evaluator Comparability

The 100 WebGen-Verifier-100 queries, 600 SFT queries, and 600 RL queries were deliberately selected to be mutually disjoint at the requirement level. The 600 RL queries form a separately sampled set and do not reuse the 600-query SFT set. They are randomly sampled from the released WebGen-Instruct train split and never from the 101-instruction WebGen-Bench evaluation set. The WebGen-Bench construction process first removes a candidate training instruction when its 5-gram Jaccard similarity to any evaluation instruction exceeds 0.6, then removes semantic near-duplicates whose all-MiniLM-L6-v2 sentence-embedding cosine similarity exceeds 0.55 (Lu et al. 2025). The benchmark authors additionally inspect the three nearest remaining training instructions for every evaluation instruction. Our RL subset preserves this released train/evaluation separation without admitting any WebGen-Bench evaluation instruction.

All generated websites reported on WebGen-Bench, including outputs from controlled policies and external generators, are evaluated from scratch with one frozen GPT-5.4 pipeline. The GPT-5.4 evaluator version, appearance and UI-agent prompts, decoding settings, interaction limits, agent configuration, browser configuration, retry policy, and timeout policy are identical across generators. The exact prompt and configuration artifacts and their content hashes are retained with the evaluation records. No result in the comparison table is copied from an earlier evaluator version. WG-core-250 is likewise run through one fixed benchmark pipeline for every generator. Its deterministic browser cases and GPT-5.4 scoring configuration are unchanged across systems.

Component	Controlled RL variants
Initialization	Same Qwen3-8B SFT checkpoint-7
Training examples	Same 600 WebGen-Instruct train queries
Rollout budget	Same batches, group size, and 100 effective updates
Sampling	Same temperature, top- p , top- k , and token limits
Optimization	Same GRPO configuration, learning rate, and KL coefficient
Changed component	Reward construction only

Table 24: Component parity for GUI-RL, VLM+GUI-RL, VLM+Base-Script-RL, and WebGrader-RL.

Training-Time Verdict Audit and Aggregation Sensitivity

Through effective update 100, the reward pipeline launched 3,712 attempts and returned 3,553 complete results containing 12,124 flow verdicts. The raw Stage-3 output contains 2,159 INCONCLUSIVE verdicts. Post-hoc attribution identifies 1,784 of these as website-caused `target_not_reached` outcomes because the required control or behavior is absent. The reward semantics therefore count them deterministically as FAIL. The remaining 375 cases are evaluator-side uncertainty and are excluded from the weighted functional average.

Verdict	Raw	Raw %	Effective	Effective %
PASS	5,930	48.91	5,930	48.91
FAIL	4,035	33.28	5,819	48.00
INCONCLUSIVE	2,159	17.81	375	3.09

Table 25: Training-time flow verdicts before and after applying the reward’s site-side/evaluator-side attribution semantics.

As an offline sensitivity check, we recompute complete eight-sample groups after assigning zero functional credit to every remaining evaluator-side INCONCLUSIVE flow. This intentionally stricter aggregation changes the mean recorded reward by -0.0121 . Although at least one pairwise relation changes in 19.21% of groups, the selected top set changes in only 2.96%, and the identity of a unique top completion changes in 1.97%.

Sensitivity statistic	Count	Rate
Complete eight-sample groups	406	100.00%
Any pairwise relation changed	78	19.21%
Selected top set changed	12	2.96%
Unique top identity changed	8	1.97%

Table 26: Offline sensitivity to replacing the remaining evaluator-side INCONCLUSIVE outcomes with zero functional credit.

Execution and Model-Call Accounting

Training cost item	Value
Effective-update wall time	5.61 h
Wall time incl. resampling	6.13 h
Allocated GPU-hours	49.07
Effective-path GPU-hours	44.87
Reward jobs	3,712
Mean completed reward job	63.75 s
Build attempts	3,527
Mean Vite build	0.707 s
Render/probe executions	3,303
Interactive flows	12,124
Stage-2 cases	3,186
Mean Stage-2 case	37.54 s

Table 27: Checkpoint-100 training and browser workload. Stage-2 time includes verifier script generation. Paused idle time is excluded.

The 3,712 attempts include retries and resampling around 3,200 policy completions. Of these, 3,553 returned complete reward records. Tables 27 and 28 report the audited end-points. Paused idle time is excluded, and the API usage totals below are lower bounds when failed requests return no usage record.

Browser execution coverage.

Outcome	Count	Rate
Sampled completion	3,200	100.00%
Build success	2,937	91.78%
Build failure	263	8.22%
Render success	2,928	91.50%
Render failure	272	8.50%
Build success, render failure	9	0.28%

Table 28: Browser execution coverage over 3,200 sampled completions. The nine build-success/render-failure cases separate compilation from browser launch.

Model-call accounting.

Stage	Successful calls		
Appearance	3,037		
Stage 1 + repair	2,037		
Stage 2 router + generation	6,170		
Stage 3 base + residual	24,256		
Verifier subtotal	32,463		
All APIs	35,500		

Stage	Input	Output	Cached
Appearance	4,675,187	414,631	0
Stage 1	9,600,148	4,578,270	2,279,552
Stage 2	117,666,616	15,154,216	3,523,968
Stage 3	75,939,479	2,480,274	6,786,048
Verifier	203,206,243	22,212,760	12,589,568
All APIs	207,881,430	22,627,391	12,589,568

Table 29: Usage-bearing successful API requests through checkpoint 100. Requests that failed before returning usage may add a small amount, so these values are an auditable lower bound.

Complete Downstream Results

Complete WebGen-Bench Results

Method	VRR	AAS	Yes	Partial	No	FSR
Qwen3-8B base	90.10	1.51	70	53	524	14.92
WebGen SFT	62.38	2.19	166	103	378	33.62
GUI-RL	96.04	3.15	207	129	311	41.96
VLM+GUI-RL	100.00	3.43	210	132	305	42.66
VLM+Base-Script-RL	100.00	3.46	216	139	292	44.13
WebGrader-RL	100.00	3.48	256	161	230	52.01

Table 30: Complete initialization-matched results on WebGen-Bench. The base-script comparison preserves the VLM appearance reward while removing verifier evolution.

For VLM+Base-Script-RL, the AAS grade distribution over the 101 pages is 2/9/38/45/7 for grades 1/2/3/4/5. The

weighted total is 349, giving AAS $349/101 = 3.4554$. Its functional score is

$$\frac{216 + 0.5(139)}{647} = 44.1267\%.$$

Relative to this baseline, WebGrader-RL adds 40 YES and 22 PARTIAL outcomes, removes 62 No outcomes, and improves FSR by 7.88 points.

Functional Categories

Category	Base script	WebGrader	Gain
Content presentation	54.31	63.80	+9.49
User interaction	41.69	48.20	+6.51
Data management	41.88	46.61	+4.73
Functional testing	30.68	36.00	+5.32
Data display	55.11	61.60	+6.49
Design validation	66.80	82.00	+15.20

Table 31: Direct category-level attribution on WebGen-Bench (FSR, %).

Category	<i>n</i>	Yes	Partial	No
Content presentation	174	75	39	60
User interaction	313	102	57	154
Data management	160	51	32	77
Functional testing	339	78	52	209
Data display	186	75	55	56
Design validation	122	73	17	32

Table 32: VLM+Base-Script-RL category outcome counts. Categories overlap, so their sizes do not sum to 647.

External Model Context on WebGen-Bench

Generator	VRR	AAS	FSR
Claude Opus 4.8	100.00	3.96	68.20
GPT-5.5	90.10	3.78	62.44
Qwen3-Coder-480B	94.06	3.32	53.25
GPT-5.4-mini	89.11	3.27	52.32
WebGrader-RL (8B)	100.00	3.48	52.01
DeepSeek-v4-flash	93.07	2.95	47.91
o4-mini	89.11	2.49	40.65

Table 33: External generator context under the same GPT-5.4 WebGen-Bench pipeline.

WG-core-250 Composition and Scoring

WG-core-250 is a fixed 250-task subset of HTMLBench-400. It contains 50 applications, 55 UI components, 35 data-visualization pages, 35 content pages, 40 landing pages, and 35 portfolios. Every task contributes to the fixed denominator of 250. The HTMLBench Full score combines renderability (10), GPT-5.4 keyframe visual quality (20), functionality (55 for interactive tasks or 65 otherwise), interactivity (10 for interactive tasks or 0 otherwise), and code quality (5). TC% is the deterministic browser test-case pass rate.

Method	Score	TC%	Rend.	E2E
Qwen3-8B base	31.160	27.418	6.004	171
WebGen SFT	32.388	25.640	7.728	213
VLM+GUI-RL	37.746	29.345	8.385	205
GUI-RL	38.120	33.861	7.388	212
VLM+Base-Script-RL	38.372	33.525	7.492	210
o4-mini	39.068	31.668	8.648	229
Qwen3-Coder-480B	42.504	36.328	8.420	222
DeepSeek-v4-flash	43.684	36.103	9.016	242
WebGrader-RL	44.953	39.931	8.712	212
GPT-5.4-mini	49.636	42.277	9.656	250
Claude Opus 4.8	50.460	45.653	9.192	239
GPT-5.5	52.280	47.783	9.356	242

Table 34: WG-core-250 aggregate and rendering results. E2E reports rendered outputs out of 250, while aggregate scores retain the fixed denominator.

Method	Vis.	Func.	Inter.	Code
Qwen3-8B base	5.808	15.644	.968	2.736
WebGen SFT	5.540	14.540	1.184	3.396
VLM+GUI-RL	7.185	16.605	1.493	4.078
GUI-RL	6.928	19.088	1.324	3.392
VLM+Base-Script-RL	7.148	18.920	1.452	3.360
o4-mini	7.704	17.876	1.176	3.664
Qwen3-Coder-480B	8.556	20.332	1.648	3.548
DeepSeek-v4-flash	8.876	20.368	1.556	3.868
WebGrader-RL	8.170	22.509	1.561	4.000
GPT-5.4-mini	10.288	23.844	1.848	4.000
Claude Opus 4.8	10.044	25.680	1.720	3.824
GPT-5.5	10.316	26.868	1.868	3.872

Table 35: WG-core-250 visual, functional, interactive, and code components.

WebGrader-RL improves the matched VLM+Base-Script-RL policy by 6.581 points, the 8B base by 13.793, WebGen SFT by 12.565, GUI-RL by 6.833, and VLM+GUI-RL by 7.207. Against external generators, it exceeds o4-mini by 5.885, Qwen3-Coder-480B by 2.449, and DeepSeek-v4-flash by 1.269. Its functional component is 22.509, the strongest among the models below the top three proprietary references.

Paired Statistical Analysis

We complement the official aggregate metrics with paired query- and task-level tests. For WebGen-Bench, each of the 101 website queries is one resampling unit. Within a query, YES, PARTIAL, and No receive 1, .5, and 0 credit, respectively, and are averaged before taking the macro mean across queries. This query-macro statistic gives every website equal weight, whereas the official FSR in Table 30 is the micro average over 647 functional cases. Confidence intervals use 10,000 paired bootstrap resamples of queries. The two-sided paired permutation reference uses 10,000 random sign permutations, and the Wilcoxon test operates on the 101 paired query scores.

Query-macro statistic	Result	Paired inference
VLM+Base-Script-RL FSR	46.3%	
WebGrader-RL FSR	52.0%	
Difference	+5.7 pp	95% CI [+1.9, +9.5] pp
Permutation test		$p = .004$
Wilcoxon signed-rank		$p = .006$

Table 36: Paired query-level analysis on WebGen-Bench.

For WG-core-250, each benchmark task is one paired unit. The evaluator’s normalized task-level Full Score and per-task test-case ratio are averaged across the 250 tasks for this analysis. These task-macro diagnostic means are reported separately from the fixed-denominator aggregate Score and TC% in Table 34. Bootstrap confidence intervals use 10,000 paired resamples of tasks.

Task-macro metric	Base	WebGrader	Delta [95% CI]
Normalized Full Score	61.6%	72.8%	+11.2 pp [+6.0, +16.4]
Test-case ratio	71.3%	80.1%	+8.8 pp [+6.1, +11.6]

Table 37: Paired task-level analysis on WG-core-250. The Full Score difference has Wilcoxon $p < .001$.

For a binary browser-test reference, a task is correct when the evaluator returns a positive task-level browser-test outcome. The matched policies are jointly correct on 145 tasks and jointly incorrect on 49. WebGrader alone is correct on 43 tasks, compared with 13 for the base-script policy. The resulting exact two-sided McNemar test gives $p = 7.3 \times 10^{-5}$. The marginal counts are 158/250 for VLM+Base-Script-RL and 188/250 for WebGrader-RL.