



INTEGRATION PROTOCOL

Exely PMS Connect

Data exchange protocol between PMS and Exely

Protocol version: 1.18

pms@exely.com

Contents

Change history

Introduction

Structure of SOAP messages

Message processing result

Protocol policy

Types of limitations

Requirements for the protocol implementation

Message structure

Message headers

Message version

Data upload in periods

Limitations on calls and transferred changes

Initial data upload

Forced data upload

Processing of bookings

Booking confirmation

Error message upon booking creation

Room availability update

Booking modifications processing

Integration user guide

Integration certification

Messages of PMSCoconnect protocol

Receiving information about property

OTA_HotelAvailRQ

OTA_HotelAvailRS

Managing prices and room availability

OTA_HotelAvailNotifRQ

OTA_HotelAvailNotifRS

OTA_HotelRateAmountNotifRQ

OTA_HotelRateAmountNotifRS

Sending prices and restrictions to PMS

OTA_HotelRatePlanRQ

OTA_HotelRatePlanRS

OTA_HotelAvailGetRQ

OTA_HotelAvailGetRS

OTA_NotifReportRQ

OTA_NotifReportRS

Bookings processing

OTA_ReadRQ

OTA_ResRetrieveRS

OTA_NotifReportRQ

OTA_NotifReportRS

OTA_CancelRQ

OTA_CancelRS

Integration with Price Assist

OTA_HotelInvCountNotifRQ

OTA_HotelInvCountNotifRS

Booking delivery from PMS

OTA_HotelResNotifRQ

OTA_HotelResNotifRS

Integration with Exely Loyalty Program

OTA_ProfileCreateRQ

OTA_ProfileCreateRS

OTA_ProfileModifyRQ

OTA_ProfileModifyRS

Specifics of receiving data on different types
of loyalty programmes

PMSCoconnect Health Check

OTA_PingRQ

OTA_PingRS

Annex 1

Error and warning codes

Warnings when uploading availability and rates

Error and warning types

Developer tools

Fiddler

PMSCoconnect FAQ

General questions regarding data upload

Availability & Restrictions (OTA_HotelAvailNotif)

Rates (OTA_HotelRateAmountNotif)

Retrieve Reservations (OTA_ResRetrieveRS)

Certification

Test environment

Prepayment allocation in reservation



Change history

Document version	Date	Changelog
1.17	2024-03-11	1. Added RemoveMaxLOS and RemoveMinLOS to values of LengthOfStay@MinMaxMessageType attribute. 2. Added PaymentIndex attribute to GuaranteePayment section — payment ID in the booking. 3. CompanyName@CompanyShortName attribute is now used to deliver name of counterparty. If counterparty not delivered by channel, attribute is not delivered. 4. Added tax details to ResGlobalInfo/Total and Service/Total 5. Added "Booking delivery from PMS to Exely" section to developer's guide. 6. Added PMSConnect FAQ section to the developer's guide.
	2024-03-21	Attributes added to the AmountPercent section to calculate prepayments: AmountPercent@BasisType, AmountPercent@NmbrOfNights, AmountPercent@Percent
	2024-06-20	Added Customer@MailDistributionSubscribed attribute to OTA_HotelResNotifRQ message
	2025-09-16	Added comment PaymentSystemCode – payment system API code in ResGlobalInfo The structure of the documentation has been changed. Minor version 1.17.1 has been added. It is not necessary to specify it in requests. Added section "Sending prices and restrictions to PMS" Added and expanded section "Booking delivery from PMS" <u>The following messages have been moved to the section "Sending prices and restrictions to PMS"</u> OTA_HotelRatePlanRQ OTA_NotifReportRQ <u>Message added:</u> OTA_HotelAvailGetRQ – getting restrictions from Exely The channel list annex has been removed. The current channel list connected to the hotel can be requested via the OTA_HotelAvailRQ message. The full list is available on the website. The ResRetrieveRS message in HotelReservation now includes a ServiceRates block with detailed service prices for each day.
	03-02-2026	Added "PMSConnect Health Check" section and OTA_PingRQ method
1.18	2024-10-21	Added BookingChannel@Primary attribute to OTA_ResRetrieveRS BookingChannel element to transfer the primary booking channel and booking subchannel. For bookings with a subchannel, POS contains multiple Source elements: the primary channel with BookingChannel@Primary="true" and the subchannel with BookingChannel@Primary="false".
	2025-02-14	Added support for special combined accommodations with children. In OTA_ResRetrieveRS, GuestCount for child accommodations now includes AgeBucket that identifies the child age range.

	2026-06-08	Added support for new ServiceManagement service types: ServiceManagementHourly, ServiceManagementOneDay, ServiceManagementDaily. For ServiceManagement services in OTA_ResRetrieveRS, ServiceDetails/TimeSpan is formed separately, ServicePricingType is transferred as Per use, and ServiceDetails/TimeSpan@Increment specifies whether Duration is measured in days, hours, or minutes. In OTA_HotelAvailRS, Services/Service@Type can now contain separate ServiceManagement values: Hourly, OneDay, Daily. Added Prepayment allocation in reservation section.
	2026-08-07	Added a warning reference for OTA_HotelAvailNotifRQ and OTA_HotelRateAmountNotifRQ processing. Clarified which warnings indicate partial data application and which indicate that the corresponding request fragment was skipped completely.

Introduction

The document contains technical details of the interaction between the two systems: automated Property Management System (hereinafter PMS) and Exely services (hereinafter the Channel).

Login and password are required to interact with the Channel, as well as the hotel code managed by PMS.

The Channel services provide the following items for PMS management:

- availability blocks – the number of rooms of the hotel inventory available for sale:

o **actions available:** getting information about availability blocks existing in the Channel;

- room types:

o **actions available:** getting the list of room types existing in the Channel, managing room availability in the specified availability block;

- rate plans:

o **actions available:** getting the list of rate plans existing in the Channel, managing prices for accommodation in a given room type under the specified rate plan, managing restrictions for staying in a hotel in a given room type under the specified rate plan;

- extra services:

o **actions available:** getting the list of extra services existing in the Channel, managing extra service fees under specified rate plan;

- bookings:

o **actions available:** getting the list of new bookings, sending notifications of booking cancellations to the Channel from PMS.

Every item is identified by a special code. Item code is generated automatically when an item is created. It can be changed by the Channel administrators manually or automatically using the methods of Channel services.

Image 1 displays the general scheme of item relationships used by the Channel. Total room inventory of the hotel is divided into blocks. Each block has a unique ID number. Every rate plan in the Channel is linked to one of the availability blocks. The number of rooms in a given availability block is reduced when a room is booked under this rate plan. Every hotel has at least one availability block by default. The Availability block has points of sale where the information about rate plans related to the given availability block is displayed. According to the scheme, it is necessary to specify the following ID numbers when sending messages to the Channel services:

- setting room type availability—room type ID, availability block ID
- setting cost of stay for the room type—room type ID, rate plan ID
- setting restrictions for staying in a hotel—room type ID, rate plan ID
- setting extra service fee—extra service ID.

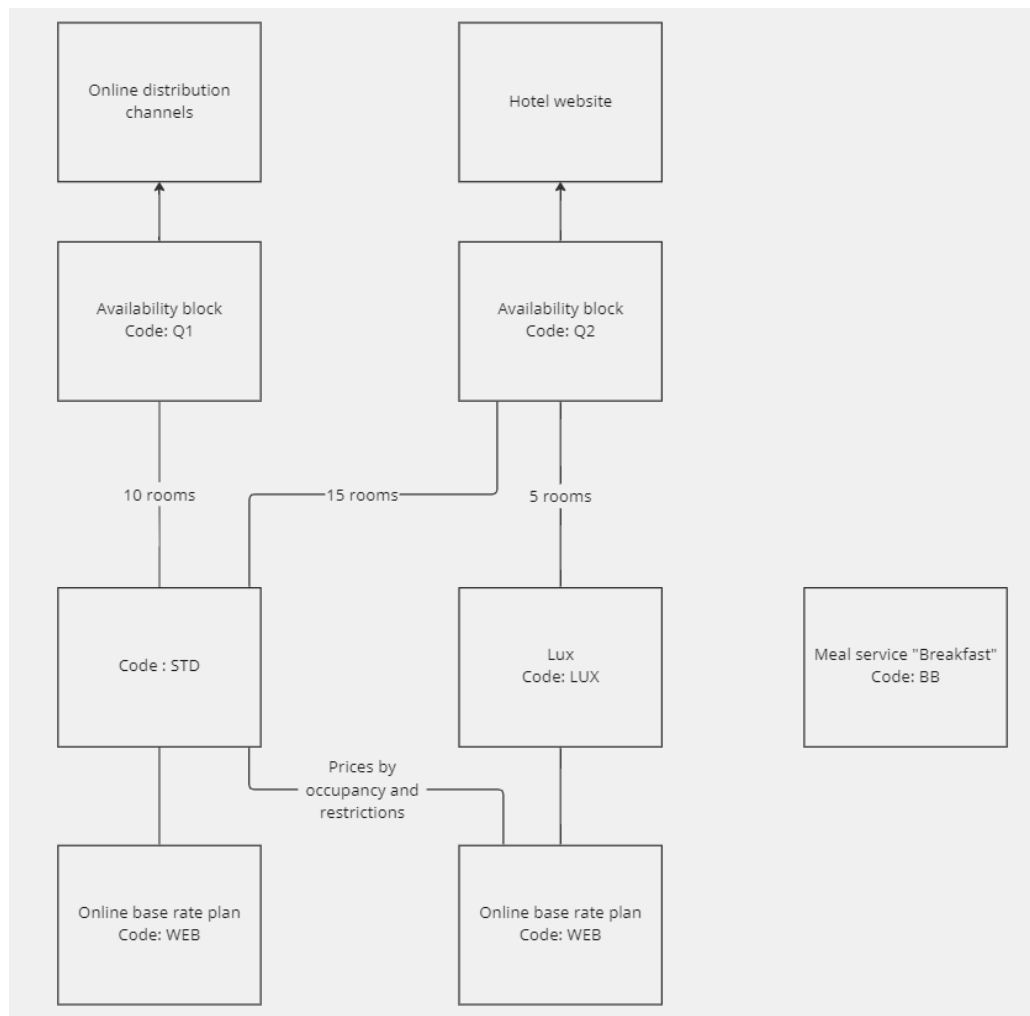


Image 1. Scheme of item relationships in the Channel.

Structure of SOAP messages

The Channel Service is based on specifications of the Open Travel Alliance (OTA), <http://www.opentravel.org>. All messages for interaction with the Channel are transferred using the SOAP protocol. Every message includes a SOAP Security header for the purpose of authorization and a SOAP body part that contains the OTA messages.

Login and password must be obtained from the Channel during the integration process. **Example of a valid SOAP message:**

```
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/">
  <soap:Header xmlns="https://www.hopenapi.com/Api/PMSConnect">
    <Security Username="USERNAME" Password="SECRET"/>
  </soap:Header>
  <soap:Body>
    <OTA_ReadRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18">
      <ReadRequests>
        <HotelReadRequest HotelCode="HOTEL1">
          <SelectionCriteria SelectionType="Undelivered"/>
        </HotelReadRequest>
      </ReadRequests>
    </OTA_ReadRQ>
  </soap:Body>
</soap:Envelope>
```

Message processing result

Response messages from the Channel include elements containing a result of the incoming message processing. Response contains `<Success/>` element and possibly several `<Warning/>` elements if the incoming message is processed correctly. This means that the Channel has received and correctly processed the message or its part. Response message contains `<Errors/>` element if an error occurred when processing the package. Elements `<Warning/>` and `<Error/>` contain codes and text descriptions of the errors which occurred when processing the package. Error and warning codes, types, and detailed processing rules are provided in Annex 1. The presence of `<Success/>` does not guarantee that every request element was applied. If `<Warnings>` are present, determine the result using the `Code` and `Tag` attributes, the `Warning` text, and the original request together. **Example of a response upon successful processing:**

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <OTA_ResRetrieverRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
      <Success/>
      <Warnings>
        <Warning Language="ENG" Type="12" Code="438" Tag="">
          Requested rate 1215 is not available
        </Warning>
      </Warnings>
    </OTA_ResRetrieverRS>
  </s:Body>
</s:Envelope>
```


Example of error message:

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <OTA_ResRetrieveRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
      <Errors>
        <Error Language="ENG" Type="4" Code="175" Tag="">Password invalid</Error>
      </Errors>
    </OTA_ResRetrieveRS>
  </s:Body>
</s:Envelope>
```

Protocol policy

The Channel limits the number of requests received from PMS per unit of time. The main recommendation for implementing integration with PMSConnect is that PMS must upload changed data only. For example, if room availability of STD room type changed for May 1, therefore the availability upload must be done using HotelAvailNotify method for this room type and for May 1 only. Our protocol policy is loyal. Limitations will never be applied if data is uploaded correctly. The exact numbers according to which we limit the incoming data are provided below.

Types of limitations

Limiting the total number of requests:

Limitation: PMSConnect processes a maximum of 650 requests per property per hour (requests with the same HotelCode).

Error code: -100

Error text: Total request count per hour limit exceeded by 650 calls

Limiting the total number of reservations:

Limitation: Maximum 30 requests from OTA_ReadRQ per hour.

Error code: -101

Error text: Total HotelReadReservationRQ request count per hour limit exceeded by 30 calls

Limiting the total number of changes:

PMSConnect processes a maximum of N changes per time period.
Changes considered:

- setting room type availability for a date;
- setting price for one accommodation type under any rate plan for a room type for a date;
- setting extra service fee for a date;
- setting restrictions for any rate plan for a room type for a date.

Depending on the time period, the following limitations can be applied:

1. PMSConnect processes the maximum of 1460 (1460) values per 1 second.

Error code: -102

Error text: Total count of changes by room category per second limit exceeded by 1460 calls

2. PMSConnect processes the maximum of 4380 (12 * 365) values per 3 minutes.

Error code: -103

Error text: Total count of changes by room category per 3 minutes limit exceeded by 4380 calls

3. PMSConnect processes the maximum of 13140 (36 * 365) values per hour.

Error code: -104

Error text: Total count of changes by room category per hour limit exceeded by 13140 calls

4. PMSConnect processes no more than 43800 (120 * 365) values per day.

Error code: -105

Error text: Total count of changes by room category per day limit exceeded by 43800 calls

How limitations work -----

When API methods that change room availability, prices and restrictions are called, the number of transferred changes for every room type is taken into account. When the above-mentioned values exceed, requests from PMS stop being processed until the number of changes meets the limitations. It is important to note that we still continue registering the incoming requests even after a limitation is actuated. In this case, requests can be blocked permanently. If the response to service method calls contains error codes -101, -102, -103, -104, -105, it means that PMS has exceeded the allowed limitations. In this case we recommend taking the following actions:

- determine the reason for the large number of requests to PMSConnect and set the parameters on the data upload from PMS;
- suspend requests and wait for a while till the restrictions are no longer in force;
- inform us about your issue; we can temporarily disable the limitations but please be ready to provide a well-grounded explanation for such a need.

We wish you luck for your success! We hope for our mutually beneficial cooperation!

Requirements for the protocol implementation

From our experience with various PMS, we have developed a number of requirements and recommendations concerning implementation of PMSCoconnect protocol that can make integration more secure and support-friendly. Please learn more below.

Message structure

Message headers

A SOAPAction header must be sent in each message.

Message	Header
OTA_HotelAvailNotifRQ	https://www.hopenapi.com/Api/PMSCoconnect/HotelAvailNotifRQ
OTA_HotelRateAmountNotifRQ	https://www.hopenapi.com/Api/PMSCoconnect/HotelRateAmountNotifRQ
OTA_ReadRQ	https://www.hopenapi.com/Api/PMSCoconnect/HotelReadReservationRQ
OTA_CancelRQ	https://www.hopenapi.com/Api/PMSCoconnect/CancelRQ
OTA_NotifReportRQ	https://www.hopenapi.com/Api/PMSCoconnect/NotifReportRQRequest
OTA_HotelAvailRQ	https://www.hopenapi.com/Api/PMSCoconnect/HotelAvailRQ
OTA_HotelInvCountNotifRQ	https://www.hopenapi.com/Api/PMSCoconnect/HotelInvCountNotifRQRequest
OTA_HotelResNotifRQ	https://www.hopenapi.com/Api/PMSCoconnect/HotelResNotifRQRequest
OTA_HotelRatePlanRQ	https://www.hopenapi.com/Api/PMSCoconnect/HotelRatePlanRQRequest
OTA_ProfileCreateRQ	https://www.hopenapi.com/Api/PMSCoconnect/ProfileCreateRQRequest
OTA_PingRQ	https://www.hopenapi.com/Api/PMSCoconnect/PingRQRequest

Message version

Every message has a Version attribute. Use the same Version attribute that corresponds to the same version of PMSCoconnect specification you are working with.

Data upload in periods

Upload messages of room availability, prices and restrictions allow setting the same values for a period of time and not only for one day.

Example: room type with STD code has 10 rooms available for January 1-3.

Example of an incorrect message:

```

<AvailStatusMessage BookingLimit="5">
  <StatusApplicationControl Start="2015-01-01" End="2015-01-01" InvTypeCode="STD" />
</AvailStatusMessage>
<AvailStatusMessage BookingLimit="5">
  <StatusApplicationControl Start="2015-01-02" End="2015-01-02" InvTypeCode="STD" />
</AvailStatusMessage>
<AvailStatusMessage BookingLimit="5">
  <StatusApplicationControl Start="2015-01-03" End="2015-01-03" InvTypeCode="STD" />
</AvailStatusMessage>

```

Example of correct message:

```

<AvailStatusMessage BookingLimit="5">
  <StatusApplicationControl Start="2015-01-01" End="2015-01-03" InvTypeCode="STD" />
</AvailStatusMessage>

```

This rule is applicable to all types of messages. For example, you can group invariable data and send it in one message if you upload prices under different rate plans/rooms.

Limitations on calls and transferred changes

We understand that it is easier to periodically upload all your available data to us, for example, to update information for one year ahead every 10 minutes. This causes unnecessary load on our servers and increases the traffic for the hotel. To stop hotels from using this simple method, we limit the number of possible calls and the number of transferred changes. We appreciate your patience. The relevant maximum limits are given in section [Protocol policy](#). Please follow the rules below to prevent us from blocking your messages:

- Send us variable data only. For example, if your hotel receives a booking of STD room type for January 1-5, then you only need to update availability of STD room type for January 1-5. No need to send us any other data.
- Keep the number of sent messages to a minimum. All messages can transfer multiple data elements. If you need to update rooms availability for one month ahead, please do it in one message instead of thirty messages.
- Consider error codes. If you receive limitations overrun codes, take a break before sending the next messages.
- Request bookings maximum once every 5-10 minutes. Basically, this is enough to avoid overbooking. We automatically register undelivered bookings and will not allow selling the same rooms twice.

Initial data upload

After you set access parameters of your hotel PMS to PMSConnect service, you will need to make the initial upload of data on prices, availability, and restrictions for one year ahead. We recommend that you do it manually, for example, by creating a Resync button in the PMS interface that allows a hotel to forcibly send data to us. Please repeat this operation when you have a new rate plan or room type. It makes no sense to write complex algorithms of automatic determination for a need of complete data upload as such a type of data upload is rarely used. **Please make the interface user-friendly which will allow doing it manually.**

Forced data upload

Occasionally, prices and the number of rooms available in PMS and Exely begin to differ. It can be caused by temporal loss of internet connection, integration errors, etc. This issue requires a rapid solution. In this case, the Resync button can also help to forcibly send data.

Processing of bookings

Booking confirmation

After a booking is saved in Exely, it can be delivered to PMS. This is done using OTA_ReadRQ message. Please request new bookings only. See the example of such a message below.

```
<OTA_ReadRQ Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <ReadRequests>
    <HotelReadRequest HotelCode="YOUR HOTEL CODE">
      <SelectionCriteria SelectionType="Undelivered" />
    </HotelReadRequest>
  </ReadRequests>
</OTA_ReadRQ>
```

In response, the service provides the list of bookings that are not yet processed. After the booking is created in PMS, please provide us with its number or the cancellation reason if the booking failed. After we receive your confirmation, we mark this booking as **processed in PMS** and send confirmation with the booking number to a hotel.

New bookings must be processed within 20 minutes. If you do not confirm processing of a new booking within this period of time, we mark it as **undelivered to PMS** and will notify the hotel that this booking must be processed manually.

Error message upon booking creation

If you fail to create a booking in your system, for example, there are no rooms available for sale, please specify the error reason in the message.

Example:

```
<OTA_NotifReportRQ Version="1.18">
  <Success/>
  <NotifDetails HotelCode=" YOUR HOTEL CODE ">
    <HotelNotifReport>
      <HotelReservations>
        <HotelReservation CreateDateTime="2015-01-01T09:17:28.653" LastModifyDateTime="2014-12-02T09:17:29.06" ResStatus="RequestDenied">
          <UniqueID Type="14" ID="20141226-3678-3388616"/>
          <ResGlobalInfo>
            <Comments>
              <Comment>
                <Text>No rooms of STD room type available for 01.01-03.03</Text>
              </Comment>
            </Comments>
          </ResGlobalInfo>
        </HotelReservation>
      </HotelReservations>
    </HotelNotifReport>
  </NotifDetails>
</OTA_NotifReportRQ>
```

This will help us explain the reason for undelivered bookings to a hotel and possibly reset the system to correct the error without contacting your customer support service.

Room availability update

After you send us confirmation of booking processing, update the availability of rooms booked for the dates of stay. Please follow the exact order:

- first, the booking confirmation;
- then availability update.

The order matters, as we consider the bookings which are not yet processed by you, dynamically reducing the number of rooms on sale. If you send us the reduced availability **BEFORE** the booking is confirmed, we will reduce it again. It explains why the booking must be confirmed first and then availability updated.

Booking modifications processing

In most cases, OTA and other booking websites allow guests to change any parameters of their bookings: dates of stay, room type, comments, etc. In such cases, you receive booking modifications in response to OTA_ReadRQ message.

Modifications do not differ structurally from the initial version of the booking. A booking and its modifications will have the same UniqueID. When you receive a booking with the number you already know, you will see that it is a modification of this booking.

The way of making modifications in PMS is totally up to you. You can cancel the old booking and create a new one, or apply differences between the initial version of a booking and its modification only. You can also try to link RoomStay from modification to the old booking version. One and the same room will have the same IndexNumber in the booking and its modifications, but in fact it is more common to receive new IndexNumber values for each modification.

The most important thing for us is to receive a confirmation from you that the modification is processed, or you could not process it and returned the error to us.

Integration user guide

After testing or prior to starting it, please create an “**Integration user guide**” for integration of your PMS and Exely. This guide is expected to describe how to set the integration and keep it operational for as long as it is needed. You will not be asked to disclose any secrets of implementation, methods of optimization, or other information you may want to keep to yourself. The main objective of this document is to minimize hotels' requests addressed towards the Exely customer support service and help Exely customer support service assist the hotels in restoring integration operability without contacting PMS. We recommend that you include the following sections in the Guide:

- Setting access to Exely service
- Setting compliance codes of room types, rate plans and extra services
- Initial data upload
- Forced data upload
- Integration status monitoring
- Most common issues of integration and ways to fix them
- PMS developer's contacts.

Integration certification

After PMSConnect protocol is implemented, testing of the implemented functionality is done by the two teams. This procedure is a must-have. Its main objective is to make sure that the implemented functionality meets the requirements of PMS, a hotel, and Exely. Integration process can be launched only after testing is completed successfully.

During the testing process, you communicate online with our specialist and perform certain actions together with us. Before the testing is done, we will provide a detailed plan according to which the integration will be tested. We test if all the above-mentioned requirements are met. Specialists of your company and Exely will agree on a date and time of making the testing.

We always try to check all the functionality that you have implemented. The list of items of the test plan that is used in the integration testing process is provided below. The detailed test plan is provided upon PMS request:

- availability upload for a long period of time - checking the correctness of rooms merging; there should be no unnecessary messages or room availability should not be fragmented;
- availability upload for one given day - no extra dates should be added to the upload;
- prices upload by room types for a long period of time, all supported accommodation types - checking the correctness of merging periods and accommodations;
- prices upload by room types for one given day, all supported accommodation types
- requests of undelivered bookings once every 5 minutes, should be performed automatically;
- booking for 1 room, 1 guest, 1 night from the booking engine. Checking the correctness of the display in the control system;
- booking cancellation from the booking engine;
- a compound booking for several rooms and nights from the booking engine, with partially-filled guest data. Checking PMS confirmation and the correctness of guests' display;
- booking cancellation in PMS
- channel booking
- channel booking modification, extending the period of stay
- channel booking modification, shortening the period of stay
- channel booking modification, adding guests and rooms
- booking cancellation from the channel
- "package" booking in one message (several bookings)
- making a reservation with overbooking. PMS must return readable error and confirm that booking is received
- reservation made for ApiKey non-existent in PMS. PMS must return a readable error and confirm that booking is received
- After a booking is confirmed, modified, or cancelled, PMS should sync changed availability.
- The booking shall contain the maximum information synced. Guests' accommodation is checked. Guests' comments should not be lost.

It is better to consider prices provided in the booking and not those which were set in the rate plan in PMS. As distribution channels often send bookings with prices different from the prices in the Exely account.

If the testing reveals non-compliance to requirements or any other issues that may be critical for work of clients with the integration and it requires additional work from the PMS provider, we will send you a list of required settings in the written form and schedule retesting over time. We hope for your understanding that we can not test integration every day or several times a day. Testing is usually performed no more than once a week.

After the testing is successfully completed, we send information about the new integration to the Marketing department, which will post the name and description of your PMS in "Partners" section of the Exely website.

Messages of PMSConnect protocol

Receiving information about property

The following messages can be used to generate and receive information about room types and rate plans:

- OTA_HotelAvailRQ
- OTA_HotelAvailRS

Using these messages will allow you to implement functionality:

- receiving the list of room types, accommodation types, rate plans, payment systems, companies' profiles from the Channel (messages OTA_HotelAvailRQ, OTA_HotelAvailRS)

OTA_HotelAvailRQ

OTA_HotelAvailRQ message is used to receive the list of room types, accommodation types, rate plans, payment systems, companies' profiles from the Channel.

Example of such a message:

```
<OTA_HotelAvailRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" Timestamp="2012-02-01T07:19:28+03:00">
  <AvailRequestSegments>
    <AvailRequestSegment>
      <HotelSearchCriteria>
        <Criterion>
          <HotelRef HotelCode="HOTEL1"/>
        </Criterion>
      </HotelSearchCriteria>
    </AvailRequestSegment>
  </AvailRequestSegments>
</OTA_HotelAvailRQ>
```

Description of structural elements in the message

Element	Minimum number of elements required in message	Description/ Value
OTA_HotelAvailRQ	1	Root element
OTA_HotelAvailRQ/@Version	1	Latest version of protocol must be used. See Revision history section.
OTA_HotelAvailRQ/@Timestamp	1	Time of the request in format xml schema dateTime.

OTA_HotelAvailRQ/AvailRequestSegments/AvailRequestSegment	1	Request criteria container
AvailRequestSegment/HotelSearchCriteria/Criterion/HotelRef	1	Identifier of the hotel for which data is requested
HotelRef@HotelCode	1	Code of the hotel for which data is requested.

OTA_HotelAvailRS

The request made with OTA_HotelAvailRQ message is responded by the Channel with the response message OTA_HotelAvailRS.

Guarantee element returns the connected payment systems that may come with the booking. They are described in more detail in “Types of guarantee and reservation payment methods”.

Example of such a message:

```

<OTA_HotelAvailRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05" TimeStamp="2012-02-01T07:19:28+03:00">
  <RoomStays>
    <RoomStay>
      <RoomTypes>
        <RoomType RoomTypeCode="289777" RoomType="STD">
          <RoomDescription Name="Single Room">
            <Text>Single Room description</Text>
          </RoomDescription>
          <Occupancy MinOccupancy="1" MaxOccupancy="2"/>
          <Occupancy MinAge="0" MaxAge="6" AgeBucket="0"/>
          <Occupancy MinAge="6" MaxAge="12" AgeBucket="1"/>
          <Amenities>
            <Amenity RoomAmenity="91" Quantity="1">Rollaway bed</Amenity>
          </Amenities>
        </RoomType>
      </RoomTypes>
      <RatePlans>
        <RatePlan RatePlanCode="329" PriceUploadIsAllowed="false" InvBlockCode="">
          <RatePlanDescription Name="Best Available Rate">
            <Text>Best Available Rate description</Text>
          </RatePlanDescription>
        </RatePlan>
      </RatePlans>
      <Guarantee>
        <Comments>
          <Comment Name="PaymentSystemName">
            <Text>INTERNET_BANKING</Text>
          </Comment>
          <Comment Name="PaymentSystemTitle">
            <Text>Internet Banking</Text>
          </Comment>
          <Comment Name="PaymentSystemCode">
            <Text>12345</Text>
          </Comment>
        </Comments>
      </Guarantee>
      <Guarantee>
        <Comments>
          <Comment Name="PaymentSystemName">
            <Text>AT_ARRIVAL</Text>
          </Comment>
          <Comment Name="PaymentSystemTitle">
            <Text>Payment at check-in</Text>
          </Comment>
          <Comment Name="PaymentSystemCode">
            <Text>12345</Text>
          </Comment>
        </Comments>
      </Guarantee>
      <Guarantee>
        <Comments>
          <Comment Name="PaymentSystemName">
            <Text>CM_PAY_ON_ARRIVAL</Text>
          </Comment>
          <Comment Name="PaymentSystemTitle">
            <Text>Payment at check-in</Text>
          </Comment>
          <Comment Name="PaymentSystemCode">
            <Text>12345</Text>
          </Comment>
        </Comments>
      </Guarantee>
    </RoomStay>
  </RoomStays>
</OTA_HotelAvailRS>

```

```

        </Comment>
    </Comments>
</Guarantee>
<Guarantee>
    <Comments>
        <Comment Name="PaymentSystemName">
            <Text>CM_CREDITCARD</Text>
        </Comment>
        <Comment Name="PaymentSystemTitle">
            <Text>Bank card</Text>
        </Comment>
        <Comment Name="PaymentSystemCode">
            <Text>12345</Text>
        </Comment>
    </Comments>
</Guarantee>
</RoomStay>
</RoomStays>
<Services>
    <Service ServicePricingType="Per use" ServiceInventoryCode="228" Type="Common" ID="5191">
        <ServiceDetails>
            <Comments>
                <Comment Name="ServiceName">
                    <Text>Transfer</Text>
                </Comment>
                <Comment Name="ServiceDescription">
                    <Text>Transfer to the hotel</Text>
                </Comment>
            </Comments>
        </ServiceDetails>
    </Service>
</Services>
<Profiles>
    <ProfileInfo>
        <Profile ProfileType="4">
            <CompanyInfo>
                <CompanyName CompanyShortName="Travel agent LLC" Code="130141" CodeContext="PMSConnect">
                    Travel agent
                </CompanyName>
            </CompanyInfo>
        </Profile>
    </ProfileInfo>
</Profiles>
<Success/>
</OTA_HotelAvailRS>

```

Description of structural elements in the message

Element	Minimum number of elements required in message	Description / Value
OTA_HotelAvailRS/@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_HotelAvailRS/@Timestamp	1	Time of the request in format xml schema dateTime.
OTA_HotelAvailRS/@EchoToken	1	

OTA_HotelAvailRS/Success	0..1	This element or Success or Errors element must be present if processing is successful.
OTA_HotelAvailRS/Errors	0..1	Contains the list of errors indicating request processing failure.
Errors/Error	1..n	Element is required if Errors is present.
Error@Type	1	Error type according to Error Warning Type (EWT) section in the OTA table of codes.
Error@Code	0..1	Error type according to Error Codes (ERR) section in OTA table of codes.
OTA_HotelAvailRS/RoomStays	0..1	Set of RoomStay elements.
RoomStays/RoomStay	1..n	Lists of room types and rate plans container.
RoomStay/RoomTypes	1	Lists of room types container.
RoomTypes/RoomType	1..n	Room type details.
RoomType@RoomTypeCode	1	Room type code.
RoomType/RoomDescription	1	Room type description.
RoomDescription@Name	1	Room type name.
RoomDescription/Text	0..1	Additional description of room type.
RoomType/Amenities	0..1	Specifies amenities in hotel rooms.
Amenities/Amenity	1..n	Amenities in room
Amenity@RoomAmenity	1	Category of amenities
Amenity@Quantity	1	Number of amenities
RoomType/Occupancy	1..5	Types of accommodation.
Occupancy@MinOccupancy	0..1	Minimum number of adult guests with main occupancy. If MinOccupancy element is present, MaxOccupancy is required.
Occupancy@MaxOccupancy	0..1	Maximum number of adult guests with main occupancy. This element is required if MinOccupancy is present.
Occupancy@MinAge	0..1	The lower age limit for child accommodation with main occupancy. If MinAge element is present, MaxAge and AgeBucket elements are required. Pairs of elements (MinOccupancy, MaxOccupancy) and (MinAge, MaxAge) can not be specified together at the same time.
Occupancy@MaxAge	0..1	The upper age limit for child accommodation with main occupancy. The element is required If MinAge element is present.
Occupancy@AgeBucket	0..1	Child age range ordinal index. This element is required, if element MinAge is present.

RoomStay/RatePlans	1	Rate plans list container
RoomStay/RatePlans/RatePlan	1..n	Rate plan details.
RatePlan@RatePlanCode	1	Rate plan code.
RatePlan@PriceUploadIsAllowed	0..1	Possibility to set actual prices for given rate plan-true. (false -for derived rate plan or RateMix, SmartRate, SpecialOffer)
RatePlan/RatePlanDescription	1	Rate plan description.
RatePlanDescription@Name	1	Rate plan name.
RatePlanDescription/Text	0..1	Rate plan additional description
Guarantee	0..n	List of connected payment systems
Guarantee/Comments	0..1	Detailed payment system parameters
Comments/Comment	2	Payment system parameter info
Comment@Name	1	Payment system parameter type. It can have the following values: PaymentSystemName – payment system code; PaymentSystemTitle – payment system name; PaymentSystemCode – api code of the payment system.
Comment/Text	1	Payment system parameter value specified in attribute Name
OTA_HotelAvailRS /Profiles	1	Block with distribution channels
Profiles/ProfileInfo	0..1	Collection of distribution channels
ProfileInfo/Profile	0..1	Distribution channel
Profile@ProfileType	1	Distribution channel field type. It accepts values: 4 – travel agent, 10 – OTA distribution channel, 12 – booking engine.
Profile/CompanyInfo	0..1	Information about company related to distribution channel
CompanyInfo/CompanyName	0..1	Information about company
CompanyName@CompanyShortName	1	Counterparty name, if delivered by the channel
CompanyName@Code	1	Code of company
OTA_HotelAvailRS /Services	1	Extra services block
Services/Service	0..1	Extra service

Service@ServicePricingType	0..1	The payment type field for the service. Can take values: Service payment type field. It can have values: Per stay – for each bed. Per person – for each guest. Per night – for each night. Per person per night – for each guest per night. Per use – for each use. Per occupancy per night – for each accommodation type per night. (same as Per person per night)
Service@ServiceInventoryCode	0..1	Rate plan description.
Services@Type	1	Service type. It can have values: Common - common service, Meal - meal, Hourly - hourly ServiceManagement service, OneDay - one-day ServiceManagement service, Daily - daily ServiceManagement service. Values Hourly, OneDay, and Daily are transferred starting from PMSCoconnect 1.18. In PMSCoconnect 1.17 and earlier, ServiceManagement services are transferred as Common.
Service@ID	1	Service ID in Exely
Service/ServiceDetails	1	Block with extra service details
ServiceDetails/Comments	1	Comments to extra service
Comments/Comment	2	Specific comment. 2 comments with Name and Description of extra service are sent by default.
Comment@Name	1	Comment name. It can have default values: ServiceName – name of extra service ServiceDescription – description of extra service
Comment/Text	1	Text of comment

Managing prices and room availability

To upload room availability, prices, and restrictions to Channel, the following messages can be used:

- OTA_HotelAvailNotifRQ
- OTA_HotelAvailNotifRS
- OTA_HotelRateAmountNotifRQ
- OTA_HotelRateAmountNotifRS

These messages implement the following functionality:

- change availability of room types under rate plans (messages OTA_HotelAvailNotifRQ, OTA_HotelAvailNotifRS);
- open/close sales (messages OTA_HotelAvailNotifRQ, OTA_HotelAvailNotifRS);
- set restrictions on length of stay (messages OTA_HotelAvailNotifRQ, OTA_HotelAvailNotifRS);
- change cost of stay and description of room type under rate plan (messages OTA_HotelRateAmountNotifRQ, OTA_HotelRateAmountNotifRS).

It is possible to change data for several room types/rate plans at the same time in each message.

OTA_HotelAvailNotifRQ

OTA_HotelAvailNotifRQ message is sent from PMS to the Channel to update availability of room types under rate plans, opened/closed sales, and set minimum length of stay.

Example of such a message:

```
<OTA_HotelAvailNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-01-01T12:11:01+03:00">
  <AvailStatusMessages HotelCode="HOTEL1">
    <AvailStatusMessage>
      <StatusApplicationControl Start="2013-01-01" End="2013-01-07" InvTypeCode="1215" InvBlockCode="4765"
Mon="0" Tue="0" Weds="0" Thur="0" Fri="1" Sat="1" Sun="1"/>
      <!-- Content missing -->
    </AvailStatusMessage>
    <AvailStatusMessage>
      <StatusApplicationControl Start="2013-01-01" End="2013-01-07" InvTypeCode="1215" InvBlockCode="4767"
Mon="0" Tue="0" Weds="0" Thur="0" Fri="1" Sat="1" Sun="1"/>
      <!-- Content missing -->
    </AvailStatusMessage>
    <AvailStatusMessage>
      <StatusApplicationControl Start="2013-01-01" End="2013-01-07" InvTypeCode="1215" InvBlockCode="4767"
Mon="0" Tue="0" Weds="0" Thur="0" Fri="1" Sat="1" Sun="1"/>
      <!-- Content missing -->
    </AvailStatusMessage>
  </AvailStatusMessages>
</OTA_HotelAvailNotifRQ>
```

OTA_HotelAvailNotifRQ message contains the single AvailStatusMessages element. This element has HotelCode attribute that indicates the hotel code to which the changes will be applied.

Hotel code values should be received from the Channel during integration.

Child elements of AvailStatusMessages node are AvailStatusMessage nodes. AvailStatusMessage nodes are used to set values for room availability, opened/closed sales, and minimum length of stay. Nodes can be used either in conjunction or separately in one message. For example, minimum length of stay and room availability can be set in one message. Every AvailStatusMessage element contains child node StatusApplicationControl. This node is used for indication of the rate plan code (attribute RatePlanCode), room types (attribute InvTypeCode) and dates (attributes Start, End; Mon, Tue, Weds, Thur, Fri, Sat, Sun) to which the changes should be applied.

Start and End attributes set the date ranges to apply the changes. It is possible to specify the days of week in the given range to which the changes should be applied by using Mon, Tue, Weds, Thur, Fri, Sat, Sun attributes.

Description of structural elements in a message

Element	Minimum number of elements required in message	Description/ Value

OTA_HotelAvailNotifRQ	1	Root node.
OTA_HotelAvailNotifRQ@TimeStamp	1	Required attribute. Transaction time in dateTime XML schema format.
OTA_HotelAvailNotifRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
AvailStatusMessages	1	AvailStatusMessage elements collection.
AvailStatusMessages@HotelCode	1	Required attribute. Accommodation property code (hotel code).
AvailStatusMessage	1..n	Instance of AvailStatusMessage element that contains data about changes in room type. Individual element AvailStatusMessage is required for every room type.
AvailStatusMessage@BookingLimit	0..1	Number of rooms available.
StatusApplicationControl	1	Required attribute. Detailed information about room availability.
StatusApplicationControl@Start	1	Required attribute. Start date from which the changes in room availability are applied.
StatusApplicationControl@End	1	Required attribute. End date till which changes in room availability are applied.
StatusApplicationControl@RatePlanCode	0..1	Code of rate plan for which room availability values are changed. Attributes InvBlockCode and RatePlanCode can not be specified simultaneously.
StatusApplicationControl@InvBlockCode	0..1	Code of availability block for which values of room availability are changed. Attributes InvBlockCode and RatePlanCode can not be specified simultaneously.
StatusApplicationControl@InvTypeCode	1	Code of the room type under the rate plan for which room availability values are changed.

StatusApplicationControl@ Mon, Tue, Weds, Thur, Fri, Sat, Sun	0..1	“0” or “1”. Optional attributes. If not specified, then value “1” is taken for all attributes by default. Codes of weekdays are used to indicate the days of week for which the changes must be applied. For example, if “1” is set for Mon, Tue and Weds and “0” is set for the other weekdays, then availability changes will only be applied for Monday, Tuesday and Wednesday. Note: if at least one weekday is specified, the other days must also be specified in the message. Either all weekdays are specified with values or days are not specified at all.
LengthsOfStay@ArrivalDateBased	0..1	Attribute is used together with MinMaxMessageType to set MinLOSArrival and MaxLOSArrival restrictions.
LengthsOfStay/LengthOfStay	0..1	Optional element.
LengthOfStay@MinMaxMessageType	1	Attribute required if LengthsOfStay element is present. It can have “SetMinLOS” or “SetMaxLOS” values. It sets the minimum (SetMinLOS) or the maximum (SetMaxLOS) number of days of stay. "RemoveMaxLOS" – remove the specified value of MaxLOS restriction; "RemoveMinLOS" – remove the specified value of MinLOS.
LengthOfStay@Time	1	Attribute required if LengthsOfStay element is present. It sets the number of days of stay.
RestrictionStatus@Status	0..1	“Open” or “Close” value.
RestrictionStatus@Restriction	0..1	Arrival or Departure value. If Arrival is specified, Status value is applicable to the arrival date restriction (CTA – Closed to Arrival). If Departure is specified, Status value is applicable to the departure date restriction (CTA – Closed to Departure). If the parameter is missing, Status value indicates if dates of stay are closed/opened (StopSell).

RestrictionStatus@MinAdvancedBookingOffset	0..1	Minimum possible number of days between the booking date and the arrival date. Value of attribute "-1" cancels the previously set restriction.
RestrictionStatus@MaxAdvancedBookingOffset	0..1	Maximum possible number of days between the booking date and the arrival date. Value of attribute "-1" cancels the previously set restriction.

Examples of messages

Changing room availability

```
<OTA_HotelAvailNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" Timestamp="2012-01-01T12:11:01+03:00">
  <AvailStatusMessages HotelCode="HOTEL1">
    <AvailStatusMessage BookingLimit="5">
      <StatusApplicationControl Start="2013-01-01" End="2013-01-07" InvTypeCode="STD" RatePlanCode="WEB" />
    </AvailStatusMessage>
  </AvailStatusMessages>
</OTA_HotelAvailNotifRQ>
```

In this example, BookingLimit attribute sets 5 rooms of "STD" room type for sale under "WEB" rate plan for the dates range 2013-01-01 to 2013-01-07.

Changing minimum length of stay

```
<OTA_HotelAvailNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" Timestamp="2012-01-01T12:11:01+03:00">
  <AvailStatusMessages HotelCode="HOTEL1">
    <AvailStatusMessage>
      <StatusApplicationControl Start="2013-01-01" End="2013-01-07" InvTypeCode="STD" RatePlanCode="WEB"/>
      <LengthsOfStay>
        <LengthOfStay MinMaxMessageType="SetMinLOS" Time="3"/>
      </LengthsOfStay>
    </AvailStatusMessage>
  </AvailStatusMessages>
</OTA_HotelAvailNotifRQ>
```

In this example, a restriction on minimum length of stay equal to 3 nights is set. Elements "LengthsOfStay" are used with element "LengthOfStay" and attributes "MinMaxMessageType" nested to specify type of restriction and "Time" identifying number of days.

Open/close sales

```

<OTA_HotelAvailNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-01-01T12:11:01+03:00">
  <AvailStatusMessages HotelCode="HOTEL1">
    <AvailStatusMessage>
      <StatusApplicationControl Start="2013-01-01" End="2013-01-07" InvTypeCode="STD" RatePlanCode="WEB"/>
      <RestrictionStatus Status="Close"/>
    </AvailStatusMessage>
  </AvailStatusMessages>
</OTA_HotelAvailNotifRQ>

```

In this example, “RestrictionStatus” element and “Status” attribute with value “Close” are used to close sales for the dates specified in “StatusApplicationControl” element.

Several simultaneous actions included in one message

```

<OTA_HotelAvailNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-01-01T12:11:01+03:00">
  <AvailStatusMessages HotelCode="HOTEL1">
    <AvailStatusMessage BookingLimit="5">
      <StatusApplicationControl Start="2013-01-01" End="2013-01-07" InvTypeCode="STD" RatePlanCode="WEB"/>
      <RestrictionStatus Status="Open"/>
      <LengthsOfStay>
        <LengthOfStay MinMaxMessageType="SetMinLOS" Time="2"/>
      </LengthsOfStay>
    </AvailStatusMessage>
  </AvailStatusMessages>
</OTA_HotelAvailNotifRQ>

```

In this example, several actions are performed simultaneously: changing room availability, opening sales, and changing minimum length of stay.

OTA_HotelAvailNotifRS

The Channel returns OTA_HotelAvailNotifRS message in response to request with OTA_HotelAvailNotifRQ message. OTA_HotelAvailNotifRS message contains information about successful or unsuccessful processing of the request made by OTA_HotelAvailNotifRQ message.

Partial-processing rules and the warning reference are provided in Annex 1.

Examples of such messages:

Successful processing

```

<OTA_HotelAvailNotifRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-05-12T04:01:43+03:00">
  <Success/>
</OTA_HotelAvailNotifRS>

```

Unsuccessful processing

```
<OTA_HotelAvailNotifRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-05-12T04:01:43+03:00">
  <Errors>
    <Error Type="13" Code="15">Invalid date</Error>
  </Errors>
</OTA_HotelAvailNotifRS>
```

OTA_HotelRateAmountNotifRQ

OTA_HotelRateAmountNotifRQ message is used to update rate plans for one or several room types or extra services.

Example of such a message:

```

<OTA_HotelRateAmountNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-02-01T07:19:28+03:00">
  <RateAmountMessages HotelCode="HOTEL1">
    <RateAmountMessage>
      <StatusApplicationControl InvTypeCode="STD" RatePlanCode="WEB"/>
      <Rates>
        <Rate Start="2012-02-01" End="2012-03-31">
          <BaseByGuestAmts>
            <BaseByGuestAmt AmountAfterTax="38" NumberOfGuests="1" CurrencyCode="EUR"/>
          </BaseByGuestAmts>
        </Rate>
      </Rates>
    </RateAmountMessage>
    <RateAmountMessage>
      <StatusApplicationControl InvTypeCode="STD" RatePlanCode="WEB"/>
      <Rates>
        <Rate Start="2012-04-01" End="2012-04-30">
          <BaseByGuestAmts>
            <BaseByGuestAmt AmountAfterTax="41" NumberOfGuests="1" CurrencyCode="EUR"/>
          </BaseByGuestAmts>
        </Rate>
      </Rates>
    </RateAmountMessage>
    <RateAmountMessage>
      <StatusApplicationControl InvTypeCode="DBL" RatePlanCode="WEB"/>
      <Rates>
        <Rate Start="2012-02-01" End="2012-03-31">
          <BaseByGuestAmts>
            <BaseByGuestAmt AmountAfterTax="50" NumberOfGuests="1" CurrencyCode="EUR"/>
            <BaseByGuestAmt AmountAfterTax="81" NumberOfGuests="2" CurrencyCode="EUR"/>
          </BaseByGuestAmts>
          <AdditionalGuestAmounts>
            <AdditionalGuestAmount AmountAfterTax="50" CurrencyCode="EUR"/>
            <AdditionalGuestAmount AmountAfterTax="70" AgeQualifyingCode="8" AgeBucket="0"
CurrencyCode="EUR"/>
            <AdditionalGuestAmount AmountAfterTax="81" MinAge="7" MaxAge="12" CurrencyCode="EUR"/>
          </AdditionalGuestAmounts>
          <RateDescription>
            <Text/>
          </RateDescription>
        </Rate>
      </Rates>
    </RateAmountMessage>
    <RateAmountMessage>
      <StatusApplicationControl InvTypeCode="STD" RatePlanCode="WEB"/>
      <Rates>
        <Rate Start="2012-04-01" End="2012-04-30">
          <BaseByGuestAmts>
            <BaseByGuestAmt AmountAfterTax="41" CurrencyCode="EUR"/>
          </BaseByGuestAmts>
        </Rate>
      </Rates>
    </RateAmountMessage>
  </RateAmountMessages>
</OTA_HotelRateAmountNotifRQ>

```

OTA_HotelRateAmountNotifRQ message contains only one element - RateAmountMessages. This element has HotelCode attribute that indicates the code of the hotel for which the changes will be applied.

Hotel code values must be received from the Channel during integration.

Child elements of RateAmountMessages node are RateAmountMessage nodes. RateAmountMessage nodes are used to set values of rate plans. Every RateAmountMessage element contains child node StatusApplicationControl. This node is used to indicate the code of room type/rooms/extra services (InvTypeCode attribute), code of rate plan (attribute RatePlanCode), and type of element (attribute IsRoom). Room type code is a required attribute while code of rate plan is optional.

RateAmountMessage element contains a single Rates node which in its turn contains a collection of Rate elements (one or more elements). Rate element is used to indicate dates for which the changes must be applied. Start and End attributes are used to set date ranges for the changes while Mon, Tue, Weds, Thur, Fri, Sat, Sun attributes are used to indicate which weekdays must be changed in the given date range.

Specifics of managing rate plans with pricing per bed in a room.

In Exely there is a specific type of rate plan in which the prices per bed in a room are specified. This rate plan allows guests to book one room under different rate plans. This option is highly popular among resorts.

This type of rate plan allows setting different prices for the first and the following guests on extra beds. In order to transfer the value of the price for the first guest on extra bed, it needs to transfer the value of MaxAdditionalGuests attribute="1" to AdditionalGuestAmount element. In order to transfer the value of the price for the second and following guests on extra beds, it needs to transfer the value of MaxAdditionalGuests attribute="[number of guests]". The price value in AmountAfterTax attribute must be equal to the cost of stay for all the guests on extra beds.

Example of request for setting prices in rate plan with pricing per bed in a room:

```
<RateAmountMessage>
  <StatusApplicationControl InvTypeCode="DBL" RatePlanCode="WEB"/>
  <Rates>
    <Rate Start="2012-02-01" End="2012-03-31">
      <BaseByGuestAmts>
        <BaseByGuestAmt AmountAfterTax="50" NumberOfGuests="1" CurrencyCode="EUR"/>
        <BaseByGuestAmt AmountAfterTax="75" NumberOfGuests="2" CurrencyCode="EUR"/>
        <BaseByGuestAmt AmountAfterTax="19" MinAge="7" MaxAge="12" CurrencyCode="EUR"/>
      </BaseByGuestAmts>
      <AdditionalGuestAmounts>
        <AdditionalGuestAmount AmountAfterTax="0.00" MaxAdditionalGuests="1" MinAge="7" MaxAge="12"
CurrencyCode="EUR"/>
        <AdditionalGuestAmount AmountAfterTax="5" MaxAdditionalGuests="2" MinAge="7" MaxAge="12"
CurrencyCode="EUR"/>
        <AdditionalGuestAmount AmountAfterTax="7.50" MaxAdditionalGuests="3" MinAge="7" MaxAge="12"
CurrencyCode="EUR"/>
      </AdditionalGuestAmounts>
      <RateDescription>
        <Text/>
      </RateDescription>
    </Rate>
  </Rates>
</RateAmountMessage>
```

In Exely, the following values will be saved:

- Price for one adult with main occupancy: 50 euro
- Price for an adult with main occupancy when booking a room for two occupants: 37.5 euro. The price will be recalculated for two: 75 euro
- Price for child with main occupancy: 19 euro
- Price for child on extra bed (7-12 years old) for one person: 0 euro

- Price for child on extra bed (7-12 years old) when booking a room with extra beds for two persons: 2.5 euro. The price will be recalculated for two: 5 euro.
- Price for child on extra bed (7-12 years old) when booking a room with extra beds for three persons: 2.5 euro. The price will be recalculated for three: 7.50 euro.

Alert appears in case of transferring MaxAdditionalGuests value of more than 1 for rate plan in which the accommodation offer “Bed in room” is not configured.

Description of structural elements in a message

Element	Minimum number of elements required in message	Description / Value
OTA_HotelRateAmountNotifRQ	1	Root node.
OTA_HotelRateAmountNotifRQ@Timestamp	1	Required attribute. Transaction time in format dateTime XML-schema.
OTA_HotelRateAmountNotifRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
HotelRateAmountNotifRQ/RateAmountMessages	1	RateAmountMessages elements collection. It contains rate plans.
RateAmountMessages/RateAmountMessage	0..n	Instance of RateAmountMessage element with data of rate plans values. Every instance contains values for one room type and one rate plan.
RateAmountMessage/StatusApplicationControl	1	Detailed information about rate plans.
StatusApplicationControl@RatePlanCode	1	Code of rate plan.
StatusApplicationControl@InvTypeCode	1	Code of room type.
StatusApplicationControl@IsRoom	0..1	Type of element. It can have the following values: True – for room type (by default). False – for extra service. Note: in extra service mode, RatePlanCode remains empty.
RateAmountMessages@HotelCode	1	Required attribute. Code of accommodation property (hotel code).
RateAmountMessages/Rates	1	Container element.
Rates/Rate	1..n	Contains information about the rate plan for the specified room type and dates range.
Rate@CurrencyCode	0..1	Optional element. Code Alfa-3 ISO 4217 of currency is used. For example, “EUR”. Transferred value must coincide with the currency of the rate plan @RatePlanCode in the Exely account.
Rate@Start, Rate@End	1	Start and end dates of rate plan in XML date format .

Rate @ Sun, Mon, Tue, Weds, Thur, Fri, Sat	0..1	“0” or “1”. Optional attributes. If they are not specified, the default value “1” is applicable for all attributes. Codes of weekdays are used to indicate the days for which the changes must be applied. For example, if “1” is set for Mon, Tue and Weds while “0” is set for the other days, availability changes will only be applied for Monday, Tuesday and Wednesday. Note: if at least one day of the week is specified, the other days must be also specified in the message. All weekdays are specified with values or not specified at all.
Rate/BaseByGuestAmts	0..1	Optional element. It contains information about rate plans for guests with main occupancy. If update is required for the text parts only, this element is not required.
BaseByGuestAmts/BaseByGuestAmt	1	It contains the value of the rate plan for guests with main occupancy.
BaseByGuestAmt@AmountAfterTax	1	AmountAfterTax attribute must be set for any rate plan update.
BaseByGuestAmt@NumberOfGuests	0..1	Accommodation of adults with main occupancy for which price is specified. Note: if MinAge and MaxAge parameters are specified, value of NumberOfGuests attribute is ignored. If parameters MinAge, MaxAge and NumberOfGuests are not specified, the price for accommodating the maximum number of adults with main occupancy for a given room type is set.
BaseByGuestAmt@MinAge, MaxAge	0..1	Optional elements. The lower and upper limits of the age range of child accommodation. Note: either both values or none of them must be specified.
BaseByGuestAmt@AgeBucket	0..1	Age group index. It allows setting prices for child accommodation without specifying MinAge and MaxAge. The index values start from “0”. Note: this attribute must be used together with attribute AgeQualifyingCode=”8”.

BaseByGuestAmt@AgeQualifyingCode	0..1	Age range. Note: this attribute supports only one value AgeQualifyingCode="8" used together with AgeBucket attribute to specify the price for child accommodation.
Rate/AdditionalGuestAmounts	0..1	Container element
AdditionalGuestAmounts/AdditionalGuestAmount	0..n	Optional element. It contains information about rate plans for guests on extra beds.
AdditionalGuestAmount@AmountAfterTax	1	AmountAfterTax attribute must be set for rate plans updates.
AdditionalGuestAmount@MaxAdditionalGuests	0..n	MaxAdditionalGuests attribute contains information about the number of extra beds for a given age range.
AdditionalGuestAmount@MinAge, MaxAge	0..1	Optional elements. The lower and upper limits of the age range of child accommodation. Note: either both values or none of them must be specified.
AdditionalGuestAmount@AgeBucket	0..1	See description of attribute in BaseByGuestAmt element
AdditionalGuestAmount@AgeQualifyingCode	0..1	See description of attribute in BaseByGuestAmt element
AdditionalGuestAmount@BedRequired	0..1	Type of element. It can have the following values: True – for an extra bed in the room (by default). False – for accommodation without bed. Note: only children can be accommodated without bed.

Examples of messages

Setting a rate plan for a room type

```
<OTA_HotelRateAmountNotifRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-02-01T07:19:28+03:00">
  <RateAmountMessages HotelCode="HOTEL1">
    <RateAmountMessage>
      <StatusApplicationControl InvTypeCode="STD" RatePlanCode="WEB"/>
      <Rates>
        <Rate Start="2012-02-01" End="2012-03-31" Mon="1" Tue="1" Weds="1" Thur="1" Fri="0" Sat="0" Sun="0">
          <BaseByGuestAmts>
            <BaseByGuestAmt AmountAfterTax="38" NumberOfGuests="1" CurrencyCode="EUR"/>
          </BaseByGuestAmts>
        </Rate>
      </Rates>
    </RateAmountMessage>
  </RateAmountMessages>
</OTA_HotelRateAmountNotifRQ>
```

OTA_HotelRateAmountNotifRS

The Channel returns a response with OTA_HotelRateAmountNotifRS message to request made with OTA_HotelRateAmountNotifRQ message. OTA_HotelRateAmountNotifRS message contains information about successful or unsuccessful processing of the request made by OTA_HotelRateAmountNotifRQ message.

Partial-processing rules and the warning reference are provided in Annex 1.

Examples of messages

Successful processing

```
<OTA_HotelRateAmountNotifRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-02-01T07:19:28+03:00" >
  <Success/>
</OTA_HotelRateAmountNotifRS>
```

Unsuccessful processing

```
<OTA_HotelRateAmountNotifRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-02-01T07:19:28+03:00" >
  <Errors>
    <Error Type="13" Code="15">Invalid date</Error>
  </Errors>
</OTA_HotelRateAmountNotifRS>
```

Sending prices and restrictions to PMS

The following messages are used to upload prices from Exely to PMS:

- OTA_HotelRatePlanRQ – receiving prices from Exely.
- OTA_NotifReportRQ – confirmation of price saving in PMS with RateAmountMessageId specified.

The following messages are used to upload restrictions from Exely to PMS:

- OTA_HotelAvailGetRQ – receiving restrictions from Exely.
- OTA_NotifReportRQ – confirmation of restrictions saved in PMS with AvailStatusMessageId specified.

OTA_HotelRatePlanRQ

Prices and restrictions are transferred using a pull model. The automated control system requests update packages and then confirms them with separate requests.

Update packages are received via the OTA_HotelRatePlanRQ request. Packages are issued one at a time. We issue all prices for all accommodations in the category for the period at once.

Receiving rates from your Exely account works on a queue basis. The queue contains messages that are returned to OTA_HotelRatePlanRS. Each message must be confirmed using OTA_NotifReportRQ. Until the message is confirmed, it will continue to be issued.

After confirming the message, you need to request the next message and so on until the RatePlans list is returned. When all messages are received, the next iterations must be repeated in 5 minutes.

To receive a price message from the queue, you need to send a request:

```

<OTA_HotelRatePlanRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18">
  <RatePlans>
    <RatePlan>
      <HotelRef HotelCode="12345" />
    </RatePlan>
  </RatePlans>
</OTA_HotelRatePlanRQ>

```

Description of structural elements in a message

Element	Quantity	Description / Value
OTA_HotelRatePlanRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_HotelRatePlanRQ/RatePlans/RatePlan	1	Rate plans description.
RatePlan/HotelRef@HotelCode	1	Hotel identifier.

OTA_HotelRatePlanRS

OTA_HotelRatePlanRS message is the response to OTA_HotelRatePlanRQ message. Every message with prices must be confirmed using OTA_NotifReportRQ method.

Example of such a message:

```

<OTA_HotelRatePlanRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <RatePlans>
    <RatePlan RatePlanCode="BB">
      <Rates>
        <Rate Start="2025-06-16" End="2025-06-17" InvTypeCode="SUITE">
          <BaseByGuestAmts>
            <BaseByGuestAmt AmountAfterTax="150.0000" CurrencyCode="EUR" NumberOfGuests="1"/>
            <BaseByGuestAmt AmountAfterTax="200.0000" CurrencyCode="EUR" NumberOfGuests="2"/>
            <BaseByGuestAmt AmountAfterTax="10.0000" CurrencyCode="EUR" NumberOfGuests="1" MinAge="0"
MaxAge="6"/>
            <BaseByGuestAmt AmountAfterTax="20.0000" CurrencyCode="EUR" NumberOfGuests="1" MinAge="6"
MaxAge="12"/>
          </BaseByGuestAmts>
          <AdditionalGuestAmounts>
            <AdditionalGuestAmount AmountAfterTax="30.0000" CurrencyCode="EUR"/>
            <AdditionalGuestAmount AmountAfterTax="40.0000" CurrencyCode="EUR" MinAge="6" MaxAge="12"/>
          </AdditionalGuestAmounts>
        </Rate>
      </Rates>
      <RateAmountMessageId>144</RateAmountMessageId>
    </RatePlan>
  </RatePlans>
  <Success/>
</OTA_HotelRatePlanRS>

```

Description of structural elements in a message

Element	Quantity	Description / Value
---------	----------	---------------------

OTA_HotelRatePlanRS/Success	0..1	It indicates that the request was processed successfully. Required if errors are not sent in a message.
OTA_HotelRatePlanRS/Errors	0..1	Errors collection.
OTA_HotelRatePlanRS/RatePlans	0..1	The list of rate plans with prices.
RatePlans/RatePlan	1..n	Rate plan.
RatePlan@RatePlanCode	1	Rate plan code in Exely system.
RatePlan/Rates/Rate	1..n	It contains information about the rate plan for the specified room type and dates range.
Rate@Start, Rate@End	1	Dates range to which the prices are applied.
Rate@InvTypeCode	1	Room type code in Exely system.
Rate/BaseByGuestAmts	0..1	It contains information about the prices for guests with main occupancy.
BaseByGuestAmts/BaseByGuestAmt	1..n	Price for main occupancy.
BaseByGuestAmt@AmountAfterTax	1	Price value.
BaseByGuestAmt@NumberOfGuests	0..1	Accommodation of guests with main occupancy.
BaseByGuestAmt@AgeBucket	0..1	Age range index for child accommodation. The index values start from "0".
BaseByGuestAmt@MinAge, MaxAge	0..1	The lower and upper limits of the age range of child accommodation. The upper limit is not included in the range.
BaseByGuestAmt@CurrencyCode	1	Currency code. Alfa-3 ISO 4217 currency code is used. For example, "EUR".
Rate/AdditionalGuestAmounts	0..1	It contains information about prices for guests on extra beds.
AdditionalGuestAmounts/AdditionalGuestAmount	1..n	Price for extra bed.
AdditionalGuestAmount@AmountAfterTax	1	Price value.
AdditionalGuestAmount@MaxAdditionalGuests	0..1	MaxAdditionalGuests attribute contains information about the number of extra beds for a given age range. It is used for the rate plans with pricing per bed in a room
AdditionalGuestAmount@MinAge, MaxAge	0..1	See description of the attribute in BaseByGuestAmt element.

AdditionalGuestAmount@BedRequired	0..1	It can have the following values: true – for guests on extra bed (by default). false – for guests without bed. Note: only children can be accommodated without bed.
AdditionalGuestAmount@CurrencyCode	1	See description of the attribute in BaseByGuestAmt element.
RatePlan/RatePlanMessageId	1	Identifier of rate plan update. This identifier must be sent in OTA_NotifReportRQ request to confirm the saving of prices.

OTA_HotelAvailGetRQ

Restriction packages are obtained via the OTA_HotelAvailGetRQ request. Packages are issued one at a time. We issue all restrictions in the category for the period at once.

Obtaining rate restrictions from your Exely personal account works on a queue basis. The queue contains messages that are returned to OTA_HotelAvailGetRS. Each message must be confirmed using OTA_NotifReportRQ. Until the message is confirmed, it will continue to be issued.

After confirming the message, you must request the next message and so on until the RatePlans list is returned. When all messages are received, the next iterations must be repeated after 5 minutes.

Example of such a message:

```
<OTA_HotelAvailGetRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18">
  <HotelAvailRequests>
    <HotelAvailRequest>
      <HotelRef HotelCode="12345" />
    </HotelAvailRequest>
  </HotelAvailRequests>
</OTA_HotelAvailGetRQ>
```

Description of structural elements in a message

Element	Quantity	Description / Value
OTA_HotelRatePlanRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_HotelAvailGetRQ/ HotelAvailRequests/ HotelAvailRequest	1	Information about the request for restrictions
RatePlan/HotelRef@HotelCode	1	Hotel identifier.

OTA_HotelAvailGetRS

The response to OTA_HotelAvailGetRQ is the OTA_HotelAvailGetRS message. Each price message must be confirmed using the OTA_NotifReportRQ method.

Example of such a message:

```

<OTA_HotelAvailGetRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <RatePlans>
    <RatePlan RatePlanCode="BB">
      <AvailStatusMessageId>143</AvailStatusMessageId>
      <AvailStatusMessages>
        <AvailStatusMessage>
          <StatusApplicationControl Start="2025-06-16" End="2025-06-17" InvTypeCode="SUITE"/>
          <LengthsOfStay>
            <LengthOfStay MinMaxMessageType="RemoveMinLOS"/>
            <LengthOfStay MinMaxMessageType="RemoveMaxLOS"/>
            <LengthOfStay>
              <LOS_Pattern FullPatternLOS="00000000000000000000000000000000"/>
            </LengthOfStay>
          </LengthsOfStay>
          <RestrictionStatus Status="Close"/>
        </AvailStatusMessage>
        <AvailStatusMessage>
          <StatusApplicationControl Start="2025-06-16" End="2025-06-17" InvTypeCode="SUITE"/>
          <LengthsOfStay ArrivalDateBased="true">
            <LengthOfStay MinMaxMessageType="RemoveMinLOS"/>
            <LengthOfStay MinMaxMessageType="RemoveMaxLOS"/>
          </LengthsOfStay>
          <RestrictionStatus Restriction="Arrival" Status="Open"/>
        </AvailStatusMessage>
        <AvailStatusMessage>
          <StatusApplicationControl Start="2025-06-16" End="2025-06-17" InvTypeCode="SUITE"/>
          <RestrictionStatus Restriction="Departure" Status="Open"/>
        </AvailStatusMessage>
      </AvailStatusMessages>
    </RatePlan>
  </RatePlans>
  <Success/>
</OTA_HotelAvailGetRS>

```

Description of structural elements in a message

Element	Quantity	Description / Value
OTA_HotelAvailGetRS/Success	0..1	Indicates successful request processing. Mandatory if no errors were sent in the response.
OTA_HotelAvailGetRS/Errors	0..1	Collection of errors.
OTA_HotelAvailGetRS/RatePlans	0..1	List of rates with restrictions.
RatePlans/RatePlan	1..n	Rate
RatePlan@RatePlanCode	1	Rate code in the Exely system.
RatePlan/AvailStatusMessageId	1	Rate update identifier. This identifier must be included in the OTA_NotifReportRQ request to confirm that the restrictions have been saved.
RatePlan/AvailStatusMessages/AvailStatusMessage	1..n	Contains information about restrictions for the specified room category and date range.

AvailStatusMessage/StatusApplicationControl	1	Information about the date range and room category.
StatusApplicationControl@Start	1	Start date of restrictions.
StatusApplicationControl@End	1	End date for the restrictions.
StatusApplicationControl@InvTypeCode	1	Room category code in the Exely system.
AvailStatusMessage/LengthsOfStay	0..1	Information about minimum stay requirements
LengthsOfStay@ArrivalDateBased	0..1	The attribute indicates that information is being transmitted according to the MinLOSArrival and MaxLOSArrival restrictions.
LengthsOfStay/LengthOfStay	0..n	Optional element.
LengthOfStay@MinMaxMessageType	1	Can take the following values: "SetMinLOS", there is a restriction on the minimum number of days of stay, "SetMaxLOS", there is a restriction on the maximum number of days of stay, "RemoveMaxLOS", there are no restrictions on the maximum number of days of stay, "RemoveMinLOS", there are no restrictions on the minimum number of days of stay.
LengthOfStay@Time	0..1	Specifies the limit value if MinMaxMessageType is SetMinLOS or SetMaxLOS.
LengthOfStay/LOS_Pattern	0..1	Specifies the value of the FullPatternLOS restriction (several possible lengths of stay)
LOS_Pattern@FullPatternLOS	1	A string with acceptable dates of stay. The element "O" indicates that the number of days is available for stay, "C" indicates that it is closed. The maximum number of periods is 30. Example: OCOC...OO O – 1 day available for stay C – 2 days not available for stay O – 3 days available for stay C – 4 days not available for stay ... O – 29 days available for stay O – 30 days available for stay
AvailStatusMessage/RestrictionStatus	1	Information on restrictions on arrival/departure/stay dates
RestrictionStatus@Status	0..1	takes the value "Open" or "Close".

RestrictionStatus@Restriction	0..1	Value: Arrival or Departure. If Arrival is specified, the Status value indicates a restriction on the arrival date (CTA – Closed to Arrival). If Departure is specified, the Status value indicates a restriction on the departure date (CTD – Closed to Departure). If the parameter is missing, the Status value determines the closure/opening of the stay date (StopSell).
RestrictionStatus@MinAdvancedBookingOffset	0..1	The minimum number of days between the booking date and the arrival date. If not specified, this restriction does not apply.
RestrictionStatus@MaxAdvancedBookingOffset	0..1	The maximum number of days between the booking date and the arrival date. If not specified, this restriction does not apply.

OTA_NotifReportRQ

Confirmation of price retention in PMS with RateAmountMessageId specified.

Example of such a message:

```
<OTA_NotifReportRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" >
  <Success />
  <NotifDetails HotelCode="12345">
    <HotelNotifReport>
      <RatePlanMessages>
        <RatePlanMessage RateAmountMessageId="144">
          <Success />
        </RatePlanMessage>
      </RatePlanMessages>
    </HotelNotifReport>
  </NotifDetails>
</OTA_NotifReportRQ>
```

Confirmation of restrictions remaining in PMS with AvailStatusMessageId specified.

Example of such a message:

```
<OTA_NotifReportRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" >
  <Success />
  <NotifDetails HotelCode="12345">
    <HotelNotifReport>
      <RatePlanMessages>
        <RatePlanMessage AvailStatusMessageId="143">
          <Success />
        </RatePlanMessage>
      </RatePlanMessages>
    </HotelNotifReport>
  </NotifDetails>
</OTA_NotifReportRQ>
```

Description of structural elements in a message

Element	Quantity	Description / Value
OTA_NotifReportRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_NotifReportRQ/Success	1	It must always be filled in. It indicates that the given messages with prices were processed. The processing status will be indicated further.
OTA_NotifReportRQ/NotifDetails@HotelCode	1	Hotel identifier.
NotifDetails/HotelNotifReport/RatePlanMessages	1	Collection of messages with prices that need to be confirmed.
RatePlanMessages/RatePlanMessage	1..n	One message confirmation.
RatePlanMessage@RateAmountMessageld	0..1	Message ID for price updates. Required if AvailStatusMessageld is not specified.
RatePlanMessage@AvailStatusMessageld	0..1	Message ID for updating restrictions. Required if RateAmountMessageld is not specified.
RatePlanMessage/Success, Errors	1	Either the Success or Errors element must be present.
Errors/Error	1	The text of the error that occurred while processing the message.

OTA_NotifReportRS

OTA_NotifReportRS message contains information about successful or unsuccessful processing of OTA_NotifReportRQ message.

Examples of messages

Processed successfully

```
<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <OTA_NotifReportRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
      <Success/>
    </OTA_NotifReportRS>
  </s:Body>
</s:Envelope>
```

Processing failed

```

<s:Envelope xmlns:s="http://schemas.xmlsoap.org/soap/envelope/">
  <s:Body xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema">
    <OTA_NotifReportRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
      <Errors>
        <Error Language="ENG" Type="4" Code="175">Unknown rate plan message Id 322354</Error>
      </Errors>
    </OTA_NotifReportRS>
  </s:Body>
</s:Envelope>

```

Bookings processing

To receive bookings from the Channel, booking confirmations and cancellations from PMS, the following messages are used:

- requesting and receiving the list of undelivered bookings to PMS - OTA_ReadRQ, OTA_ResRetrieveRS;
- notifying Exely of the status of processing the bookings in PMS – NotifReportRQ, OTA_NotifReportRS;
- notifying Exely of booking cancellation sent from PMS – OTA_CancelRQ, OTA_CancelRS.

OTA_ReadRQ

OTA_ReadRQ message is used to receive the list of undelivered bookings from Exely.

Example of such a message:

```

<OTA_ReadRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18">
  <ReadRequests>
    <HotelReadRequest HotelCode="HOTEL1">
      <SelectionCriteria SelectionType="Undelivered"/>
    </HotelReadRequest>
  </ReadRequests>
</OTA_ReadRQ>

```

OTA_ReadRQ message consists of a single ReadRequests element containing one or more HotelReadRequest elements. HotelReadRequest element contains a required HotelCode attribute that indicates the hotel code for which the list of bookings will be requested. Values of the hotel code must be received from the Channel during integration.

A child element of HotelReadRequest node is SelectionCriteria element setting the area for reservations search.

Description of structural elements in a message

N	Parent element	Element	Quantity	Description / Value
1		OTA_ReadRQ	1	Root element of the message.
2	OTA_ReadRQ	@Version	1	Latest version of the protocol must be used. See Revision history section.
3	OTA_ReadRQ	ReadRequests	1	ReadRequests elements collection.

4	ReadRequests	HotelReadRequest	0..1	Hotel reservations request element.
5	HotelReadRequest	@HotelCode	1	Required attribute. Code of accommodation property (hotel code).
5	HotelReadRequest	SelectionCriteria	1	Reservations search criterion.
6	SelectionCriteria	@SelectionType	0..1	Attribute must always contain value "Undelivered".

OTA_ResRetrieveRS

OTA_ResRetrieveRS message is the response to OTA_ReadRQ message and contains the list of new bookings, not yet processed by PMS. The structure of the message is simple and has 3 types of response that depend on the following:

- In Exely there are reservations that are not yet processed by PMS.
- In Exely there are no new reservations since the last data upload.
- An error occurred while processing OTA_ReadRQ message.

Examples of every response are provided at the end of the section.

Examples of messages

There are reservations non - processed by PMS in the Channel

`<Success/>` element in the response indicates successful processing of the request for the list of undelivered bookings.

```
<OTA_ResRetrieveRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18">
  <Success/>
  <ReservationsList>
    <HotelReservation CreateDateTime="2012-12-18T11:32:40" LastModifyDateTime="2012-12-18T11:33:10"
ResStatus="Confirmed">
      <UniqueID Type="14" ID="990663"/>
      <!-- Booking details omitted -->
    </HotelReservation>
    <HotelReservation CreateDateTime="2012-12-20T03:59:00" ResStatus="Confirmed">
      <UniqueID Type="14" ID="993452"/>
      <!-- Booking details omitted -->
    </HotelReservation>
  </ReservationsList>
</OTA_ResRetrieveRS>
```

There are no reservations non - processed by PMS in the Channel

`<Success/>` element in the response indicates successful processing of the response. The absence of `<ReservationsList/>` collection indicates that there are no undelivered bookings.

```
<OTA_ResRetrieveRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18">
  <Success/>
</OTA_ResRetrieveRS>
```

Error occurred while processing OTA_ReadRQ message.

Presence of `<Errors/>` element in the response indicates that an error occurred while processing the message.

```
<OTA_ResRetrieveRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18">
  <Errors>
    <Error Type="3" Code="392">Invalid hotel code</Error>
  </Errors>
</OTA_ResRetrieveRS>
```

Sample part of OTA_ResRetrieveRS message with booking details.

```

<HotelReservation CreateDateTime="2014-01-29T12:34:04.987" LastModifyDateTime="2014-01-29T12:34:05.207"
ResStatus="Confirmed">
  <POS>
    <Source>
      <RequestorID Type="22" ID="PMSCONNECT"/>
      <BookingChannel Type="7">
        <TPA_Extensions>
          <BookingWebSource Code="" Url=""/>
        </TPA_Extensions>
      </BookingChannel>
    </Source>
  </POS>
  <UniqueID Type="14" ID="20140130-2975-1979469"/>
  <RoomStays>
    <RoomStay IndexNumber="2029032">
      <RoomTypes>
        <RoomType RoomTypeCode="14269" InvBlockCode="18946" Quantity="1"/>
      </RoomTypes>
      <RatePlans>
        <RatePlan RatePlanId="9018"/>
      </RatePlans>
      <RoomRates>
        <RoomRate EffectiveDate="2014-01-30" ExpireDate="2014-01-30" RatePlanCode="9018">
          <Total AmountBeforeTax="90.0000" AmountAfterTax="100.0000" CurrencyCode="EUR">
            <Taxes>
              <Tax Code="0" Amount="10.7000" Percent="10.0000">
                <TaxDescription>
                  <Text>Tax 10%</Text>
                </TaxDescription>
              </Tax>
            </Taxes>
          </Total>
        </RoomRate>
      </RoomRates>
      <GuestCounts>
        <GuestCount AgeQualifyingCode="AdultBed" Count="1" ResGuestRPH="1"/>
      </GuestCounts>
      <TimeSpan Start="2014-01-30T12:00:00" Duration="1" End="2014-01-31T14:00:00"/>
      <CancelPenalties CancelPolicyIndicator="true">
        <CancelPenalty>
          <Deadline AbsoluteDeadline="2014-01-29T08:00:00Z"/>
          <AmountPercent NmbrOfNights="1" BasisType="Nights" CurrencyCode="EUR" Amount="1.25"/>
          <PenaltyDescription>
            <Text>If cancelled within less than 24 hours before 12:00 (check-in time) of the arrival date,
the cost of the first night will be charged as a penalty</Text>
          </PenaltyDescription>
        </CancelPenalty>
      </CancelPenalties>
      <BasicPropertyInfo HotelCode="2975"/>
      <ServiceRPHs>
        <ServiceRPH RPH="1"/>
      </ServiceRPHs>
      <SpecialRequests>
        <SpecialRequest Name="King size bed" RequestCode="2" />
        <SpecialRequest Name="Seaview" RequestCode="37" />
      </SpecialRequests>
    </RoomStay>
  </RoomStays>
  <ResGuests>
    <ResGuest ResGuestRPH="1">

```

```

<Profiles>
  <ProfileInfo>
    <UniqueID Type="21" ID_Context="PMSConnect" ID="445648423"/>
    <Profile>
      <Customer>
        <PersonName>
          <GivenName>John</GivenName>
          <MiddleName>John</MiddleName>
          <Surname>Smith</Surname>
        </PersonName>
        <CitizenCountryName Code="AUS"/>
      </Customer>
    </Profile>
  </ProfileInfo>
</Profiles>
</ResGuest>
</ResGuests>
<ResGlobalInfo>
  <Comments>
    <Comment>
      <Text>I want to order a transfer from the airport</Text>
    </Comment>
  </Comments>
  <Guarantee GuaranteeCode="CcDcVoucher">
    <Comments>
      <Comment Name="PaymentMethodName">
        <Text>BankCardGuarantee</Text>
      </Comment>
      <Comment Name="PaymentSystemName">
        <Text>TLPAYMENTS</Text>
      </Comment>
      <Comment Name="PaymentSystemTitle">
        <Text>Bank card guarantee</Text>
      </Comment>
      <Comment Name="PaymentSystemCode">
        <Text>12345</Text>
      </Comment>
    </Comments>
  </Guarantee>
  <Total AmountBeforeTax="1.25" AmountAfterTax="1.25" CurrencyCode="EUR"/>
  <Taxes>
    <Tax Code="36" Amount="0.1250" Percent="10.0000">
      <TaxDescription>
        <Text>Fee 10%</Text>
      </TaxDescription>
    </Tax>
  </Taxes>
</Profiles>
  <ProfileInfo>
    <Profile>
      <Customer>
        <PersonName>
          <GivenName>John</GivenName>
          <MiddleName>John</MiddleName>
          <Surname>Smith</Surname>
        </PersonName>
        <Telephone PhoneNumber="8765435678"/>
        <Email>smith@gmail.com</Email>
      </Customer>
    </Profile>
  </ProfileInfo>

```

```

    </Profiles>
  </ResGlobalInfo>
  <Services>
    <Service ServicePricingType="Per person per night" ServiceRPH="1" Inclusive="true" Quantity="2"
ID="3742">
      <ServiceDetails>
        <TimeSpan Start="30.01.2014 0:00:00" Duration="1"/>
        <Comments>
          <Comment Name="Breakfast">
            <Text/>
          </Comment>
        </Comments>
        <Total AmountBeforeTax="7.50" AmountAfterTax="7.50" CurrencyCode="EUR"/>
        <Taxes>
          <Tax Code="36" Amount="0.7500" Percent="10.0000">
            <TaxDescription>
              <Text>Fee 10%</Text>
            </TaxDescription>
          </Tax>
        </Taxes>
        <ServiceRates>
          <ServiceRate EffectiveDate="2025-09-05" AmountAfterTax="1200.0000" />
          <ServiceRate EffectiveDate="2025-09-05" AmountAfterTax="1800.0000" />
        </ServiceRates>
      </ServiceDetails>
    </Service>
    <Service ServicePricingType="Per stay" ServiceRPH="2" Inclusive="false" Quantity="1" ID="3743">
      <ServiceDetails>
        <TimeSpan Start="30.01.2014 0:00:00" Duration="1"/>
        <Comments>
          <Comment Name="Parking">
            <Text/>
          </Comment>
        </Comments>
        <Total AmountBeforeTax="0.00" AmountAfterTax="0.00" CurrencyCode="EUR"/>
      </ServiceDetails>
    </Service>
    <Service ServiceRPH="3" Inclusive="false" Quantity="1" ID="3743" ServiceCategoryCode="Transfer">
      <ServiceDetails>
        <TimeSpan Start="30.01.2014 12:15:00" Duration="1"/>
        <Comments>
          <Comment Name="TransferDetails">
            <Text>Transfer "Dublin" Airport → Hotel
              Arrival time: 17:40
              Flight number: TK2128
              Departure from:
              Airline:
              Transfer car - 1 X €40;
            </Text>
          </Comment>
        </Comments>
        <Total AmountBeforeTax="0.00" AmountAfterTax="40" CurrencyCode="EUR"/>
      </ServiceDetails>
    </Service>
  </Services>
</HotelReservation>

```

Processing bookings for accommodation of several guests in one room type under different rate plans

Protocol can support bookings for several guests accommodated under different rate plans in one booking. This function is frequently used by health resorts that sell “Medical treatment” and “Recreation” packages. For example, the first guest selects a rate plan including medical treatment while the second guest would come for recreation only without treatment. Hence, they can be accommodated in one room under different rate plans.

For such bookings, additional TPA_Extensions elements will be added to the message of the following type:

```
<RoomRate EffectiveDate="2017-10-14" ExpireDate="2017-10-14" RatePlanCode="14873">
  <Total AmountAfterTax="76.00" CurrencyCode="EUR"/>
  <TPA_Extensions>
    <PlacementRates>
      <PlacementRate ResGuestRPH="1" RatePlanCode="14873">
        <Total AmountAfterTax="32.00" CurrencyCode="EUR"/>
      </PlacementRate>
      <PlacementRate ResGuestRPH="2" RatePlanCode="14874">
        <Total AmountAfterTax="32.00" CurrencyCode="EUR"/>
      </PlacementRate>
      <PlacementRate ResGuestRPH="3" RatePlanCode="14875">
        <Total AmountAfterTax="12.00" CurrencyCode="EUR"/>
      </PlacementRate>
    </PlacementRates>
  </TPA_Extensions>
</RoomRate>
```

Every PlacementRate element has ResGuestRPH attribute that contains an order number of a guest and RatePlanCode attribute that determines the guest's rate plan code.

RoomRate element contains RatePlanCode attribute for compatibility with the previous versions of the protocol. The attribute indicates the code of the rate plan under which the first guest in the list is accommodated.

Processing bookings with special combined accommodation

Starting from version 1.18, the protocol supports bookings with special combined accommodations that include children.

For such bookings, GuestCounts contains the guest composition: adults are transferred with AgeQualifyingCode="AdultBed", and children are transferred with AgeQualifyingCode="ChildBandBed" and AgeBucket.

AgeBucket contains the sequential index of the child age range from the property settings: 0 for the first range, 1 for the second range, 2 for the third range, and so on.

Example of guest composition for special combined accommodation

```
<GuestCounts>
  <GuestCount AgeQualifyingCode="AdultBed" Count="2"/>
  <GuestCount AgeQualifyingCode="ChildBandBed" Count="1" AgeBucket="0"/>
  <GuestCount AgeQualifyingCode="ChildBandBed" Count="1" AgeBucket="1"/>
</GuestCounts>
```

If the property has child age ranges 0-3 and 3-12 configured, the example describes accommodation for 2 adults, 1 child aged 0-3, and 1 child aged 3-12.

Processing bookings with discounts

Since version 1.16, the protocol can support bookings with discounts.

The message for such bookings contain Discount element of the following type:

```
<Discount DiscountCode="12312" AmountAfterTax="12.00" Percent="10.00" Type="1">
  <DiscountReason>
    <Text>For registration</Text>
  </DiscountReason>
</Discount>
```

Specifics of transferring ServiceManagement services

Starting from version 1.18, ServiceManagement services in OTA_ResRetrieveRS contain a separate ServiceDetails/TimeSpan element.

For such services, ServicePricingType is transferred as Per use.

TimeSpan@Increment specifies the unit used for the service duration: Day, Hour, or Minute. TimeSpan@Duration is calculated in the specified unit.

Example of ServiceManagement service

```
<Service ServiceRPH="1" ServicePricingType="Per use" Quantity="1">
  <ServiceDetails>
    <TimeSpan Start="2026-06-01T10:00:00" Duration="2" Increment="Hour"/>
    <Total AmountAfterTax="1200.00" CurrencyCode="EUR"/>
    <Comments>
      <Comment Name="Meeting room rental">
        <Text>Hourly meeting room rental</Text>
      </Comment>
    </Comments>
  </ServiceDetails>
</Service>
```

Types of guarantee and payment methods

ResGlobalInfo element contains the description of the payment method used in a booking. Exely sends several elements/fields for description of payment method :

- GuaranteeCode – code of guarantee. The field indicates whether a booking is guaranteed. The booking is considered guaranteed when a hotel receives a prepayment or bank card details of a guest;
- PaymentMethodName – payment method for a booking. The field indicates the method that should be used to pay for a booking. For example, "Bank card guarantee" or "Payment at check-in";
- PaymentSystemName and PaymentSystemTitle – the elements contain the code and the name of the payment system used to pay for a booking;
- PaymentSystemProfileAcquiringName – the element indicates the type of acquiring to make a payment transaction. It may have two permitted values: CB and Hotel. CB acquiring means that the payment is kept on the Exely bank account, and it will be transferred to a hotel under the terms of contract. Hotel acquiring means that the payment is immediately transferred to a hotel. This option is available only for bookings made via Exely Booking Engine.
- PaymentTransactionId – Transaction ID in the payment system. It is used for hotel acquiring only.
- PaymentSystemCode – api code of the payment system.

Example of description for payment transaction made using Yandex.Money:

```

<ResGlobalInfo>
  <Guarantee GuaranteeCode="None | PrePay | CcDcVoucher">
    <Comments>
      <Comment Name="PaymentMethodName">
        <Text>Electronic</Text>
      </Comment>
      <Comment Name="PaymentSystemName">
        <Text>>INTERNET_BANKING</Text>
      </Comment>
      <Comment Name="PaymentSystemTitle">
        <Text>Internet Banking</Text>
      </Comment>
      <Comment Name="PaymentSystemProfileAcquiringName">
        <Text>Exely</Text>
      </Comment>
      <Comment Name="PaymentTransactionId">
        <Text>1234567890</Text>
      </Comment>
      <Comment Name="PaymentSystemCode">
        <Text>12345</Text>
      </Comment>
    </Comments>
  </Guarantee>
  <DepositPayments>
    <GuaranteePayment Type="ReceivedPayment | ExpectedPayment | ReceivedLoyaltyPayment">
      <AmountPercent BasisType="Fixed" CurrencyCode="EUR" Amount="90.00"/>
    </GuaranteePayment>
  </DepositPayments>
</ResGlobalInfo>

```

Values of guarantee types (GuaranteeCode) and payment methods (PaymentMethodName) are listed in the table below, with the examples of payment systems. The list of payment systems available for the hotel can be provided under OTA_HotelAvailRQ request.

Other payment systems can be added to the list, whereas the list of valid values GuaranteeCode and PaymentMethodName are not permitted to be modified for the current version of the protocol.

The information about the prepayment made or the prepayment required is transferred in the DepositPayments section. Type attribute helps to determine the type of payment. The attribute has the following values: ReceivedPayment (the prepayment is made), ExpectedPayment (the prepayment is pending), ReceivedLoyaltyPayment (redeemed points).

The following cases are possible:

- 1\ The prepayment is not required - DepositPayments section is not filled in.
- 2\ The guest makes a prepayment upon booking (Payment by bank card) – DepositPayments is filled in with ReceivedPayment type.
- 3\ A guest is required to make a prepayment, but the fact that the prepayment is made is unknown to us (Bank transfer to hotel) – DepositPayments is filled in with ExpectedPayment type.
- 4\ A guest is required to make a prepayment, and the fact that the prepayment is made is known to us (Deferred electronic payment through QIWI or ReservMaster terminals) – DepositPayments is first filled in as ExpectedPayment, then as ReceivedPayment in the booking modification.

In the Guarantee Payment section, PaymentIndex attribute is specified only for the ReceivedPayment type. It can have values 0..n depending on the number of payments made in the booking. This behaviour is relevant for payments and surcharges made within one booking.

Example of payment and surcharge for booking

First version of booking (one euro has been paid)

```
<ResGlobalInfo>
  <Guarantee GuaranteeCode="PrePay">
    <!-- Guarantee information is missing -->
  </Guarantee>
  <DepositPayments>
    <GuaranteePayment Type="ReceivedPayment" PaymentIndex="0">
      <AmountPercent BasisType="Fixed" CurrencyCode="EUR" Amount="1.00"/>
    </GuaranteePayment>
  </DepositPayments>
</ResGlobalInfo>
```

Second version of booking (the remaining amount has been paid)

```
<ResGlobalInfo>
  <Guarantee GuaranteeCode="PrePay">
    <!-- Guarantee information is missing -->
  </Guarantee>
  <DepositPayments>
    <GuaranteePayment Type="ReceivedPayment" PaymentIndex="0">
      <AmountPercent BasisType="Fixed" CurrencyCode="EUR" Amount="1.00"/>
    </GuaranteePayment>
    <GuaranteePayment Type="ReceivedPayment" PaymentIndex="1">
      <AmountPercent BasisType="Fixed" CurrencyCode="EUR" Amount="99.00"/>
    </GuaranteePayment>
  </DepositPayments>
</ResGlobalInfo>
```

If no prepayment was made in the first version of the booking, future bookings with payments will receive PaymentIndex (1,2 ... n).

The following are the possible values of GuaranteeCode and PaymentMethodName parameters:

Value of GuaranteeCode	Value of PaymentMethodName	Value of PaymentSystemName for Exely Booking Engine	Value of PaymentSystemName for Exely Channel Manager
None	Unknown – unknown payment method	Not used	CM_UNKNOWN (Unknown) – the channel did not provide the guarantee information.
	PayOnArrival – a guest pays at check-in	AT_ARRIVAL	CM_PAY_ON_ARRIVAL (Payment at check-in) – the channel provided the information that a guest would pay at check-in.
	PayAtOffice – a guest pays in the office of a hotel	AT_OFFICE	Not used.

PrePay	Electronic – payment made using the payment system. The payment amount is withdrawn at the time of booking.	XENDIT PAYPAL etc.	Not used.
	Offline – a deferred payment method. A guest is required to make a prepayment within a certain period of time via terminals or using e-wallets.	RESERVMaster etc.	Not used.
	Cashless – a guest pays by bank transfer to the hotel account.	CASHLESS – Bank transfer for legal entities (an invoice is issued automatically) MANUAL_CASHLESS - Bank transfer for legal entities (an invoice is issued by hotel) INDIVIDUAL_CASHLESS – Bank transfer for individuals (an invoice is issued automatically) MANUAL_INDIVIDUAL_CASHLESS - Bank transfer for individuals (an invoice is issued by hotel)	CM_CASHLESS – (Bank transfer) – the channel has received the guest's prepayment and all the future payment transactions between the channel and the hotel will be made through a bank transfer.
	BankCard – the payment is withdrawn from the guest's card using bank acquiring.	CPD_BANKCARD RAIFFEISEN etc.	CM_CREDITCARD (Payment by bank card) – the channel has transferred the bank card details to a hotel, excluding the channel manager, so that a hotel could withdraw the money. For example, the bank card details are available in the channel extranet.
	Agency – the payment method used by travel agents when booking from the Agent's Exely account (B2B).	TA_AT_ARRIVAL TA_AT_RACK TA_TOTAL_PRICE_INVOICE etc.	Not used.
CcDcVoucher	BankCardGuarantee – the guest's provided bank card details can be used by a hotel to withdraw the money.	TLPAYMENTS TLPAYMENTS_NOPREPAY etc.	CM_CREDITCARD_GUARANTEE (Guarantee by bank card / Hotel collect) – the channel transferred the details of the guest's actual bank card so that a hotel could withdraw the money. CM_PREPAY_CREDITCARD_GUARANTEE (Guarantee by bank card / Channel collect) – the channel has charged the money from the guest and transferred the details of the virtual card from which a hotel can withdraw the money.

Specifics of payment transfer for Exely Channel Manager distribution channels.

The channels do not often transfer the information about the payment. We consider such bookings to be None type of guarantee and the Unknown payment method. For this reason PaymentSystemProfileAcquiringName and

DepositPayments parameters are not filled in and payment transactions between the channel and the hotel are made according to their internal processes for which no information is provided.

Description of structural elements in a message

N	Parent element	Element	Quantity	Description / Value
1		OTA_ResRetrieveRS	1	Root element of the message.
2	OTA_ResRetrieveRS	@Version	1	The latest version of protocol must be used. See Revision history section.
3	OTA_ResRetrieveRS	Success	0..1	It indicates that the request was processed successfully. It is required if errors are not sent in a message.
3	OTA_ResRetrieveRS	Errors	0..1	Errors collection.
4	Errors	Error	1..n	It describes the error which occurred while processing the request.
5	Error	@Language	1	Error text language.
5	Error	@Type	1	Error type. According to the OTA specification codes table. It can have the following values: 1 - Unknown 3 - BizRule 10 - RequiredFieldMissing 12 - ProcessingException
5	Error	@Code	1	Error code according to the OTA codes table. Examples of error codes: 320 - InvalidValue 321 - RequiredFieldMissing 322 - NoAvailability 425 - NoMatchFound
5	Error	@Tag	1	Xpath to the tag in which the error is found.
3	OTA_ResRetrieveRS	ReservationsList	0..1	Collection of bookings.
Booking details				
4	ReservationsList	HotelReservation	1..n	Booking details.
5	HotelReservation	@CreateDateTime	0..1	Time of booking creation.
5	HotelReservation	@LastModifyDateTime	1	Time of booking modification. This field must contain value of LastModifyDateTime field of the corresponding HotelReservation element for which the Channel notification is made.
5	HotelReservation	@ResStatus	1	Booking status. Possible values include: Unconfirmed – booking is not confirmed. Confirmed – booking is confirmed. Cancelled – booking is cancelled. Released – a guest leaves a room before the check-out time. Pending – payment is pending.
5	HotelReservation	UniqueID	0..n	Booking identifier.

6	UniqueID	@ID	1..n	Booking identifier. For example, 100345.
6	UniqueID	@ID_Context	0..1	Type of identifier. Possible values included: "PMSCoconnect" – the identifier belongs to the Channel identifiers directory. "External" - the identifier belongs to the directory of the external system - point of sale. Note: - If the parameter is not specified, ID belongs to the Channel identifiers directory; - When generating NotifReportRQ response, ID with an empty context or PMSCoconnect context must be used.
5	HotelReservation	RoomStays	0..1	RoomStay elements collection. It contains accommodation for groups of guests in different rooms under one booking.
6	RoomStays	RoomStay	1..n	Detailed description of accommodation in a room. It includes number of guests, period of stay, rate plan, room.
7	RoomStay	@IndexNumber	0..1	Unique code of accommodation.
7	RoomStay	RoomRates	1	Collection of prices for a room per days.
8	RoomRates	RoomRate	1..n	Description of the price for a time period.
8	RoomRate	@EffectiveDate	1	Start date of time period.
8	RoomRate	@ExpireDate	1	End date of time period.
8	RoomRate	@RatePlanCode	1	Rate plan code.
9	RoomRate	TPA_Extensions	0..1	Root element required to indicate the compliance of guests and rate plans.
10	TPA_Extensions	PlacementRates	1	The price list for the costs of stay and rate plans for guests.
11	PlacementRates	PlacementRate	1..n	Cost of stay and rate plan of a guest.
11	PlacementRate	@ResGuestRPH	1	Guest index
11	PlacementRate	@RatePlanCode	1	Guest's rate plan code indicated by @ResGuestRPH attribute.
12	PlacementRate	Total	1	Description of the cost of stay in a room for the guest indicated by @ResGuestRPH attribute of the parent element.
12	Total	@AmountAfterTax	1	Value of the cost of stay for the guest indicated by @ResGuestRPH attribute of the parent element.
12	Total	@CurrencyCode	1	Currency code. Alfa-3 ISO 4217 currency code is used. For example, "EUR".
9	RoomRate	Total	1	Description of the cost of stay in a room.
10	Total	@AmountBeforeTax	1	Value of room rate before taxation
10	Total	@AmountAfterTax	1	Value of room rate after taxation
10	Total	@CurrencyCode	1	Currency code. Alfa-3 ISO 4217 currency code is used, for example, "EUR".
10	Total	Taxes	0..n	Detailed taxation

11	Taxes	@Amount	1	The sum of all taxes within a day's stay
12	Taxes	Tax	0..n	Specific tax
12	Tax	@Code	1	Tax Type.
12	Tax	@Percent	1	Tax rate
12	Tax	@Amount	1	Amount of specific tax
13	Tax	TaxDescription	0..1	Description of the tax
14	TaxDescription	Text	1	Name of tax
9	GuestCount	@AgeQualifyingCode	0..1	Age range of a guest and details of accommodation type. It can have the following values: AdultBed - adult with main occupancy. ChildBandBed - child with main occupancy. AdultExtraBed - adult on extra bed. ChildBandExtraBed - child on extra bed. ChildBandWithoutBed - child without bed.
9	GuestCount	@Age	0..1	Child age.
9	GuestCount	@Count	0..1	Number of guests.
9	GuestCount	@ResGuestRPH	0..1	Unique reference to a guest within a pair of request-response. It is used to collate the information about the guest's age group assigned by the system.
9	GuestCount	@AgeBucket	0..1	Child age ordinal index from the hotel settings.
7	RoomStay	TimeSpan	1	Period of stay.
8	TimeSpan	@Start	1	Check-in date and time. Supported formats: yyyy-MM-ddThh:mm:ss – the time as per the hotel timezone. For example, 2014-01-01T12:00:00.
8	TimeSpan	@End	1	Check-out date and time. Supported formats: yyyy-MM-ddThh:mm:ss – the time as per the hotel timezone. For example, 2014-01-01T12:00:00
7	RoomStay	Total	1	Describes the cost of stay.
8	Total	@AmountBeforeTax	1	Value of room rate before taxation
8	Total	@AmountAfterTax	1	Value of room rate after taxation
8	Total	@CurrencyCode	1	Currency code. Alfa-3 ISO 4217 currency code is used, for example, "EUR".
9	Total	Taxes	0..n	Detailed taxation
9	Taxes	@Amount	1	Amount of all taxes within the scope of the accommodation
10	Taxes	Tax	0..n	Specific tax
10	Tax	@Code	1	Tax Type.
10	Tax	@Percent	1	Tax rate
10	Tax	@Amount	1	Amount of specific tax

11	Tax	TaxDescription	0..1	Description of the tax
12	TaxDescription	Text	1	Name of tax
8	Discounts	Discount	1..n	Discount information.
8	Discount	@DiscountCode	1	Discount code.
8	Discount	@AmountAfterTax	0..1	Fixed discount amount.
8	Discount	@Percent	0..1	Discount rate.
8	Discount	@Type	1	Type of discount: fixed or percent-based.
8	Discount	DiscountReason	1	It contains the reason for a discount.
9	DiscountReason	Text	1	Reason for a discount.
6	HotelReservation	ResGuests	1	Guests collection in a booking.
7	ResGuests	ResGuest	1..n	Element with details about a guest.
8	ResGuest	@ResGuestRPH	1	Unique identifier of a guest in a message. GuestCount/@ResGuestRPH makes reference to this element.
8	ResGuest	Profiles	1	Guest profiles collection.
9	Profiles	ProfileInfo	1	
10	ProfileInfo	UniqueID	1	Guest identifier in Exely system. Identifier value may change if a booking is modified. This ID is necessary for the integration with PMSCoconnect: OnlineCheck-In service.
11	UniqueID	Type	1	Type of identifier. It has the value: 21 - profile.
11	UniqueID	ID	1	Identifier value.
11	UniqueID	ID_Context	1	Type of identifier. Possible values: "PMSCoconnect" – identifier that belongs to the Channel identifiers directory.
10	ProfileInfo	Profile	1	Guest profile.
11	Profile	Customer	1	It contains guest details.
12	Customer	PersonName	1	Guest's full name.
13	PersonName	Surname	1	Guest's last name.
13	PersonName	GivenName	0..1	Guest's first name.
13	PersonName	MiddleName	0..1	Guest's middle name.
12	Customer	CitizenCountryName	0..1	Guest's citizenship.
13	CitizenCountryName	@Code	1	Country code.
12	Customer	@Gender	0..1	Guest's gender.
12	Customer	@BirthDate	0..1	Guest's date of birth.
12	Customer	CustLoyalty	0..1	Guest's loyalty card.
13	CustLoyalty	@ProgramID	1	Loyalty program code.
13	CustLoyalty	@MembershipID	1	Card number in the loyalty program.
13	CustLoyalty	@SignupDate	1	Date of registration in the loyalty program.

13	CustLoyalty	@LoyalLevel	1	Loyalty level of the guest's card.
13	CustLoyalty	@ExpireDate	0..1	Expiry date of the loyalty card.
13	CustLoyalty	SubAccountBalance	1..n	Balance on the loyalty card.
14	SubAccountBalance	@Balance	1	The accumulated points on the loyalty card.
14	SubAccountBalance	@Type	1	Type of loyalty points.
5	HotelResevation	ResGlobalInfo	1	Global information about a booking. It contains details of the payer, guarantee, and comments to a booking.
8	RoomStay	SpecialRequests	0..1	Preferences section
9	SpecialRequests	@Name	1	preference name
9	SpecialRequests	@RequestCode	1	preference code
Information about guarantee and prepayment				
6	ResGlobalInfo	Guarantee	1	It contains information about payment methods in a booking.
7	Guarantee	@GuaranteeCode	1	Type of guarantee. It can have the following values: None – no guarantee. A guest pays at check-in. CcDcVoucher – guarantee by bank card. There are bank card details, but the money has not yet been withdrawn from the guest's card. PrePay – prepayment guarantee. Prepayment is pending or has already been received. DepositPayments tag contains prepayment details.
8	Guarantee	Comments	1	
9	Comments	Comment	1..n	Detailed guarantee parameters.
9	Comment	@Name	1	Type of guarantee parameter: It can have values: PaymentMethodName – payment method; PaymentSystemName – payment system; PaymentSystemTitle – name of the payment method; PaymentSystemProfileAcquiringName – type of acquiring used to process the payment. Values permitted: - CB - the money is in a Exely account and will be transferred to a hotel under the terms of the contract. - Hotel - the money is immediately transferred to the hotel's bank account. PaymentTransactionId - Transaction ID in the payment system. Used for hotel acquiring only. PaymentSystemCode – api code of the payment system. Details are described in section "Types of guarantee and payment methods in booking" .
10	Comment	Text	1	The value of the guarantee parameter specified in Name attribute.
6	ResGlobalInfo	DepositPayments	0..1	It describes the type of prepayment required or made.

7	DepositPayments	GuaranteePayment	1..n	
7	GuaranteePayment	@Type	1	Type of prepayment. It can have values: ReceivedPayment – prepayment is received; ExpectedPayment – prepayment is expected; ReceivedLoyaltyPayment – redeemed points Parameters are described in detail in “Types of guarantee and payment methods in booking” section.
7	GuaranteePayment	@PaymentIndex	0..n	Payment identifier in booking for ReceivedPayment type
8	GuaranteePayment	AmountPercent	1	Prepayment is required or made.
8	AmountPercent	@Amount	1	Prepayment amount.
8	AmountPercent	@CurrencyCode	1	Currency code. Alfa-3 ISO 4217 currency code is used. For example, “EUR”.
8	AmountPercent	@BasisType	0..1	Filled in if GuaranteePayment@Type = ReceivedPayment. Indicates the method of prepayment calculation. The attribute can take values: - Nights - if the prepayment is made for the number of nights, - FullStay - if the prepayment is made for a percentage of the accommodation cost, Fixed - if the method of prepayment calculation is unknown. Used for reservations from channels.
8	AmountPercent	@NmbrOfNights	0..1	Number of nights to calculate prepayment. For reservations from channels this attribute is not filled in.
8	AmountPercent	@Percent	0..1	Percentage for calculating prepayment. For reservations from channels this attribute is not filled in.
6	ResGlobalInfo	Total	1	Contains the cost of the reservation.
7	Total	@AmountAfterTax	1	Final value of the reservation for the specified period
7	Total	@AmountBeforeTax	0..1	The cost of the reservation is tax free.
7	Total	Taxes	0..n	Detailed taxation
8	Taxes	@Amount	1	Amount of all taxes within the reservation
8	Taxes	Tax	0..n	Specific tax
9	Tax	@Code	1	Tax Type.
9	Tax	@Percent	1	Tax rate
9	Tax	@Amount	1	Amount of specific tax
9	Tax	TaxDescription	0..1	Tax Description
10	TaxDescription	Text	1	Tax name
Information about the customer in a booking				
6	ResGlobalInfo	Profiles	1	It contains information about the payer.
7	Profiles	ProfileInfo	1	
8	ProfileInfo	Profile	1	

9	Profile	Customer	1	Person who pays for a booking.
10	Customer	@BirthDate	0..1	Date of birth.
11	Customer	@Gender	0..1	Guest's gender.
10	Customer	PersonName	1	Guest's full name.
11	PersonName	Surname	1	Guest's last name.
11	PersonName	GivenName	0..1	Guest's first name.
11	PersonName	MiddleName	0..1	Guest's middle name.
10	Customer	CitizenCountryName	0..1	Guest's citizenship.
11	CitizenCountryName	@Code	1	Country code.
10	Customer	Email	0..1	Email.
10	Customer	Telephone	0..1	It contains a phone number.
11	Telephone	@PhoneNumber	1	Phone number.
10	Customer	Address	0..1	It contains address details.
11	Address	@CompanyName	0..1	Company name if needed.
11	Address	@CityName	0..1	City
11	Address	@PostalCode	0..1	Postal code.
11	Address	StateProv	0..1	It contains information on the state/region.
12	StateProv	@StateCode	0..1	State/region.
11	Address	CountryName	0..1	Country.
11	Address	AddressLine	1	Street, house, apartment.
Comments to a booking				
6	ResGlobalInfo	Comments	0..1	Comments to a booking.
7	Comments	Comment	0..n	It contains comments to a booking
7	Comment	@Name	0..1	Type of comment. It can have the following values: • SpecialRequest – additional requests, received from distribution channels (usually a guest has to select one or several options from the list); • RoomTypeAdditionalDetail – additional room parameters received from a distribution channel; • RoomTypeDescription - general room description received from a distribution channel; • RoomTypeMaxFreeChildren – number of children who can be accommodated in a room free of charge; • RoomTypeMealPlan – meal plan; • RoomTypeName – name of room type; • RoomTypeAmenities – room amenities received from a distribution channel. Note: if no attribute is specified, it is the guest's comment.
8	Comment	Text	1	Text comment.
Extra services				

5	HotelReservation	Services	0..1	The list of extra services.
6	Services	Service	1..n	Extra service.
7	Service	@ServicePricingType	0..1	Payment type: Per stay Per person Per night Per person per night Per use This field must not be taken into account when calculating the number of extra services sold. The final number of extra services and days is specified in Quantity and TimeSpan attributes.
7	Service	@ServiceRPH	1	Reference to an extra service in a message.
7	Service	@ID	0..1	Extra service identifier.
7	Service	@ServiceInventoryCode	0..1	Code of extra service. Possible values: • Transfer – transfer details. • EarlyArrival – information about early check-in. • LateDeparture – information about late check-out. Note: if ServiceInventoryCode attribute is missing, Service element describes a fee-based service.
7	Service	@Inclusive	1	It indicates whether an extra service is included in a rate plan or not.
7	Service	@Quantity	1	Number of ordered services. Extra service fee is set in PMS based on attributes Quantity (number of extra services) and TimeSpan (days for which extra services are provided). For example, Quantity=2 and <TimeSpan Start="27.04.2016 0:00:00" Duration="2"> means that two extra services were bought on April 27, and two extra services were bought on April 28. AmountAfterTax value displays the total cost for all the extra services for the entire validity period of extra services.
7	Service	ServiceDetails	1	Extra service details.
8	ServiceDetails	TimeSpan	0..1	Extra service validity period.
9	TimeSpan	@StartDate	0..1	Start date of extra service validity. Note: if StartDate attribute is not specified, the start date of stay is considered the start date of service validity.
9	TimeSpan	@Duration	1	Duration of extra service validity. For ServiceManagement services, the value is calculated in the units specified in TimeSpan@Increment.
9	TimeSpan	@Increment	0..1	Unit used to calculate Duration for ServiceManagement services. Possible values: Day, Hour, Minute. The attribute is transferred starting from PMSConnect 1.18.

8	ServiceDetails	Total	1	It contains the extra service fee. Note: the field contains the total service fee with Count/ parameter.
9	Total	@AmountAfterTax	1	Total extra service fee for the given period of time (ServiceDetails/TimeSpan) in the specified quantity (Service@Quantity). AmountAfterTax value is equal to zero for extra services included in rate plans.
9	Total	@AmountBeforeTax	0..1	Extra service fee excluding taxes.
9	Total	Taxes	0..n	Detailed taxation
10	Taxes	@Amount	1	The sum of all taxes within the service
10	Taxes	Tax	0..n	Specific tax
11	Tax	@Code	1	Tax Type.
11	Tax	@Percent	1	Tax rate
11	Tax	@Amount	1	Amount of specific tax
11	Tax	TaxDescription	0..1	Tax Description
12	TaxDescription	Text	1	Tax name
8	ServiceDetails	Comment	0..n	Comments to an extra service.
9	ServiceDetails	ServiceRates	0..1	Block with daily service prices
10	ServiceRates	ServiceRate	1..n	Daily detailed pricing for services
11	ServiceRate	@EffectiveDate	1	Date of service application
11	ServiceRate	@AmountAfterTax	1	Service amount on a specific date
9	Comment	Text	1	Text of comment.
Point of sale				
5	HotelResevation	POS	0..1	Instance of POS element with data on booking delivery systems.
6	POS	Source	1..10	Collection of Source elements with POS data.
7	Source	RequestorID	0..1	Point of sale identifier.
8	RequestorID	@Type	1	Required attribute. POS Type. According to the OTA specification codes table. It can have the following values: 1 - Customer 5 – Travel agency 11 – Tour Operator 22 - ERSP (Electronic reservation service provider)
6	RequestorID	@ID	1	Required attribute. Point of sale identifier. In the current API version, the Channel is the only point of sale and the property can have the only value - PMSCoconnect.
7	Source	BookingChannel	0..1	Instance of BookingChannel element with data on the distribution channel. Starting from PMSCoconnect 1.18, POS can contain multiple Source elements: the primary booking channel and the booking subchannel.

8	BookingChannel	@Type	1	Required attribute. Type of distribution channel. According to the OTA specification codes table. It can have the following value: 1 - Global distribution system (GDS) 2 - Alternative distribution system (ADS) 5 - Central reservation system (CRS) 6 - Tour operator system (TOS) 7 - Internet 9 – Agent
8	BookingChannel	@Primary	0..1	Indicates the primary booking channel. Used when POS contains multiple Source elements. true - primary booking channel; false - booking subchannel. The attribute is transferred starting from PMSConnect 1.18.
9	BookingChannel	CompanyName	0..1	Instance of CompanyName element with data on a legal entity that represents a distribution channel.
9	CompanyName	@Code	0..1	Company identifier. If a booking is received from an online distribution channel, use the connected-channel codes provided in the Profiles block of the OTA_HotelAvailRS response.
9	CompanyName	@CodeContext	0..1	Type of identifier. In the current API version, identifier type can have the values: «PMSConnect» – identifier belongs to the Channel identifiers directory. «IATA» – identifier represents IATA code.
9	BookingChannel	TPA_Extensions	0..1	Instance of TPA_Extensions element with additional properties of the distribution channel.
10	TPA_Extensions	BookingWebSource	0..1	Instance of BookingWebSource element with additional data on the point of sale in the distribution channel.
10	BookingWebSource	@Code	1	Required attribute. Type of point of sale in the channel. It can have the following values: «BS-MOBILE_SITE» – mobile website of the client. «BS-CLIENT_SITE» – website of the client «BS-FACEBOOK» – Facebook website
10	BookingWebSource	@Url		URL of the web page where a booking was made.
Cancellation rules				
6	ResGlobalInfo	CancelPenalties	0..1	It contains information about booking cancellation rules.
7	CancelPenalties	CancelPenalty	1	Element describing cancellation rule.
8	CancelPenalty	AmountPercent	0..1	Element describing penalty amount.
9	AmountPercent	@Amount	1	Penalty amount.
9	AmountPercent	@CurrencyCode	1	Currency of penalty amount. Alfa-3 <u>ISO 4217</u> currency code is used. For example, "EUR".

8	CancelPenalty	PenaltyDescription	1	Collection of comments to the cancellation rule.
9	PenaltyDescription	Text	1	Element contains description of the cancellation rule.

Examples of messages with different accommodation types for guests

When transferring bookings to PMS, the Exely system is not often aware of the exact accommodation type for guests as the information from external distribution channels is rarely sent to Exely. Hence, PMS must decide on how to assign rooms for guests based on the requirements for provision of complete information about bookings. The examples of messages specifying the number of guests accommodated in a room are provided below:

One room, single occupancy:

```
<RoomStays>
  <RoomStay>
    <RoomTypes>
      <RoomType RoomTypeCode="..." InvBlockCode="..." Quantity="1"/>
    </RoomTypes>
    <!-- Details omitted -->
    <GuestCounts>
      <GuestCount AgeQualifyingCode="AdultBed" Count="1" ResGuestRPH="1"/>
    </GuestCounts>
  </RoomStay>
</RoomStays>
```

One double room, double occupancy:

```
<RoomStays>
  <RoomStay>
    <RoomTypes>
      <RoomType RoomTypeCode="..." InvBlockCode="..." Quantity="1"/>
    </RoomTypes>
    <!--Details omitted -->
    <GuestCounts>
      <GuestCount AgeQualifyingCode="AdultBed" Count="2" ResGuestRPH="1"/>
    </GuestCounts>
  </RoomStay>
</RoomStays>
```

The same type of accommodation can be presented as follows:

```
<RoomStays>
  <RoomStay>
    <RoomTypes>
      <RoomType RoomTypeCode="..." InvBlockCode="..." Quantity="1"/>
    </RoomTypes>
    <!--Details omitted -->
    <GuestCounts>
      <GuestCount AgeQualifyingCode="AdultBed" Count="1" ResGuestRPH="1"/>
      <GuestCount AgeQualifyingCode="AdultBed" Count="1"/>
    </GuestCounts>
  </RoomStay>
</RoomStays>
```

Double room of one room type, double occupancy + extra bed:


```

<RoomStays>
  <RoomStay>
    <RoomTypes>
      <RoomType RoomTypeCode="14272" InvBlockCode="18946" Quantity="1"/>
    </RoomTypes>
    <!--Details omitted -->
    <GuestCounts>
      <GuestCount AgeQualifyingCode="AdultBed" Count="1" ResGuestRPH="1"/>
      <GuestCount AgeQualifyingCode="AdultBed" Count="1"/>
      <GuestCount AgeQualifyingCode="AdultExtraBed" Count="1"/>
    </GuestCounts>
  </RoomStay>
</RoomStays>

```

Examples of messages for different points of sale

The booking made through Exely Channel Manager on booking.com

```

<OTA_ResRetrieveRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-01-01T12:11:01+03:00">
  <ReservationsList>
    <HotelReservation>
      <POS>
        <Source>
          <RequestorID Type="22" ID="PMSConnect"/>
          <BookingChannel Type="2">
            <CompanyName Code="BGC" CodeContext="PMSConnect">Booking.com</CompanyName>
          </BookingChannel>
        </Source>
      </POS>
      <!-- Accommodation details omitted -->
    </HotelReservation>
  </ReservationsList>
</OTA_ResRetrieveRS>

```

In this example, the booking was made through Booking.com. The code of the company providing the reservation system is attributed to the Channel codes directory and is equal to BGC. This code must be used to identify the legal entity that represents the hotel agent on the PMS side.

The booking made through Exely Channel Manager with primary channel and subchannel

```

<OTA_ResRetrieveRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-01-01T12:11:01+03:00">
  <ReservationsList>
    <HotelReservation>
      <POS>
        <Source>
          <RequestorID Type="22" ID="PMSConnect"/>
          <BookingChannel Primary="true" Type="2">
            <CompanyName Code="CMB" CodeContext="PMSConnect">Comfort booking</CompanyName>
          </BookingChannel>
        </Source>
        <Source>
          <BookingChannel Primary="false" Type="2">
            <CompanyName Code="OZN" CodeContext="PMSConnect">Ozon.Travel</CompanyName>
          </BookingChannel>
        </Source>
      </POS>
      <!-- Accommodation details omitted -->
    </HotelReservation>
  </ReservationsList>
</OTA_ResRetrieveRS>

```

In this example, the primary booking channel is transferred in BookingChannel with Primary="true", and the booking subchannel is transferred in a separate Source element with BookingChannel@Primary="false". The Primary attribute is transferred starting from PMSConnect 1.18.

The booking made through the booking engine on the mobile version of the hotel website

```

<OTA_ResRetrieveRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-01-01T12:11:01+03:00">
  <ReservationsList>
    <HotelReservation>
      <POS>
        <Source>
          <RequestorID Type="22" ID="PMSConnect"/>
          <BookingChannel Type="7">
            <TPA_Extensions>
              <BookingWebSource Code="BS-MOBILE_SITE" Url="http://www.hotelsite.com"/>
            </TPA_Extensions>
          </BookingChannel>
        </Source>
      </POS>
      <!--Accommodation details omitted -->
    </HotelReservation>
  </ReservationsList>
</OTA_ResRetrieveRS>

```

In this example, the booking is created through the mobile website of the hotel.

Examples of different payment methods:

Payment at check-in at the hotel

```

<ResGlobalInfo>
  <!-- Content omitted -->
  <Guarantee GuaranteeCode="PayOnArrival">
    <Comments>
      <Comment Name="PaymentMethodName">
        <Text>PayOnArrival</Text>
      </Comment>
      <Comment Name="PaymentSystemName">
        <Text>AT_ARRIVAL</Text>
      </Comment>
      <Comment Name="PaymentSystemTitle">
        <Text>At check-in</Text>
      </Comment>
    </Comments>
  </Guarantee>
</ResGlobalInfo>

```

By selecting this payment method, a guest does not make a prepayment for the booking, but receives a booking confirmation to provide upon arrival at the hotel.

Bank card guarantee

```

<ResGlobalInfo>
  <!-- Content omitted -->
  <Guarantee GuaranteeCode="CcDcVoucher">
    <Comments>
      <Comment Name="PaymentMethodName">
        <Text>BankCardGuarantee</Text>
      </Comment>
      <Comment Name="PaymentSystemName">
        <Text>TLPAYMENTS</Text>
      </Comment>
      <Comment Name="PaymentSystemTitle">
        <Text>Bank card guarantee</Text>
      </Comment>
    </Comments>
  </Guarantee>
</ResGlobalInfo>

```

A guest provides the bank card details to the hotel to guarantee the booking. The guest's bank card details are not transferred anywhere. The hotel administrators can obtain bank card details in Exely account.

Payment by bank card (hotel acquiring)

```

<ResGlobalInfo>
  <!-- Content omitted -->
  <Guarantee GuaranteeCode="PrePay">
    <Comments>
      <Comment Name="PaymentMethodName">
        <Text>BankCard</Text>
      </Comment>
      <Comment Name="PaymentSystemName">
        <Text>UNITEDBULGARIANBANK</Text>
      </Comment>
      <Comment Name="PaymentSystemTitle">
        <Text>United Bulgarian Bank</Text>
      </Comment>
      <Comment Name="PaymentSystemProfileAcquiringName">
        <Text>Hotel</Text>
      </Comment>
      <Comment Name="PaymentTransactionId">
        <Text>1234567890</Text>
      </Comment>
    </Comments>
  </Guarantee>
  <DepositPayments>
    <GuaranteePayment Type="ReceivedPayment" PaymentIndex="0">
      <AmountPercent CurrencyCode="EUR" Amount="90.00"/>
    </GuaranteePayment>
  </DepositPayments>
</ResGlobalInfo>

```

Advance payment made by bank card. The guest's bank card details will not be sent. The payment transaction is made through the Alfa Bank Russia acquiring. The payment amount is deposited to the Exely bank account.

Electronic payment

```

<ResGlobalInfo>
  <!-- Content omitted -->
  <Guarantee GuaranteeCode="PrePay">
    <Comments>
      <Comment Name="PaymentMethodName">
        <Text>Electronic</Text>
      </Comment>
      <Comment Name="PaymentSystemName">
        <Text>UNITEDBULGARIANBANK</Text>
      </Comment>
      <Comment Name="PaymentSystemTitle">
        <Text>United Bulgarian Bank</Text>
      </Comment>
      <Comment Name="PaymentSystemProfileAcquiringName">
        <Text>Exely</Text>
      </Comment>
    </Comments>
  </Guarantee>
  <DepositPayments>
    <GuaranteePayment Type="ReceivedPayment" PaymentIndex="0">
      <AmountPercent CurrencyCode="EUR" Amount="160.0000"/>
    </GuaranteePayment>
  </DepositPayments>
</ResGlobalInfo>

```

Channel booking, payment at check-in

```
<ResGlobalInfo>
  <!-- Content omitted -->
  <Guarantee GuaranteeCode="PayOnArrival">
    <Comments>
      <Comment Name="PaymentMethodName">
        <Text>PayOnArrival</Text>
      </Comment>
      <Comment Name="PaymentSystemName">
        <Text>CM_PAY_ON_ARRIVAL</Text>
      </Comment>
      <Comment Name="PaymentSystemTitle">
        <Text>At check-in</Text>
      </Comment>
    </Comments>
  </Guarantee>
</ResGlobalInfo>
```

Channel booking, cashless payment

```
<ResGlobalInfo>
  <!-- Content omitted -->
  <Guarantee GuaranteeCode="PrePay">
    <Comments>
      <Comment Name="PaymentMethodName">
        <Text>Cashless</Text>
      </Comment>
      <Comment Name="PaymentSystemName">
        <Text>CM_CASHLESS</Text>
      </Comment>
      <Comment Name="PaymentSystemTitle">
        <Text>Cashless</Text>
      </Comment>
    </Comments>
  </Guarantee>
</ResGlobalInfo>
```

Channel booking, channel virtual card

```
<ResGlobalInfo>
  <!-- Content omitted -->
  <Guarantee GuaranteeCode="CcDcVoucher">
    <Comments>
      <Comment Name="PaymentMethodName">
        <Text>BankCardGuarantee</Text>
      </Comment>
      <Comment Name="PaymentSystemName">
        <Text>CM_PREPAY_CREDITCARD_GUARANTEE </Text>
      </Comment>
      <Comment Name="PaymentSystemTitle">
        <Text>Bank card guarantee / Channel collect</Text>
      </Comment>
    </Comments>
  </Guarantee>
</ResGlobalInfo>
```

The Channel withdrew the money from the guest's virtual card and transferred the card details to Exely. The hotel can get the card details in the Exely account.

Examples of different rate plans in a booking

A booking under one rate plan

```
<RoomStay IndexNumber="55318">
  <RoomTypes>
    <RoomType RoomTypeCode="14269" InvBlockCode="18946" Quantity="1"/>
  </RoomTypes>
  <RatePlans>
    <RatePlan RatePlanID="9018"/>
  </RatePlans>
  <RoomRates>
    <RoomRate EffectiveDate="2015-05-25" ExpireDate="2015-05-25" RatePlanCode="9018">
      <Total AmountAfterTax="60.00" CurrencyCode="EUR"/>
    </RoomRate>
    <RoomRate EffectiveDate="2015-05-26" ExpireDate="2015-05-26" RatePlanCode="9018">
      <Total AmountAfterTax="60.00" CurrencyCode="EUR"/>
    </RoomRate>
  </RoomRates>
  <TimeSpan Start="2015-05-25T12:00:00" Duration="1" End="2015-05-27T12:00:00"/>
  <!-- Content omitted -->
</RoomStay>
```

A booking under two rate plans

```
<RoomStay IndexNumber="55318">
  <RoomTypes>
    <RoomType RoomTypeCode="14269" InvBlockCode="18946" Quantity="1"/>
  </RoomTypes>
  <RatePlans>
    <RatePlan RatePlanID="9018"/>
    <RatePlan RatePlanID="9019"/>
  </RatePlans>
  <RoomRates>
    <RoomRate EffectiveDate="2015-05-25" ExpireDate="2015-05-25" RatePlanCode="9018">
      <Total AmountAfterTax="90.00" CurrencyCode="EUR"/>
    </RoomRate>
    <RoomRate EffectiveDate="2015-05-26" ExpireDate="2015-05-26" RatePlanCode="9019">
      <Total AmountAfterTax="90.00" CurrencyCode="EUR"/>
    </RoomRate>
  </RoomRates>
  <TimeSpan Start="2015-05-25T12:00:00" Duration="1" End="2015-05-27T12:00:00"/>
  <!-- Content omitted -->
</RoomStay>
```

OTA_NotifReportRQ

OTA_NotifReportRQ message is used to notify the Channel service that PMS has received and successfully processed the list of undelivered bookings received in OTA_ResRetrieveRS message. If the booking has not been processed and specified in OTA_NotifReportRQ message, the Channel service will consider the booking undelivered. In this case, the booking will be specified in OTA_ResRetrieveRS message until it is confirmed by PMS.

Example of message

General structure

```
<OTA_NotifReportRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" EchoToken="echo">
  <Success/>
  <NotifDetails HotelCode="2942">
    <HotelNotifReport>
      <HotelReservations>
        <HotelReservation CreateDateTime="2012-01-01T12:11:01+03:00" LastModifyDateTime="2012-01-
01T12:12:01+03:00" ResStatus="Reserved">
          <UniqueID Type="14" ID="BOOKING IDENTIFIER" ID_Context="IDENTIFIER CONTEXT"/>
          <RoomStays>
            <RoomStay IndexNumber="INDEX 1"/>
            <RoomStay IndexNumber="INDEX 2"/>
            <!-- Content omitted -->
          </RoomStays>
          <ResGlobalInfo>
            <HotelReservationIDs>
              <HotelReservationID ResID_Type="14" ResID_Value="PMS BOOKING IDENTIFIER"/>
            </HotelReservationIDs>
          </ResGlobalInfo>
        </HotelReservation>
      </HotelReservations>
    </HotelNotifReport>
  </NotifDetails>
</OTA_NotifReportRQ>
```

- CHANNEL BOOKING IDENTIFIER – the value of ID field of HotelReservation element transmitted by the Channel in OTA_ResRetrieveRS message for the booking which confirmation is being processed;
- IDENTIFIER CONTEXT – the value of ID_Context field of HotelReservation element transferred by the Channel in OTA_ResRetrieveRS message for the booking which confirmation is being processed;
- STAY INDEX 1..n – the value of IndexNumber field of processed RoomStay elements transferred by the Channel in OTA_ResRetrieveRS message. These elements belong to one booking in PMS with PMS BOOKING IDENTIFIER that must be used when the booking received from the Channel is saved as several bookings in PMS;
- PMS BOOKING IDENTIFIER – the booking number in PMS.

Booking processed but not created in PMS

```

<OTA_NotifReportRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" EchoToken="echo">
  <Success/>
  <NotifDetails HotelCode="LHHotel">
    <HotelNotifReport>
      <HotelReservations>
        <HotelReservation CreateDateTime="2012-01-01T12:11:01+03:00" LastModifyDateTime="2012-01-
01T12:12:01+03:00" ResStatus="Requestdenied">
          <UniqueID Type="14" ID="20121005-010-990663"/>
          <ResGlobalInfo>
            <Comments>
              <Comment>
                <Text>Room type code 37 not found</Text>
              </Comment>
            </Comments>
          </ResGlobalInfo>
        </HotelReservation>
      </HotelReservations>
    </HotelNotifReport>
  </NotifDetails>
</OTA_NotifReportRQ>

```

If ResStatus="Requestdenied" element is specified, the booking is not created in PMS. UniqueID element indicates to the Channel service which particular booking cannot be created. The booking will be marked by the Channel service as confirmed but not delivered to PMS.

Booking processed and created in PMS

```

<OTA_NotifReportRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" EchoToken="echo">
  <Success />
  <NotifDetails HotelCode="3184">
    <HotelNotifReport>
      <HotelReservations>
        <HotelReservation CreateDateTime="2014-09-30T00:45:30+02:00" LastModifyDateTime="2014-09-
30T01:43:43.323" ResStatus="Reserved">
          <UniqueID Type="14" ID="10333084" />
          <ResGlobalInfo>
            <HotelReservationIDs>
              <HotelReservationID ResID_Type="14" ResID_Value="F00002056" />
            </HotelReservationIDs>
          </ResGlobalInfo>
        </HotelReservation>
      </HotelReservations>
    </HotelNotifReport>
  </NotifDetails>
</OTA_NotifReportRQ>

```

Booking consists of several bookings in PMS


```

<OTA_NotifReportRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" EchoToken="echo">
  <Success/>
  <NotifDetails HotelCode="3184">
    <HotelNotifReport>
      <HotelReservations>
        <HotelReservation CreateDateTime="2014-09-30T00:45:30+02:00" LastModifyDateTime="2014-09-
30T01:43:43.323" ResStatus="Reserved">
          <UniqueID Type="14" ID="10333084"/>
          <RoomStays>
            <RoomStay IndexNumber="111"/>
          </RoomStays>
          <ResGlobalInfo>
            <HotelReservationIDs>
              <HotelReservationID ResID_Type="14" ResID_Value="F00002056"/>
            </HotelReservationIDs>
          </ResGlobalInfo>
        </HotelReservation>
        <HotelReservation CreateDateTime="2014-09-30T00:45:30+02:00" LastModifyDateTime="2014-09-
30T01:43:43.323" ResStatus="Reserved">
          <UniqueID Type="14" ID="10333084"/>
          <RoomStays>
            <RoomStay IndexNumber="222"/>
          </RoomStays>
          <ResGlobalInfo>
            <HotelReservationIDs>
              <HotelReservationID ResID_Type="14" ResID_Value="F00002057"/>
            </HotelReservationIDs>
          </ResGlobalInfo>
        </HotelReservation>
      </HotelReservations>
    </HotelNotifReport>
  </NotifDetails>
</OTA_NotifReportRQ>

```

ResStatus="Reserved" element means that the booking was not created in PMS.

UniqueID element indicates to the Channel service which particular booking is confirmed. RoomStay elements indicate which accommodation types are processed. The booking will be marked by the Channel service as confirmed and delivered to PMS.

Description of structural elements in a message

Element	Minimum number of elements required in message	Description / Value
OTA_NotifReportRQ/@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_NotifReportRQ/@EchoToken	0..1	Value of the attribute will be returned in a response message.
OTA_NotifReportRQ/Success, Errors	1	Success or Errors element must be present. Note: if Error element is present, HotelReservations collection must be empty.

OTA_NotifReportRQ/Warnings	0..1	Text list of non-critical errors occurred while processing the previous message.
OTA_NotifReportRQ/NotifDetails/HotelNotifReport	1	HotelReservations collection.
NotifDetails@HotelCode	1	Hotel code for which data is requested.
HotelReservations/HotelReservation	1..n	Every element contains a confirmation for one booking.
HotelReservation/@CreateDateTime	1	Date and time of booking creation in PMS.
HotelReservation/@ResStatus	1	Statuses of booking processing. It can have the following values: Reserved – the booking has been processed; Requestdenied – the booking has not been processed.
HotelReservation/@LastModifyDateTime	1	Time of the last booking modification. The field value must match the value of the corresponding field LastModifyDateTime in OTA_ResRetrieveRS response.
HotelReservation/UniqueID	1	Booking ID element in the Channel.
UniqueID/@Type	1	Attribute must always contain value "14".
UniqueID/@ID	1	Booking identifier in the Channel. Note: the identifier with an empty value of ID_Context field must be used if there are several booking identifiers in OTA_ResRetrieveRS message.
HotelReservation/RoomStays	0..1	Collection for identification of the processed RoomStay elements.
RoomStays/RoomStay	1..n	Confirmation of processing RoomStay element.
RoomStay@IndexNumber	1	Index of RoomStay element. This field must contain the value from corresponding IndexNumber field of RoomStay element received in OTA_ResRetrieveRS message.
HotelReservation/ResGlobalInfo	0..1	It is sent if the booking is successfully created in PMS.
HotelReservation/ResGlobalInfo/HotelReservationIDs/HotelReservationID	1	Collection for booking identification in PMS.
HotelReservationID/@ResID_Type	1	Attribute must always contain value "14".
HotelReservationID/@ResID_Value	1	Booking identifier in PMS.
HotelReservation/ResGlobalInfo/Comments	0..1	List of comments on processing bookings in PMS.
HotelReservation/ResGlobalInfo/Comments/Comment/Text	1	Text of comment on booking processing in PMS. Note: if the booking is not accepted by PMS, the comment must contain the text explaining why the booking cannot be accepted.

OTA_NotifReportRS

In response to a request with OTA_NotifReportRQ message, the Channel returns OTA_NotifReportRS message. OTA_HotelAvailNotifRS message contains information about successful or unsuccessful processing of the request made by OTA_HotelAvailNotifRQ message.

Examples of such messages:

Processed successfully

```
<OTA_NotifReportRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-02-01T07:19:28+03:00" EchoToken="echo">
  <Success/>
</OTA_NotifReportRS>
```

Processing failed

```
<OTA_NotifReportRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-02-01T07:19:28+03:00" EchoToken="echo">
  <Errors>
    <Error Type="3" Code="402">Reservation 20120131-100-344512 does not exist</Error>
  </Errors>
</OTA_NotifReportRS>
```

OTA_CancelRQ

OTA_CancelRQ message is used to notify the Channel service of booking cancellation in PMS. This message must be sent in case of complete cancellation. Do not send this message if only some of the rooms in a total booking are cancelled.

Example of message

General structure

```
<OTA_CancelRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" EchoToken="echo">
  <UniqueID ID="BOOKING IDENTIFIER" ID_Context="PMSCoconnect" Reason="CANCELLATION REASON"/>
  <CancellationOverrides>
    <CancellationOverride CurrencyCode="PENALTY CURRENCY" Amount="PENALTY AMOUNT">
    </CancellationOverride>
  </CancellationOverrides>
</OTA_CancelRQ>
```

- BOOKING IDENTIFIER – the value of ID field of UniqueID element sent by the Channel in OTA_ResRetrieveRS message for the booking which confirmation is being processed. It is necessary to send UI value of such UniqueID element, ID_Context field value of which is missing or equal to an empty string;
- CANCELLATION REASON - the string field that contains information about the reason for booking cancellation;
- PENALTY CURRENCY – ID_Context field value of HotelReservation element sent by the Channel in OTA_ResRetrieveRS message for the booking which confirmation is being processed;
- PMS BOOKING IDENTIFIER – the booking number in PMS.

Description of structural elements in a message

Element	Minimum number of elements required in message	Description/ Value
OTA_CancelRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_CancelRQ@EchoToken	0..1	Attribute value will be returned in a response message.
OTA_CancelRQ/UniqueID	1	Container for booking identifier.
UniqueID@ID	1	Booking identifier. Example: 1003453543.
UniqueID@ID_Context	1	Identifier type. Possible values are: "PMSCONNECT" – the identifier belongs to the Channel identifiers directory.
UniqueID@Reason	1	Cancellation reason.
OTA_CancelRQ/CancellationOverrides	0..1	Collection of penalties for booking cancellation.
CancellationOverrides/CancellationOverride	1	Penalty for booking cancellation.
CancellationOverride@Amount	1	Penalty amount.
CancellationOverride@CurrencyCode	0..1	Currency code. Alfa-3 code ISO 4217 is used. For example, "EUR". Note: if the field is not specified, the currency of a hotel set in Exely account is used.

OTA_CancelRS

In response to a request with OTA_CancelRQ message, the Channel returns OTA_CancelRS message. OTA_CancelRS message contains information about successful or unsuccessful processing of the request made by OTA_CancelRQ message.

Description of structural elements in a message.

Element	Minimum number of elements required in message	Description/ Value
OTA_CancelRS@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_CancelRS@Timestamp	1	Time of the request in xml schema dateTime format.
OTA_CancelRS@EchoToken	1	
OTA_CancelRS/Success	0..1	This element or Success or Errors element must be present if processing is successful.

Examples of messages

Processed successfully

```
<OTA_CancelRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-02-01T07:19:28+03:00" EchoToken="echo">
  <Success/>
</OTA_CancelRS>
```

Processing failed

```
<OTA_CancelRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18" TimeStamp="2012-02-01T07:19:28+03:00" EchoToken="echo">
  <Errors>
    <Error Type="3" Code="402">Reservation 20120131-100-344512 does not exist</Error>
  </Errors>
</OTA_CancelRS>
```

Integration with Price Assist

In order to integrate PMS with Price Assist, it is required to implement method:

- OTA_HotelInvCountNotifRQ – updating current data on the room inventory of the accommodation property;

OTA_HotelInvCountNotifRQ

We recommend that you send changes of the room inventory only. If it is not possible, we recommend you upload the total room inventory of the hotel 365 days in advance from the current date once every 24 hours. In case the message is not that large, send a separate message for every room type.

Example of message

```

<OTA_HotelInvCountNotifRQ Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <Inventories HotelCode="HOTEL1">
    <Inventory>
      <StatusApplicationControl Start="2019-05-01" InvTypeCode="4591" IsRoom="true"/>
      <InvCounts>
        <InvCount CountType="1" Count="20"/>
        <InvCount CountType="2" Count="15"/>
        <InvCount CountType="3" Count="0"/>
        <InvCount CountType="4" Count="3"/>
        <InvCount CountType="5" Count="2"/>
        <InvCount CountType="6" Count="0"/>
        <InvCount CountType="7" Count="0"/>
      </InvCounts>
    </Inventory>
    <Inventory>
      <StatusApplicationControl Start="2019-05-01" InvTypeCode="4592" IsRoom="true"/>
      <InvCounts>
        <InvCount CountType="1" Count="13"/>
        <InvCount CountType="2" Count="10"/>
        <InvCount CountType="3" Count="0"/>
        <InvCount CountType="4" Count="1"/>
        <InvCount CountType="5" Count="2"/>
        <InvCount CountType="6" Count="0"/>
        <InvCount CountType="7" Count="0"/>
      </InvCounts>
    </Inventory>
    <Inventory>
      <StatusApplicationControl Start="2019-05-02" InvTypeCode="4591" IsRoom="true"/>
      <InvCounts>
        <InvCount CountType="1" Count="20"/>
        <InvCount CountType="2" Count="11"/>
        <InvCount CountType="3" Count="0"/>
        <InvCount CountType="4" Count="8"/>
        <InvCount CountType="5" Count="1"/>
        <InvCount CountType="6" Count="0"/>
        <InvCount CountType="7" Count="0"/>
      </InvCounts>
    </Inventory>
    <Inventory>
      <StatusApplicationControl Start="2019-05-02" InvTypeCode="4592" IsRoom="true"/>
      <InvCounts>
        <InvCount CountType="1" Count="13"/>
        <InvCount CountType="2" Count="5"/>
        <InvCount CountType="3" Count="0"/>
        <InvCount CountType="4" Count="6"/>
        <InvCount CountType="5" Count="2"/>
        <InvCount CountType="6" Count="0"/>
        <InvCount CountType="7" Count="0"/>
      </InvCounts>
    </Inventory>
  </Inventories>
</OTA_HotelInvCountNotifRQ>

```

Description of structural elements in a message

Element	Quantity	Description / Value
OTA_HotelInvCountNotifRQ@Version	1	Latest version of the protocol must be used. See Revision history section.

OTA_HotelInvCountNotifRQ/Inventories	1	Section describes the total room inventory.
Inventories@HotelCode	1	Hotel identifier.
Inventories/Inventory	1..n	The room inventory per one day upon one room type.
Inventory/StatusApplicationControl	1	Required attribute. Detailed information.
StatusApplicationControl@Start	1	Date in yyyy-MM-dd format.
StatusApplicationControl@InvTypeCode	1	Room type code in Exely system.
StatusApplicationControl@IsRoom	1	It indicates that this room type physically exists, and it is not virtual.
Inventory/InvCounts	1	List of values.
InvCounts/InvCount	1..7	Value of one of the room inventory parameters.
InvCount@CountType	1	Parameter type. Values permitted: 1 (Physical) – the number of physical rooms. 2 (OutOfInventory) – the number of rooms that are out of stock: - The rooms for which the sales are closed for a long period of time (for more than 6 months); - The rooms for internal use. 3 (OutOfOrder) – the rooms closed for maintenance and other reasons for a short period of time (more than a day and less than 6 months); 4 (ChargelessRooms) – the free-of-charge rooms in which guests are accommodated for free, i.e., the rooms that do not bring profit. 5 (TransientSold) – the private rooms, sales. The number of rooms sold to individual guests. 6 (GroupSold) – the group rooms, sales. The number of rooms sold to group guests. 7 (AvailableRooms) – the vacant rooms. The rooms available for sale or the rooms in which guests can be accommodated for free.
InvCount@Count	1	The number of rooms for the specified parameter.

OTA_HotelInvCountNotifRS

OTA_HotelInvCountNotifRS message is the response to OTA_HotelInvCountNotifRQ message.

Examples of messages

Processed successfully

```
<OTA_HotelInvCountNotifRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <Success/>
</OTA_HotelInvCountNotifRS>
```

Processing failed

```
<OTA_HotelInvCountNotifRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <Errors>
    <Error Language="ENG" Type="4" Code="175">Password invalid</Error>
  </Errors>
</OTA_HotelInvCountNotifRS>
```

Booking delivery from PMS

It is possible to deliver bookings to Exely from an external PMS via API. To do this, it is necessary to implement the OTA_HotelResNotifRQ method and OTA_HotelResNotifRS response processing.

OTA_HotelResNotifRQ – Exely notification of reservation modification in the automated control system.

OTA_HotelResNotifRQ

This message is used to notify the Channel of the created or modified booking in PMS. Based on all the bookings, the hotel market analysis is performed and recommendations for setting prices are given. The bookings received through Exely system using ReadRQ request must also be synced.

Example of such a message:


```

<OTA_HotelResNotifRQ Version="1.18">
  <HotelReservations>
    <HotelReservation CreateDateTime="2019-01-24T10:00:15+01:00" LastModifyDateTime="2019-01-
24T10:36:15+01:00" ResStatus="Confirmed">
      <POS>
        <Source>
          <BookingChannel>
            <CompanyName Code="65" CodeContext="PMS">booking.com</CompanyName>
          </BookingChannel>
        </Source>
      </POS>
      <UniqueID Type="14" ID_Context="PMS" ID="1238593"/>
      <UniqueID Type="9" ID_Context="PMS" ID="48923"/>
      <UniqueID Type="14" ID_Context="PMSCoconnect" ID="990663"/>
      <RoomStays>
        <RoomStay IndexNumber="1" MarketCode="Leisure" SourceOfBusiness="Web">
          <RoomRates>
            <RoomRate EffectiveDate="2019-02-10" ExpireDate="2019-02-10" RatePlanCode="123597"
RatePlanName="Base rate plan" RoomTypeCode="902" RoomTypeName="Standard" InvBlockCode="5333"
InvBlockName="Main block">
              <Total AmountAfterTax="40.00" CurrencyCode="EUR"/>
            </RoomRate>
            <RoomRate EffectiveDate="2019-02-11" ExpireDate="2019-02-11" RatePlanCode="123533"
RatePlanName="Base rate plan - 10%" RoomTypeCode="902" RoomTypeName="Standard" InvBlockCode="5444"
InvBlockName="Selected block">
              <Total AmountAfterTax="36.00" CurrencyCode="EUR"/>
            </RoomRate>
            <RoomRate EffectiveDate="2019-02-12" ExpireDate="2019-02-12" RatePlanCode="123533"
RatePlanName="Base rate plan - 10%" RoomTypeCode="902" RoomTypeName="Standard" InvBlockCode="5444"
InvBlockName="Selected block">
              <Total AmountAfterTax="36.00" CurrencyCode="EUR"/>
            </RoomRate>
          </RoomRates>
          <GuestCounts>
            <GuestCount AgeQualifyingCode="AdultBed" Count="1" ResGuestRPH="1"/>
            <GuestCount AgeQualifyingCode="AdultBed" Count="1" ResGuestRPH="2"/>
            <GuestCount AgeQualifyingCode="ChildBandBed" Count="1"/>
          </GuestCounts>
          <TimeSpan Start="2019-02-10T14:00:00" End="2019-02-13T12:00:00"/>
          <BasicPropertyInfo HotelCode="3184"/>
          <ServiceRPHs>
            <ServiceRPH RPH="1"/>
          </ServiceRPHs>
        </RoomStay>
      </RoomStays>
      <ResGuests>
        <ResGuest ResGuestRPH="1">
          <Profiles>
            <ProfileInfo>
              <UniqueID Type="21" ID_Context="PMS" ID="445648423"/>
              <UniqueID Type="21" ID_Context="PMSCoconnect" ID="4323222"/>
            </ProfileInfo>
            <Profile>
              <Customer MailDistributionSubscribed="true">
                <PersonName>
                  <GivenName>John</GivenName>
                  <MiddleName>John</MiddleName>
                  <Surname>Smith</Surname>
                </PersonName>
                <Telephone PhoneNumber="8765435678"/>
                <Telephone PhoneNumber="8555544444"/>
              </Customer>
            </Profile>
          </Profiles>
        </ResGuest>
      </ResGuests>
    </HotelReservation>
  </HotelReservations>
</OTA_HotelResNotifRQ>

```

```

        <Email>smith@smith_gmail.com</Email>
        <Email>alternative-smith@smith_gmail.com</Email>
        <CitizenCountryName Code="AUS"/>
    </Customer>
</Profile>
</ProfileInfo>
</Profiles>
</ResGuest>
<ResGuest ResGuestRPH="2">
    <Profiles>
        <ProfileInfo>
            <UniqueID Type="21" ID_Context="PMS" ID="445648424"/>
            <UniqueID Type="21" ID_Context="PMSConnect" ID="4323223"/>
            <Profile>
                <Customer MailDistributionSubscribed="false">
                    <PersonName>
                        <GivenName>David</GivenName>
                        <MiddleName>David</MiddleName>
                        <Surname>Brown</Surname>
                    </PersonName>
                    <Telephone PhoneNumber="838923893"/>
                    <Email>david@brown_gmail.com</Email>
                    <CitizenCountryName Code="AUS"/>
                </Customer>
            </Profile>
        </ProfileInfo>
    </Profiles>
</ResGuest>
</ResGuests>
<ResGlobalInfo>
    <Guarantee GuaranteeCode="PrePay">
    </Guarantee>
    <DepositPayments>
        <GuaranteePayment Type="ReceivedPayment" PaymentIndex="0">
            <AmountPercent CurrencyCode="EUR" Amount="40.00"/>
        </GuaranteePayment>
    </DepositPayments>
    <Total AmountAfterTax="161.0000" CurrencyCode="EUR"/>
    <Profiles>
        <ProfileInfo>
            <UniqueID Type="21" ID_Context="PMS" ID="445648423"/>
            <UniqueID Type="21" ID_Context="PMSConnect" ID="4323222"/>
            <Profile>
                <Customer MailDistributionSubscribed="true">
                    <PersonName>
                        <GivenName>John</GivenName>
                        <MiddleName>John</MiddleName>
                        <Surname>Smith</Surname>
                    </PersonName>
                    <Telephone PhoneNumber="8765435678"/>
                    <Telephone PhoneNumber="8555544444"/>
                    <Email>smith@smith_gmail.com</Email>
                    <Email>alternative-smith@smith_gmail.com</Email>
                    <CitizenCountryName Code="AUS"/>
                    <CustLoyalty ProgramID="LS" MembershipID="543-876-123" SignupDate="1967-08-13"
LoyalLevel="a" ExpireDate="1967-08-13">
                        <SubAccountBalance Balance="2" Type="Miles"/>
                    </CustLoyalty>
                </Customer>
            </Profile>
        </ProfileInfo>
    </Profiles>

```

```

    </Profiles>
  </ResGlobalInfo>
  <Services>
    <Service ServiceRPH="1" Inclusive="false" Quantity="1" ID="699">
      <ServiceDetails>
        <TimeSpan Start="2019-02-10T00:00:00" Duration="3"/>
        <Comments>
          <Comment Name="Breakfast Buffet">
            <Text/>
          </Comment>
        </Comments>
        <Total AmountAfterTax="16.00" CurrencyCode="EUR"/>
      </ServiceDetails>
    </Service>
    <Service ServiceRPH="2" Inclusive="false" Quantity="1" ID="701" ServiceCategoryCode="Transfer">
      <ServiceDetails>
        <TimeSpan Start="2019-02-10T00:00:00" Duration="1"/>
        <Comments>
          <Comment Name="Airport transfer">
            <Text/>
          </Comment>
        </Comments>
        <Total AmountAfterTax="33.00" CurrencyCode="EUR"/>
      </ServiceDetails>
    </Service>
  </Services>
</HotelReservation>
</HotelReservations>
</OTA_HotelResNotifRQ>

```

Description of structural elements in a message

Element	Quantity	Description / Value
OTA_HotelResNotifRQ	1	Root node.
OTA_HotelResNotifRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_HotelResNotifRQ/HotelReservations	1	Collection of bookings.
HotelReservations/HotelReservation	1..n	Booking details.
OTA_HotelResNotifRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_HotelResNotifRQ/HotelReservations	1	Collection of bookings.
HotelReservations/HotelReservation	1..n	Booking details.
HotelReservation@CreateDateTime	1	Time of booking creation.
HotelReservation@LastModifyDateTime	1	Time of booking modification. It is specified in case of booking modification in PMS.

HotelReservation@ResStatus	1	Booking status. Possible values are: Confirmed – the booking is confirmed. Waitlisted – the booking needs to be confirmed. In-House – the booking upon which a guest has checked in. Checked-Out – the booking upon which a guest has checked out. Cancelled – the booking is cancelled.
HotelReservation/POS/Source/BookingChannel	0..1	Description of the legal entity that represents a point of sale.
BookingChannel/CompanyName	1	Name of the legal entity in PMS.
CompanyName@Code	1	Legal entity identifier in PMS.
CompanyName@CodeContext	1	It always has PMS value. It indicates that the identifier belongs to PMS.
HotelReservation/UniqueID	1..3	Bookings identifiers and a group identifier that the given booking corresponds to.
UniqueID@Type	1	Identifier type. Possible values are: 14 – for booking identifier; 9 – for group identifier. If it is a group booking, specify a unique identifier of the group. It is used to keep records of the group check-ins. UniqueID element with the given type is optional.
UniqueID@ID	1	Identifier value.
UniqueID@ID_Context	1	Identifier context. Possible values are: “PMSCoconnect” – identifier in Exely. UniqueID element with this context is not required. “PMS” – identifier in PMS.
HotelReservation/RoomStays	1	Collection of stays.
RoomStays/RoomStay	1..n	Description of stay in a booking.
RoomStay@IndexNumber	0..1	Unique room stay code from ResRetrieveRS message. It is required for bookings received from Exely.
RoomStay@MarketCode	1	Code of market segment that a booking is related to. The value from PMS is specified. The information about segments will be used to analyse hotel revenue. Possible values are: Corporate, TravelAgency, OTA, Individual and others.
RoomStay@SourceOfBusiness	1	Code of point of sale. The value from PMS is specified. The information about points of sale will be used to analyse hotel revenue. Possible values are: Walk-in, Web, Telephone, Email etc.
RoomStay/RoomRates	1	Collection of prices per each day with a rate plan and a room type specified.

RoomRates/RoomRate	1..n	Description of price per day.
RoomRate@EffectiveDate RoomRate@ExpireDate	1	Date of stay for which the price is specified. Both fields must have the same value.
RoomRate@RatePlanCode	0..1	Rate plan code in Exely system.
RoomRate@RatePlanName	1	Rate plan name in PMS.
RoomRate@RoomTypeCode	0..1	Room type code in Exely system.
RoomRate@RoomTypeName	1	Room type name in PMS.
RoomRate@InvBlockCode	0..1	Code of availability block in Exely system. Required to be filled in if the booking belongs to the selected availability block.
RoomRate@InvBlockName	0..1	Name of availability block in PMS.
RoomRate/Total	1	Description of the total cost of stay.
Total@AmountAfterTax	1	Cost of stay value.
Total@CurrencyCode	1	Currency code. Alfa-3 ISO 4217 currency code is used. For example, "EUR".
RoomStay/GuestCounts	1	Collection that describes the number of staying guests and their occupancy per bed.
GuestCounts/GuestCount	1..2	It describes the number of guests of the same age range.
GuestCount@AgeQualifyingCode	1	Age range of a guest and details of accommodation type. It can have the following values: AdultBed - adult with main occupancy; ChildBandBed - child with main occupancy; AdultExtraBed - adult on extra bed; ChildBandExtraBed - child on extra bed; ChildBandWithoutBed - child without bed.
GuestCount@Age	0..1	Child age.
GuestCount@Count	1	Number of guests.
GuestCount@ResGuestRPH	0..1	Unique reference to a guest with the given accommodation type.
RoomStay/TimeSpan	1	Period of stay.
TimeSpan@Start	1	Check-in date and time. Supported formats: yyyy-MM-ddThh:mm:ss – the time in the hotel time zone. For example, 2014-01-01T12:00:00
TimeSpan@End	1	Check-out date and time. Supported formats: yyyy-MM-ddThh:mm:ss – the time in the hotel timezone. For example, 2014-01-01T12:00:00.
RoomStay/BasicPropertyInfo	1	It contains information about a hotel.
BasicPropertyInfo@HotelCode	1	Hotel identifier.

RoomStay/ServiceRPHs	0..1	The list of references to extra services related to the given stay.
ServiceRPHs/ServiceRPH	1..n	Reference to an extra service.
ServiceRPH@RPH	1	Value of the reference to an extra service in a message.
HotelReservation/ResGuests	0..1	Section describes information about guests.
ResGuest@ResGuestRPH	1	Guest unique identifier in a message.
ResGuest/Profiles/ProfileInfo/UniqueID	1..2	Guests identifiers.
UniqueID@Type	1	Identifier type. It always has value 21 – guest profile.
UniqueID@ID	1	Identifier value.
UniqueID@ID_Context	1	Identifier context. Possible values are: “PMSCoconnect” – identifier in Exely. UniqueID element with this context is optional. “PMS” – identifier in PMS.
ProfileInfo/Profile/Customer/PersonName	0..1	Guest's full name.
PersonName/GivenName	0..1	Guest's first name.
PersonName/Surname	1	Guest's last name.
PersonName/MiddleName	0..1	Guest's middle name.
ProfileInfo/Profile/Customer/BirthDate	0..1	Guest's date of birth
ProfileInfo/Profile/Customer/BirthDate	0..1	Consent to mailing
ProfileInfo/Profile/Customer/Telephone	0..n	Guest's phone numbers.
Telephone@PhoneNumber	1	Phone number.
ProfileInfo/Profile/Customer/Email	0..n	Guest's email addresses.
ProfileInfo/Profile/Customer/CitizenCountryName	1	Guest's citizenship.
ProfileInfo/Profile/Customer/Address	0..1	Guest's addresses Note: If an address is specified, at least one of its optional fields must be passed.
ProfileInfo/Profile/Customer/Gender	0..1	Guest's gender. Possible values: "Male" "Female" "Unknown"
Address@CityName	0..1	City name
Address@PostalCode	0..1	Postal address
Address/CountryName@Code	0..1	Country code
Address/CountryName	0..1	Country name
Address/AddressLine	0..3	Address strings in text form

GuaranteePayment/AmountPercent@CurrencyCode	1	Currency code
ResGlobalInfo/Total	1	Total cost of booking
Total@AmountAfterTax	1	Total cost value
Total@CurrencyCode	1	Currency code
ResGlobalInfo/Profiles/ProfileInfo/Profile/Customer	1	Customer of a booking – the person who made a booking
Customer/PersonName/GivenName	0..1	Customer's first name
Customer/PersonName/Surname	1	Customer's last name
Customer/PersonName/MiddleName	0..1	Customer's middle name
Customer/Telephone	0..n	Customer's phone numbers
Telephone@PhoneNumber	1	Phone number
Customer/Email	0..n	Customer's email addresses
Customer/CitizenCountryName	0..1	Customer's citizenship
Customer/CustLoyalty	0..n	Information about the customer's loyalty card
CustLoyalty@ProgramID	1	Loyalty program code
CustLoyalty@MembershipID	1	Card number in the loyalty program
CustLoyalty@SignupDate	1	Date of registration in the loyalty program
CustLoyalty@LoyalLevel	1	Loyalty level of the guest's card
CustLoyalty@ExpireDate	0..1	Expiry date of the loyalty card
CustLoyalty/SubAccountBalance	1..n	Balance on the loyalty card
SubAccountBalance@Balance	1	The accumulated points on the loyalty card
SubAccountBalance@Type	1	Type of loyalty points
SubAccountBalance@Type	1	Type of loyalty points.
HotelReservation/Services	0..1	Extra services in a booking.
Services/Service	1..n	Describes an extra service in a booking.
Service@ServiceRPH	1	Service unique identifier in a message.
Service@ID	0..1	Extra service code in Exely.
Service@ServiceInventoryCode	0..1	Code of extra service type. Possible values are: - Transfer – information about the transfer; - EarlyArrival – information about the early check-in; - LateDeparture – information about the late check-out. Note: if ServiceInventoryCode attribute is missing, Service element describes a fee-based service.
Service@Inclusive	1	It indicates whether an extra service is included in a rate plan or not.
Service@Quantity	1	Collection of extra services.
Service/ServiceDetails	1	Extra service details.
ServiceDetails/TimeSpan	1	Validity period of extra service.

TimeSpan@StartDate	1	Start date of extra service validity.
TimeSpan@Duration	1	Duration of extra service validity. For ServiceManagement services, the value is calculated in the units specified in TimeSpan@Increment.
ServiceDetails/Total	1	It contains the extra service fee.
Total@AmountAfterTax	1	Total extra service fee for the given period of time (ServiceDetails/TimeSpan) in the specified quantity (Service@Quantity).
Total@CurrencyCode	1	Currency code.
ServiceDetails/Comments	1	Section contains the name of extra service in PMS.
Comments/Comment@Name	1	The name of extra service in PMS.

OTA_HotelResNotifRS

OTA_HotelResNotifRS message is the response to OTA_HotelResNotifRQ message.

Examples of such messages:

Processed successfully

```
<OTA_HotelResNotifRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <Success/>
</OTA_HotelResNotifRS>
```

Processing failed

```
<OTA_HotelResNotifRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <Errors>
    <Error Language="ENG" Type="4" Code="175">Password invalid</Error>
  </Errors>
</OTA_HotelResNotifRS>
```

Integration with Exely Loyalty Program

In order to integrate PMS with Exely Loyalty, it is necessary to implement two methods:

- OTA_ProfileCreateRQ – loyalty card creation;
- OTA_ProfileModifyRQ – loyalty card modification.

OTA_ProfileCreateRQ

Example of such a message:


```

<OTA_ProfileCreateRQ EchoToken="a" Version="1.18" TimeStamp="2001-12-17T09:30:47Z"
xmlns="http://www.opentravel.org/OTA/2003/05">
  <UniqueID ID="12312313" Type="1" ID_Context="CRM"/>
  <Profile ProfileType="0" StatusCode="0">
    <Customer BirthDate="1967-08-13" Gender="Female">
      <PersonName>
        <GivenName>John</GivenName>
        <MiddleName>John</MiddleName>
        <Surname>Smith</Surname>
      </PersonName>
      <Telephone PhoneNumber="+19879877896"/>
      <Email>john@smith.com</Email>
      <Address>
        <AddressLine>a</AddressLine>
        <CityName>London</CityName>
        <PostalCode>321312</PostalCode>
        <County>Great Britain</County>
        <StateProv StateCode="LDN"/>
        <CountryName Code="GBR"/>
      </Address>
      <CitizenCountryName Code="GBR"/>
      <CustLoyalty ProgramID="LS" MembershipID="213-123-123" SignupDate="1967-08-13" LoyalLevel="GOLD"
ExpireDate="1967-08-13">
        <SubAccountBalance Balance="100" Type="Miles"/>
      </CustLoyalty>
    </Customer>
  </Profile>
</OTA_ProfileCreateRQ>

```

Description of structural elements in a message

Element	Quantity	Description / Value
OTA_ProfileCreateRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_ProfileCreateRQ/UniqueID	1	Section describes profile identifier.
UniqueID@ID	1	Profile identifier.
UniqueID@Type	1	Profile identifier type.
UniqueID@ID_Context	0..1	Profile identifier type.
OTA_ProfileCreateRQ/Profile/Customer	1	Section describes a profile in the Loyalty program.
Customer/PersonName/GivenName	0..1	Customer's first name.
Customer/PersonName/Surname	1	Customer's last name.
Customer/PersonName/MiddleName	0..1	Customer's middle name.
Customer/Telephone	0..n	Customer's phone numbers.
Telephone@PhoneNumber	1	Phone number.
Customer/Email	0..n	Customer's email addresses.
Customer/CitizenCountryName	0..1	Customer's citizenship.

Customer/CustLoyalty	0..n	Information about customer's loyalty card.
CustLoyalty@ProgramID	1	Loyalty program code.
CustLoyalty@MembershipID	1	Card number in the loyalty program.
CustLoyalty@SignupDate	1	Date of registration in the loyalty program.
CustLoyalty@LoyalLevel	1	Loyalty level of the customer's card.
CustLoyalty@ExpireDate	0..1	Expiry date of the loyalty card.
CustLoyalty/SubAccountBalance	1..n	Balance on the loyalty card.
SubAccountBalance@Balance	1	The accumulated points on the loyalty card.
SubAccountBalance@Type	1	Type of loyalty points.

OTA_ProfileCreateRS

OTA_ProfileCreateRS message is the response to OTA_ProfileCreateRQ message.

Examples of such messages:

Processed successfully

```
<OTA_ProfileCreateRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <Success/>
  <UniqueID ID="a" Type="0" ID_Context="a"/>
</OTA_ProfileCreateRS>
```

Processing failed

```
<OTA_ProfileCreateRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <Errors>
    <Error Language="ENG" Type="4" Code="175">Password invalid</Error>
  </Errors>
</OTA_ProfileCreateRS>
```

OTA_ProfileModifyRQ

Example of such a message:

```

<OTA_ProfileModifyRQ EchoToken="a" Version="1.18" TimeStamp="2001-12-17T09:30:47Z"
xmlns="http://www.opentravel.org/OTA/2003/05">
  <UniqueID ID="12312313" Type="1" ID_Context="CRM"/>
  <ProfileModify ProfileType="0" StatusCode="0">
    <Customer BirthDate="1967-08-13" Gender="Female">
      <PersonName>
        <GivenName>John</GivenName>
        <MiddleName>John</MiddleName>
        <Surname>Smith</Surname>
      </PersonName>
      <Telephone PhoneNumber="+44207896"/>
      <Email>john@smith.com</Email>
      <Address>
        <AddressLine>a</AddressLine>
        <CityName>London</CityName>
        <PostalCode>321312</PostalCode>
        <County>Great Britain</County>
        <StateProv StateCode="LDN"/>
        <CountryName Code="GBR"/>
      </Address>
      <CitizenCountryName Code="GBR"/>
      <CustLoyalty ProgramID="LS" MembershipID="213-123-123" SignupDate="1967-08-13" LoyalLevel="GOLD"
ExpireDate="1967-08-13">
        <SubAccountBalance Balance="100" Type="Miles"/>
      </CustLoyalty>
    </Customer>
  </ProfileModify>
</OTA_ProfileModifyRQ>

```

Description of structural elements in a message

Element	Quantity	Description / Value
OTA_ProfileModifyRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
OTA_ProfileModifyRQ/UniqueID	1	Section describes profile identifier.
UniqueID@ID	1	Profile identifier.
UniqueID@Type	1	Profile identifier type.
UniqueID@ID_Context	0..1	Profile identifier type.
OTA_ProfileModifyRQ/Profile/Customer	1	Section describes a profile in the Loyalty program.
Customer/PersonName/GivenName	0..1	Customer's first name.
Customer/PersonName/Surname	1	Customer's last name.
Customer/PersonName/MiddleName	0..1	Customer's middle name.
Customer/Telephone	0..n	Customer's phone numbers.
Telephone@PhoneNumber	1	Phone number.
Customer/Email	0..n	Customer's email addresses.
Customer/CitizenCountryName	0..1	Customer's citizenship.

Customer/CustLoyalty	0..n	Information about customer's loyalty card.
CustLoyalty@ProgramID	1	Loyalty program code.
CustLoyalty@MembershipID	1	Card number in the loyalty program.
CustLoyalty@SignupDate	1	Date of registration in the loyalty program.
CustLoyalty@LoyalLevel	1	Loyalty level of the customer's card.
CustLoyalty@ExpireDate	0..1	Expiry date of the loyalty card.
CustLoyalty/SubAccountBalance	1..n	Balance on the loyalty card.
SubAccountBalance@Balance	1	The accumulated points on the loyalty card.
SubAccountBalance@Type	1	Type of loyalty points.

OTA_ProfileModifyRS

OTA_HotelInvCountNotifRS message is the response to OTA_HotelInvCountNotifRQ.

Examples of such messages:

Processed successfully

```
<OTA_ProfileModifyRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <Success/>
</OTA_ProfileModifyRS>
```

Processing failed

```
<OTA_ProfileModifyRS Version="1.18" xmlns="http://www.opentravel.org/OTA/2003/05">
  <Errors>
    <Error Language="ENG" Type="4" Code="175">Password invalid</Error>
  </Errors>
</OTA_ProfileModifyRS>
```

Specifics of receiving data on different types of loyalty programmes

Exely Loyalty Program: Points

When this type of loyalty program works:

- The amount of a definite stay in the OTA_ResRetrieveRS message in the HotelReservation-\>RoomStay-\>Total.AmountAfterTax section will not change
- The amount of the reservation in the OTA_ResRetrieveRS message in the HotelReservation-\>Total.AmountAfterTax section will not change.
- The amount of charged points in the reservation is transferred in the OTA_ResRetrieveRS message in the HotelReservation-\>ResGlobalInfo-\>Guarantee-\>DepositPayments-\> GuaranteePayment\ [Type='ReceivedLoyaltyPayment']-\>AmountPercent-\>Amount

Example

```

<DepositPayments>
  <GuaranteePayment Type ="ReceivedLoyaltyPayment ">
    <AmountPercent BasisType="Fixed" CurrencyCode="EUR" Amount="1082.0000" />
  </GuaranteePayment>
</DepositPayments>

```

Exely Loyalty Program: Discounts

When this type of loyalty program works:

- Discount information is specified in the OTA_ResRetrieveRS message for each stay (RoomStay) in the HotelReservation-\>RoomStay-\>Discounts section
- Discount percentage is specified in the OTA_ResRetrieveRS message in the HotelReservation-\>RoomStay-\>Discounts-\>Discount.Percent section.
- Information about the cost of a specific room stay (RoomStay) after the discount is applied is specified in the OTA_ResRetrieveRS message in the HotelReservation-\>RoomStay-\>Total.AmountAfterTax section
- The total amount of the reservation after applying the discount is transferred to OTA_ResRetrieveRS in the HotelReservation-\>Total-\>AmountAfterTax section.
- The amount of discount for loyalty program is provided in percent only.

Example

```

<Discounts Type ="Percent " Percent ="10.0000 " DiscountCode="44879 ">
  <DiscountReason Name ="SILVER ">
    <Text />
  </DiscountReason>
</Discounts>

```

In OTA_ResRetrieveRS message in HotelReservation-\>RoomStay-\>Discounts-\>Discount.AmountAfterTax section there is a possibility to transfer discount in monetary terms, but this element is used only for those discount types, for which a fixed amount of money is set. This element will not work for transferring the amount of loyalty program discount at all.

=====

PMSCoconnect Health Check

To verify the availability of the PMSCoconnect service, you must implement the OTA_PingRQ method and process the OTA_PingRS response.

This must be implemented by RMS systems. For PMS systems, it is optional and does not affect the integration status. Receipt of a request is grounds for considering the integration to be working.

The request must be sent every 5 minutes for the integration to remain in the “working” status. If no PingRQ request has been sent within 15 minutes of the last request, the integration is considered non-working.

OTA_PingRQ

Example of such a message:

```
<OTA_PingRQ xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18">
  <EchoData HotelCode="12254">Healthy</EchoData>
</OTA_PingRQ>
```

Description of structural elements in a message

Element	Quantity	Description / Value
OTA_PingRQ@Version	1	Latest version of the protocol must be used. See Revision history section.
EchoData	1	A reference for additional message identification, assigned by the requesting host system. Any string parameter from 1 to 128 characters can be sent.
EchoData@HotelCode	1	Required attribute. Accommodation property code (hotel code).

OTA_PingRS

Example of such a message:

```
<OTA_PingRS xmlns="http://www.opentravel.org/OTA/2003/05" Version="1.18">
  <Success/>
  <EchoData HotelCode="12254">Healthy</EchoData>
</OTA_PingRS>
```

=====

Annex 1

Error and warning codes

The **Code** attribute identifies the general error or warning category. Determine the exact processing result using the code, EWT type, message text, **Tag** attribute, and original request together.

Error code (Code)	Description / Value
15	Invalid date
61	Invalid currency code
69	Minimum stay criteria not fulfilled
87	Booking reference invalid
94	Same booking references
97	Booking reference not found
135	End date invalid
136	Start date invalid
150	Changes are not permitted
163	Payment type invalid
175	Password invalid
182	Password required
187	System currently unavailable
188	Transaction error - please report
240	Bank card expired
241	Expiry date is invalid
242	Bank card number is invalid or missing
281	Reservation requires bank card data
320	Invalid value
321	Required field missing
322	No availability
361	Invalid hotel
365	Error bank card
375	Hotel not active

392	Invalid hotel code
394	Invalid item
400	Invalid property code
402	Invalid room type
425	No match found
433	Please book on a separate reservation
436	Rate plan does not exist
437	Rate plan unavailable
438	Requested rate plan not available
448	System error
450	Unable to process
504	Extra bed or crib not available
505	Invalid bed type
730	Invalid room type for requested hotel
767	Invalid room stay index
769	Only first reservation processed
783	Room or rate plan not found
784	Your request timed out. Please retry the request
840	Duplicated rate plan codes
850	Non-existent service type
852	Invalid children ages

Warnings when uploading availability and rates

The `OTA_HotelAvailNotifRQ` and `OTA_HotelRateAmountNotifRQ` methods may return both `<Success/>` and `<Warnings>`. This response means that no critical error occurred, but some data may have been processed with limitations, applied partially, or skipped completely. The presence of `<Success/>` does not guarantee that every request element was applied.

To determine the processing result, use the `Code` and `Tag` attributes, the `Warning` text, and the original request together. The same code may indicate either partial processing or a complete skip of the corresponding request fragment.

The accepted date range starts on the current date in the property's time zone and ends two years after that date. Both boundaries are included.

Method	Code	Typical Warning text	Reason	Processing result
Both methods	136	Period {Start}-{End} was not handled	The range contains no dates that can be processed: it ended before the property's current date, contains none of the selected weekdays, or has its dates in reverse order.	The corresponding <code>AvailStatusMessage</code> or <code>Rate</code> is skipped completely. Other request elements continue to be processed.
Both methods	136	Start date was truncated to {Date}	The period starts before the property's current date.	Dates before the specified boundary are ignored. Data from the specified boundary through <code>End</code> continues to be processed.
Both methods	135	End date was truncated to {Date}	The period ends after the maximum accepted date, which is the property's current date plus two years.	Dates after the specified boundary are ignored. Data from <code>Start</code> through the specified boundary continues to be processed.
<code>OTA_HotelAvailNotif RQ</code>	150	Availability integration is disabled.	Automatic availability upload is disabled for the property.	<code>BookingLimit</code> is not applied. Restrictions from the same element may be processed independently.
<code>OTA_HotelAvailNotif RQ</code>	150	Restrictions are disabled for this provider or {Restriction} restriction is disabled for this provider	Uploading all restrictions or the specified restriction type is disabled.	Disabled restrictions are not applied. Availability and enabled restriction types may be processed independently.
<code>OTA_HotelAvailNotif RQ</code>	320	Attribute value is out of accepted bounds <code>BookingLimit="..."</code>	<code>BookingLimit</code> is not a valid integer.	Availability from the corresponding element is not applied; other data in the element may be processed independently.
<code>OTA_HotelAvailNotif RQ</code>	402, 783	Unknown <code>InvTypeCode="..."</code> , Unknown <code>InvBlockCode="..."</code> , or Unknown <code>RatePlanCode="..."</code>	The room type, availability block, or rate plan code is not found in the integration settings.	Data related to the unknown item is not applied; other request elements continue to be processed.
<code>OTA_HotelAvailNotif RQ</code>	320, 448	Attribute value is out of accepted bounds ... or Unknown <code>MinMaxMessageType</code> value: ...	The restriction value is outside the accepted range or the restriction type is not supported.	The corresponding restriction is not applied; other supported changes continue to be processed.

Method	Code	Typical Warning text	Reason	Processing result
OTA_HotelRateAmount NotifRQ	150	Price integration is disabled. or Options price integration is disabled.	Uploading accommodation rates or extra-service rates is disabled for the property.	Rates of the corresponding type are not applied; other enabled rate types may be processed independently.
OTA_HotelRateAmount NotifRQ	783, 850	Unknown InvTypeCode="..." or Unknown RatePlanCode="..."	The room type, rate plan, or extra service is not found in the integration settings.	The related rate fragment is skipped; other request elements continue to be processed.
OTA_HotelRateAmount NotifRQ	61	Cannot update prices without currency code... or Invalid currency code ...	The currency is missing when multiple currencies are possible, or the supplied currency is not allowed for the rate plan.	The corresponding rate is not applied.
OTA_HotelRateAmount NotifRQ	321	@CurrencyCode attribute is missed, assumed {CurrencyCode}.	The currency was not supplied, but a single default currency can be determined for the item.	The rate continues to be processed using the currency stated in the warning. For other code 321 messages where the currency cannot be determined, the corresponding rate is not applied.
OTA_HotelRateAmount NotifRQ	320	Value ... is out of range ... , Attribute value is out of accepted bounds ... , or MaxAdditionalGuests must be positive numeric	A numeric rate or occupancy value is outside the accepted range.	The invalid value is not applied; other independent rates continue to be processed.
OTA_HotelRateAmount NotifRQ	450	Negative or empty price value is ignored , Price upload for this extra service is not supported... , Uploading prices for default rate plan is not allowed , or Price modification ... is not allowed.	The rate is invalid or direct modification is prohibited by the settings or the rate plan/service type.	The corresponding rate or rate-plan fragment is skipped.
OTA_HotelRateAmount NotifRQ	394, 505, 852	Combined placement not found , Adult ... bed was not found , or Child bed category was not found ...	The supplied occupancy or age category is not mapped to an item configured for the property.	The rate for the corresponding occupancy is not applied; other rates continue to be processed.

The warning applies to the fragment identified by `Tag` . PMS must log the full response together with the original request and must not treat `<Success/>` as unconditional confirmation that all submitted values were applied.

Error and warning types

Error type (Error Warning Type, EWT)	Description / Value
1	Unknown
2	No implementation
3	Biz rule
4	Authentication
6	Authorization
7	Protocol violation
10	Required field missing
12	Processing exception
13	Application error

Developer tools

Fiddler

Fiddler is the proxy routing the traffic between your computer and the remote server allowing it to inspect and change it.

Official website: <http://www.telerik.com/fiddler>

You can use Fiddler to emulate responses of PMSCoordinate service. Please follow the steps below:

1\ Download and install Fiddler.

2\ Apply settings in Tools -> Fiddler Options -> Connections as displayed below:



After that, Fiddler will become available at: <http://127.0.0.1:9999>. For example, open this page in the browser:



Fiddler Echo Service

```
GET / HTTP/1.1
Host: 127.0.0.1:9999
Connection: keep-alive
Cache-Control: max-age=0
Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/webp,*/*;q=0.8
Upgrade-Insecure-Requests: 1
User-Agent: Mozilla/5.0 (Windows NT 6.3; WOW64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/50.0.2661.75 Safari/537.36
Accept-Encoding: gzip, deflate, sdch
Accept-Language: en-US,en;q=0.8,ru;q=0.6
```

This page returned a **HTTP/200** response
Originating Process Information: chrome:8880

- To configure Fiddler as a reverse proxy instead of seeing this page, see [Reverse Proxy Setup](#)
- You can download the [FiddlerRoot certificate](#)

3\ Go to the Autoresponder tab to set an automatic response.



4\ Select Add Rule and add Create New Response for 127.0.0.1:9999 -> Save.



5\ In TextEditor, add a required response. For example, a message with a response from PMSCoordinate service you want to test.



6\). From now on, you will be receiving the required message each time <http://127.0.0.1:9999> is requested.

PMSCoconnect FAQ

General questions regarding data upload

What is an Api key and how to retrieve it?

Api key is a code to identify an object (room type, rate plan, extra service, etc.) which is used to interact with external PMS. A code can be found in the section "PMS integration" \> "PMS inventory" of the HotelSalesWizard account. It is preferable to retrieve such codes using the OTA_HotelAvailRQ message (see PMSCoconnect manual).

How to retrieve Api codes automatically?

The OTA_HotelAvailRQ request is used to receive a list of room types, rate plans, extra services, connected channels, and enabled payment methods. The message can be used to implement the setting of mapping objects from PMS with the ones from HotelSalesWizard.

Are login, password, and hotel code different for each property?

Yes, they are. Usually, when setting up a new connection, a new combination of these parameters must be provided. Login and password for a cloud PMS can be identical if needed. A hotel ID is always unique.

Is there a time limit for the updates upload?

Yes, there is. Updates for 2 years ahead are accepted only. Updates beyond the limit will be ignored, and a response will contain a corresponding warning. Hence, there is no need to upload data for 3 years ahead.

How often must updates be sent?

Updates must be sent right after they occur in PMS. It is also recommended to use the queues to guarantee the delivery of updates to HotelSalesWizard in case of temporary loss of Internet connection. Delta updates must be sent only.

What are delta updates?

These are the updates for the certain dates when changes have been made. It is forbidden to upload all the data if any change occurs. All the data must be uploaded manually in case of the initial setup or when recovering from failures.

Is it possible to disable the synchronization of certain data?

Yes, it is. In HotelSalesWizard, there are the following modes:

For availability:

- Automatic mode from PMS;
- Manual mode — availability is managed in the HotelSalesWizard account.

For prices:

- Automatic mode from PMS;
- Manual mode — all prices are set in the HotelSalesWizard account;
- Mixed mode — prices are retrieved from PMS, but users can edit them.

For restrictions (it is set separately for each restriction):

- Automatic mode from PMS;
- Manual mode.

If PMS does not support the integration by prices, a manual entry is automatically selected when setting up the integration. In other cases, it can be used if an error is detected in data upload from PMS.

If “Manual mode” is selected for some data, a warning with the text “Availability/Price/Restriction integration is disabled” will appear when attempting to make any changes.

It is better to have the option to disable the transfer of some data in PMS.

Is it possible to create rate plans and room types through PMSConnect?

No, it is not. All the items are created in the HotelSalesWizard account. After that, they get Api codes which can be used in messages.

How to process the Success or Error response from the service?

PMSConnect can return several response options:

Success response is a message which is successfully processed.

Success and Warnings response is a message processed with limitations. For example, “Rate plan from the message is not found” or “Update dates are out of the allowed range”.

Error response is a message which is not fully processed. For example, an authorization error occurs, or a message is not completed correctly.

How to process errors from the service?

PMS must log errors received from PMSConnect. It would be wise to display error messages to the users. Examples of errors:

- Authentication error

```
<Error Language="EN" Type="4" Code="450" Tag="">Unable to process</Error>
```

- System error of the PMSConnect service

```
<Error Language="EN" Type="1" Code="448" Tag="">System error</Error>
```

- Incorrectly completed message

```
<Error Language="EN" Type="10" Code="321"
Tag="/OTA_HotelAvailNotifRQ/AvailStatusMessages/AvailStatusMessage[1]/BookingLimit">BookingLimit attribute
is required</Error>
```

If the System error is received, repeat the request after a while. Sometimes there is no need to do it, and it is just required to determine the reason.

For more information on error and warning codes, see Annex 1.

One should repeat the request over time if HTTP code other than 200 is received.

We received a big list of Warnings in response. What should we do?

The Warning text indicates what must be fixed in a message. The reason may lie in the settings which do not coincide or a message might not be completed correctly. We recommend that you do not ignore such warnings, as they can point to discrepancies in the integration.

Availability & Restrictions (OTA_HotelAvailNotif)

Is it required to send availability updates when receiving new bookings?

Yes, it is. Availability updates must be sent after each booking. Updates can even be sent if a booking has been modified, but dates of stay remain the same.

Note that updates must be sent **after** the NotifReportRQ request. HotelSalesWizard logs bookings which have not been delivered to PMS. They are listed in the table of Undelivered bookings to PMS. Such bookings are subtracted from the current availability value. When a booking confirmation (NotifReportRQ) is received from PMS, the availability gets automatically reduced in HotelSalesWizard, and we expect PMS to have the same availability value. This must be done to avoid overbooking. If the availability reduction from PMS comes earlier than NotifReportRQ response, this way the availability will be reduced twice which must not be allowed.

What is the availability block?

Availability block is a selected number of rooms for sales under special rate plans. If PMS allows creating such blocks, the availability must be uploaded with the InvBlockCode field specified. Do not send the parameter if there is one availability block in PMS only.

What restrictions does HotelSalesWizard support?

- Open/Close
- CTA
- CTD
- MinLOS/MinLOSArrival
- MaxLOS/MaxLOSArrival
- MinAdvBooking
- MaxAdvBooking
- FullPatternLOS

Restrictions are set for a room type or a rate plan. Hence, the rate plan code must be specified in the RatePlanCode field, and the room type InvTypeCode code should also be stated.

See the PMSConnect manual.

Can the availability of more than 0 be sent for dates with closed sales restrictions?

Yes, it can. The Closed restriction will be active.

Should restrictions be sent if availability is changed?

No, they should not. It can produce extra load on the system. Restrictions must be sent separately from availability or when they are changed.

Rates (OTA_HotelRateAmountNotif)

Is it possible to sell rooms and beds separately in hostels?

In HotelSalesWizard, properties can sell beds in rooms as well as rooms of different types. It can be tested in a test environment.

Which accommodation types are available?

In HotelSalesWizard, the following accommodation types are available:

- Adult with main occupancy (the number of beds is set for each room type)
 - Single occupancy
 - ...
 - N occupancy
- Adult on extra bed
- Child with main occupancy for each child age range
- Child on extra bed for each child age range
- Child without bed for certain child age ranges

Price should be specified for each accommodation type. See BaseByGuestAmts and AdditionalGuestAmounts for more details.

Rate plans of the “Price for bed in room” type have special terms.

What peculiarities are there when working with health resorts?

There are special “Price for bed in room” rate plans in HotelSalesWizard. Prices are uploaded to such rate plans the same way as to standard rate plans, BUT it is possible to specify the extra bed price for booking a different number of extra beds (MaxAdditionalGuests attribute).

Such rate plans also allow booking rooms for several guests accommodated under different rate plans, e.g. the first guest has booked a room under the “With treatment” rate plan, and the other has made a booking under the “Without treatment” rate plan.

To learn more, see “Specifics of managing rate plans with pricing per bed in a room” and “Processing bookings with several guests accommodated in one room type under different rate plans”.

How many child age ranges can be created in HotelSalesWizard?

It is possible to add any number of child age ranges. To specify an age range, use the attributes:

- AgeQualifyingCode="8"
- AgeBucket="0" or the combination MinAge="3" and MaxAge="5"

Retrieve Reservations (OTA_ResRetrieveRS)

How often is it required to request bookings?

It is possible to request bookings once every 3 to 5 minutes. HotelSalesWizard reduces availability temporarily until a booking is delivered to PMS.

How long does it take a booking to be delivered?

It takes 20 minutes. After that, a booking is manually processed and cannot be retrieved using a ReadRQ request. It can be resent from the “Undelivered bookings to PMS” section in the HotelSalesWizard account.

Which booking fields must be displayed in PMS?

The maximum number of fields that can be sent in a message. Some fields might be missing in PMS. In this case, it is recommended to implement these fields in PMS. From our experience, the following fields are available for display:

- Number of adults and children with main occupancy and on extra bed
- Point of sale, distribution channel (e.g., Booking.com)
- Guarantee type and prepaid amount
- Comment to a booking
- Booking numbers from a booking system (HotelSalesWizard internal number and channel booking number)
- Booking cost from a channel
- Services
- Date and time of check-in and check-out
- Guest data

What does a partial booking cancellation look like?

Partial cancellation is a booking modification with one or several stays (RoomStay) missing if compared to the previous booking version. If such a modification is retrieved, it is required to cancel or delete stays in PMS and confirm only the newly retrieved RoomStays by using NotifReportRQ request.

How to confirm a booking if every RoomStay in PMS corresponds to a separate booking?

The NotifReportRQ message allows confirming each stay with different booking numbers in PMS separately. See the detailed examples of the OTA_NotifReportRQ messages in the specification. If not required, it is possible to confirm a full booking without specifying RoomStay.

How to process services in a booking?

Services get processed in PMS based on the Quantity (number of services) and TimeSpan (service provision days) attributes. For example, if Quantity=2 and `<TimeSpan Start="27.04.2016 0:00:00" Duration="2">`, it means that 2 services have been bought both on 27 April and 28 April. The AmountAfterTax value is the cost of all the services for the entire service validity period. If a service is included in a room rate, the AmountAfterTax value equals 0. To learn more, see the description of attributes in PMSCoconnect manual for the OTA_ResRetrieveRS message.

How to work with early check-in and late check-out?

HotelSalesWizard allows setting rules for guests to check in earlier or check out later than the standard time. Guests can be charged extra for such services. Starting with version 1.14, such surcharges are transferred as services (Services) and have unique ServiceInventoryCode:

- EarlyArrival code retrieves information about early check-in
- LateDeparture code transfers information about late check-out

The expected time of the guest's check-in and check-out is specified in TimeSpan of a booking. Sometimes it is required to block a room for -1 day from the check-in date or +1 day from the check-out day to avoid overbooking. For example, one guest should check out at 12:00 noon, which is the hotel's standard time, and the other guest should check in at 06:00 am. This rule can be adjusted by the "Select the availability" setting in "Early check-in/Late check-out". The rule in PMS is set separately, but a room is advised to be blocked for an extended period of time by default.

Services from channels do not have Api codes. What should we do in this case?

Services from channels are retrieved without Api codes. In PMS, they must be counted as a cost of services separately from the cost of stay. The service name, its cost, and payment type must be transferred.

Can the cost of stay in a booking be different from the cost of stay set in a rate plan?

Yes, it can. Channels set their own discounts, which can be adjusted in channels only. Hence, the cost of stay in a booking can differ from the price set in a rate plan. It is important to save the final cost of stay for the bookings. If it is not possible, a user must be notified that the final cost of stay in a booking is different from the final cost of stay in a rate plan.

Can there be bookings with several rate plans?

Yes, there can be. A rate plan code is specified for every day, and a rate plan can be different within one RoomStay. This is called RateMix. There are also dynamic rate plans in HotelSalesWizard. Bookings under such rate plans can have different codes depending on the rate level selected for a given day. The dynamic rate code itself is not sent.

A booking has a prepayment. Where to find this information?

A booking contains a guarantee type and a prepayment amount if there is any. Note that a prepayment amount has two modes: ExpectedPayment (prepayment is expected) and ReceivedPayment (prepayment is received). Use ReceivedPayment to display the amount of prepayment made.

See "Types of guarantee and payment methods" for more details.

Certification

What is certification?

See "Integration certification" in the PMSConnect manual.

What set of tests is performed during certification?

See "Integration certification" in the PMSConnect manual.

Test environment

Is there any test environment where requests can be completed?

Yes, there is. We have a test environment. Access is granted upon request.

How is it possible to test bookings without the test environment?

You can use the Fiddler application, which sends a required XML for each request.

To learn more, see "Developer tools" in PMSConnect manual.

Prepayment allocation in reservation

In protocol version 1.17, the reservation message received attributes that describe how a received prepayment was calculated.

In the DepositPayments section, the nested GuaranteePayment element must have Type="ReceivedPayment" for the AmountPercent@BasisType attribute to be filled. BasisType indicates how the prepayment amount was calculated in the reservation.

BasisType can have the following values:

- Nights - the prepayment was made for a number of nights;
- FullStay - the prepayment was made as a percentage of the accommodation cost;

- Fixed - the prepayment calculation method is unknown. This value is usually used for channel reservations because the channel's prepayment calculation principle is not available.

AmountPercent can also contain attributes that depend on BasisType:

- If BasisType="FullStay", AmountPercent@Percent contains the percentage of the reservation cost taken as the prepayment.
- If BasisType="Nights", AmountPercent@NmbrOfNights contains the number of reservation nights covered by the prepayment.

Prepayment for a number of nights:

```
<ResGlobalInfo>
  <Guarantee GuaranteeCode="PrePay">
    <!-- Guarantee information is missing -->
  </Guarantee>
  <DepositPayments>
    <GuaranteePayment Type="ReceivedPayment" PaymentIndex="0">
      <AmountPercent BasisType="Nights" NmbrOfNights="1" CurrencyCode="EUR" Amount="100.00"/>
    </GuaranteePayment>
  </DepositPayments>
</ResGlobalInfo>
```

Prepayment as a percentage of the accommodation cost:

```
<ResGlobalInfo>
  <Guarantee GuaranteeCode="PrePay">
    <!-- Guarantee information is missing -->
  </Guarantee>
  <DepositPayments>
    <GuaranteePayment Type="ReceivedPayment" PaymentIndex="0">
      <AmountPercent BasisType="FullStay" Percent="50.00" CurrencyCode="EUR" Amount="60.00"/>
    </GuaranteePayment>
  </DepositPayments>
</ResGlobalInfo>
```

Fixed prepayment amount when the calculation method is unknown:

```
<ResGlobalInfo>
  <Guarantee GuaranteeCode="PrePay">
    <!-- Guarantee information is missing -->
  </Guarantee>
  <DepositPayments>
    <GuaranteePayment Type="ReceivedPayment" PaymentIndex="0">
      <AmountPercent BasisType="Fixed" CurrencyCode="EUR" Amount="10.00"/>
    </GuaranteePayment>
  </DepositPayments>
</ResGlobalInfo>
```