



04 FEBRUARY
2025

Webinar on DCAT-AP

interoperable
europe
innovation ∞ govtech ∞ community

Agenda

01

Welcome

02

Status DCAT-AP

03

Expected use of controlled vocabularies

04

Alignment issues with GeoDCAT-AP

05

Open issues

06

Handling changes in external vocabularies

07

Wrap up and next steps

Workshop practicalities


Audio

Click on 'connect audio' but please mute your microphones



Chat

You can also share your questions for the Q&A session via the chat



Recording

The workshop will be recorded





Context of the SEMIC assets

Introduction to SEMIC

The objectives of the SEMIC action is to promote Semantic Interoperability amongst the EU Member States by:



Promoting, share and reuse of semantic assets, experience and tools and facilitating agreements in key areas.



Identifying opportunities for alignment on semantic definitions, metadata and reference data sources with special focus on identification and definitions of Core Concepts / Vocabularies.



Raising awareness on the importance of data and metadata management.

SEMIC specifications



A person's name(s), date and place of birth/death, identifier, addresses, citizenship, etc.



The legal name, address, identifier, company type, and activities of a legal entity.



The different ways of describing a location, e.g. via an address, a geographic name, or a geometry, in alignment with INSPIRE.



The requirements and evidence of a procedure or formal process.



The administrative information, hierarchy, identifiers, events and classification of a public organisation.



A public event, its time, audience, location, etc.



Vocabularies

Application Profiles



Objective of the webinar



- Address several key topics related to DCAT-AP
 - Address the status of DCAT-AP: Overview of the outstanding issues and their resolution.
 - Specify the expected use of controlled vocabularies.
 - Discuss open issues related to the alignment with GeoDCAT-AP.
 - Introduce open issues for which community feedback is requested.
 - Handle changes in external vocabularies.

Status of GitHub issues


Description

GitHub issue breakdown

- 43 Open issues

Of which:


- 6 bugs
- 10 generic questions for information
- 7 feedback requested (8)

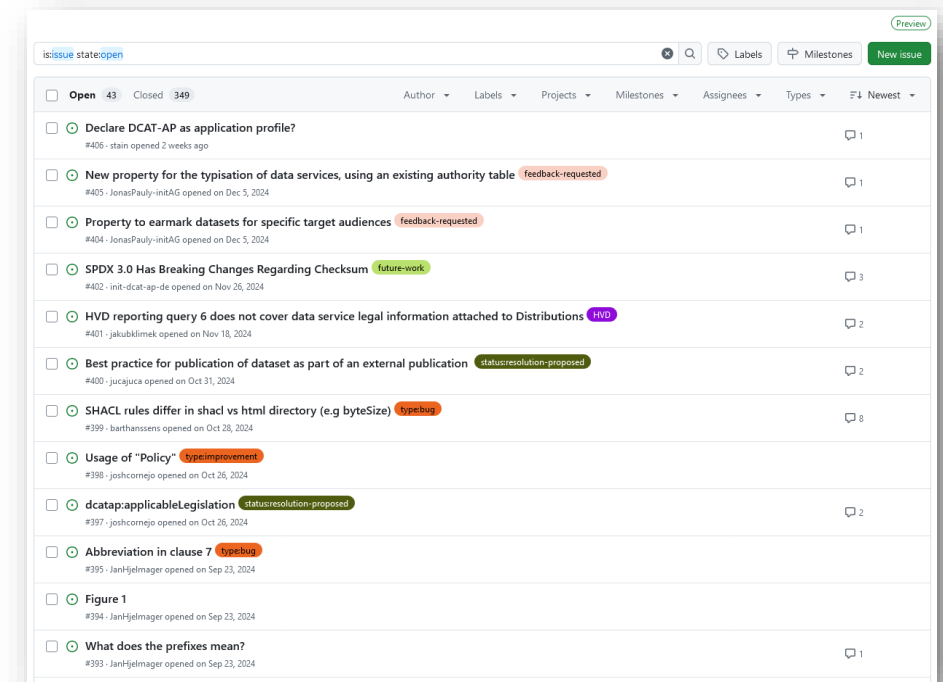

Draft release: <https://semiceu.github.io/uri.semic.eu-generated/DCAT-AP/releases/3.0.1-draft/>

Release Plan

Goal of the next releases

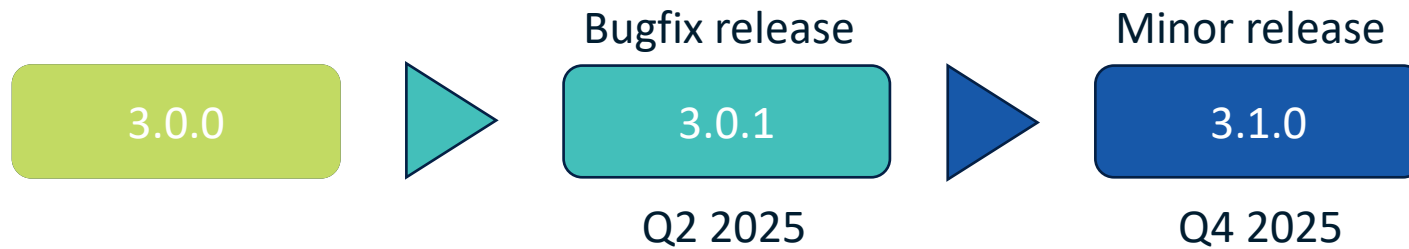

Most of the issues can be resolved within bugfix release.
Some choices may require a minor release

Draft release: <https://semiceu.github.io/uri.semic.eu-generated/DCAT-AP/releases/3.0.1-draft/>



Codelists

Motivation

Slides have been presented during [GeoDCAT-AP webinar 14th May 2024](#).

- (Geo)DCAT-AP community agreed with the general proposal
- Missing a concrete proposal for the qualifications for DCAT-AP codelists

Objective today:

- Re-establish the understanding of the different qualifications
- Agree on a concrete proposal for DCAT-AP

Codelist Qualifier

Problem statement

Establishing a common ***interpretation*** for the sentence:

*“The property **MUST** use as range values codes from {codelist} which are transferred from one specification to another.”*


Other qualifiers (MUST, IS RECOMMENDED, MAY) and cardinalities (0..N, 1..N, 0..1, 1..1)

Codelist Qualifier

Problem statement

Qualifications have impact on:

- Profiling
- validation

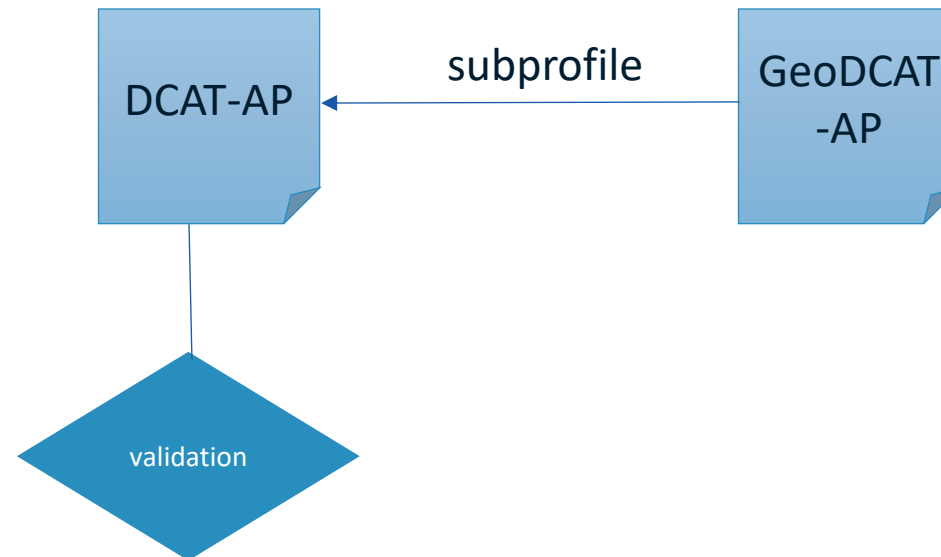

Codelist Example

Example

```
ns:codelist1 a skos:ConceptScheme.  
ns:codelist1 skos:prefLabel "Example Codelist1"@en.
```

```
codelist1:x2 a skos:Concept.  
codelist1:x2 skos:prefLabel "Code x2"@en.  
codelist1:x2 skos:inScheme ns:codelist1.  
codelist1:x2 skos:topConceptOf ns:codelist1.
```

European Commission

English 

Search

European Commission > INSPIRE > INSPIRE registry > INSPIRE theme register

INSPIRE registry

INSPIRE theme register

URI	http://inspire.ec.europa.eu/theme
Label	INSPIRE theme register
Content summary	The INSPIRE theme register contains all spatial data themes, as defined in the Annexes of the INSPIRE Directive (Directive 2007/2/EC of the European Parliament and of the Council of 14 March 2007 establishing an Infrastructure for Spatial Information in the European Community (INSPIRE)). The descriptions of the themes are based on version 3.0 of the "Definition of Annex Themes and Scope (D 2.3)" by the data specifications drafting team and subsequent updates by the INSPIRE Thematic Working Groups (TWGs).
Register Manager	European Commission, Joint Research Centre
Register Owner	European Union
Control Body	Control body for the central INSPIRE registers and INSPIRE register federation
Submitting Organization	Nominated submitting organisations for the central INSPIRE registers and INSPIRE register federation
Contact Point	JRC INSPIRE Registry Team
License	Europe Legal Notice
Insert date	2013-03-25 14:14 PM CET
Available formats:	XML Registry XML ISO 19135 RDF/XML JSON CSV ATOM ROR

Available items

Show entries

Showing 1 to 10 of 35 entries

Filter:

Label	Status
Addresses	Valid
Administrative units	Valid
Agricultural and aquaculture facilities	Valid
Area management/restriction/regulation zones and reporting units	Valid
Atmospheric conditions	Valid
Atmospheric Conditions and meteorological geographical features	Invalid
Bio-geographical regions	Valid
Buildings	Valid
Cadastral parcels	Valid
Coordinate reference systems	Valid

1

2

3

4

Next >

Codelist Qualifier

Example

The property **MUST** use as range values codes from EU vocabularies Data theme.

Example 1

```
_:d dcat:theme nal:AGRI.
```



Example 2

```
_:d dcat:theme inspire:au.
```



Example 3

```
_:d dcat:theme nal:AGRI.
```

```
_:d dcat:theme inspire:au.
```



Codelist Qualifier

Example

The property **MAY** use as range values codes from EU vocabularies Data theme.

Example 1

```
_:d dcat:theme nal:AGRI.
```



Example 2

```
_:d dcat:theme inspire:au.
```



Example 3

```
_:d dcat:theme nal:AGRI.
```

```
_:d dcat:theme inspire:au.
```



Codelist Qualifier: possible outcome

Example

The property **MUST** use as range values codes from EU vocabularies Data theme.

Example 1

```
_:d dcat:theme nal:AGRI.
```



Example 2

```
_:d dcat:theme inspire:au.
```



Example 3

```
_:d dcat:theme nal:AGRI.
```

```
_:d dcat:theme inspire:au.
```



Codelist Qualifier: possible outcome

Example

The property **MAY** use as range values codes from EU vocabularies Data theme.

Example 1

```
_:d dcat:theme nal:AGRI.
```



Example 2

```
_:d dcat:theme inspire:au.
```



Example 3

```
_:d dcat:theme nal:AGRI.
```

```
_:d dcat:theme inspire:au.
```



Current SHACL shapes used by DCAT-AP

```
:Codelist1Restriction
```


```
  a sh:NodeShape ;
  rdfs:comment "Codelist1 restriction" ;
  sh:property [
    sh:hasValue ns:codelist1;
    sh:minCount 1 ;
    sh:nodeKind sh:IRI ;
    sh:path skos:inScheme
  ] .
```

```
:PropertyShape
```

```
  a sh:NodeShape ;
  sh:property [
    sh:node :CodelistRestriction ;
    sh:nodeKind sh:IRI ;
    sh:path dct:subject ;
    sh:severity sh:Violation
  ] ;
  sh:targetClass dcat:Dataset.
```

In case of MANDATORY the severity is a **‘Violation’**,
in all other cases the severity is a **‘Warning’**.

Multiple systems

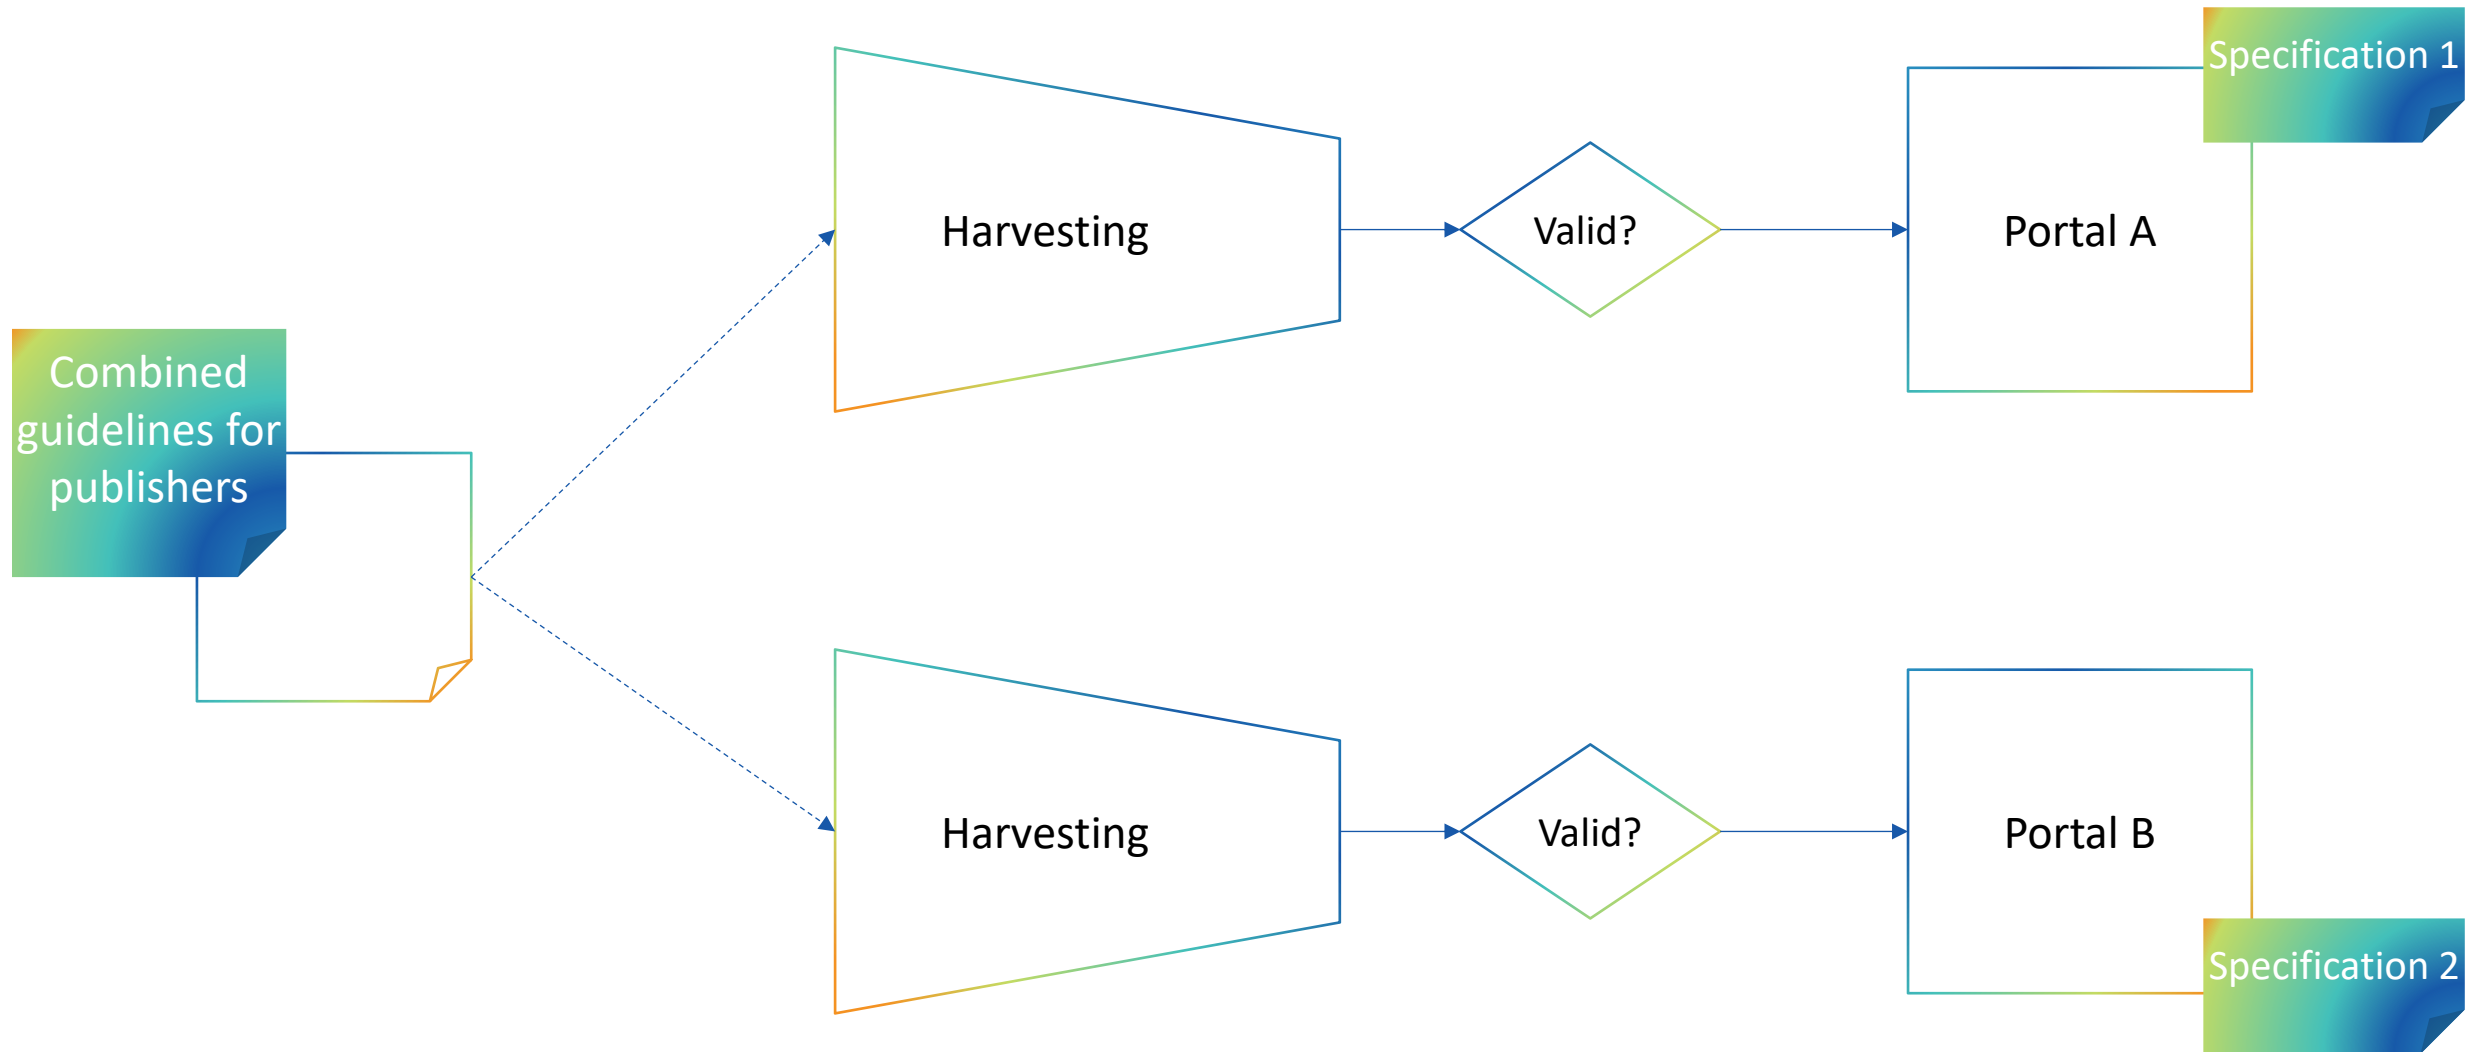


Example scenario


- Publisher publishes **successfully** for System 1.
- Publisher gets request to publish on System 2.




Multiple systems

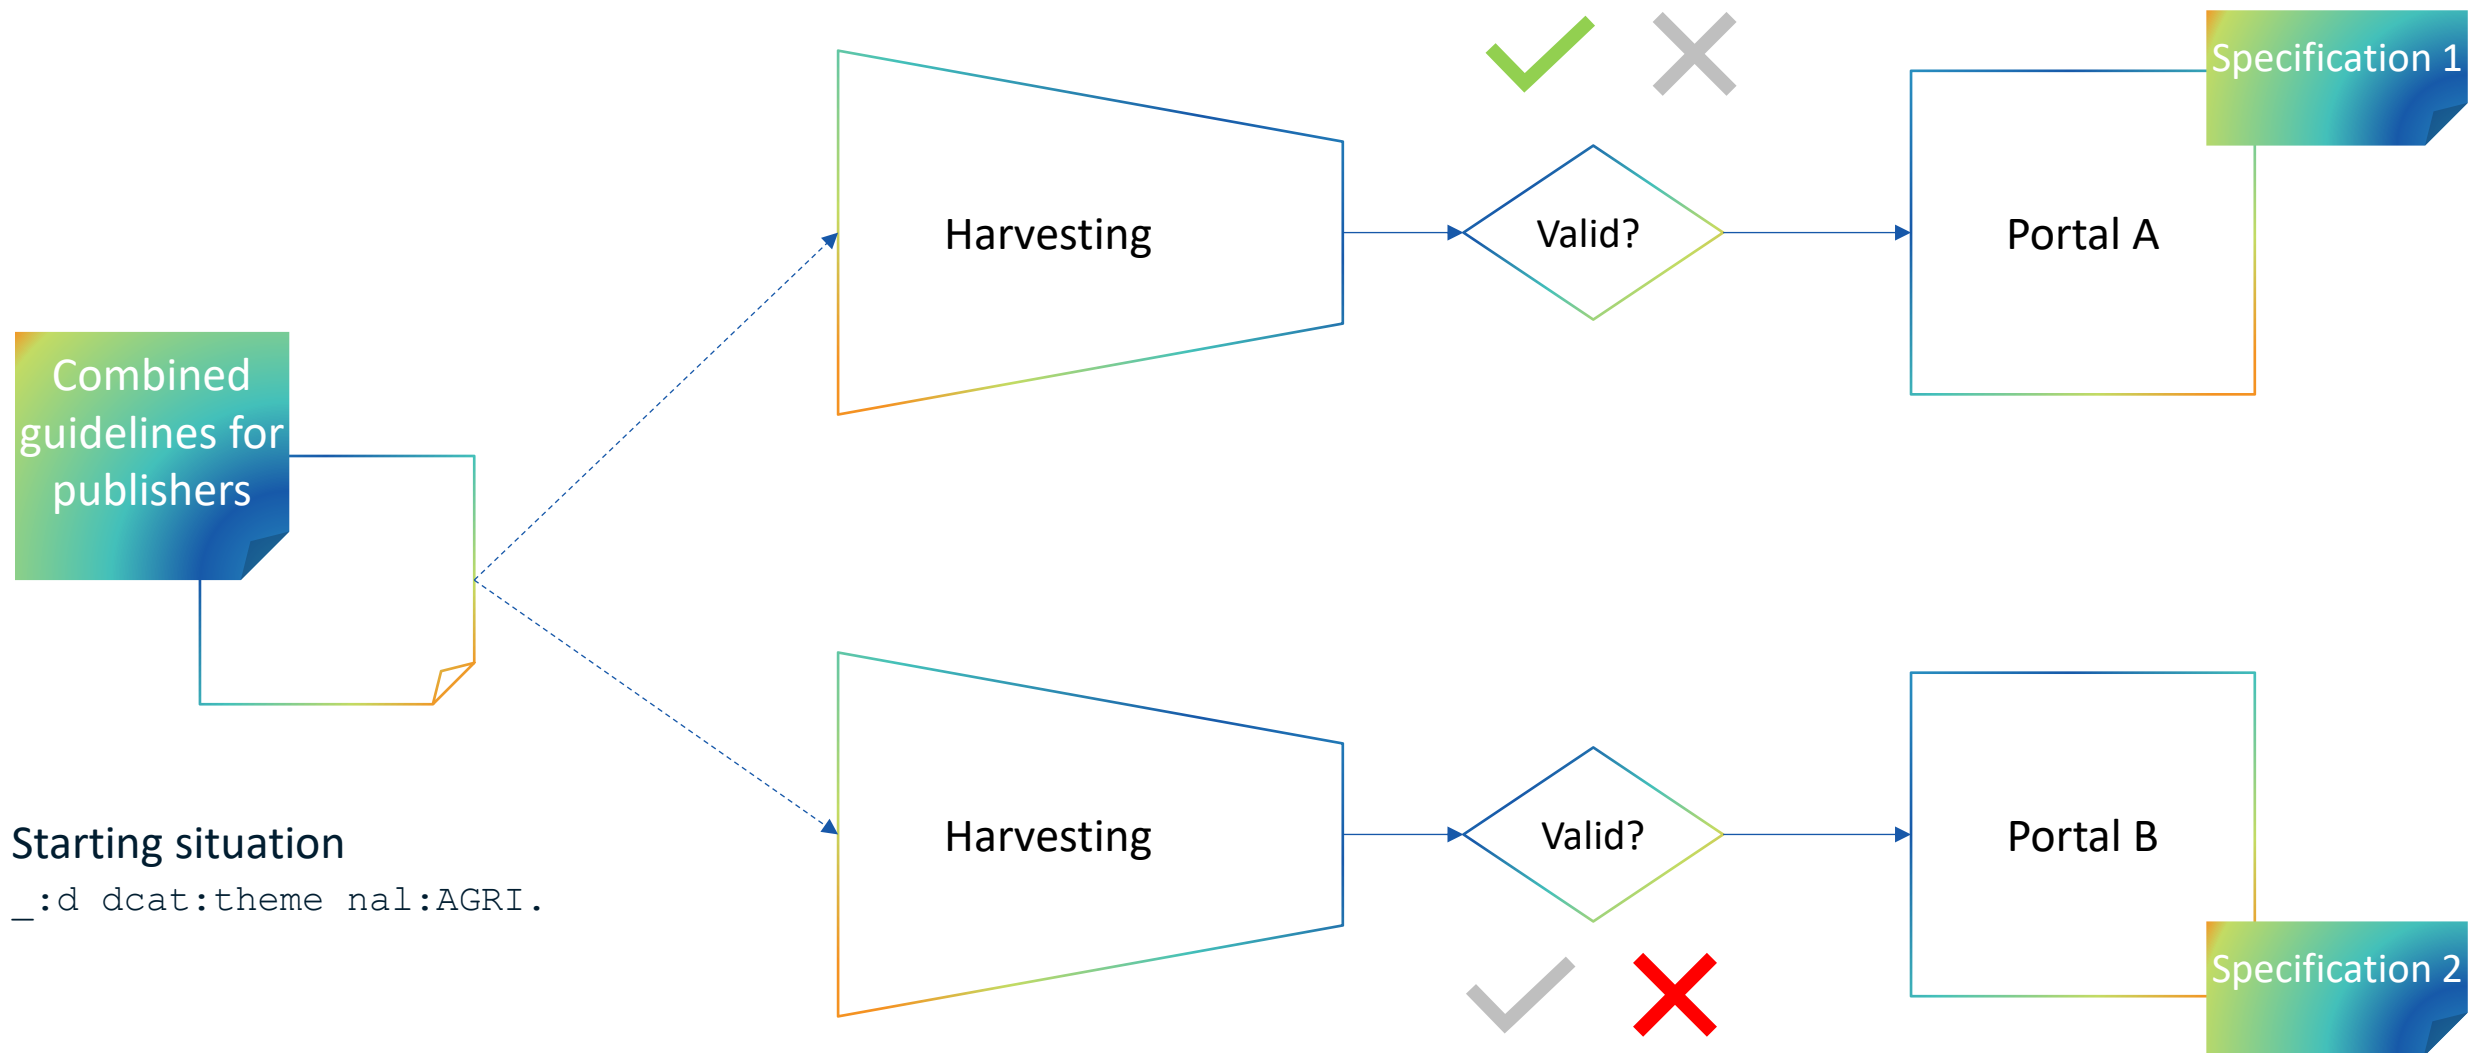

Multiple systems

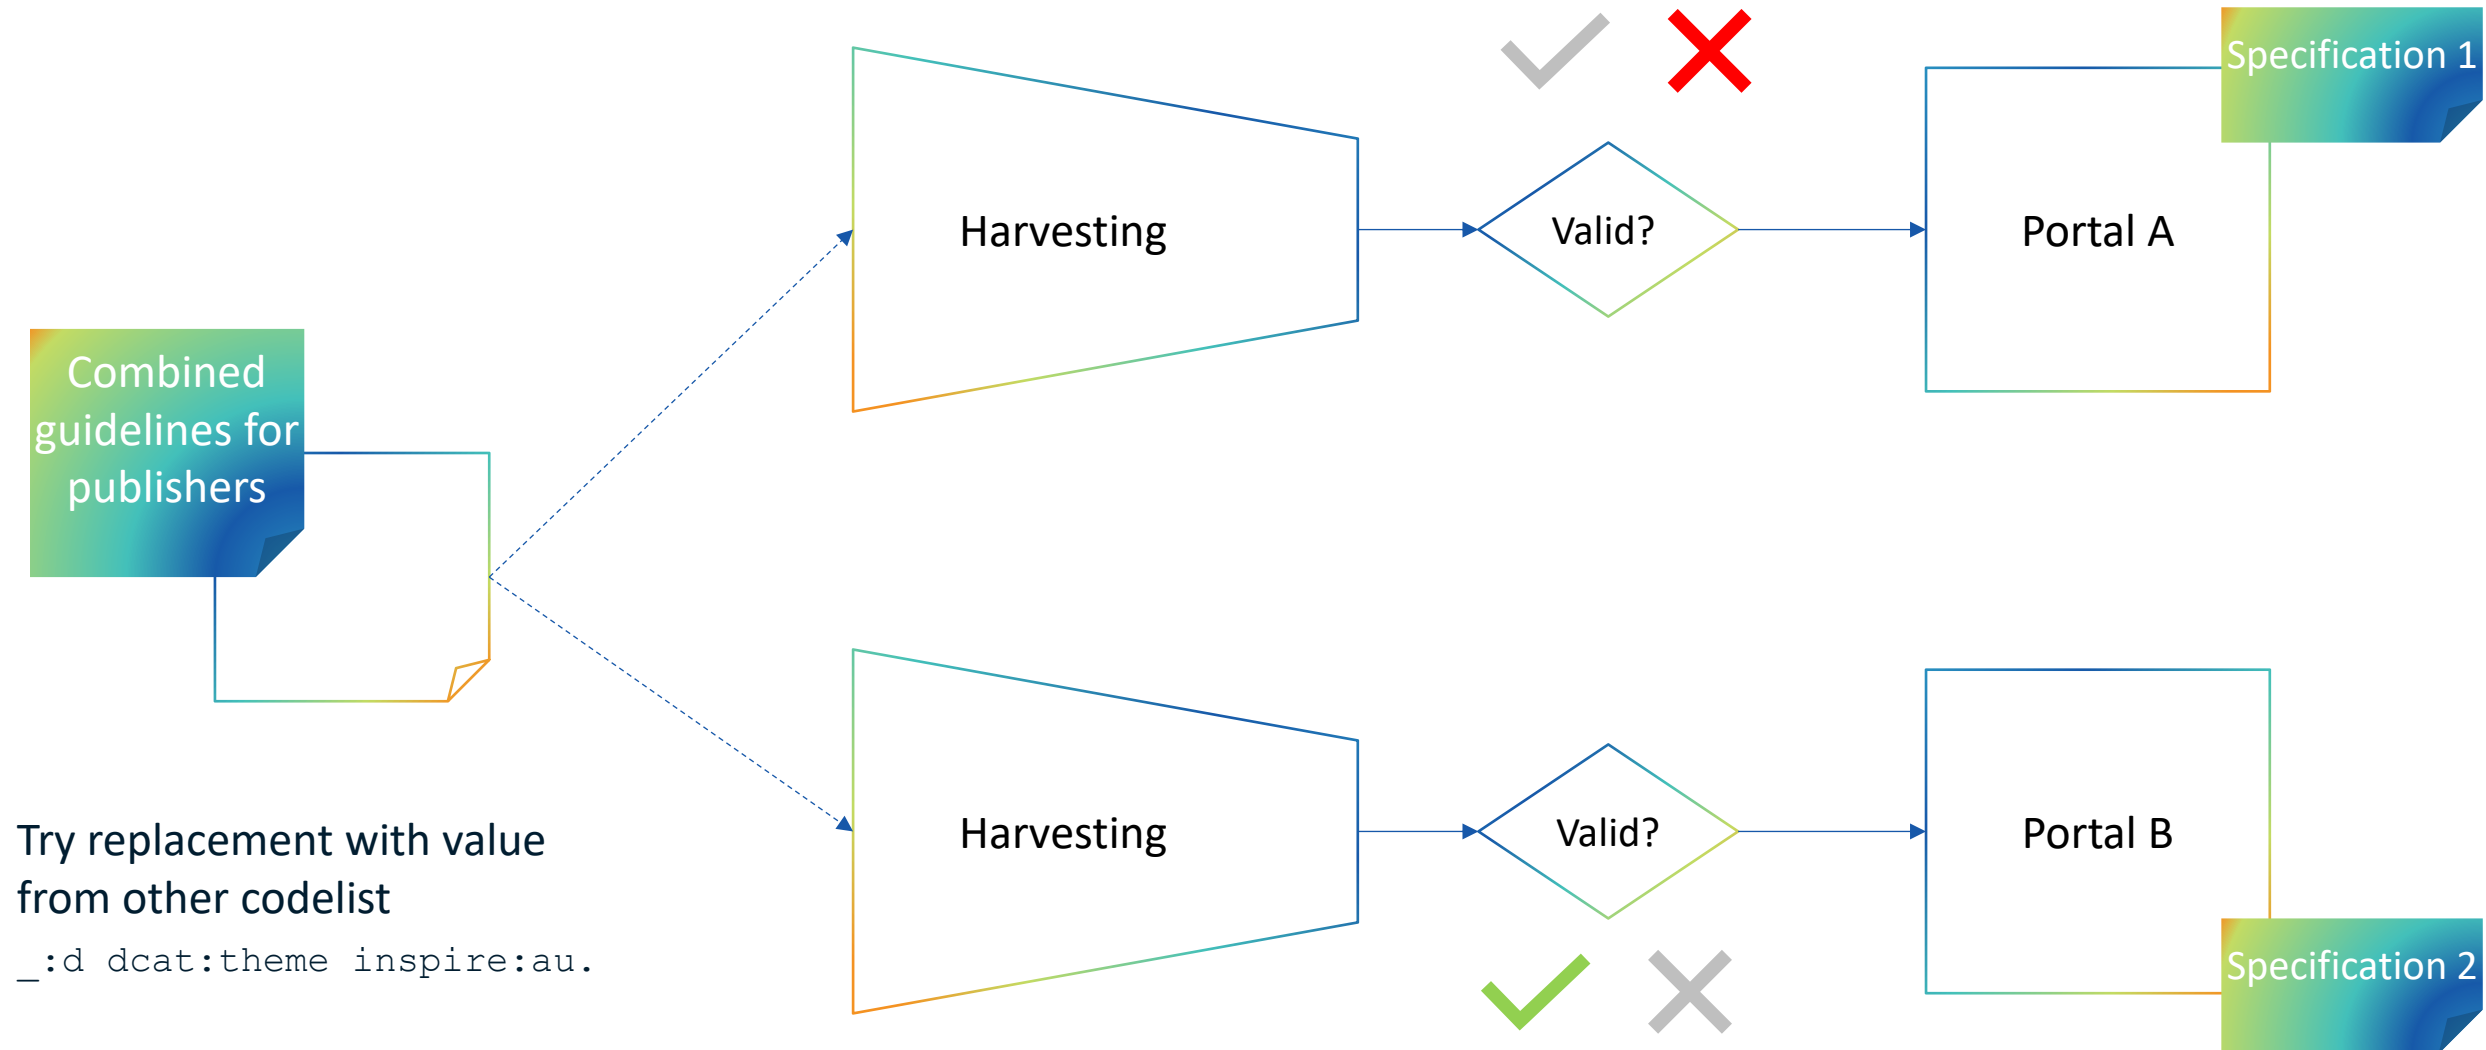

Multiple systems

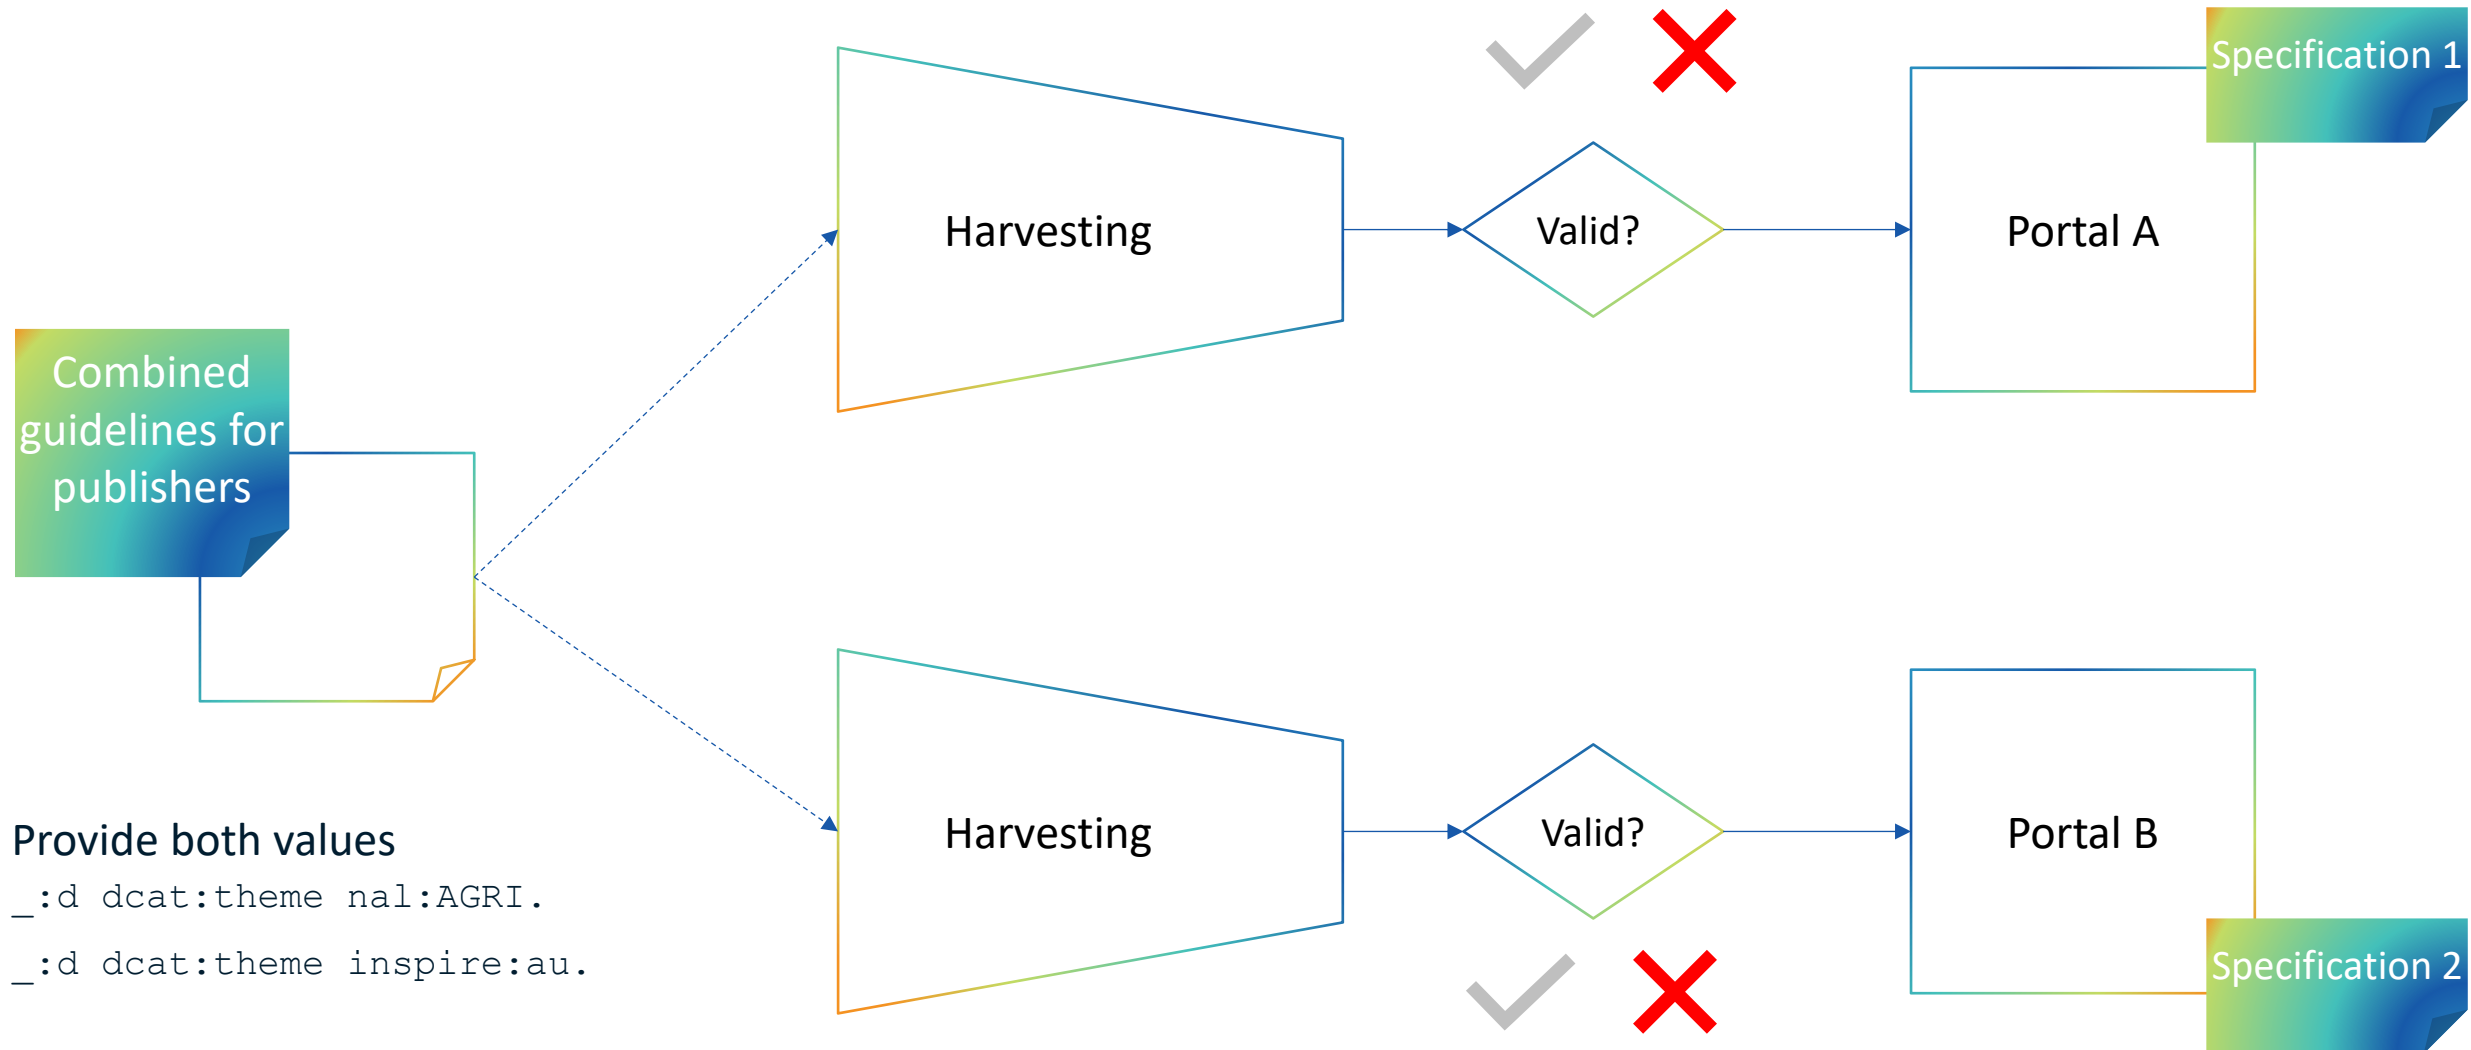

Typical scenario

- Publisher publishes **successfully** for System 1.  
- Publisher gets request to publish on System 2.
- Publisher tries with existing data on System 2 but **fails**.  
- Publisher add extra value to satisfy System 2 but the publishing on **both** Systems **fails**.  

→ The codelist restriction is *not additive*.

Two interpretations for mandatory codelist

Interpretation 1: The value space is closed under the codelist.

Interpretation 2: At least 1 value from the codelist.

Interpretation 1

- Cardinality and value space constraints are independent.
- Restricts the freedom of compatible (sub)profiles to reenforcing the cardinalities or further restricting the possible codelist values (e.g. to a single value).

Interpretation 2

- Cardinality and value space constraint are made dependent.
- Compatible (sub)profiles may freely add other codelist constraints.
- Cannot be used in case the property is optional (cardinality 0 means optional).

Application assessment

- Interpretation 1:
 - Conformant to the way literal value spaces are expressed.
 - Most naturally for programming languages and most software systems.
- Interpretation 2:
 - Of interest in cases where there is a need for aggregation (at the level of properties) in the specification.

Validation assessment

- Interpretation 1:
 - **Existing** SHACL shapes **can** be used as-is:
 - Validation is simple and direct.
 - As it is closing the value space, violations drive the feedback.
- Interpretation 2:
 - **Existing** SHACL shapes **cannot** be used as-is:
 - requires to define a **filtering** process as inherent part of the processing and conformance building Such filtering process is non-trivial to standardise and imposed in all implementations.
 - As it is not closing the value space, poor usages will be harder to detect.
 - Matching SHACL shapes can be designed.

Cross-profile assessment

- Interpretation 1 is more strict than Interpretation 2.
 - e.g.: When profiles DCAT-AP use Interpretation 2 and GeoDCAT-AP uses Interpretation 1 then the usage in DCAT-AP is also Interpretation 1.
- As datasets are subject to multiple profiles, profiles influence each other.
 - e.g.: mobilityDCAT-AP and healthDCAT-AP are siblings, but may influence each other because there are datasets that are expressed under both profiles.
- note that this kind of influence is not limited to codelist constraints but also for other constraints such as max-cardinality constraints
- Conclusion: **coordination is required.**

Proposal: make the interpretation explicit



A) The property **MUST** use as range values codes from {codelist}

= interpretation 1: The value space is closed under the codelist (**validation results: violations**)

All (sub)profiles must avoid conflicts by creating subproperties.



B) The property **MUST** have at least one value from {codelist}

= interpretation 2: The value space is minimally constrained (**validation results: warnings**)

All (sub)profiles must adopt this interpretation in case they want to restrict the value space.



C) The property **IS RECOMMENDED** to use as range values codes from {codelist}

= interpretation 1: The value space is closed under the codelist, but other values are tolerated (**validation results: warnings**)



D) The property **MAY** use as range values codes from {codelist}

= interpretation 1: The value space is closed under the codelist, but other values are accepted (**no validation required**)

Application to DCAT-AP (issues [#316](#), [#314](#))

§ 10.2 Expected usage of controlled vocabularies

To increase the interoperability, the value spaces of properties can be further harmonised using shared controlled vocabularies. This kind of restriction may be subject to a varying interpretation on what the expected usage of a controlled vocabulary is. To ensure a common interpretation the following expectations are defined:

- The property *MUST* use as range values codes from {codelist}
This expectation results in that the value space is closed under the codelist. Validation systems *SHOULD* produce errors. All profiles in the ecosystem *MUST* avoid conflicts by creating subproperties.
- The property *MUST* have at least one value from {codelist}
This expectation makes the value space minimally constrained. Validation systems *SHOULD* produce warnings. All profiles in the ecosystem *MUST* adopt this interpretation in case they want to restrict the value space. Adopting the former expectation will lead to cross-profile interpretations challenges.
- The property *IS RECOMMENDED* to use as range values codes from {codelist}
The value space is closed under the codelist, but other values are tolerated. Recommending means expressing a strong preference. To make this stronger direction towards harmonisation visible in the data exchanges, validation systems *SHOULD* produce warnings.
- The property *MAY* use as range values codes from {codelist}
The value space is closed under the codelist, but other values are accepted. This expectation is more a hint to be used. As there is no obligation nor strongly suggestion expressed here, the use of other codelists is valid in all cases. Therefore validation systems *MAY* produce warnings but users are free to ignore them. No validation in this case is also acceptable.

The first two (and preferably also the others) *SHOULD* only be used for requirements that can be verified by a machine. If the validation can only be realised with the involvement of humans, then a less strong requirement (RECOMMENDED or MAY) is used, even if the intention is to be very strict. This is to ensure that the provided SHACL representations correspond closely to all use cases possible. Stronger enforcements are left for implementations as they have control on actual data exchange.

interoperability.

Property URI	Used for Class	Vocabulary name	Usage note
dcat:mediaType	Distribution	IANA Media Types	
dcat:theme	Dataset , Data Service , Catalogue	Dataset Theme Vocabulary	The values to be used for this property are the URIs of the concepts in the vocabulary.
dct:accrualPeriodicity	Dataset , Dataset Series	EU Vocabularies Frequency Named Authority List	
dct:format	Distribution , Data Service	EU Vocabularies File Type Named Authority List	
dct:language	Catalogue , Dataset , Catalogue Records , Distribution	EU Vocabularies Languages Named Authority List	
dct:publisher	Catalogue , Dataset , Dataset Series , Data Service	EU Vocabularies Corporate bodies Named Authority List	The Corporate bodies NAL must be used for European institutions and a small set of international organisations. In case of other types of organisations, national, regional or local vocabularies should be used.
dct:spatial	Catalogue , Dataset , Dataset Series	EU Vocabularies Continents Named Authority List , EU Vocabularies Countries Named Authority List , EU Vocabularies Places Named Authority List , Geonames	The EU Vocabularies Name Authority Lists must be used for continents, countries and places that are in those lists; if a particular location is not in one of the mentioned Named Authority Lists, Geonames URIs must be used.
adms:status	Distribution	EU Vocabularies Distribution Status	
dct:type	Agent	ADMS publisher type vocabulary	The list of terms in the ADMS publisher type vocabulary is included in the ADMS specification
dct:type	Licence Document	ADMS licence type vocabulary	The list of terms in the ADMS licence type vocabulary is included in the ADMS specification
dcatap:availability	Distribution	Distribution availability	The list of terms for the availability levels of a dataset distribution in the DCAT-AP

Application to DCAT-AP (issues [#316](#), [#314](#))

Proposition

MUST	AT LEAST 1	RECOMMENDED	MAY
dcat:mediatype			dct:publisher
dcat:theme			dct:spatial
dct:accrualPeriodicity			
dct:format			
dct:language			
Adms:status			
dct:type (Agent Type)			
dct:type (licence type)			
dcatap:availability			
spdx:algorithm			
dct:accessRights			

Application to DCAT-AP (issues [#407](#))


Proposition: Agreement for the green ones?

MUST	AT LEAST 1	RECOMMENDED	MAY
dcat:mediatype			dct:publisher
dcat:theme			dct:spatial
dct:accrualPeriodicity			
dct:format			
dct:language			
Adms:status			
dct:type (Agent Type)			
dct:type (licence type)			
dcatap:availability			
spdx:algorithm			
dct:accessRights			

Application to DCAT-AP (issues [#408](#))

Proposition: relaxation of codelists for types?

MUST	AT LEAST 1	RECOMMENDED	MAY
dcat:mediatype		dct:type (Agent Type)	dct:publisher
dcat:theme		dct:type (licence type)	dct:spatial
dct:accrualPeriodicity			
dct:format			
dct:language			
Adms:status			
dct:type (Agent Type)			
dct:type (licence type)			
dcatap:availability			
spdx:algorithm	Motivation: codelist subject to local data portal interpretation		
dct:accessRights			

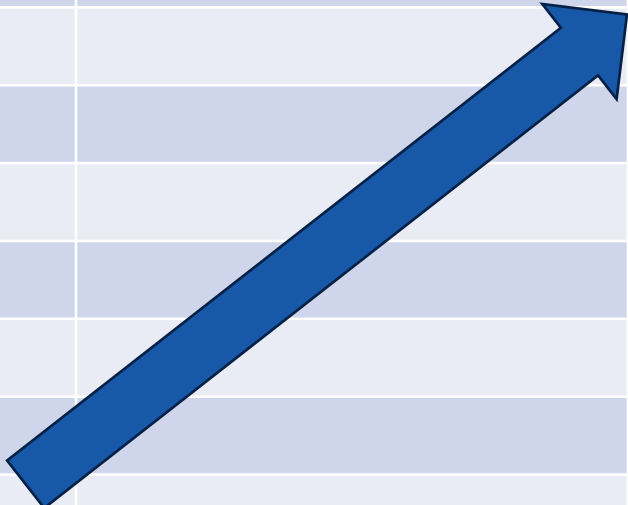

Application to DCAT-AP (issues [#409](#))

Proposition

MUST	AT LEAST 1	RECOMMENDED	MAY
dcat:mediatype	dcat:theme		dct:publisher
dcat:theme			dct:spatial
dct:accrualPeriodicity			
dct:format			
dct:language			
Adms:status			
dct:type (Agent Type)			
dct:type (licence type)			
dcatap:availability			
spdx:algorithm			
dct:accessRights			

MUST or AT LEAST 1 for dataset theme [#316](#)

Description

- In the individual usage notes for dataset theme, the at least 1 formulation is used.
- In the codelist section the must formulation is used.
- In the practice many data portals have aligned with the EU NAL dataset theme vocabulary
 - By extending it
 - By mapping to it (e.g. INSPIRE)

MUST or AT LEAST 1 for dataset theme [#316](#)

Proposition A - MUST

All other DCAT-AP profiles that would like to share their theme must introduce a subproperty of dcat:theme.

dcat:theme stays paired exclusively with the EU NAL Dataset theme Vocabulary.

Conflict stays with profiles beyond EU boundaries.

Bug fix release of the specification

Proposition B - AT LEAST 1

All data Catalogues must adapt their uniqueness expectation in the theme property and implement a filter based on the theme they like to show in the UI.

The used codelists MUST be published as proper Linked Data in the public space. To facilitate every portal to make easy decisions.


Bug fix release of the specification

Proposition C - Conflict free resolution

Replace the use of dcat:theme in DCAT-AP with a subproperty of dcat:theme.

The new property r5r:theme stays paired exclusively with the EU NAL Dataset theme Vocabulary.

Minor release of the specification.

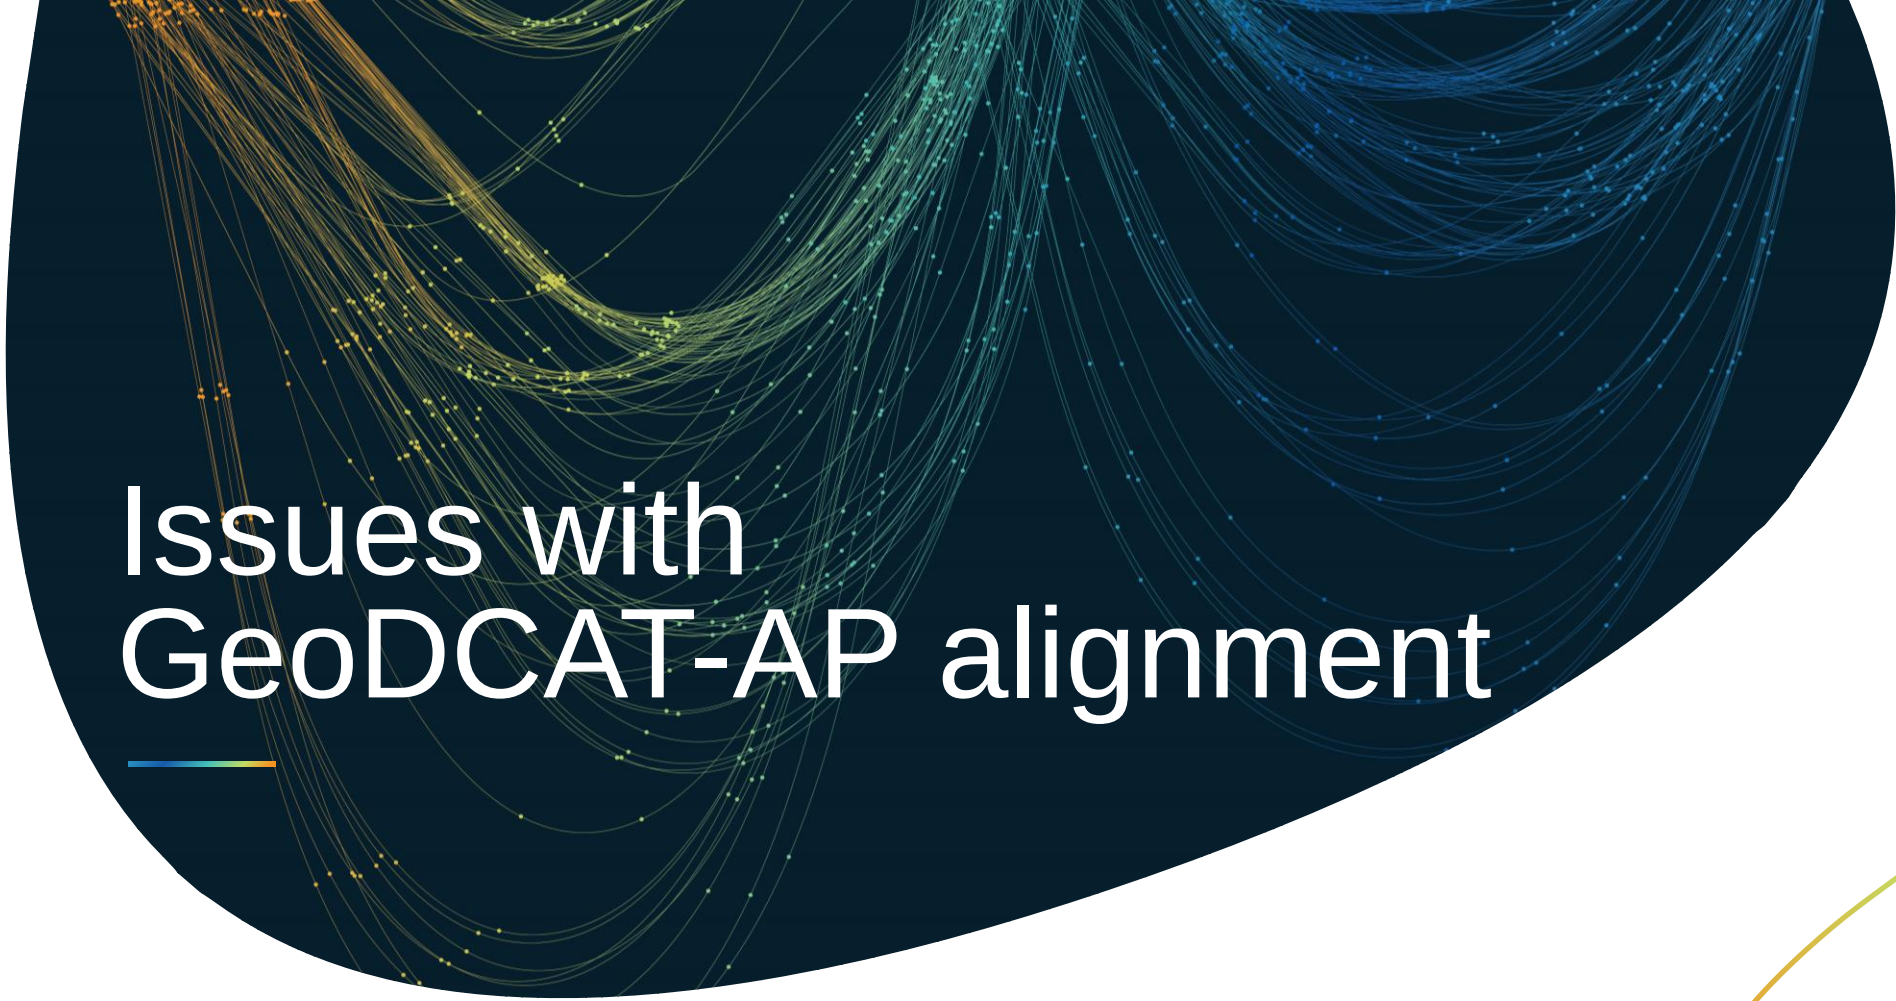

Issues with GeoDCAT-AP alignment



Not applied to the draft

Relaxation cardinality property dct:rights

([#370](#) derived from [#82](#) GeoDCAT-AP) + [#380](#)

Description

In DCAT-AP `dct:rights` is used for Catalogue and Distribution, with cardinality 0..1.

In GeoDCAT-AP, the cardinality was relaxed to 0..*.

In DCAT-AP HVD, `dct:rights` with cardinality 0..* is used also for Data Services.

Motivation

- Relaxation to 0..* was done for GeoDCAT-AP, to function as a fallback mechanism where multiple statements are present, but concatenating them into one value is not desirable.

Proposition

Relax cardinality for `dct:rights` to 0..* everywhere in DCAT-AP.

rights	Rights statement	0..1	A statement that specifies rights associated with the Catalogue.
rights	Rights statement	0..*	A statement that specifies rights associated with the Catalogue.

Conflicting cardinality of the spatial resolution with GeoDCAT-AP [#384](#)

Description

Resolution of GeoDCAT-AP revision conflicting with DCAT-AP 3.0

Motivation

In GeoDCAT-AP, the community agreed on

- For Distribution, spatial resolution $[0..1]$ represents the spatial resolution of the described file.
- For Data Service – spatial resolution $[0..*]$ describes the capabilities of the data service, i.e. in which spatial resolutions it can serve data.
- For Dataset – spatial resolution $[0..*]$ describes the spatial resolution of **the original** data in the dataset, i.e. regardless of how it is distributed using distributions.

Proposition

Relax the DCAT-AP 3.0 cardinality of spatial resolution for Dataset to $0..*$.

spatial resolution	xsd:decimal	0..1	The minimum spatial separation resolvable in a dataset, measured in meters.
spatial resolution in metres	xsd:decimal	0..*	The minimum spatial separation resolvable in a Dataset, measured in meters.

SHACL: Constraints on `locn:geometry`, `dcat:bbox`, and `dcat:centroid` [#175](#), [#265](#) GeoDCAT-AP [#68](#)

Description

Current SHACL constraints allow only one instance of `locn:geometry`, `dcat:bbox`, and `dcat:centroid`.

However, GeoDCAT-AP permits multiple instances, representing one entity, described using different geometry encodings, e.g. WKT, GML and GeoJSON, leading to SHACL validation errors.

```
[ ] dct:spatial [ a dct:Location ;
  dcat:bbox ""
    POLYGON((-10.58 70.09,34.59 70.09,34.59 34.56,-10.58 34.56,-10.58 70.09))
    ""^^gsp:wktLiteral ;
  dcat:bbox ""
    <gml:Envelope srsName="http://www.opengis.net/def/crs/OGC/1.3/CRS84">
      <gml:lowerCorner>34.56 -10.58</gml:lowerCorner>
      <gml:upperCorner>70.09 34.59</gml:upperCorner>
    </gml:Envelope>
    ""^^gsp:gmlLiteral ;
  dcat:bbox ""
    {
      "type": "Polygon",
      "coordinates": [[
        [-10.58,70.09],[34.59,70.09],[34.59,34.56],
        [-10.58,34.56],[-10.58,70.09]
      ]]
    }
    ""^^<gsp:geoJSONLiteral> ] ;
```

Proposition

Multiple representations are allowed. Lift cardinalities to 0..* and adapt SHACL shapes.

Cfr. Multilingual texts



Issues with a feedback request

New property for the typisation of data services, using an existing authority table [#405](#)

Description

DCAT-AP provides no option for Data Service providers to classify the type of the Data service.


Motivation

- Active community input required, now and on GitHub
- Decision to be taken in autumn 2025 Webinar

Proposition

Create subproperty `dcatap:dataServiceType` of `dct:type` to denote "types" of Data Services using a common codelist.

This proposition is similar to the `geodcatap:serviceType` property introduced in GeoDCAT-AP with a codelist maintained by INSPIRE.

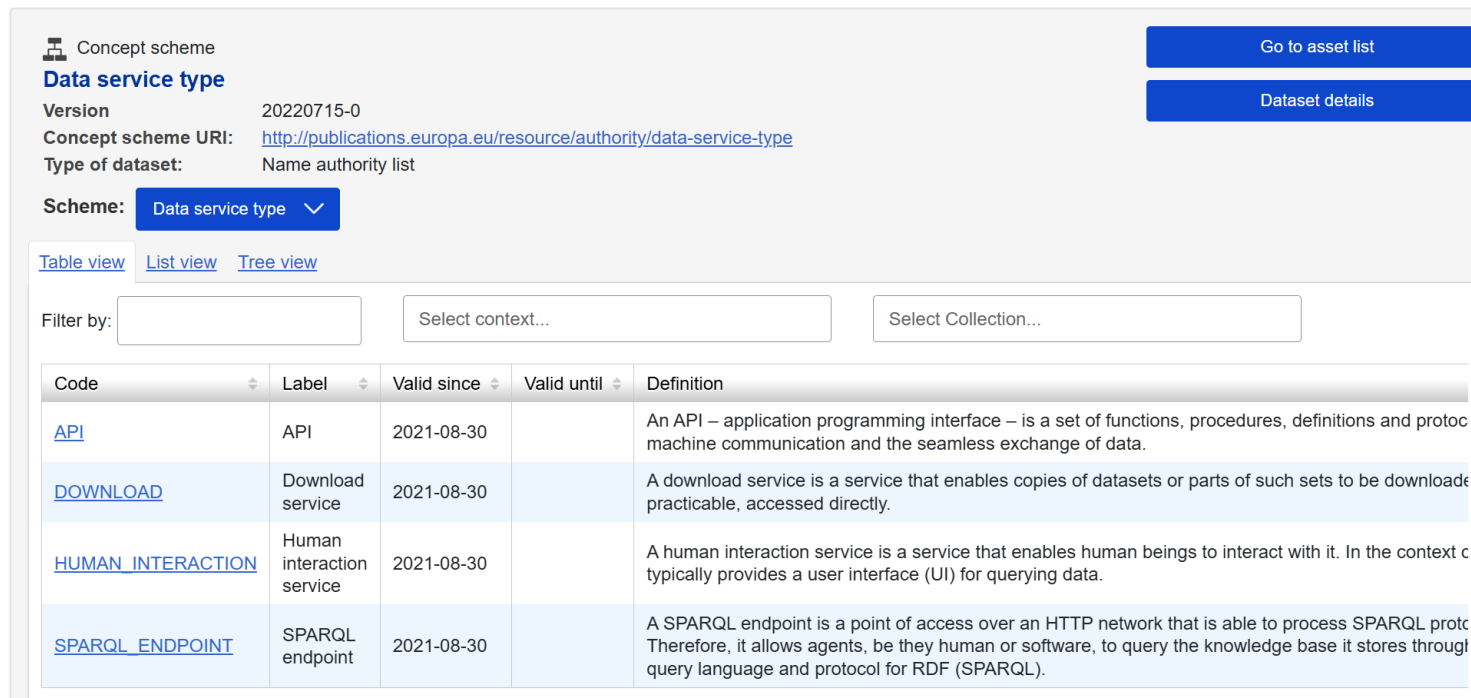

The screenshot shows the 'Data service type' concept scheme in the INSPIRE portal. It includes a header with a 'Go to asset list' button and a 'Dataset details' button. The main content area displays the concept scheme details, including the version (20220715-0), the concept scheme URI (<http://publications.europa.eu/resource/authority/data-service-type>), and the type of dataset (Name authority list). Below this, there are tabs for 'Table view', 'List view', and 'Tree view'. A 'Filter by:' section contains a text input field, a 'Select context...' dropdown, and a 'Select Collection...' dropdown. The main table lists four data service types: API, Download service, Human interaction service, and SPARQL endpoint, each with a code, label, valid since date, valid until date, and a definition.

Code	Label	Valid since	Valid until	Definition
API	API	2021-08-30		An API – application programming interface – is a set of functions, procedures, definitions and protocols for machine communication and the seamless exchange of data.
DOWNLOAD	Download service	2021-08-30		A download service is a service that enables copies of datasets or parts of such sets to be downloaded in a practicable, accessed directly.
HUMAN_INTERACTION	Human interaction service	2021-08-30		A human interaction service is a service that enables human beings to interact with it. In the context of data services, it typically provides a user interface (UI) for querying data.
SPARQL_ENDPOINT	SPARQL endpoint	2021-08-30		A SPARQL endpoint is a point of access over an HTTP network that is able to process SPARQL protocols. Therefore, it allows agents, be they human or software, to query the knowledge base it stores through the query language and protocol for RDF (SPARQL).

Inclusion of `dcat:DatasetSeries` into `dcat:Catalog` [#348](#)

Description

How to include a `dcat:DatasetSeries` directly into a `dcat:Catalog`? In DCAT-AP 3.0.0, `dcat:DatasetSeries` is not a subclass of `dcat:Dataset` but of `dcat:Resource`, creating ambiguity in how to properly include it in a catalog.

Motivation

- An open issue on the topic exist at W3C on DCAT3
- Decision to be taken in autumn 2025 Webinar

Proposition

1. No support, wait for W3C (no release)
2. Introduce a separate `r5r:datasetSeries` property (equivalent to `dcat:dataset` or `dcat:service`) (minor release)
3. Replace the use of `dcat:dataset` and `dcat:service` with `dcat:resource` and then it is up to the system to adress the expectations. (minor release)

Changes in Checksum class in SPDX 3.0 [#402](#)

Description

SPDX 3.0 has been released. DCAT-AP relies on SPDX 2.0. SPDX 3.0 replaces the Checksum class with the Hash class.

Motivation

Specific SPDX problems:

- a) the (versionless) URIs refer to the version 2.3 version
- b) the SPDX community does not consider RDF representation as cross specification relevant.
- c) version 2.3 is not made obsolete

Specific DCAT-AP problem:

Change from version 2.3 to version 3.0 impacts DCAT-AP users without additional benefit.

Generic problem:

DCAT-AP relies on external vocabulary and this vocabulary deprecates the use of the terms used by DCAT-AP.

Changes in Checksum class in SPDX 3.0 [#402](#)

Description

SPDX 3.0 has been released. DCAT-AP relies on SPDX 2.0. SPDX 3.0 replaces the Checksum class with the Hash class.

Motivation

- Active community input required, now and on GitHub
- Decision to be taken in autumn 2025 Webinar

Proposition

- Option A: replace SPDX 2.3 with SPDX 3.0 (minor release)
- Option B: do not replace SPDX 2.3 but add usage note (bug fix release)

Agree on principle: to avoid too much impact from such dependencies apply by preference ***by reference with minimal additional requirements*** integration.

Lifting the max cardinality for publisher for catalogues [#386](#)

Description

At most one publisher for a Catalogue is allowed. Issuer requests to lift the max cardinality.

Motivation

- The Pangea catalogue is jointly operated by awi.de and marum.de.
- This limitation is problematic for catalogues maintained by multiple organizations

Proposition

Usage of foaf:Group instead of foaf:Agent for the range to bundle all members of the publisher group

```
<ds123> a dcat:Dataset ;
  dcterms:publisher [
    a foaf:Group, foaf:Agent ;
    foaf:name "PANGEA Publisher Group" ;
    foaf:member [
      a foaf:Agent ;
      foaf:name "Org 1" ;
    ] , [
      a foaf:Agent ;
      foaf:name "Org 2" ;
    ] ;
  ] .
```

Earmark datasets for specific target audiences [#404](#)

Description

DCAT-AP provides no option for data providers to make annotations regarding the intended target audience of a dataset.

Motivation

Support sharing the target interest group for datasets.

Proposition

Target audience is a vague concept. Objective is very portal usage dependent. Therefore sharing it might be not informative.

Proposal **not** to adopt this.

I assume that the codelist referred to is <https://op.europa.eu/publications.europa.eu/resource/authority/target-aud>

In this list the following instances are included:

- [Children and teenagers](#)
- [Consumers](#)
- [Education experts](#)
- [General public](#)
- [Legal experts](#)
- [Media experts](#)
- [Minorities](#)
- [Policy making experts](#)
- [Scientists](#)
- [Specialised](#)
- [Young people](#)

Property *change type* of Catalogue Record (issue [#295](#))

Description

The label of the property *change type* seems not to match the definition and the mapping on the URI `adms:status`.

Motivation

The property indicates a change in the context of the editorial flow: the metadata of the Catalogued Resource has been created/updated/removed.

History:

- property was present since DCAT-AP 1
- DCAT 2 provided a generic definition and in DCAT-AP 2, both have been aligned.

Suggestions were requested:

- Be backwards compatible
- Proposed change in the issue is to adapt the human-readable label to status

Proposition

Since no feedback has been provided, proposal is to close the issue without consequence

	change type	Concept	0..1	The status of the catalogue record in the context of editorial flow of the dataset and data service descriptions.
---	-----------------------------	-------------------------	------	---



Next steps

Next steps



For minor-changes intermediate release will take place in March 2025
For major changes release will take place in autumn 2025




DCAT-AP webinar on remaining open issues in autumn 2025
We will monitor the GitHub issues & ongoing GeoDCAT-AP pilot



Feedback on the open issues is requested by April 2025

Please provide your additional feedback on GitHub.

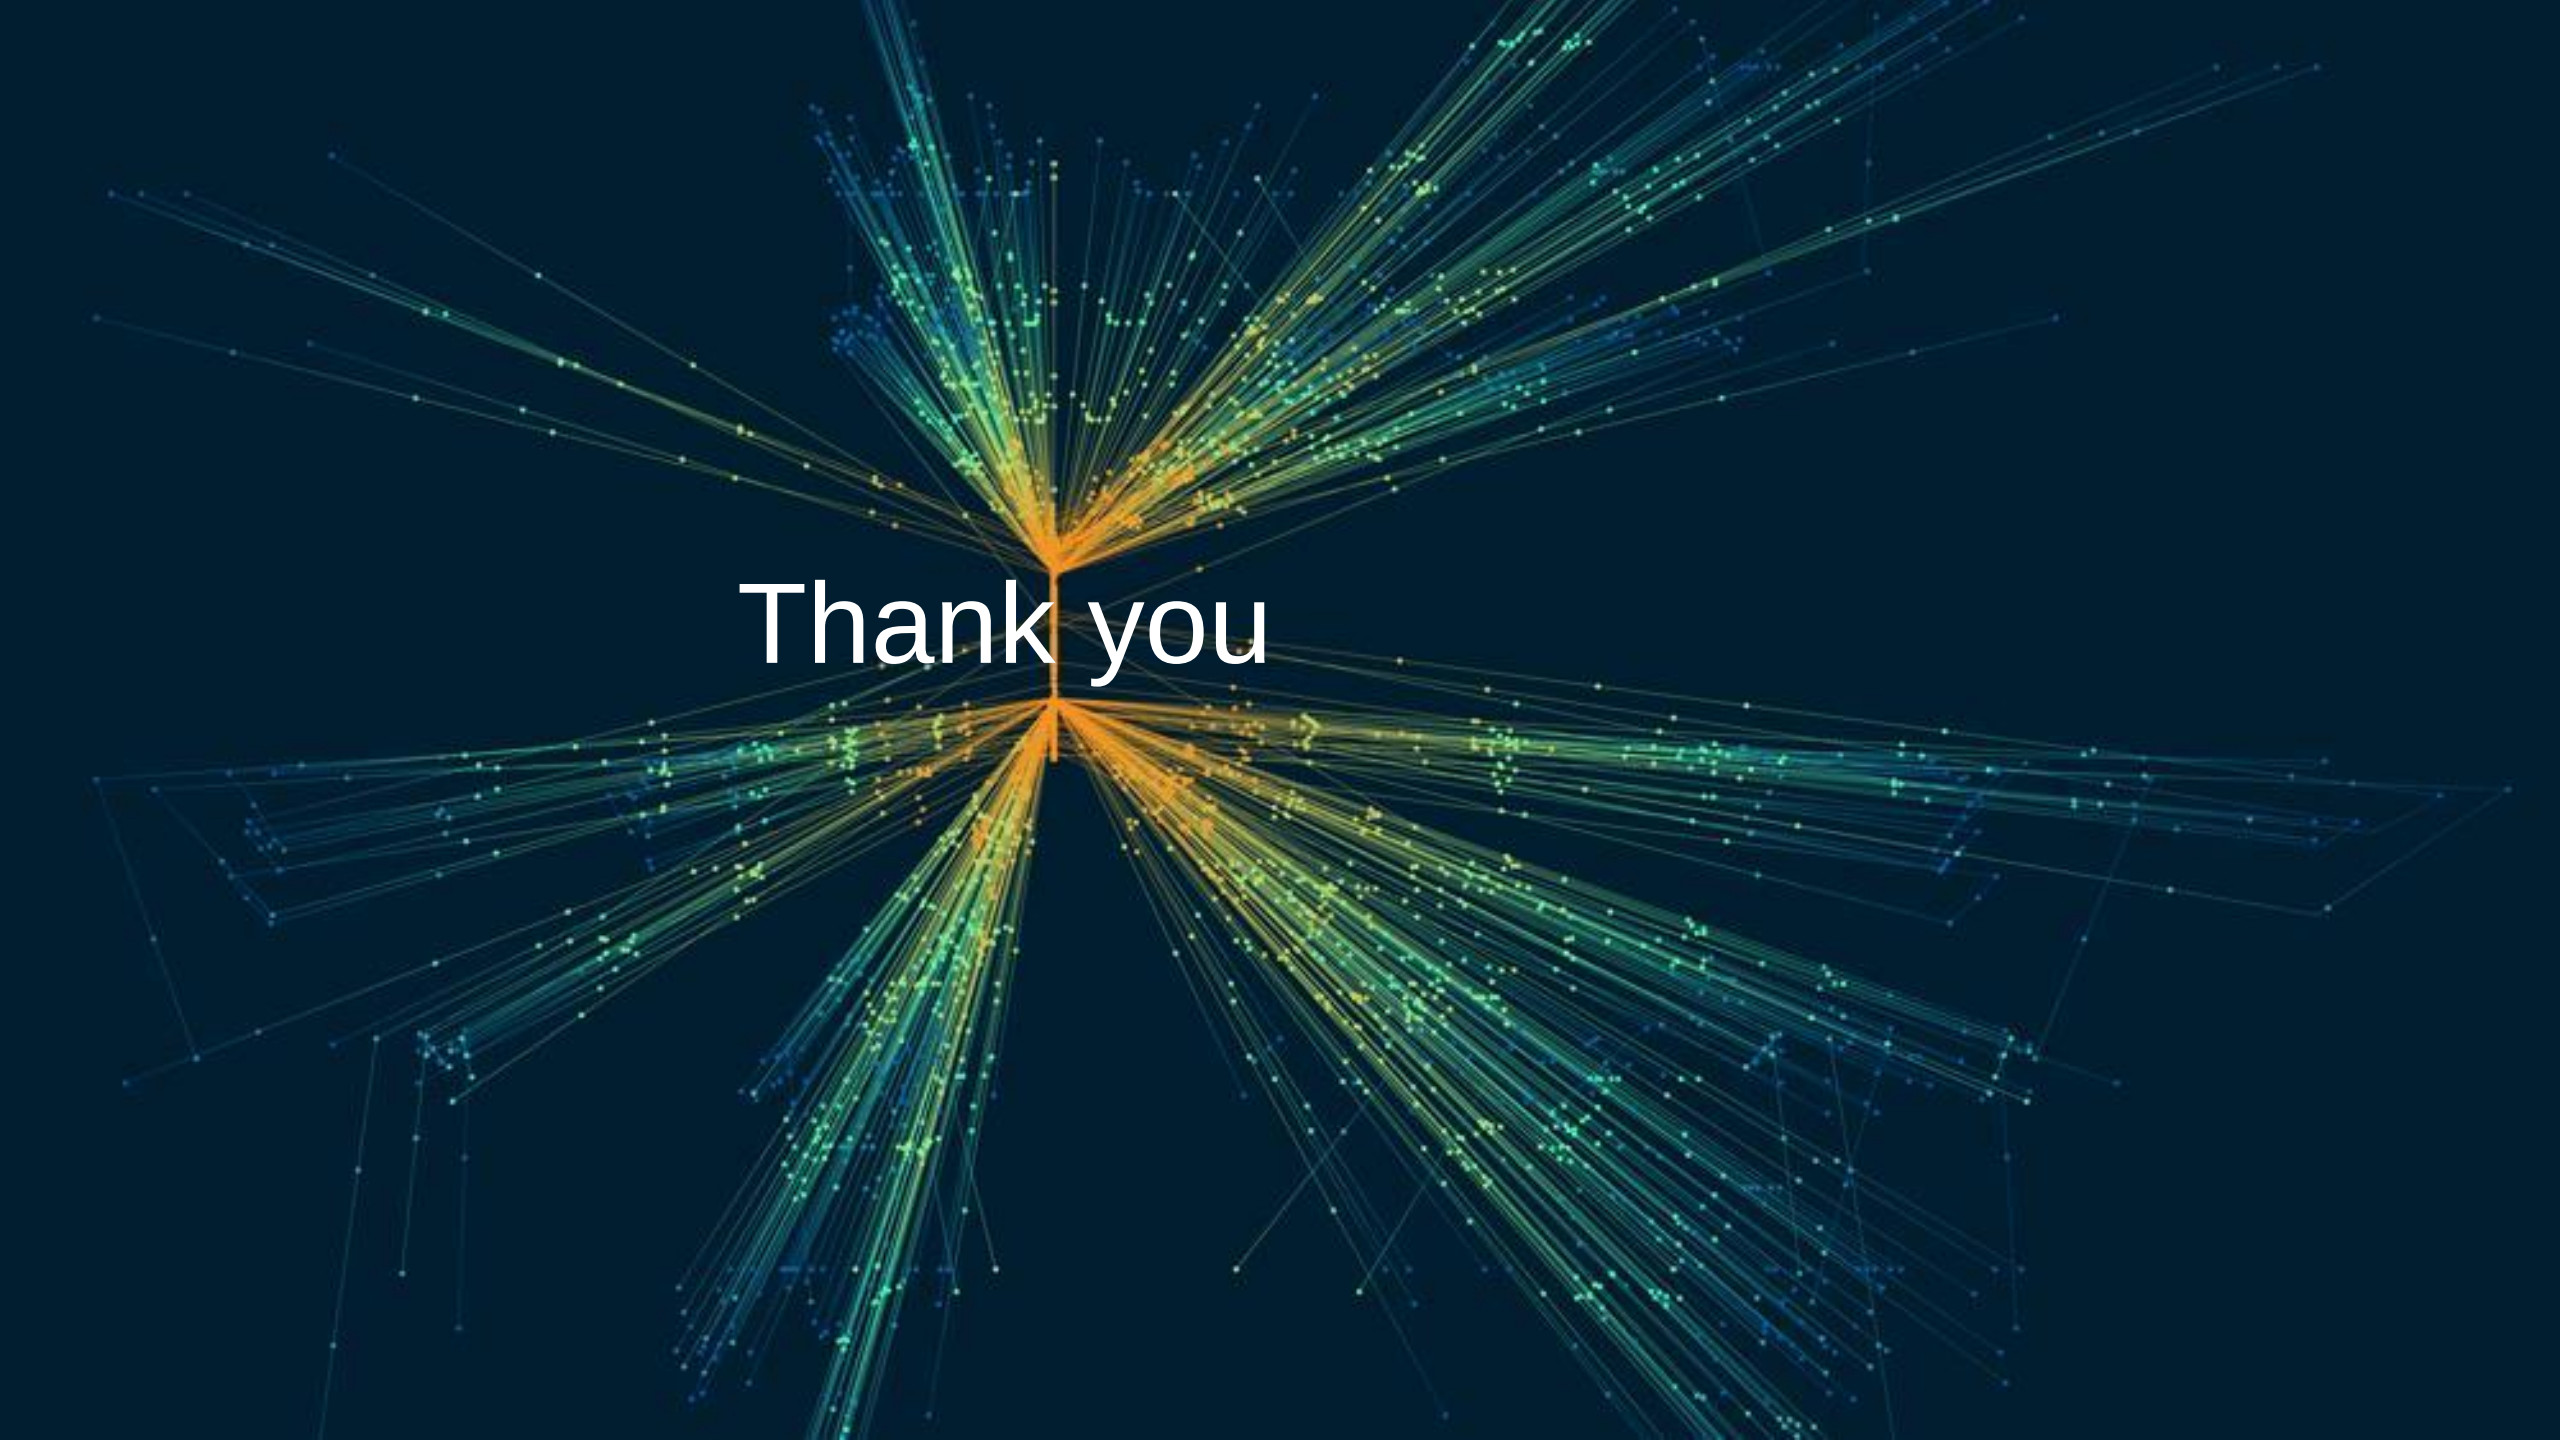A complex network graph visualization on a dark blue background. A central hub of orange nodes is connected by numerous lines to a vast, radiating network of smaller nodes. The lines and nodes transition in color from orange at the center to green and then to blue as they move towards the periphery. The overall shape is star-like, with many lines extending outwards in various directions.

Thank you



interoperable europe

innovation ∞ govtech ∞ community

Stay in
touch



(@InteroperableEU) / Twitter



Interoperable Europe - YouTube



Interoperable Europe | LinkedIn



DIGIT-INTEROPERABILITY@ec.europa.eu



<https://joinup.ec.europa.eu/collection/interoperable-europe/interoperable-europe>