CREACIÓN DE CLUSTER CON GLUSTERFS + SAMBA

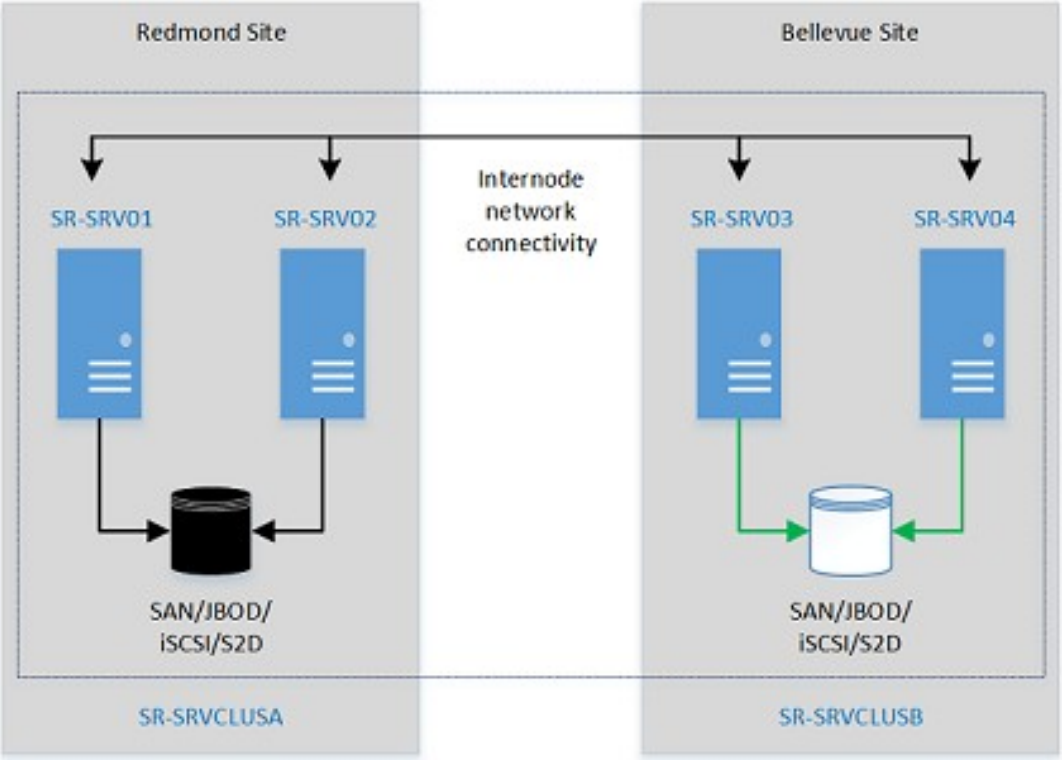

Indice

GLUSTERFS.....3
SAMBA.....6

GLUSTERFS

Instalamos glusterfs en las dos maquinas

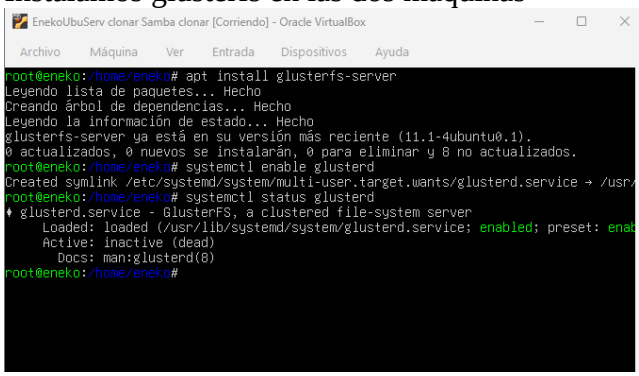

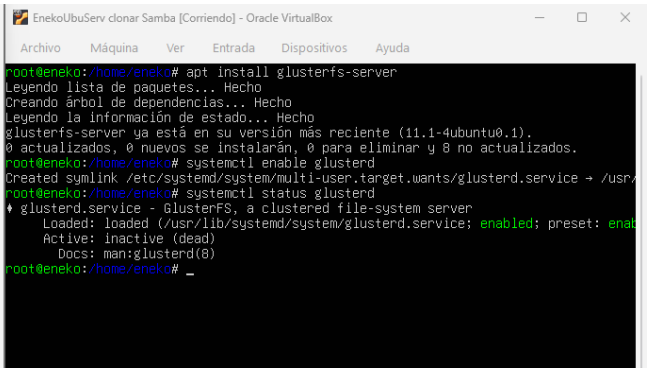

Asignamos ips en la misma red y comprobamos ping

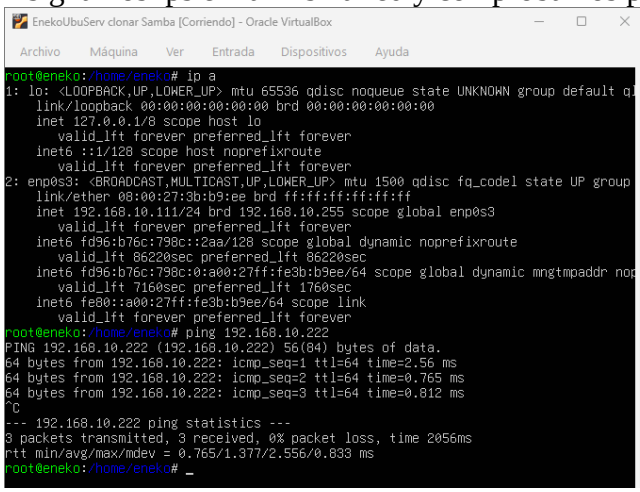

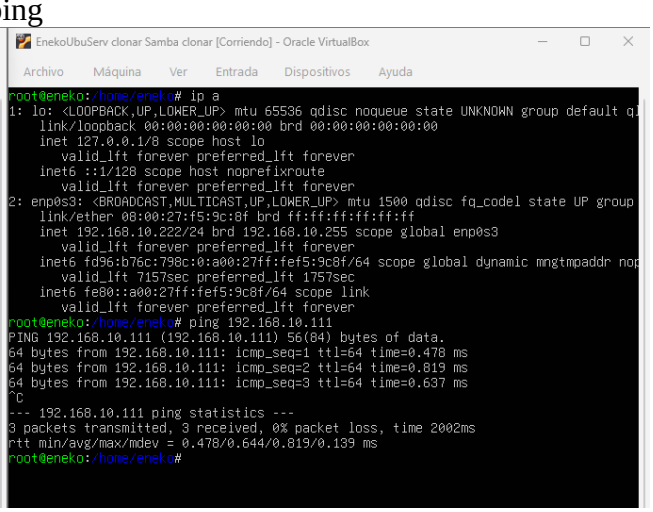

Le damos formato a los discos secundarios y los montamos en la carpeta creada brick1

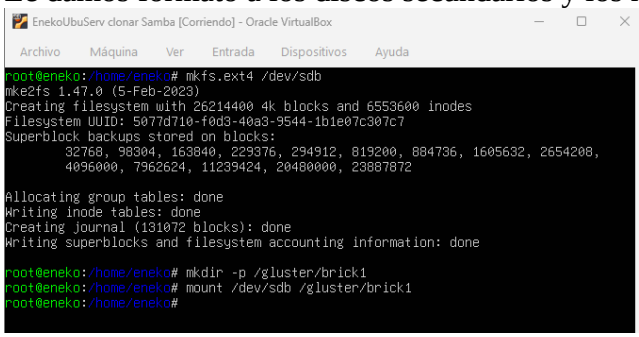

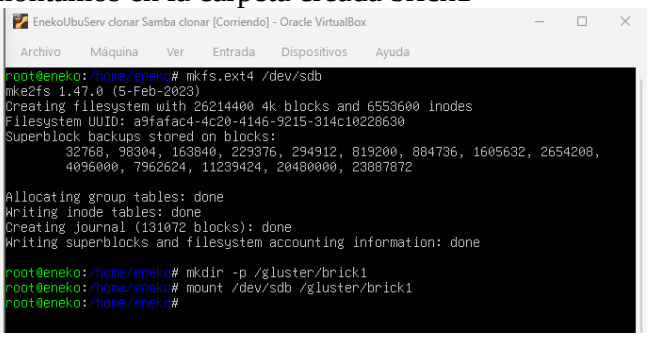

Montamos los discos automáticamente con el fstab

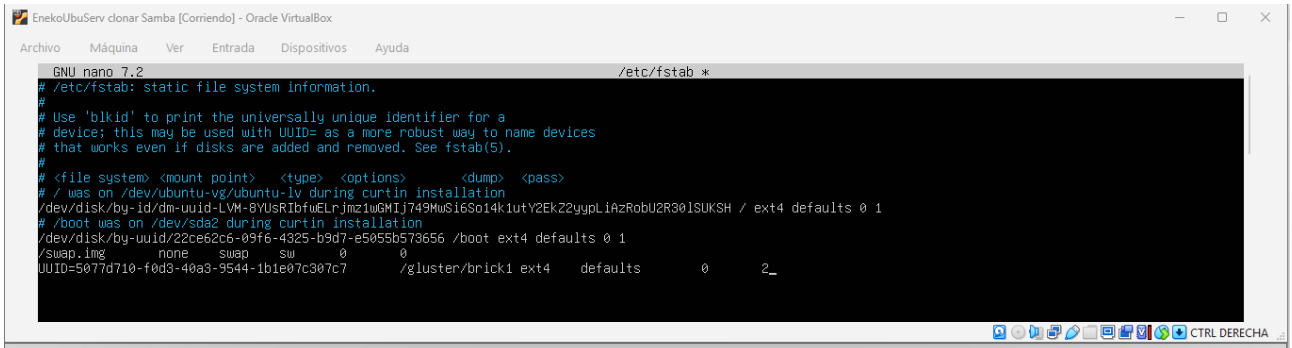

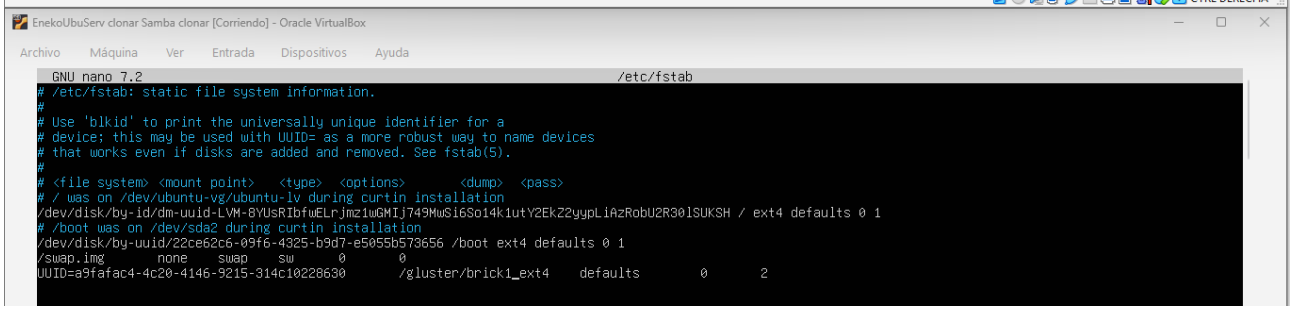

Comprobamos

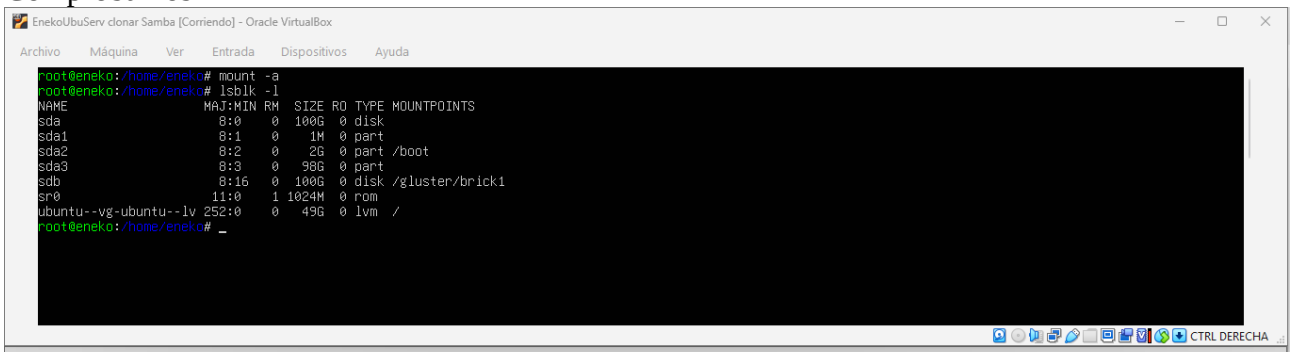

En la maquina 1 configuramos la 2ª maquina como peer y comprobamos con peer status

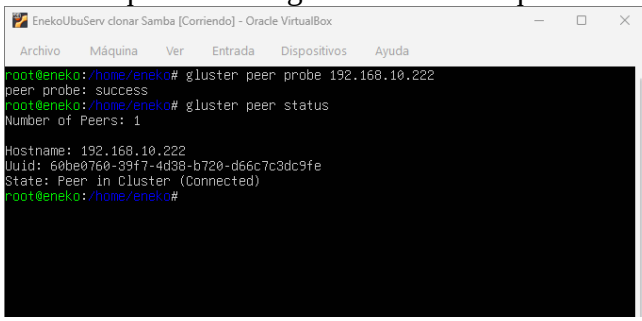

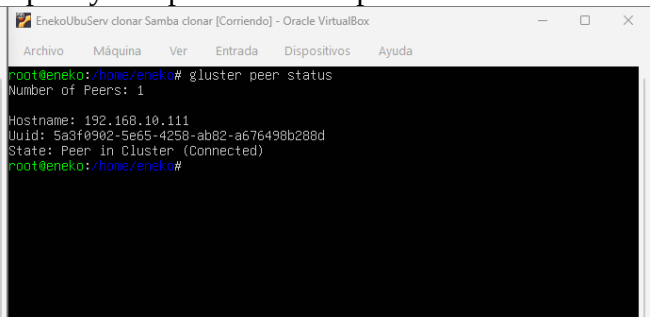

Creamos el cluster con los discos montados en las carpetas brick1

EnekoUbuServ clonar Samba [Corriendo] - Oracle VirtualBox

Archivo Máquina Ver Entrada Dispositivos Ayuda

```
root@eneko:/home/eneko# gluster volume create backup replica 2 192.168.10.111:/gluster/brick1 192.168.10.222:/gluster/brick1 force
volume create: backup: failed: Volume backup already exists
root@eneko:/home/eneko# gluster volume start backup
volume start: backup: failed: Volume backup already started
root@eneko:/home/eneko# _
```

Automatizamos con fstab

EnekoUbuServ clonar Samba [Corriendo] - Oracle VirtualBox

Archivo Máquina Ver Entrada Dispositivos Ayuda

```
  GNU nano 7.2                                                    /etc/fstab
# /etc/fstab: static file system information.
#
# Use 'blkid' to print the universally unique identifier for a
# device; this may be used with UUID= as a more robust way to name devices
# that works even if disks are added and removed. See fstab(5).
#
# <file system> <mount point>   <type>  <options>       <dump>  <pass>
# / was on /dev/ubuntu-vg/ubuntu-lv during curtin installation
/dev/disk/by-id/dm-uuid-LVM-8YUsRIbfwELrjmz1wGMIj749MwSi6So14k1utY2EkZ2yypLiAzRobU2R30lSUKSH / ext4 defaults 0 1
# /boot was on /dev/sda2 during curtin installation
/dev/disk/by-uuid/22ce62c6-09f6-4325-b9d7-e5055b573656 /boot ext4 defaults 0 1
/swap.img       none    swap    sw      0       0
UUID=5077d710-f0d3-40a3-9544-1b1e07c307c7       /gluster/brick1 ext4    defaults        0       2
192.168.10.111,192.168.10.222:/backup   /mnt/backup     glusterfs       defaults,_netdev        0       0
```

EnekoUbuServ clonar Samba clonar [Corriendo] - Oracle VirtualBox

Archivo Máquina Ver Entrada Dispositivos Ayuda

```
  GNU nano 7.2                                                    /etc/fstab
# /etc/fstab: static file system information.
#
# Use 'blkid' to print the universally unique identifier for a
# device; this may be used with UUID= as a more robust way to name devices
# that works even if disks are added and removed. See fstab(5).
#
# <file system> <mount point>   <type>  <options>       <dump>  <pass>
# / was on /dev/ubuntu-vg/ubuntu-lv during curtin installation
/dev/disk/by-id/dm-uuid-LVM-8YUsRIbfwELrjmz1wGMIj749MwSi6So14k1utY2EkZ2yypLiAzRobU2R30lSUKSH / ext4 defaults 0 1
# /boot was on /dev/sda2 during curtin installation
/dev/disk/by-uuid/22ce62c6-09f6-4325-b9d7-e5055b573656 /boot ext4 defaults 0 1
/swap.img       none    swap    sw      0       0
UUID=a9fafac4-4c20-4146-9215-314c10228630       /gluster/brick1 ext4    defaults        0       2
192.168.10.111,192.168.10.222:/backup   /mnt/backup     glusterfs       defaults,_netdev        0       0
```

Activar Windows
Ve a Configuración para activar Windows.

montamos y comprobamos

EnekoUbuServ clonar Samba [Corriendo] - Oracle VirtualBox

Archivo Máquina Ver Entrada Dispositivos Ayuda

```
root@eneko:/home/eneko# mount -a
/sbin/mount.glusterfs: according to mtab, GlusterFS is already mounted on /mnt/backu
root@eneko:/home/eneko# df -h
Filesystem                         Size  Used Avail Use% Mounted on
tmpfs                              209M  1,1M  208M   1% /run
/dev/mapper/ubuntu--vg-ubuntu--lv   48G  4,7G   41G  11% /
tmpfs                              1,1G     0  1,1G   0% /dev/shm
tmpfs                              5,0M     0  5,0M   0% /run/lock
/dev/sdb                            98G  1,1M   93G   1% /gluster/brick1
/dev/sda2                          2,0G  104M  1,7G   6% /boot
tmpfs                              209M   12K  209M   1% /run/user/1000
192.168.10.111:/backup              98G 1004M   93G   2% /mnt/backup
root@eneko:/home/eneko# ls /mnt/backup/
lost+found
root@eneko:/home/eneko# ls /mnt/backup/
hola.txt  lost+found
root@eneko:/home/eneko#
```

EnekoUbuServ clonar Samba clonar [Corriendo] - Oracle VirtualBox

Archivo Máquina Ver Entrada Dispositivos Ayuda

```
root@eneko:/mnt# mount -a
mount: (hint) your fstab has been modified, but systemd still uses
       the old version; use 'systemctl daemon-reload' to reload.
root@eneko:/mnt# systemctl daemon-reload
root@eneko:/mnt# df -h
Filesystem                         Size  Used Avail Use% Mounted on
tmpfs                              209M  1,1M  208M   1% /run
/dev/mapper/ubuntu--vg-ubuntu--lv   48G  4,7G   41G  11% /
tmpfs                              1,1G     0  1,1G   0% /dev/shm
tmpfs                              5,0M     0  5,0M   0% /run/lock
/dev/sdb                            98G  1,1M   93G   1% /gluster/brick1
/dev/sda2                          2,0G  104M  1,7G   6% /boot
tmpfs                              209M   12K  209M   1% /run/user/1000
192.168.10.111:/backup              98G 1004M   93G   2% /mnt/backup
root@eneko:/mnt# touch /mnt/backup/hola.txt
root@eneko:/mnt#
```

hacemos mas comprobaciones creando un archivo y comprobamos en las dos maquinas

EnekoUbuServ clonar Samba [Corriendo] - Oracle VirtualBox

Archivo Máquina Ver Entrada Dispositivos Ayuda

```
root@eneko:/home/eneko# ls /gluster/brick1/
hola.txt  lost+found
root@eneko:/home/eneko# ls /gluster/brick1/
adios.txt  hola.txt  lost+found
root@eneko:/home/eneko#
```

EnekoUbuServ clonar Samba clonar [Corriendo] - Oracle VirtualBox

Archivo Máquina Ver Entrada Dispositivos Ayuda

```
root@eneko:/mnt# touch /mnt/backup/adios.txt
root@eneko:/mnt# ls /gluster/brick1/
adios.txt  hola.txt  lost+found
root@eneko:/mnt#
```

SAMBA

Configuramos samba para compartir el directorio /mnt/Backup con permisos al usuario eneko

```
   path = /var/tmp
   printable = yes
   guest ok = no
   read only = yes
   create mask = 0700

# Windows clients look for this share name as a source of downloadable
# printer drivers
[print$]
   comment = Printer Drivers
   path = /var/lib/samba/printers
   browseable = yes
   read only = yes
   guest ok = no
# Uncomment to allow remote administration of Windows print drivers.
# You may need to replace 'lpadmin' with the name of the group your
# admin users are members of.
# Please note that you also need to set appropriate Unix permissions
# to the drivers directory for these users to have write rights in it
;   write list = root, @lpadmin

[Backup]
   path = /mnt/Backup
   browseable = yes
   writable = yes
   guest ok = no
   read only = no
   create mask = 0775
   directory mask = 0775
   valid users = eneko


root@eneko:/mnt# _
```

Reiniciamos el servicio y creamos el usuario eneko para poder acceder

```
root@eneko:/mnt# systemctl status smbd
● smbd.service - Samba SMB Daemon
     Loaded: loaded (/usr/lib/systemd/system/smbd.service; enabled; preset: enabled)
     Active: active (running) since Mon 2026-01-19 15:19:57 UTC; 6s ago
       Docs: man:smbd(8)
             man:samba(7)
             man:smb.conf(5)
    Process: 2522 ExecCondition=/usr/share/samba/is-configured smb (code=exited, status=0/SUCCESS)
   Main PID: 2525 (smbd)
     Status: "smbd: ready to serve connections..."
      Tasks: 3 (limit: 7026)
     Memory: 7.5M (peak: 7.7M)
        CPU: 79ms
     CGroup: /system.slice/smbd.service
             ├─2525 /usr/sbin/smbd --foreground --no-process-group
             ├─2529 "smbd: notifyd" .
             └─2530 "smbd: cleanupd "

ene 19 15:19:57 eneko systemd[1]: Starting smbd.service - Samba SMB Daemon...
ene 19 15:19:57 eneko (smbd)[2525]: smbd.service: Referenced but unset environment variable evaluates to an empty string: SMBDOPTIONS
ene 19 15:19:57 eneko systemd[1]: Started smbd.service - Samba SMB Daemon.
root@eneko:/mnt# smbpasswd -a eneko
New SMB password:
Retype new SMB password:
Added user eneko.
root@eneko:/mnt# _
```
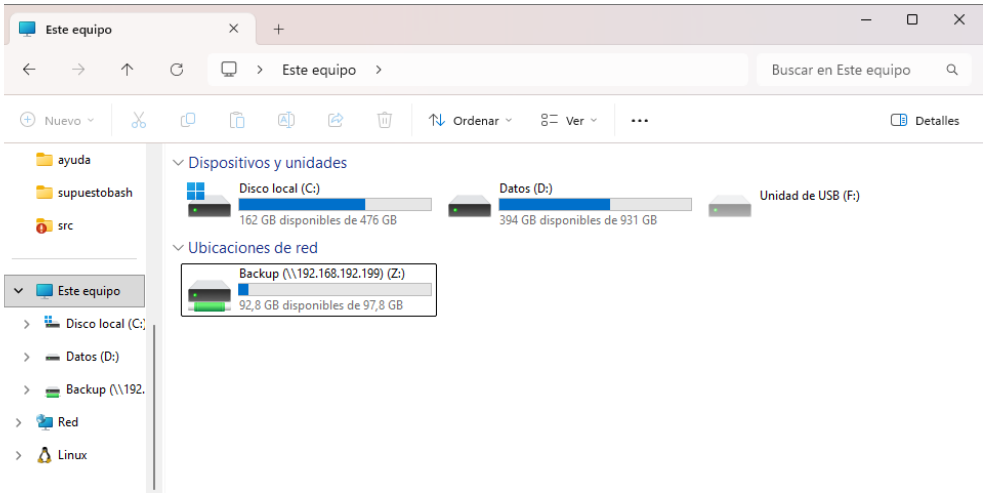
En windows activamos la unidad de red con el usuario eneko