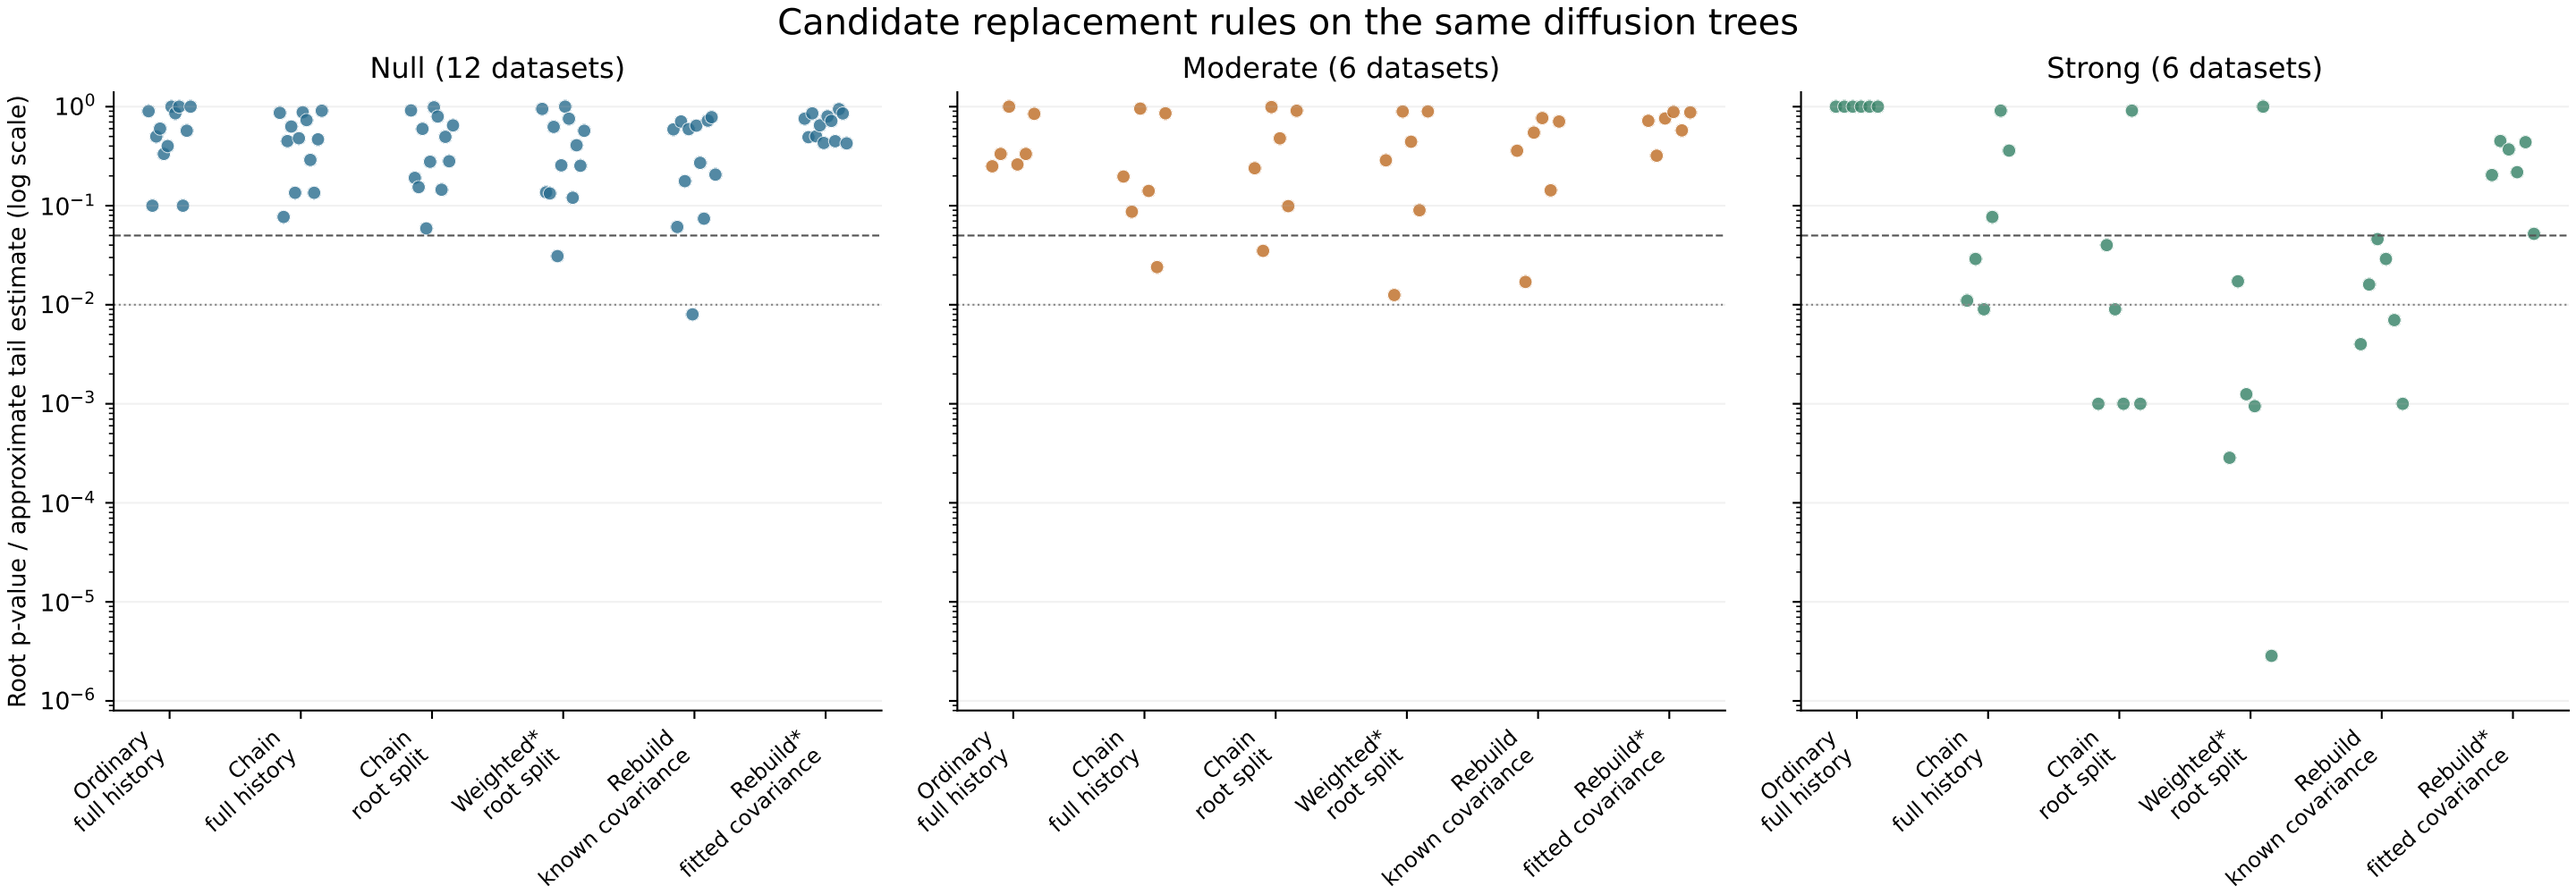
Candidate replacement rules on the same diffusion trees
Null (12 datasets)
Moderate (6 datasets)
Strong (6 datasets)
Root p-value / approximate tail estimate (log scale)
10^{0}
10^{-1}
10^{-2}
10^{-3}
10^{-4}
10^{-5}
10^{-6}
Ordinary full history
Chain full history
Chain root split
Weighted* root split
Rebuild known covariance
Rebuild* fitted covariance
Known-identity Gaussian controls, 9 rows × 3 features. Lines: 0.05 and 0.01.
*Approximation; numerical event membership throughout. Conditional and rebuilding tests ask different questions.