

<b>Name of Student</b>	<b>MANAV PUNJABI</b>
<b>Class Roll No</b>	<b>44</b>
<b>D.O.P.</b>	
<b>D.O.S.</b>	
<b>Sign and Grade</b>	

### Experiment – 7: MongoDB

1) **Aim:** To study CRUD operations in MongoDB

2) **Problem Statement:**

A) Create a new database to storage student details of IT dept( Name, Roll no, class name) and perform the following on the database

- a) Insert one student details
- b) Insert at once multiple student details
- c) Display student for a particular class
- d) Display students of specific roll no in a class
- e) Change the roll no of a student
- f) Delete entries of particular student




B) Create a set of RESTful endpoints using Node.js, Express, and Mongoose for handling student data operations.


The endpoints should support:

- Retrieve a list of all students.
- Retrieve details of an individual student by ID.
- Add a new student to the database.
- Update details of an existing student by ID.
- Delete a student from the database by ID.

Connect the server to MongoDB using Mongoose, and store student data with attributes: name, age, and grade.

3) **Output:**

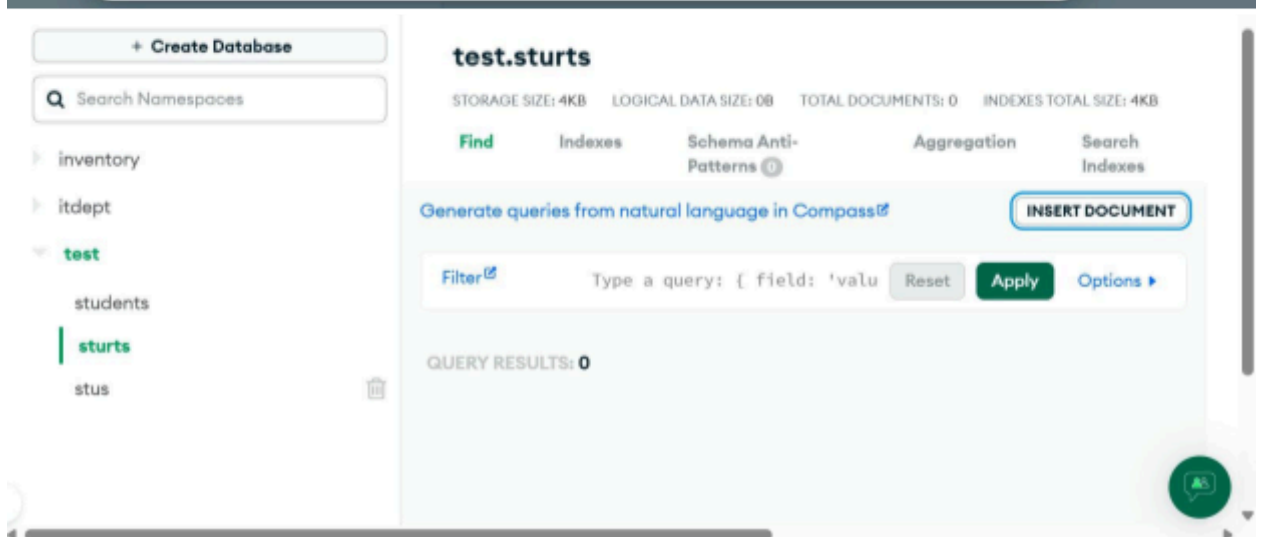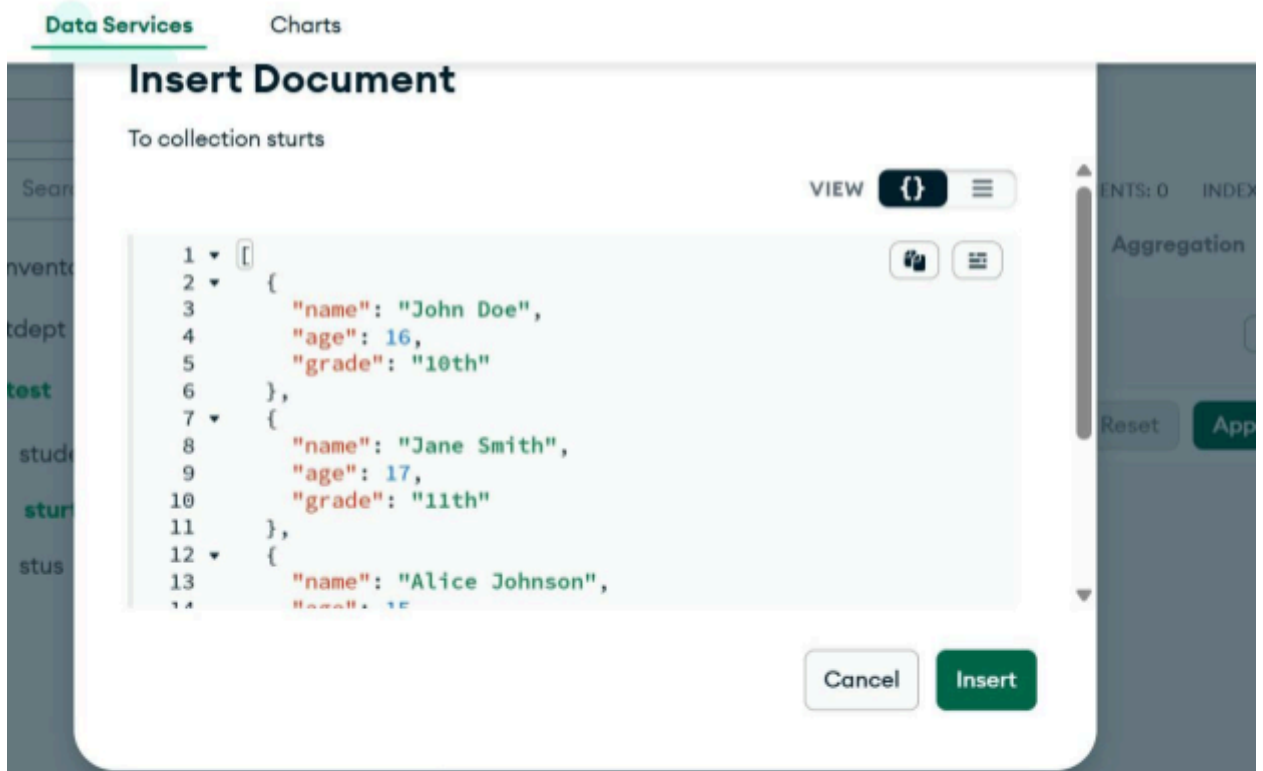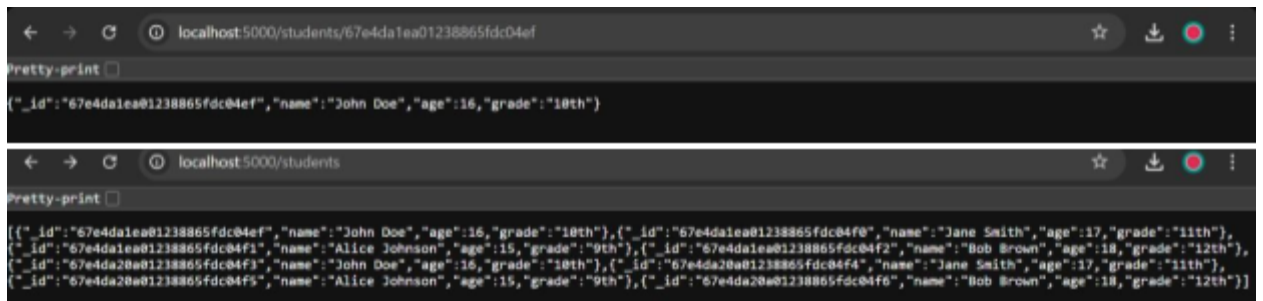

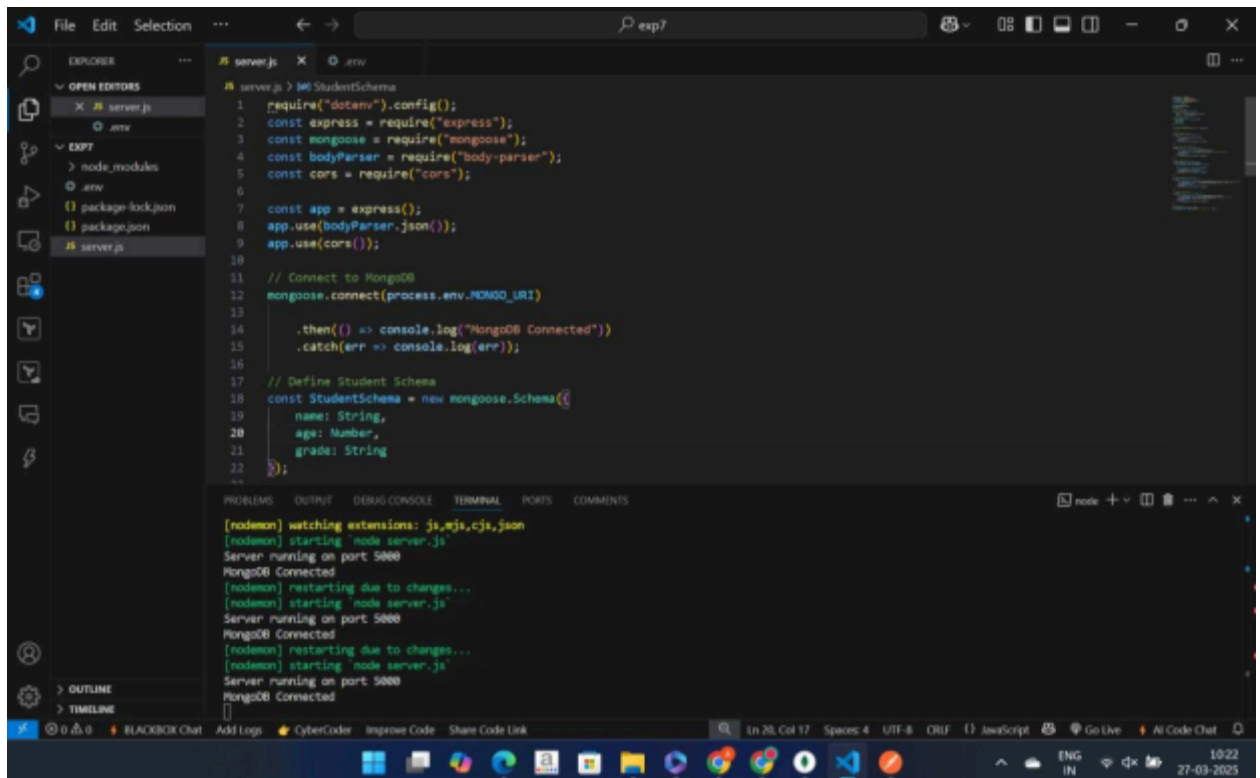

```
> db.students.updateOne({ RollNo: "IT101" }, { $set: { RollNo: "IT110" } })
< {
  acknowledged: true,
  insertedId: null,
  matchedCount: 1,
  modifiedCount: 1,
  upsertedCount: 0
}
> db.students.deleteOne({ Name: "Charlie Brown" })
< {
  acknowledged: true,
  deletedCount: 1
}
Atlas atlas-jsa0wb-shard-0 [primary] itdept>
```

```
>_MONGOSH
```

```
> db.students.find({ ClassName: "IT-1" }).pretty()
```

```
< {  
  _id: ObjectId('67e4d54b85c12e85bbe0e052'),  
  Name: 'John Doe',  
  RollNo: 'IT101',  
  ClassName: 'IT-1'  
}  
{  
  _id: ObjectId('67e4d55585c12e85bbe0e053'),  
  Name: 'Alice Smith',  
  RollNo: 'IT102',  
  ClassName: 'IT-1'  
}  
{  
  _id: ObjectId('67e4d55585c12e85bbe0e055'),  
  Name: 'Charlie Brown',  
  RollNo: 'IT104',  
  ClassName: 'IT-1'  
}
```

```
> db.students.find({ RollNo: "IT103", ClassName: "IT-2" }).pretty()
```

```
< {  
  _id: ObjectId('67e4d55585c12e85bbe0e054'),  
  Name: 'Bob Johnson',  
  RollNo: 'IT103',  
  ClassName: 'IT-2'
```

```
}
```

```
>_MONGOSH
```

```
> use itdept
```

```
< switched to db itdept
```

```
>
```

```
> db.students.insertOne({
```

```
    Name: "John Doe",
```

```
    RollNo: "IT101",
```

```
    ClassName: "IT-1"
```

```
  })
```

```
< {
```

```
  acknowledged: true,
```

```
  insertedId: ObjectId('67e4d54b85c12e85bbe0e052')
```

```
}
```

```
> db.students.insertMany([
```

```
  { Name: "Alice Smith", RollNo: "IT102", ClassName: "IT-1" },
```

```
  { Name: "Bob Johnson", RollNo: "IT103", ClassName: "IT-2" },
```

```
  { Name: "Charlie Brown", RollNo: "IT104", ClassName: "IT-1" },
```

```
  { Name: "David White", RollNo: "IT105", ClassName: "IT-3" }
```

```
])
```

```
< {
```

```
  acknowledged: true,
```

```
  insertedIds: {
```

```
    '0': ObjectId('67e4d55585c12e85bbe0e053'),
```

```
    '1': ObjectId('67e4d55585c12e85bbe0e054'),
```

```
    '2': ObjectId('67e4d55585c12e85bbe0e055'),
```

```
    '3': ObjectId('67e4d55585c12e85bbe0e056')
```

```
}
```

Data Services

Charts

ARVAS

C

Over

BASES

Search

nvent

prod

REGION

AWS Mun

y Insights

SUALIZE YOUR DA

UMENTS: INDE

36KB

Aggregation

II

Create Database

×

Database name ?

itdept

Collection name ?

student

Additional Preferences

Select

Cancel

Create