



Reconstructed simulator — current diagnostic results

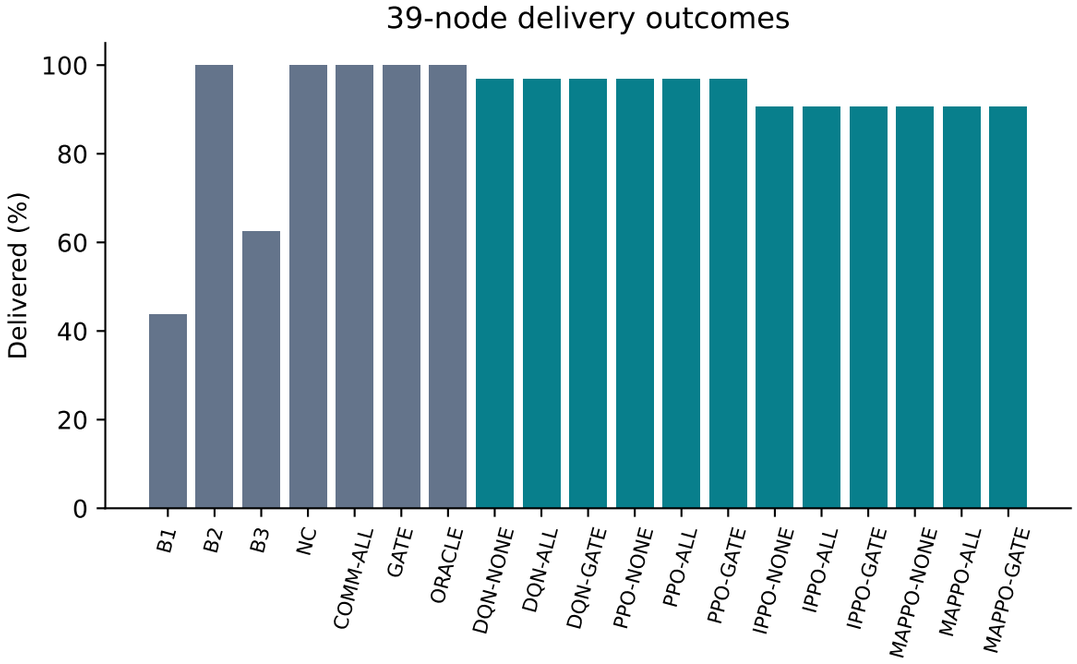

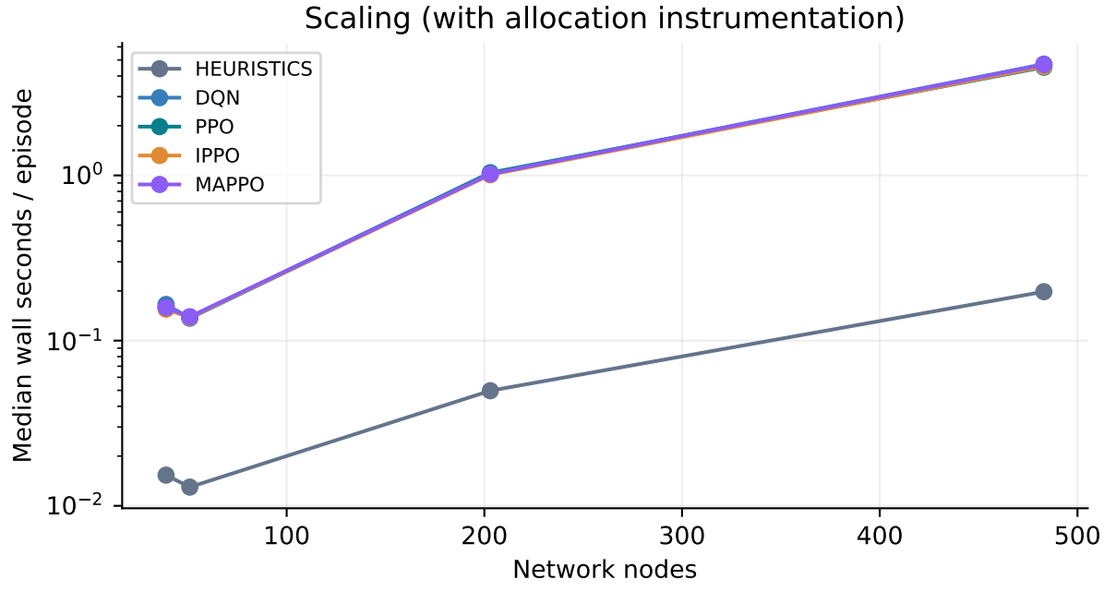

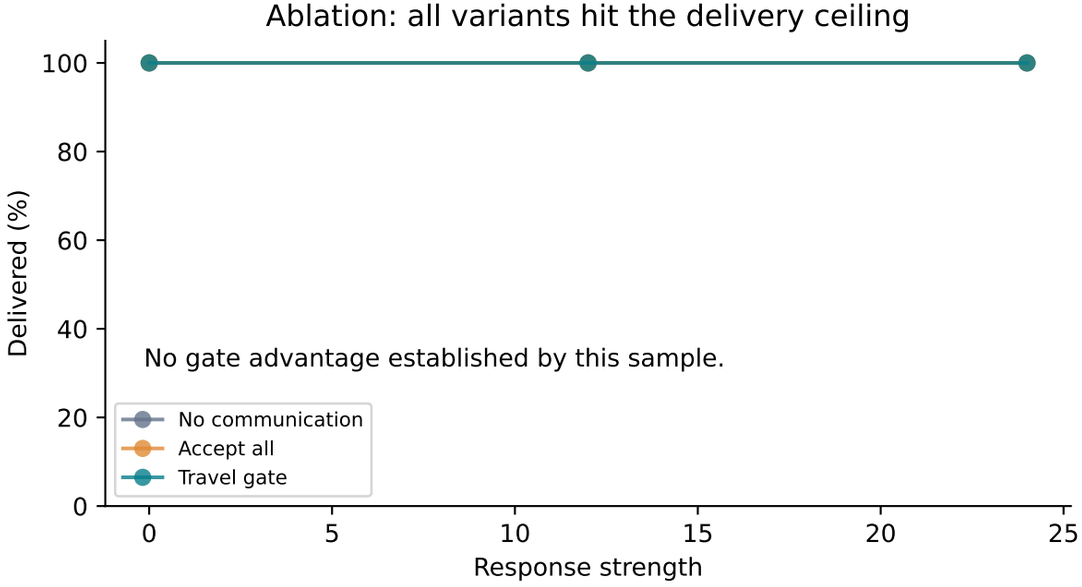


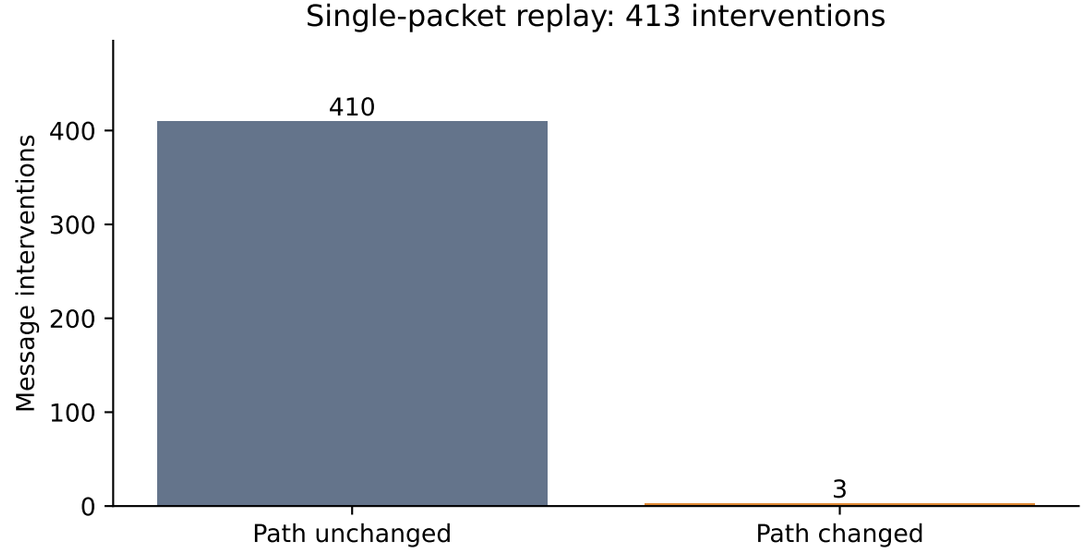

28 tests passed; 24 short-trained models. Three packet interventions changed paths; none changed delivery.

DIAGNOSTIC SMOKE RUNS • 4 training episodes • 2 graph seeds • not publication evidence


Training executes; convergence is not established

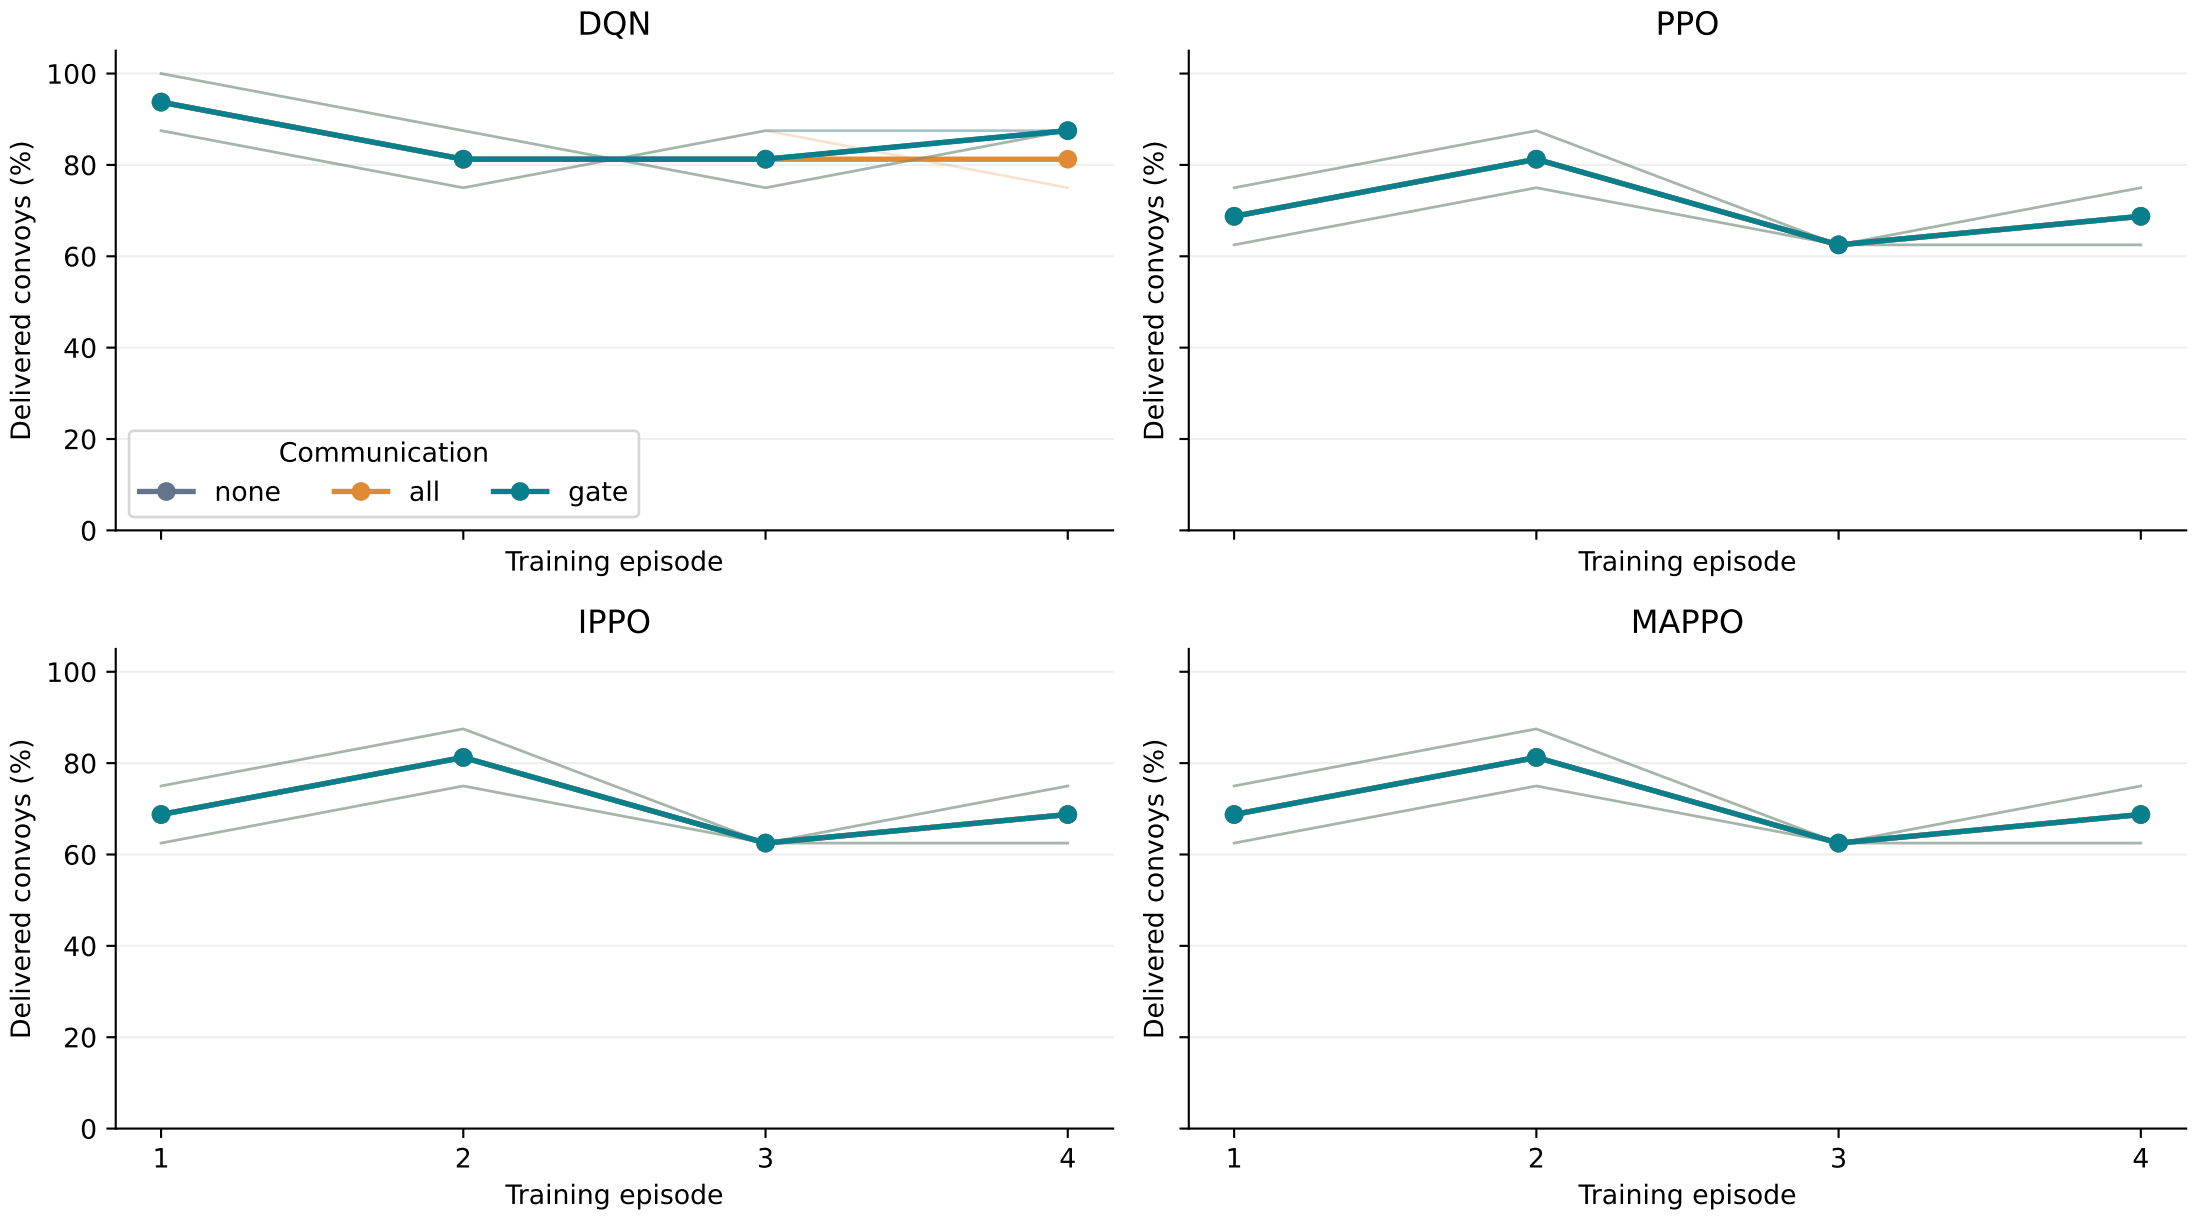

Bold lines: two-seed means. Faint lines: individual seeds. Training graph changes by episode.

DIAGNOSTIC SMOKE RUNS • 4 training episodes • 2 graph seeds • not publication evidence


Held-out delivery outcomes across network sizes

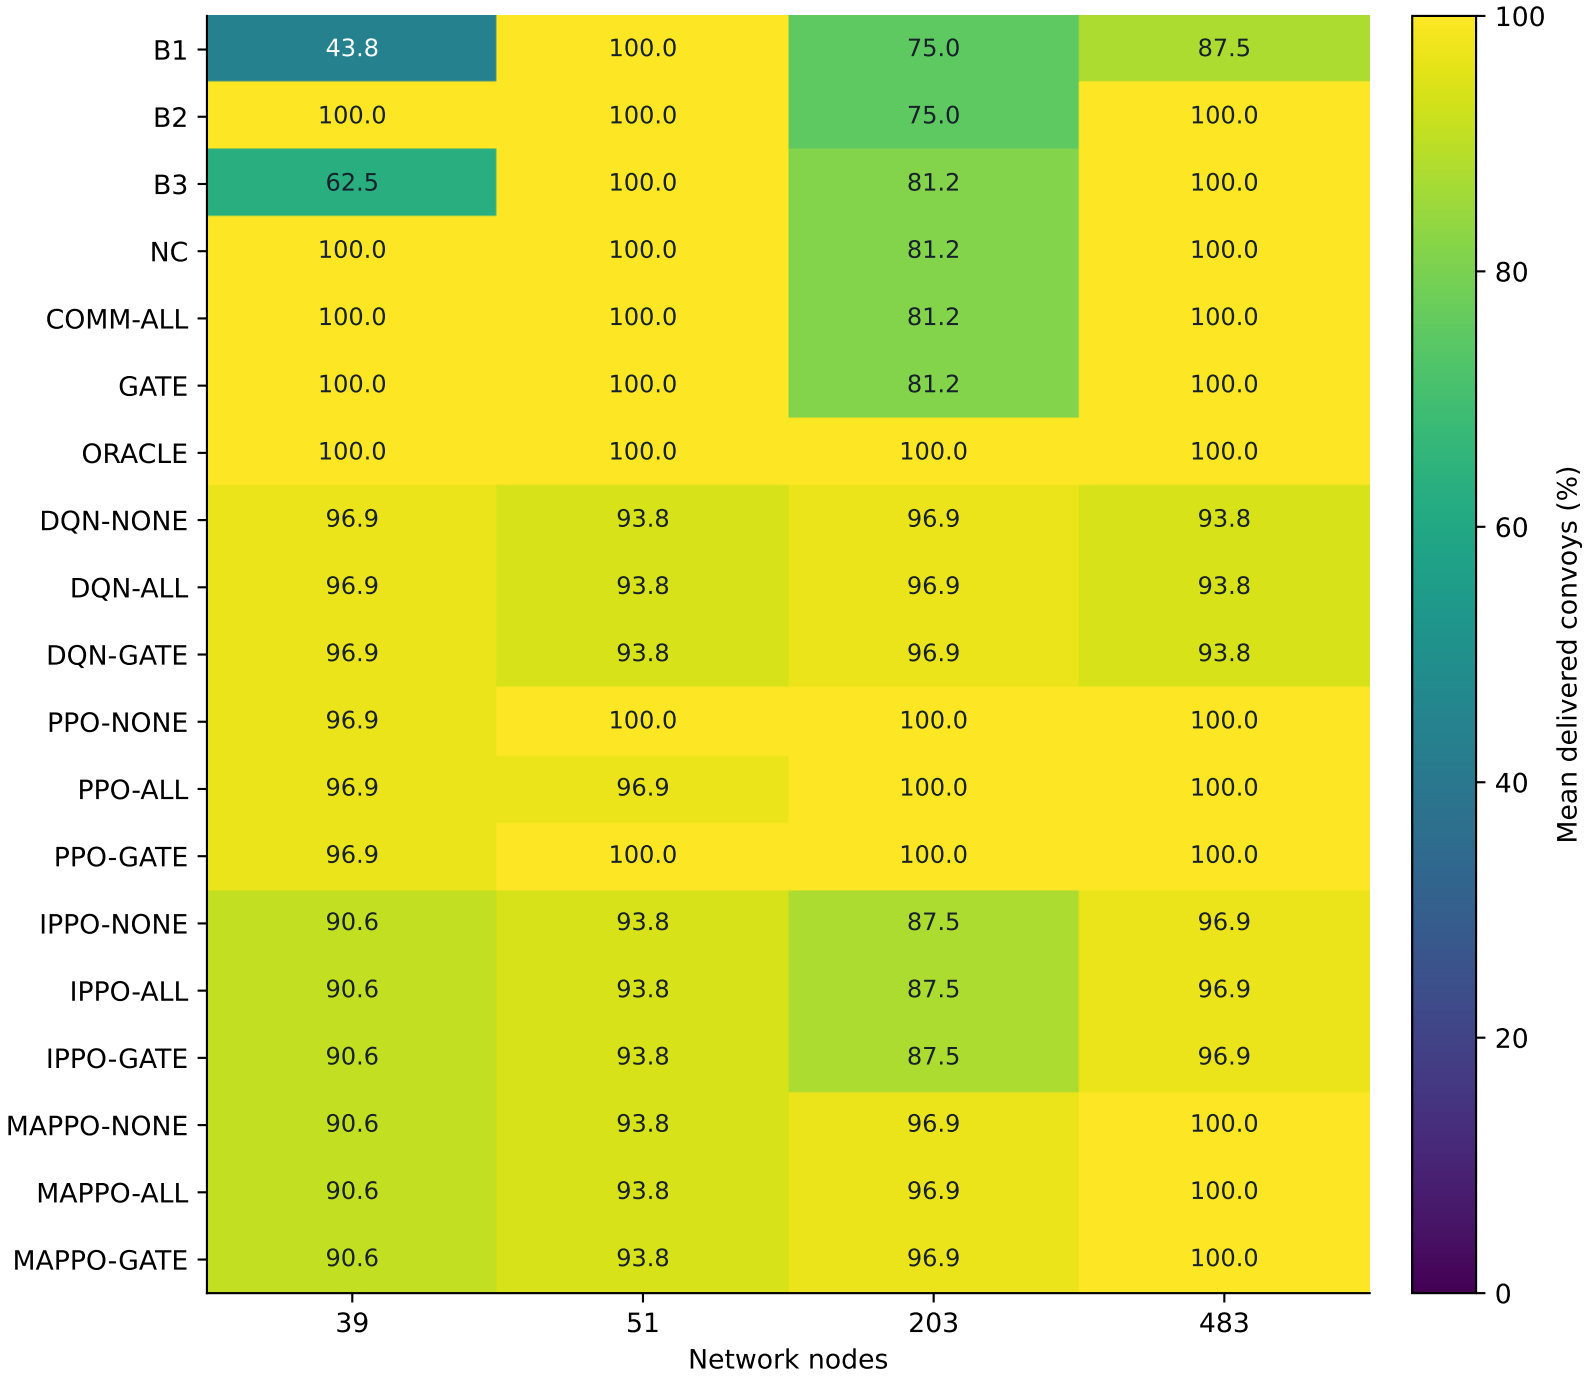

Two graphs × one episode; learned methods additionally average two training seeds. Population fixed at 8.

DIAGNOSTIC SMOKE RUNS • 4 training episodes • 2 graph seeds • not publication evidence


Measured execution cost of graph-size inference

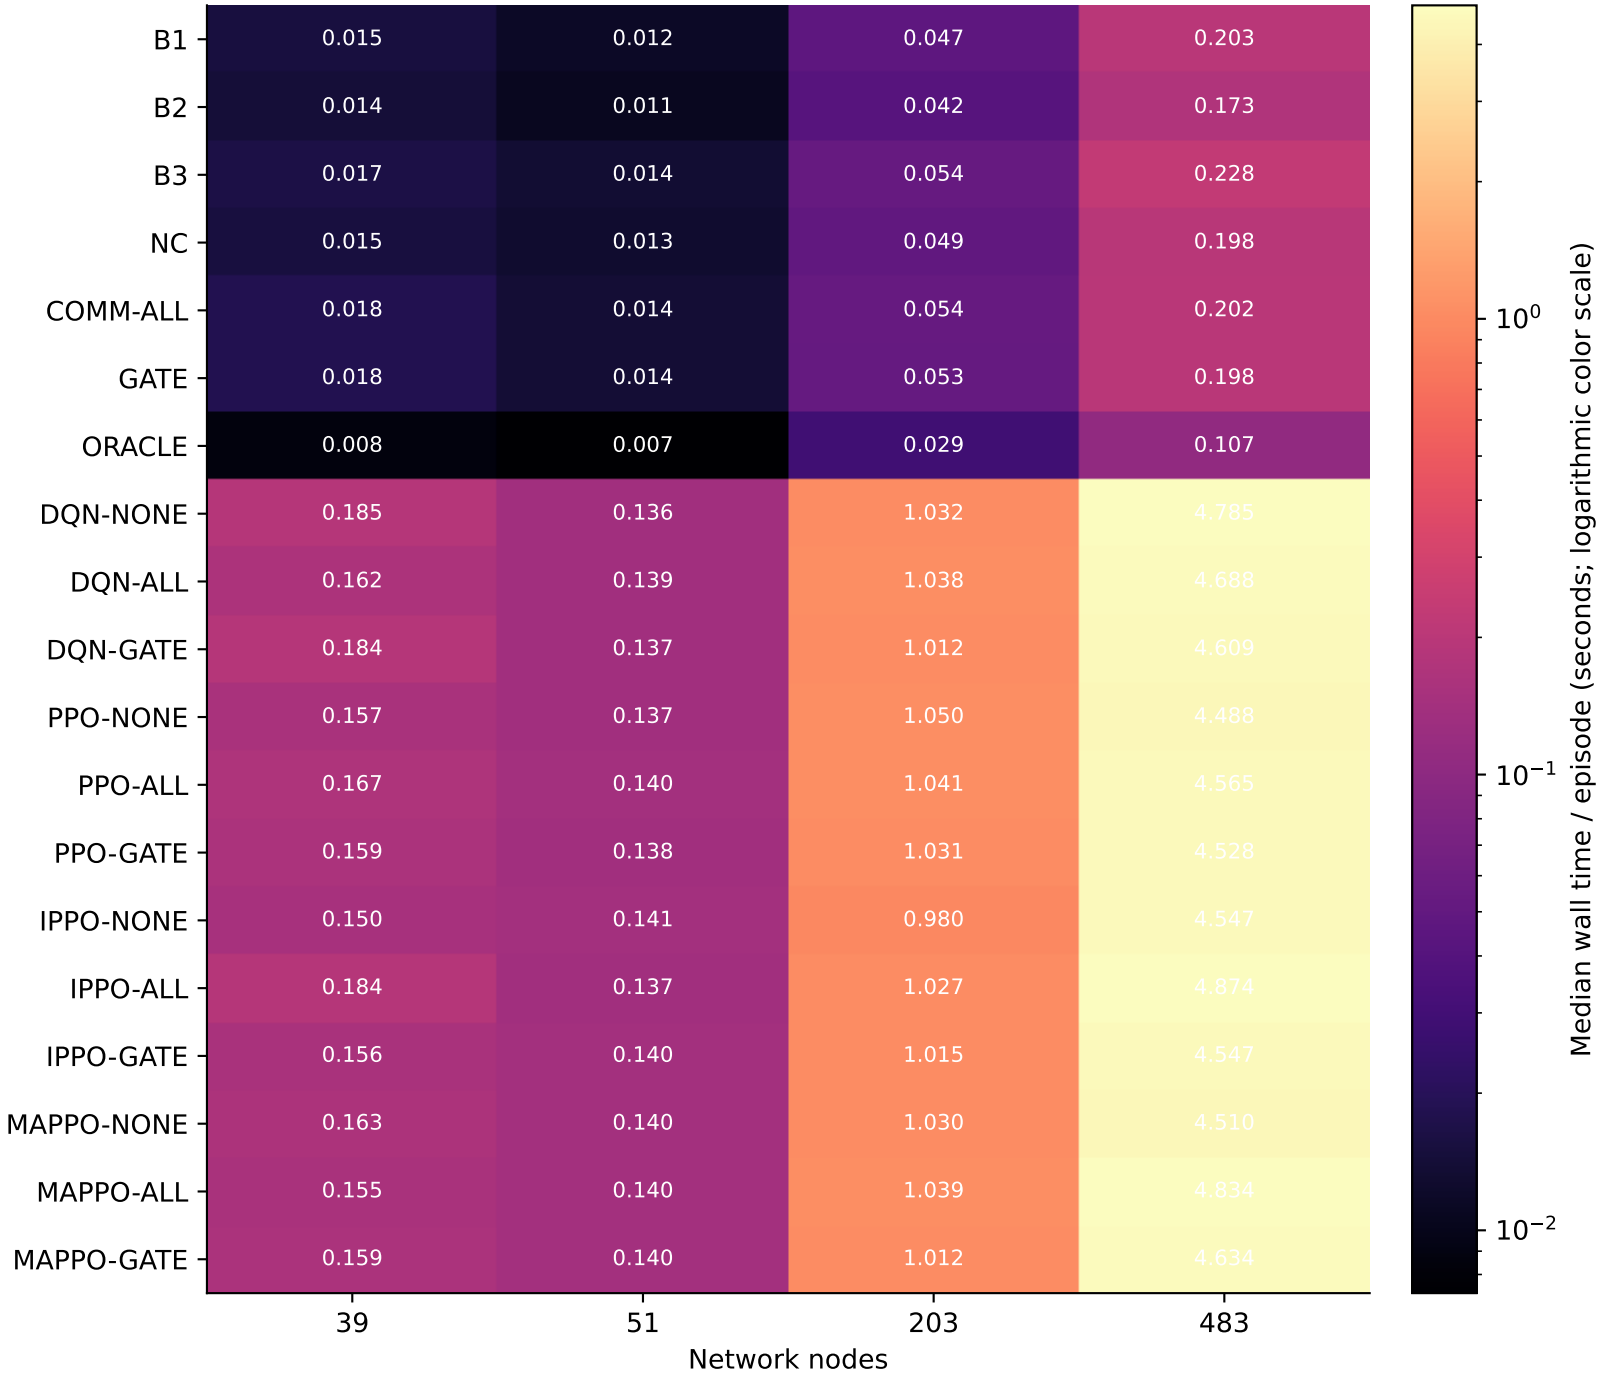

CPU, 2 PyTorch threads; includes Python allocation instrumentation. These are not uninstrumented benchmarks.

DIAGNOSTIC SMOKE RUNS • 4 training episodes • 2 graph seeds • not publication evidence


Two threat scenarios: separate small samples

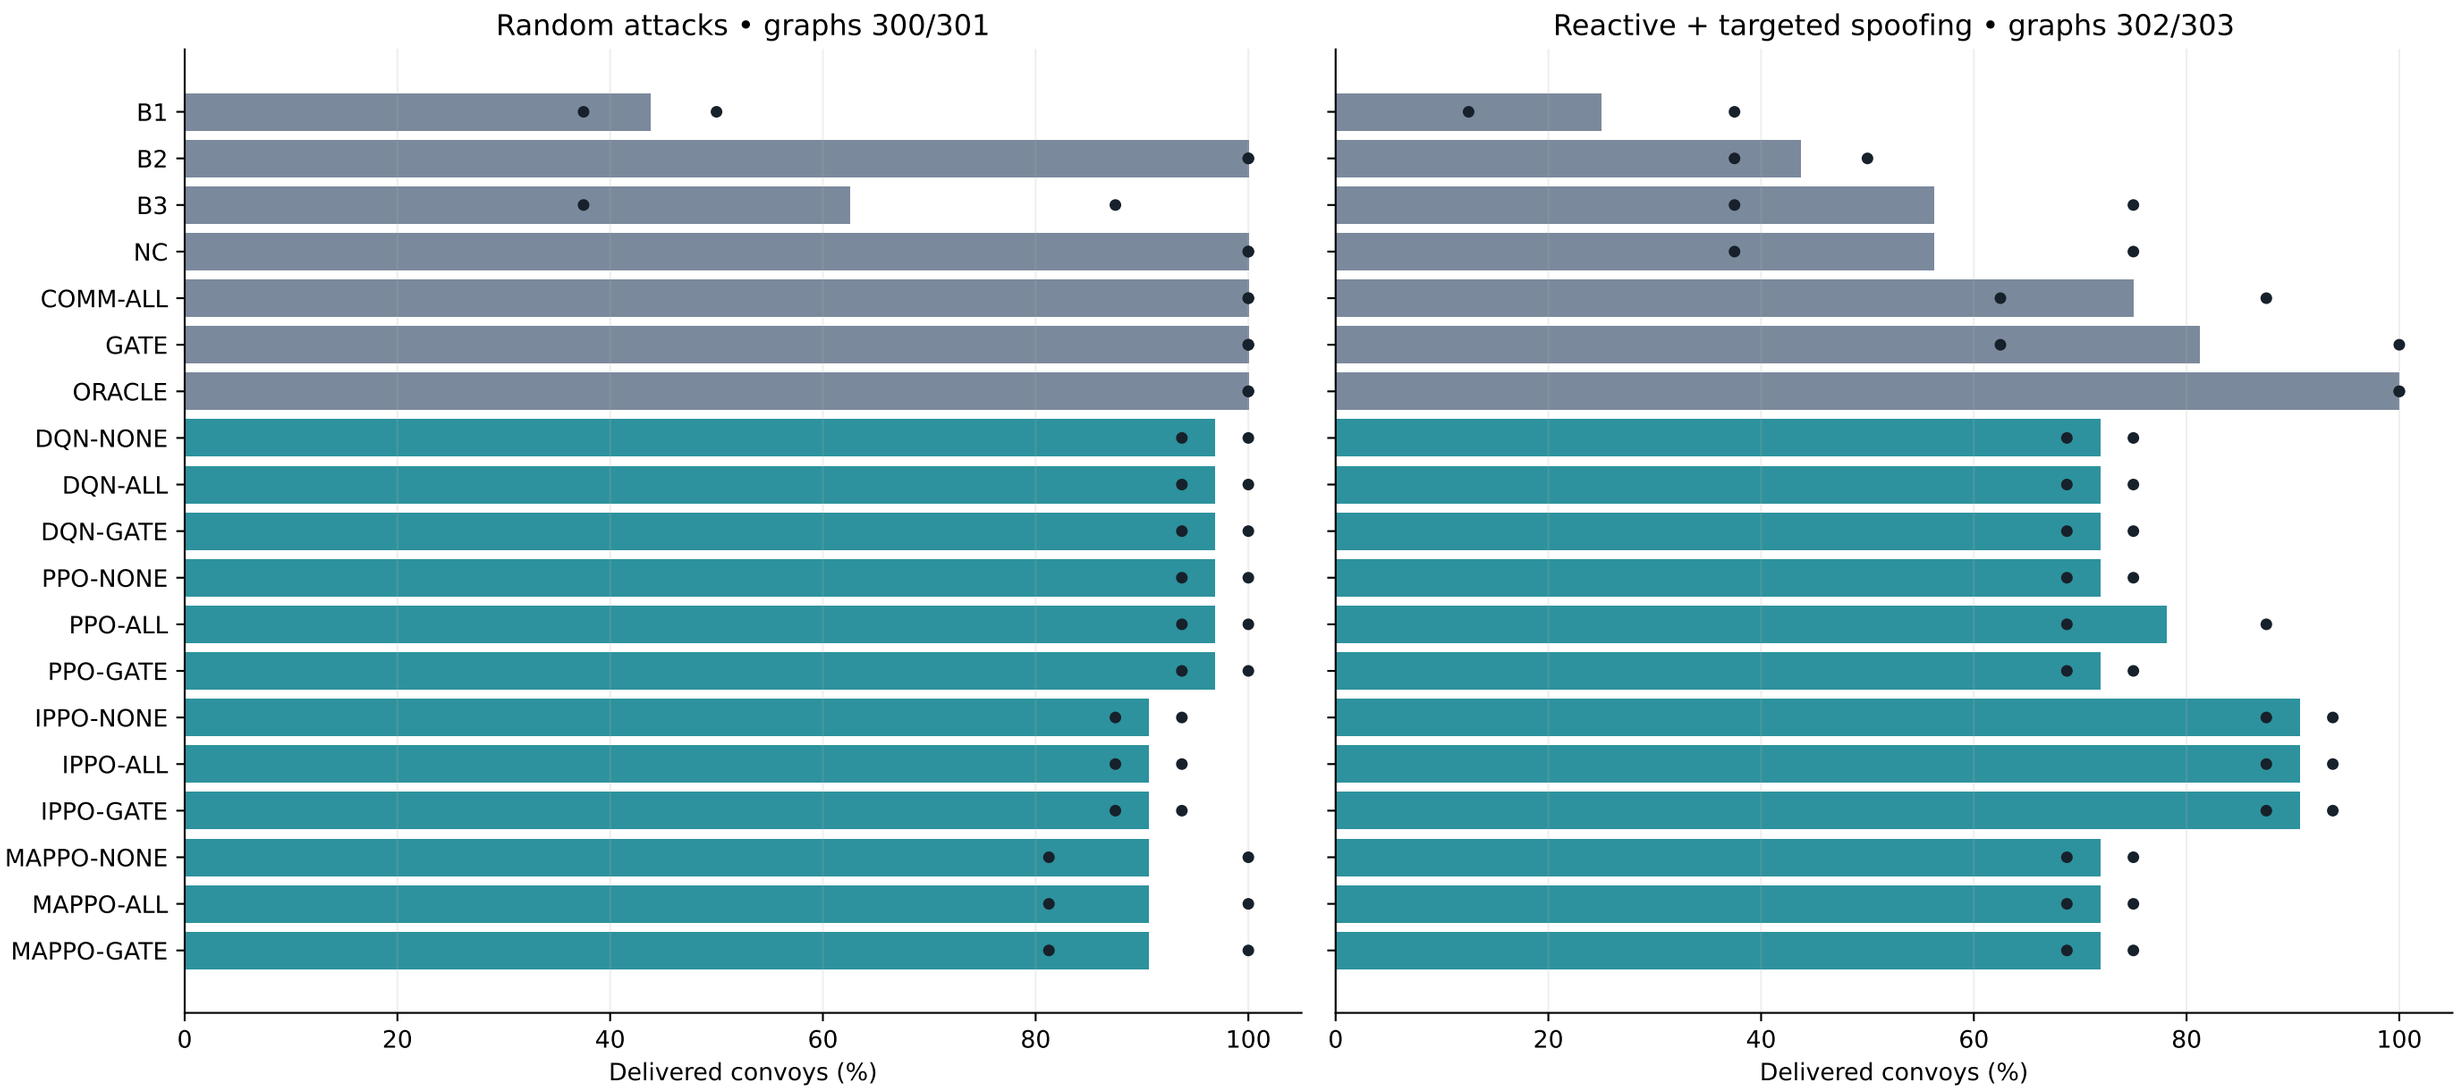

39 nodes, 8 convoys. Dots: graph-level means. Different graphs/configurations prevent a paired robustness claim.

DIAGNOSTIC SMOKE RUNS • 4 training episodes • 2 graph seeds • not publication evidence


Separate filtering from penalty strength

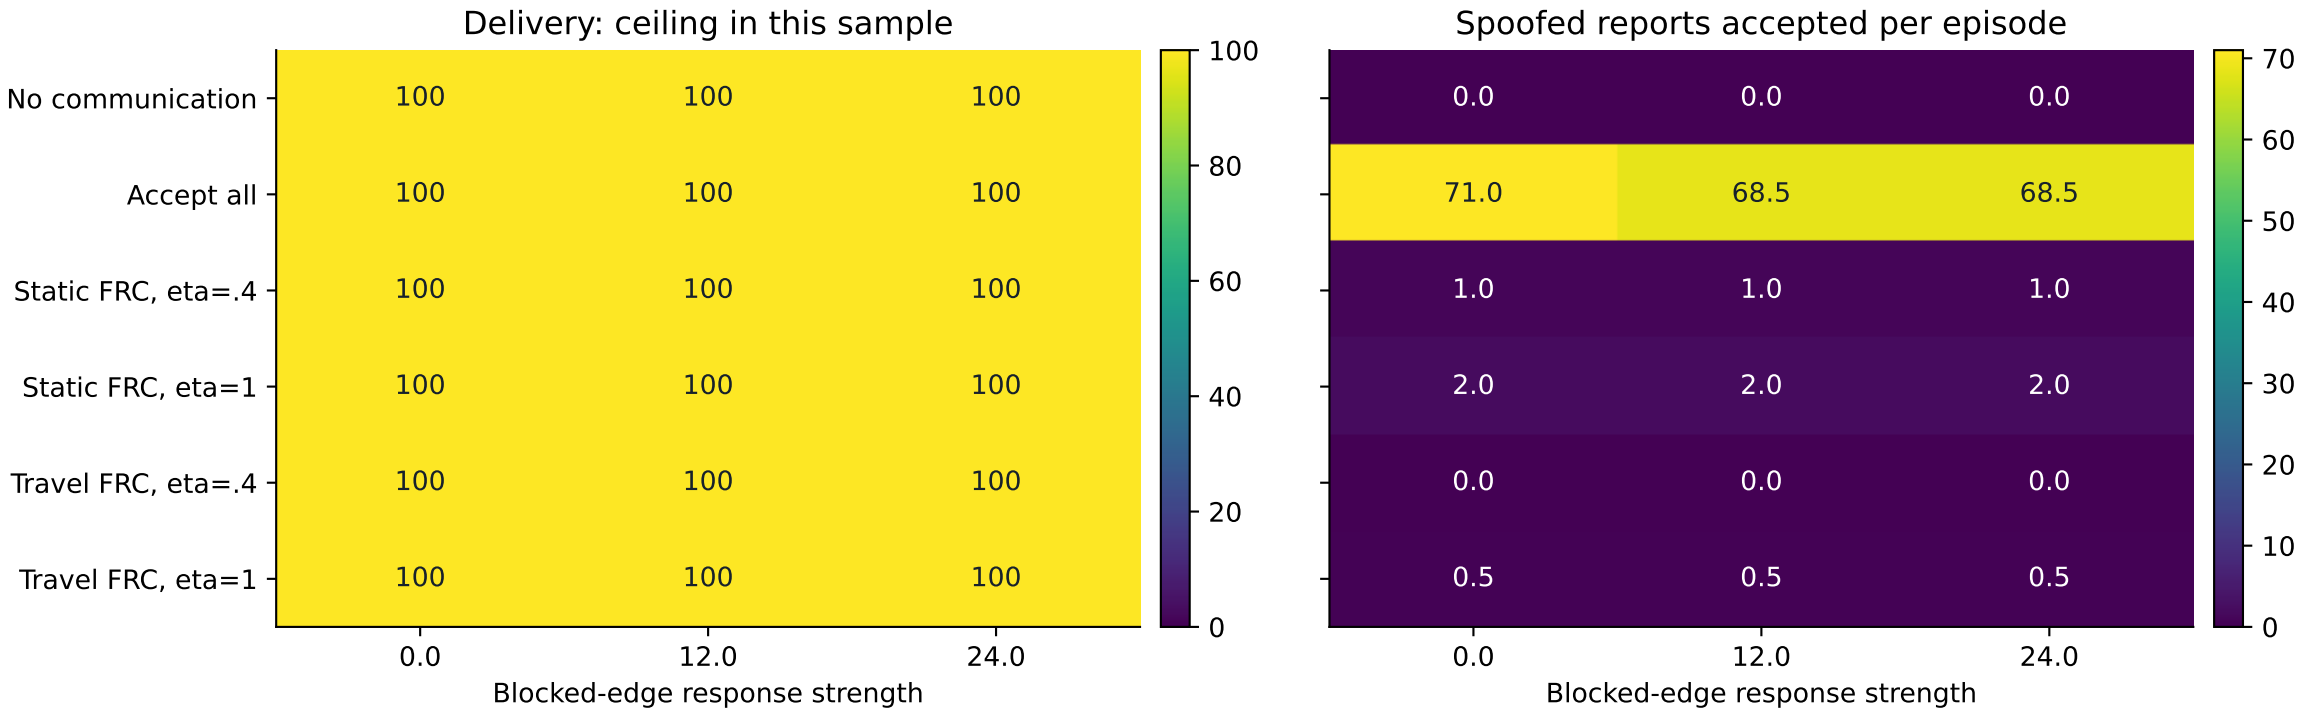

All 204 ablation runs delivered 100%. Filtering changes acceptance; this sample cannot show a delivery advantage.

DIAGNOSTIC SMOKE RUNS • 4 training episodes • 2 graph seeds • not publication evidence

Exact replay isolates individual packet effects

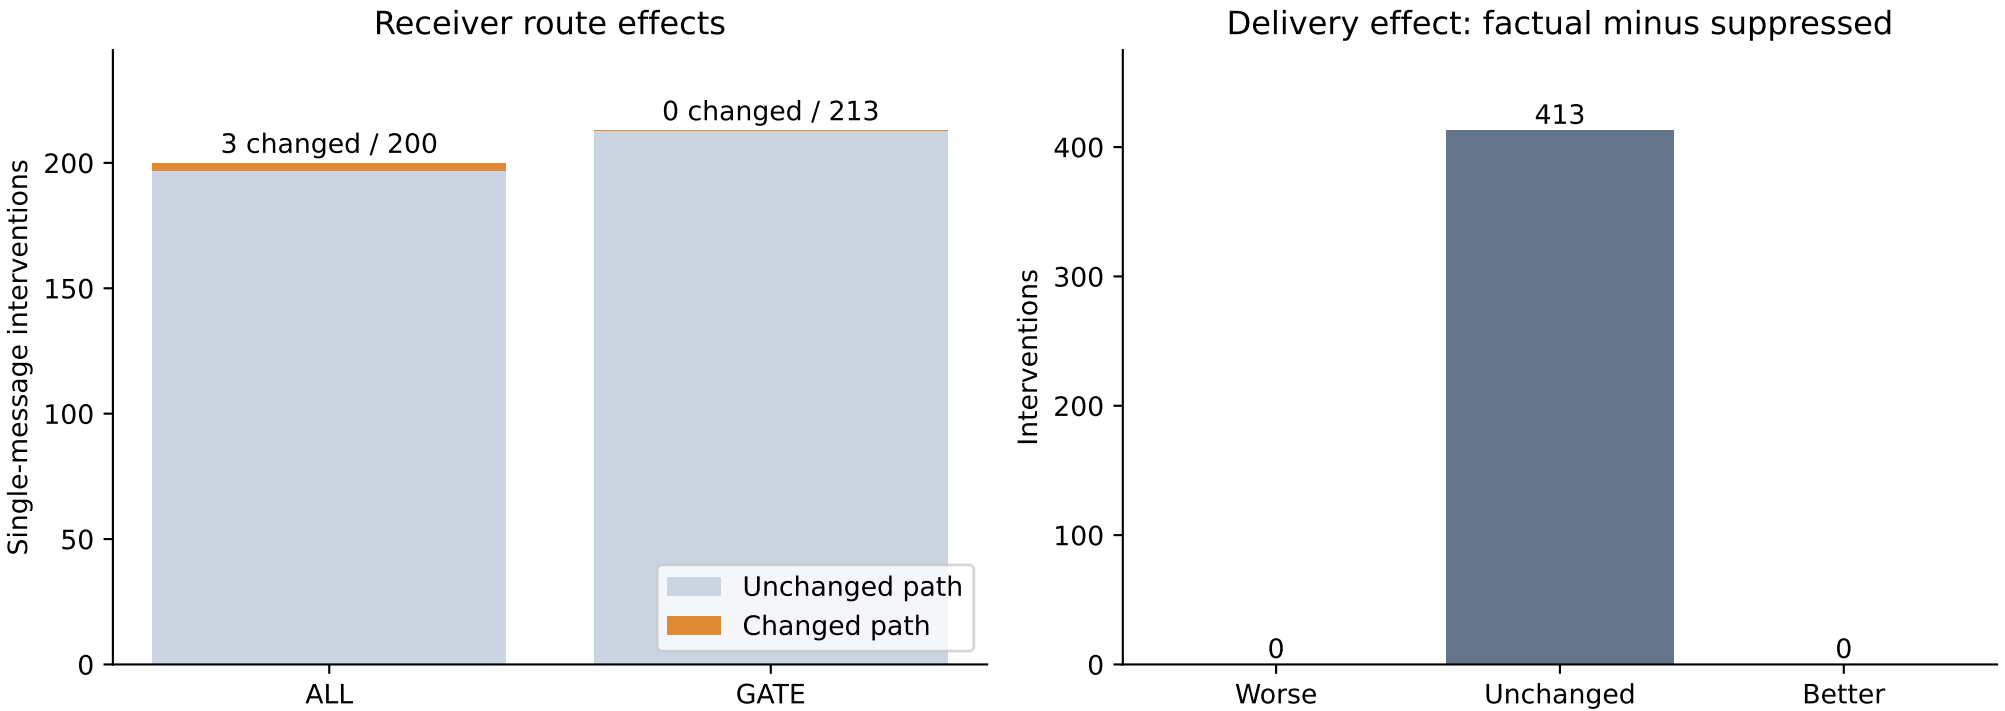

All 413 decision-processed packets replayed. Three paths changed; no receiver delivery outcomes changed.

DIAGNOSTIC SMOKE RUNS • 4 training episodes • 2 graph seeds • not publication evidence