original-19 / reliable

original-19 / delayed-spoof

original-19 / heavy-spoof

original-19 / reactive-spoof

synthetic-39 / reliable

synthetic-39 / delayed-spoof

synthetic-39 / heavy-spoof

synthetic-39 / reactive-spoof

synthetic-51 / reliable

synthetic-51 / delayed-spoof

synthetic-51 / heavy-spoof

synthetic-51 / reactive-spoof

original-19 vs COMM-ALL

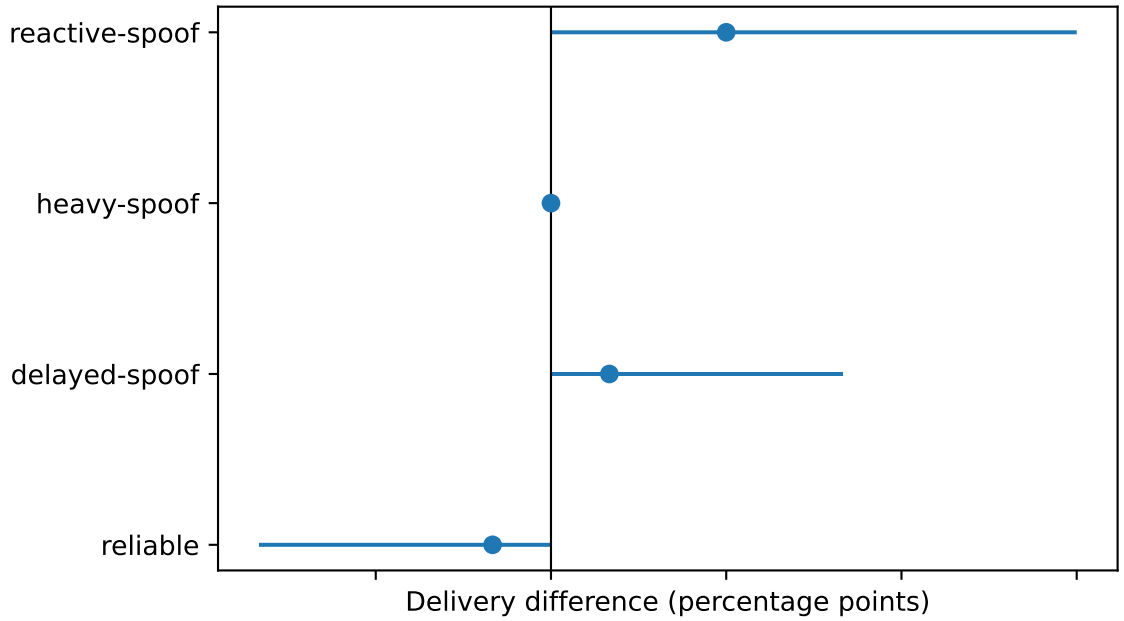

original-19 vs SOFT-ALL

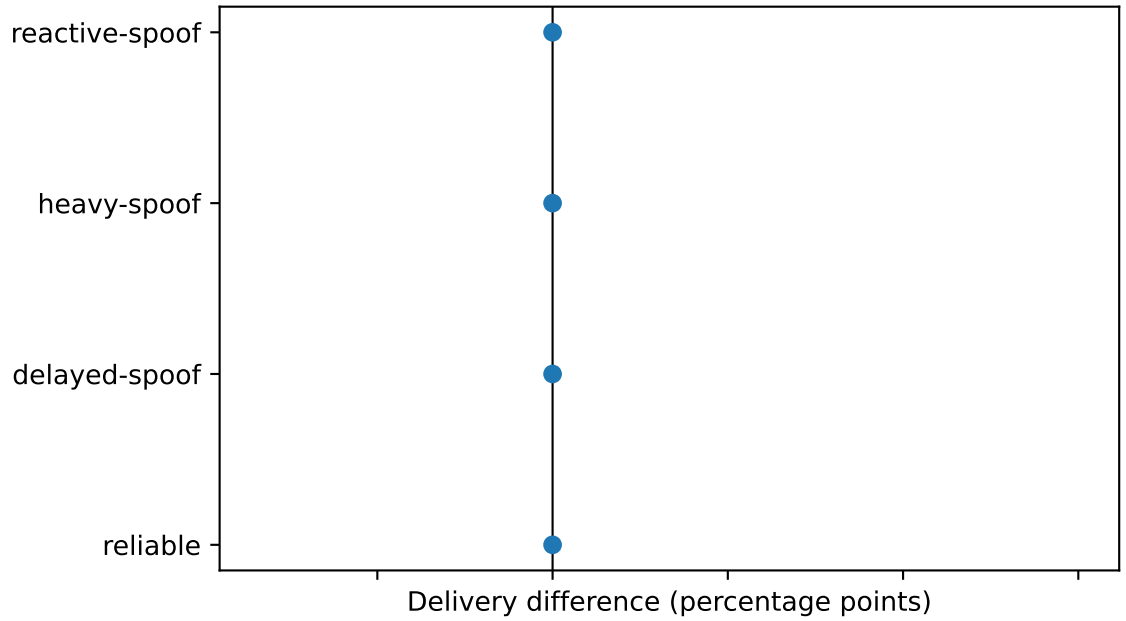

synthetic-39 vs COMM-ALL

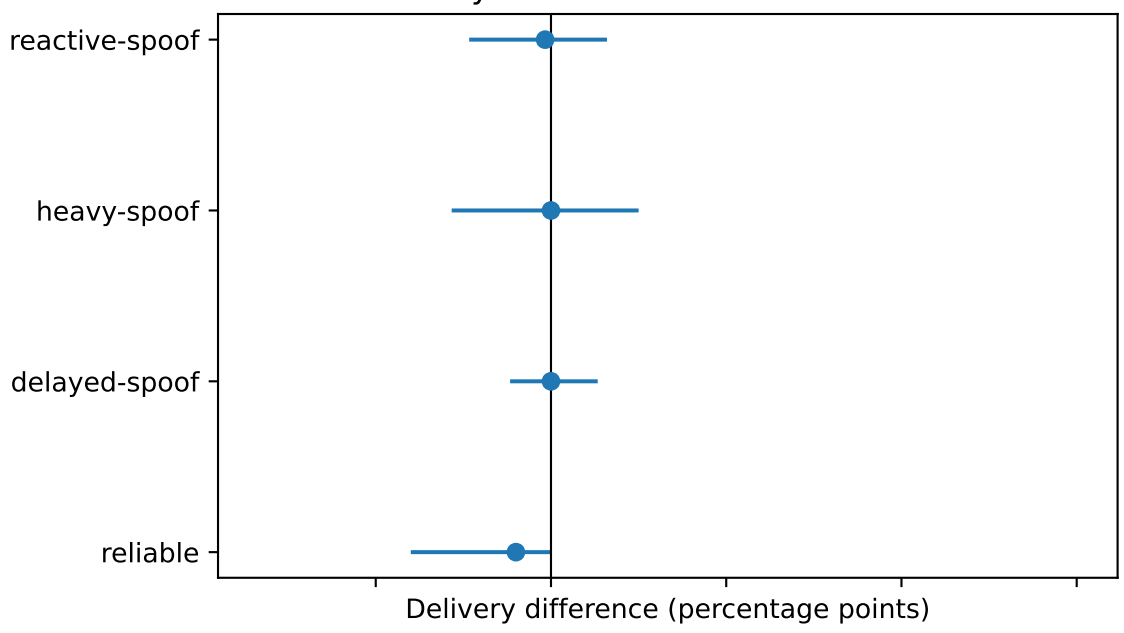

synthetic-39 vs SOFT-ALL

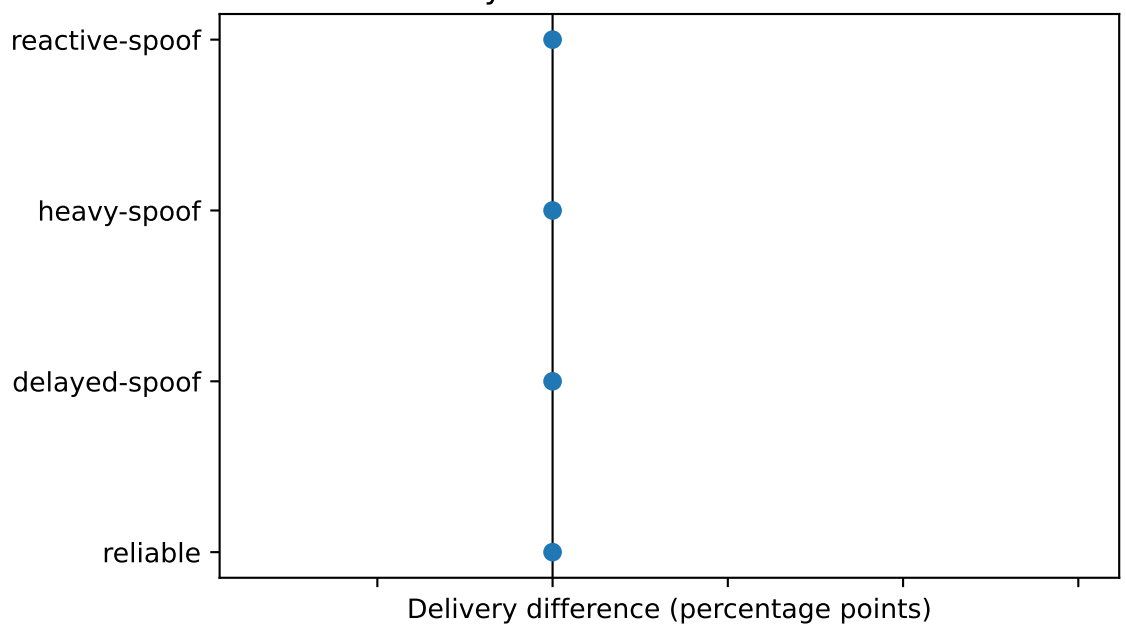

synthetic-51 vs COMM-ALL

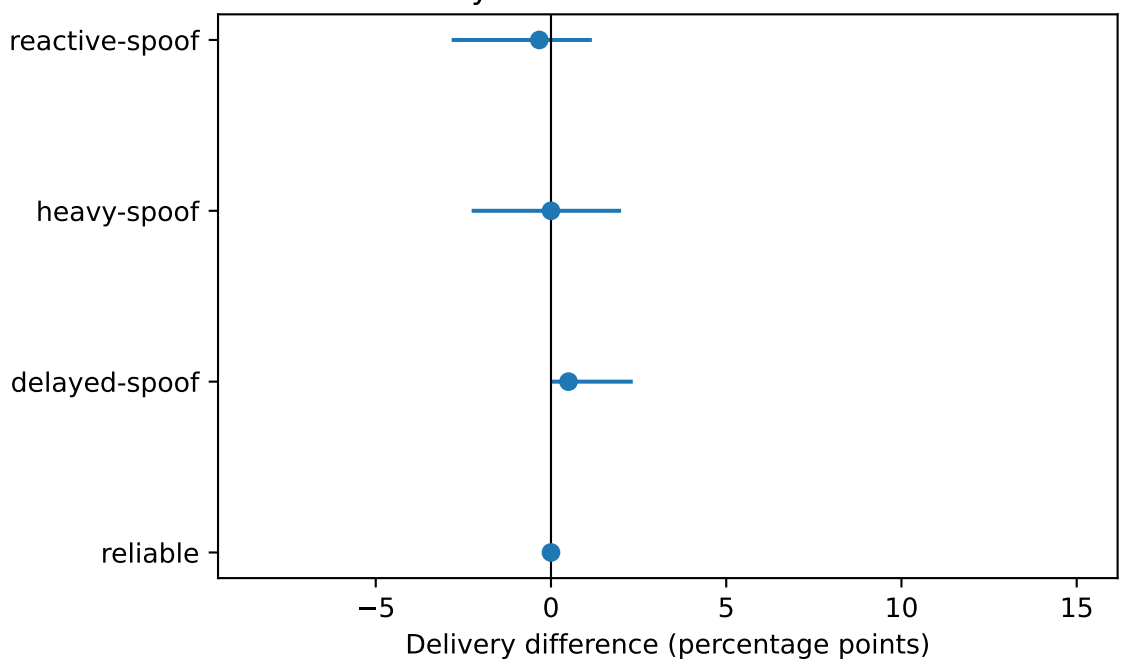

synthetic-51 vs SOFT-ALL

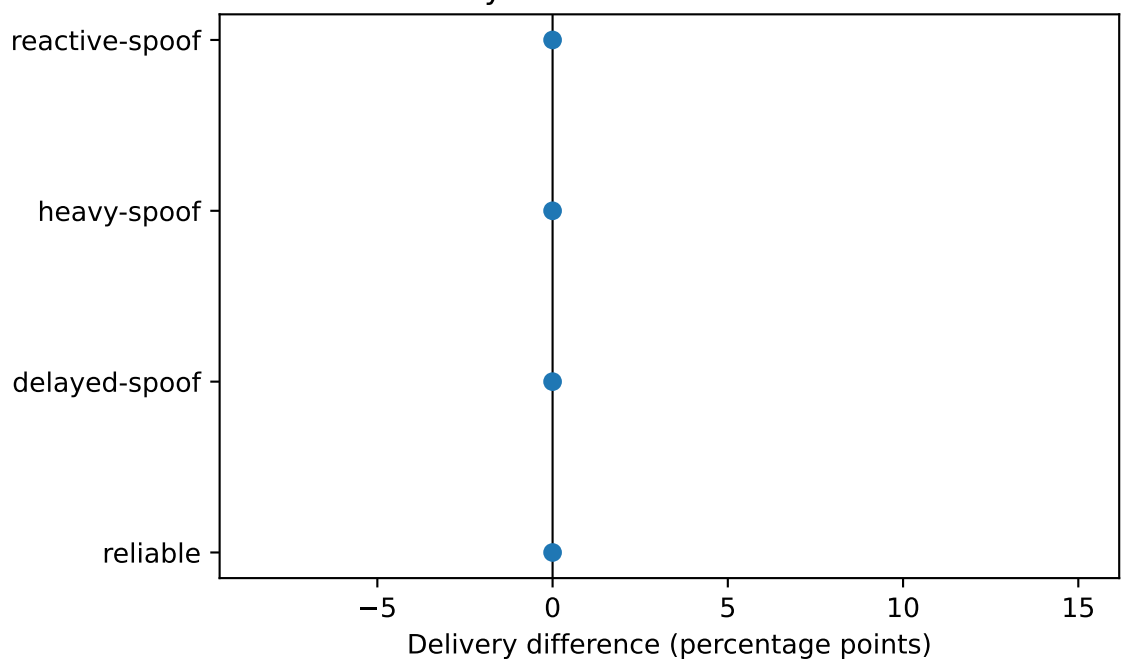

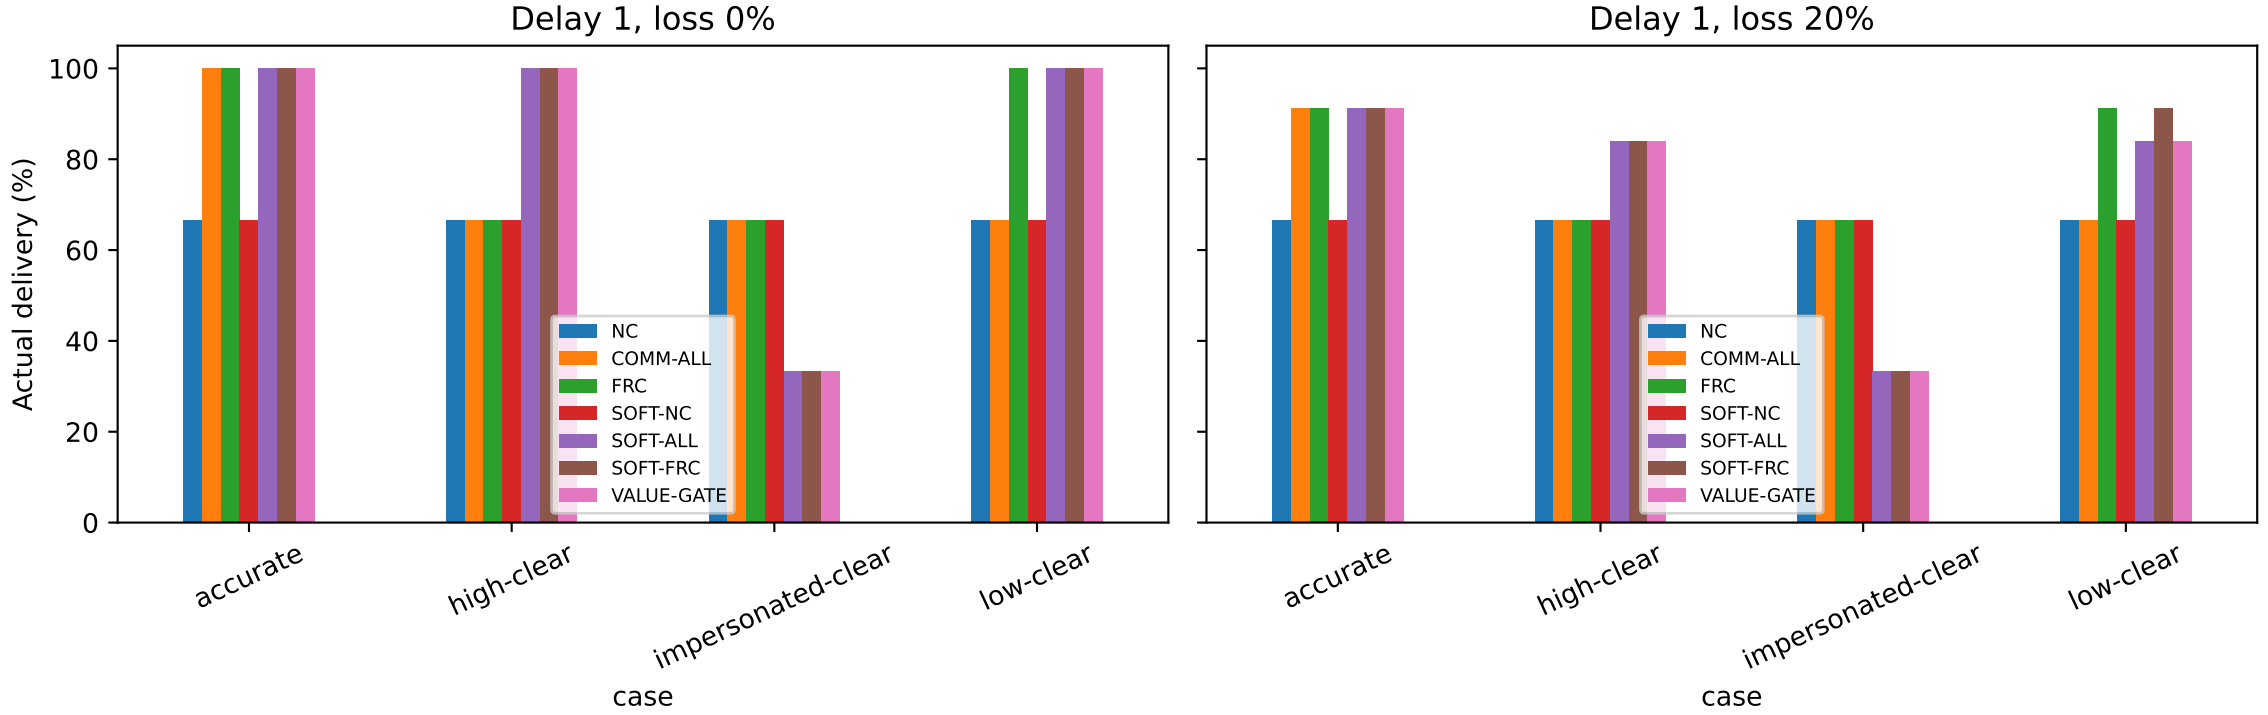
Delay 1, loss 0%
Delay 1, loss 20%
Actual delivery (%)
0
20
40
60
80
100
NC
COMM-ALL
FRC
SOFT-NC
SOFT-ALL
SOFT-FRC
VALUE-GATE
accurate
high-clear
impersonated-clear
low-clear
case

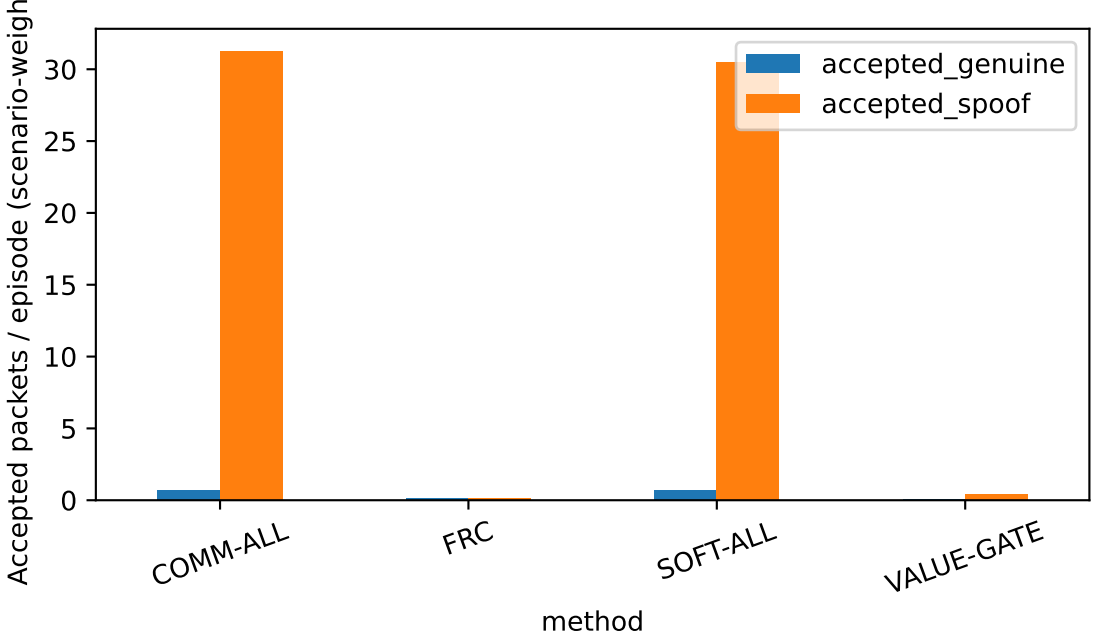
accepted_genuine
accepted_spoof
Accepted packets / episode (scenario-weigh
0
5
10
15
20
25
30
COMM-ALL
FRC
SOFT-ALL
VALUE-GATE
method

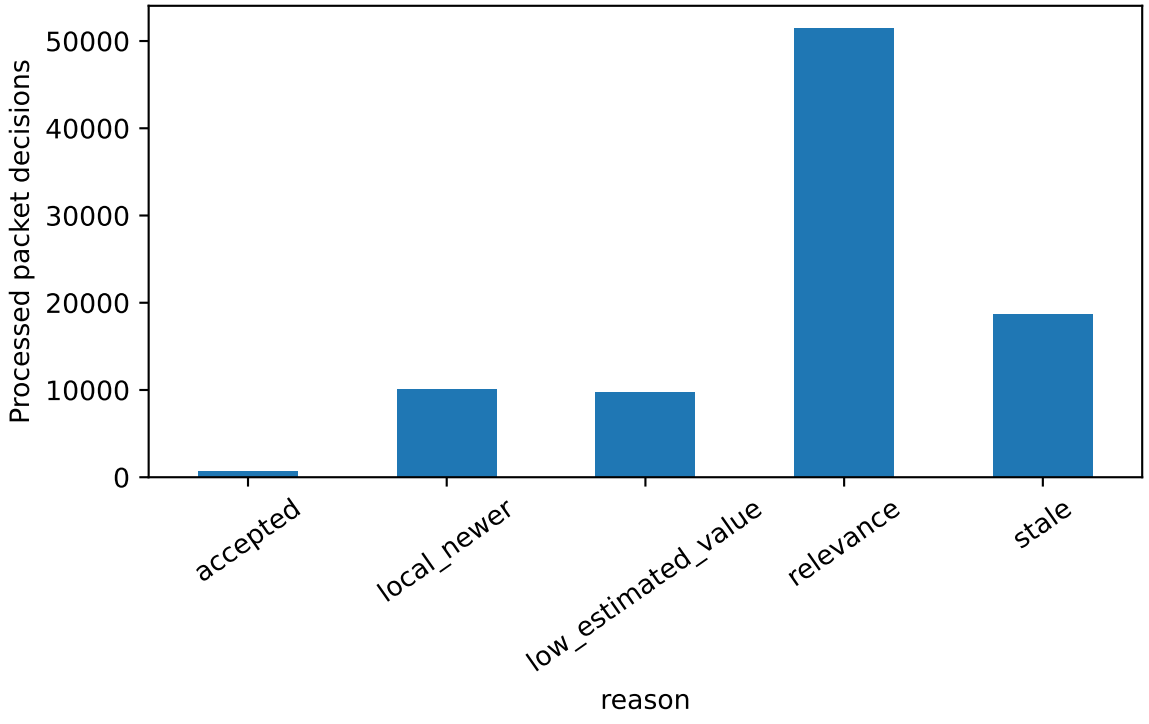
Processed packet decisions
0
10000
20000
30000
40000
50000
accepted
local_newer
low_estimated_value
relevance
stale
reason

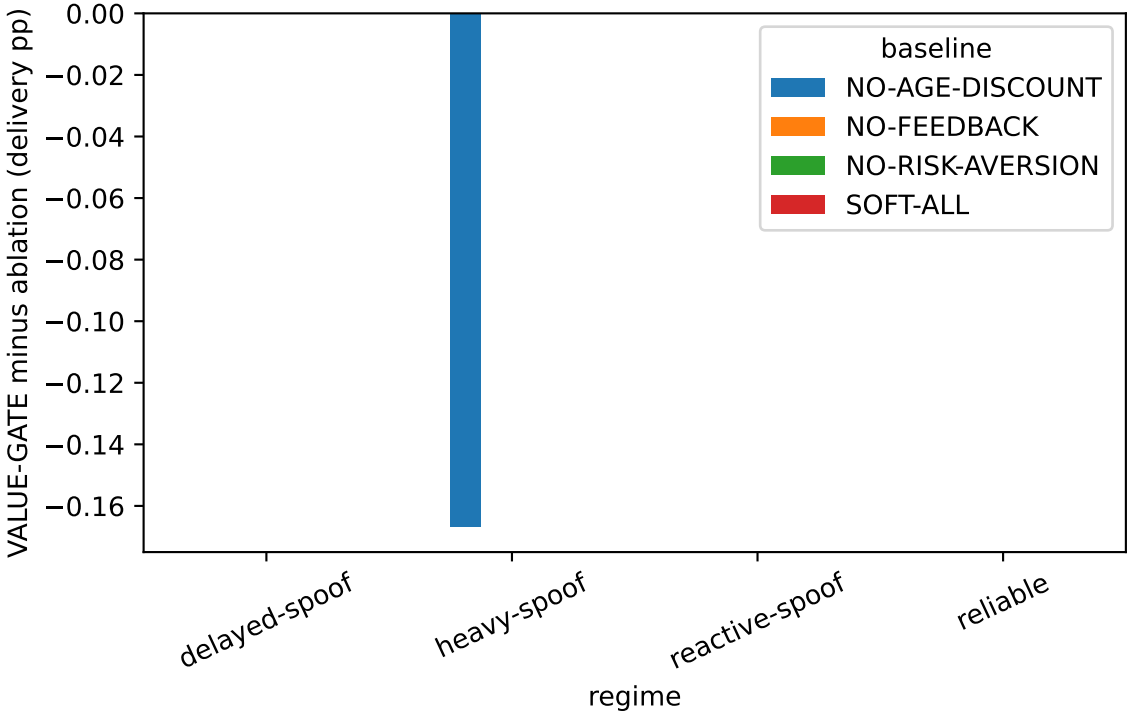
VALUE-GATE minus ablation (delivery pp)
0.00
−0.02
−0.04
−0.06
−0.08
−0.10
−0.12
−0.14
−0.16
baseline
NO-AGE-DISCOUNT
NO-FEEDBACK
NO-RISK-AVERSION
SOFT-ALL
delayed-spoof
heavy-spoof
reactive-spoof
reliable
regime

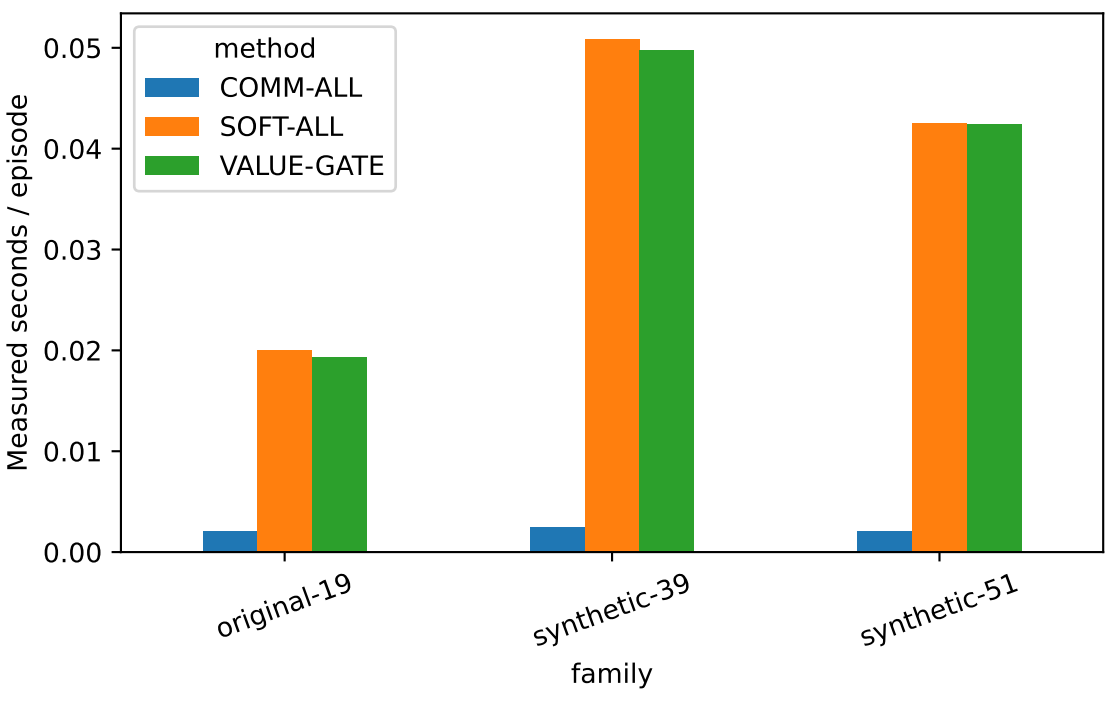
Measured seconds / episode
0.05
0.04
0.03
0.02
0.01
0.00
method
COMM-ALL
SOFT-ALL
VALUE-GATE
original-19
synthetic-39
synthetic-51
family

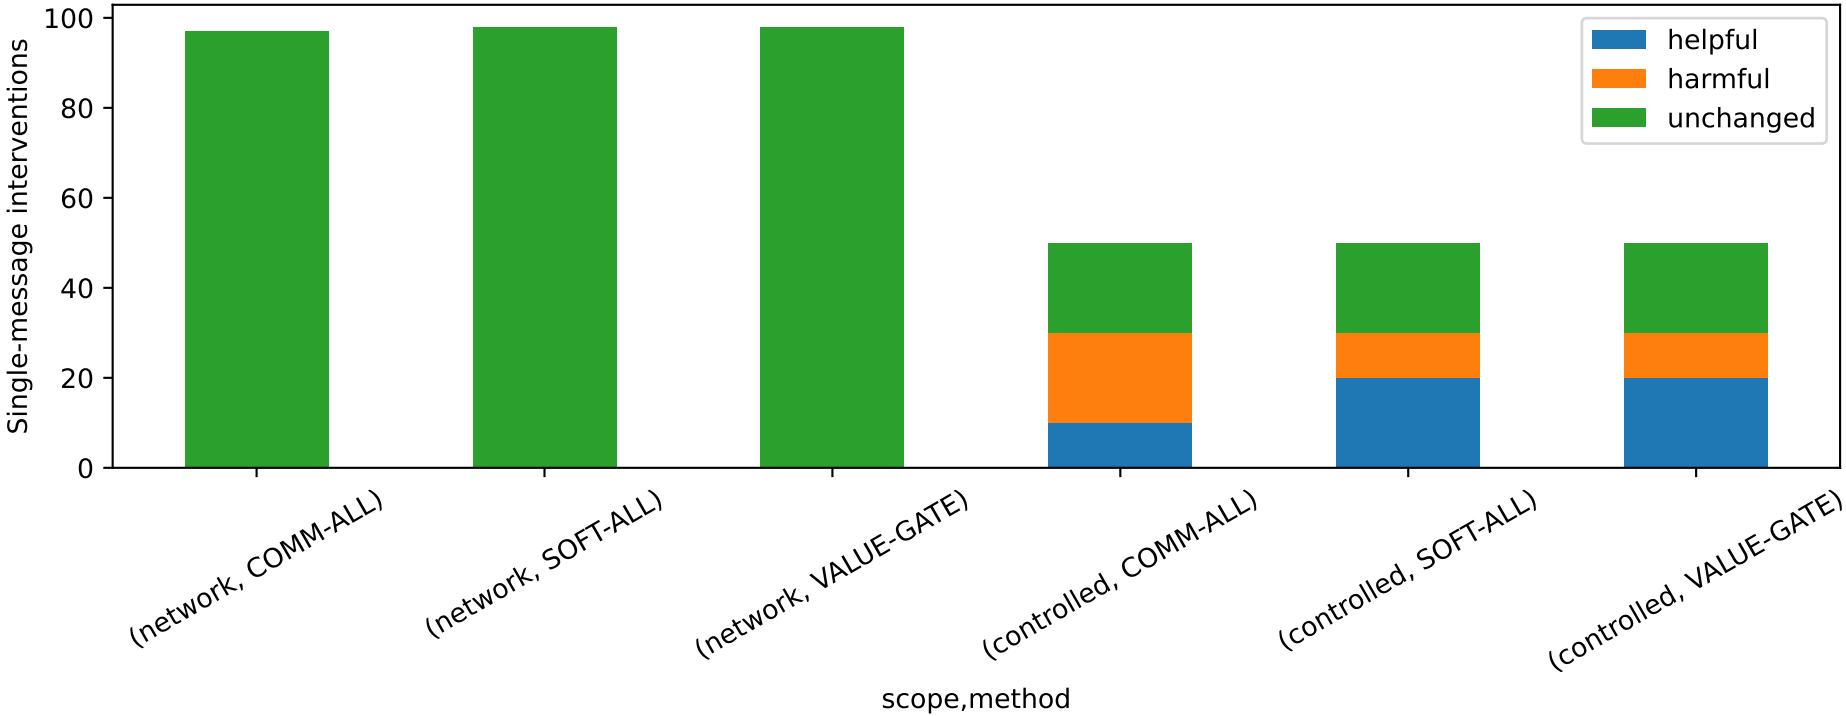
helpful
harmful
unchanged
Single-message interventions
0
20
40
60
80
100
(network, COMM-ALL)
(network, SOFT-ALL)
(network, VALUE-GATE)
(controlled, COMM-ALL)
(controlled, SOFT-ALL)
(controlled, VALUE-GATE)
scope,method